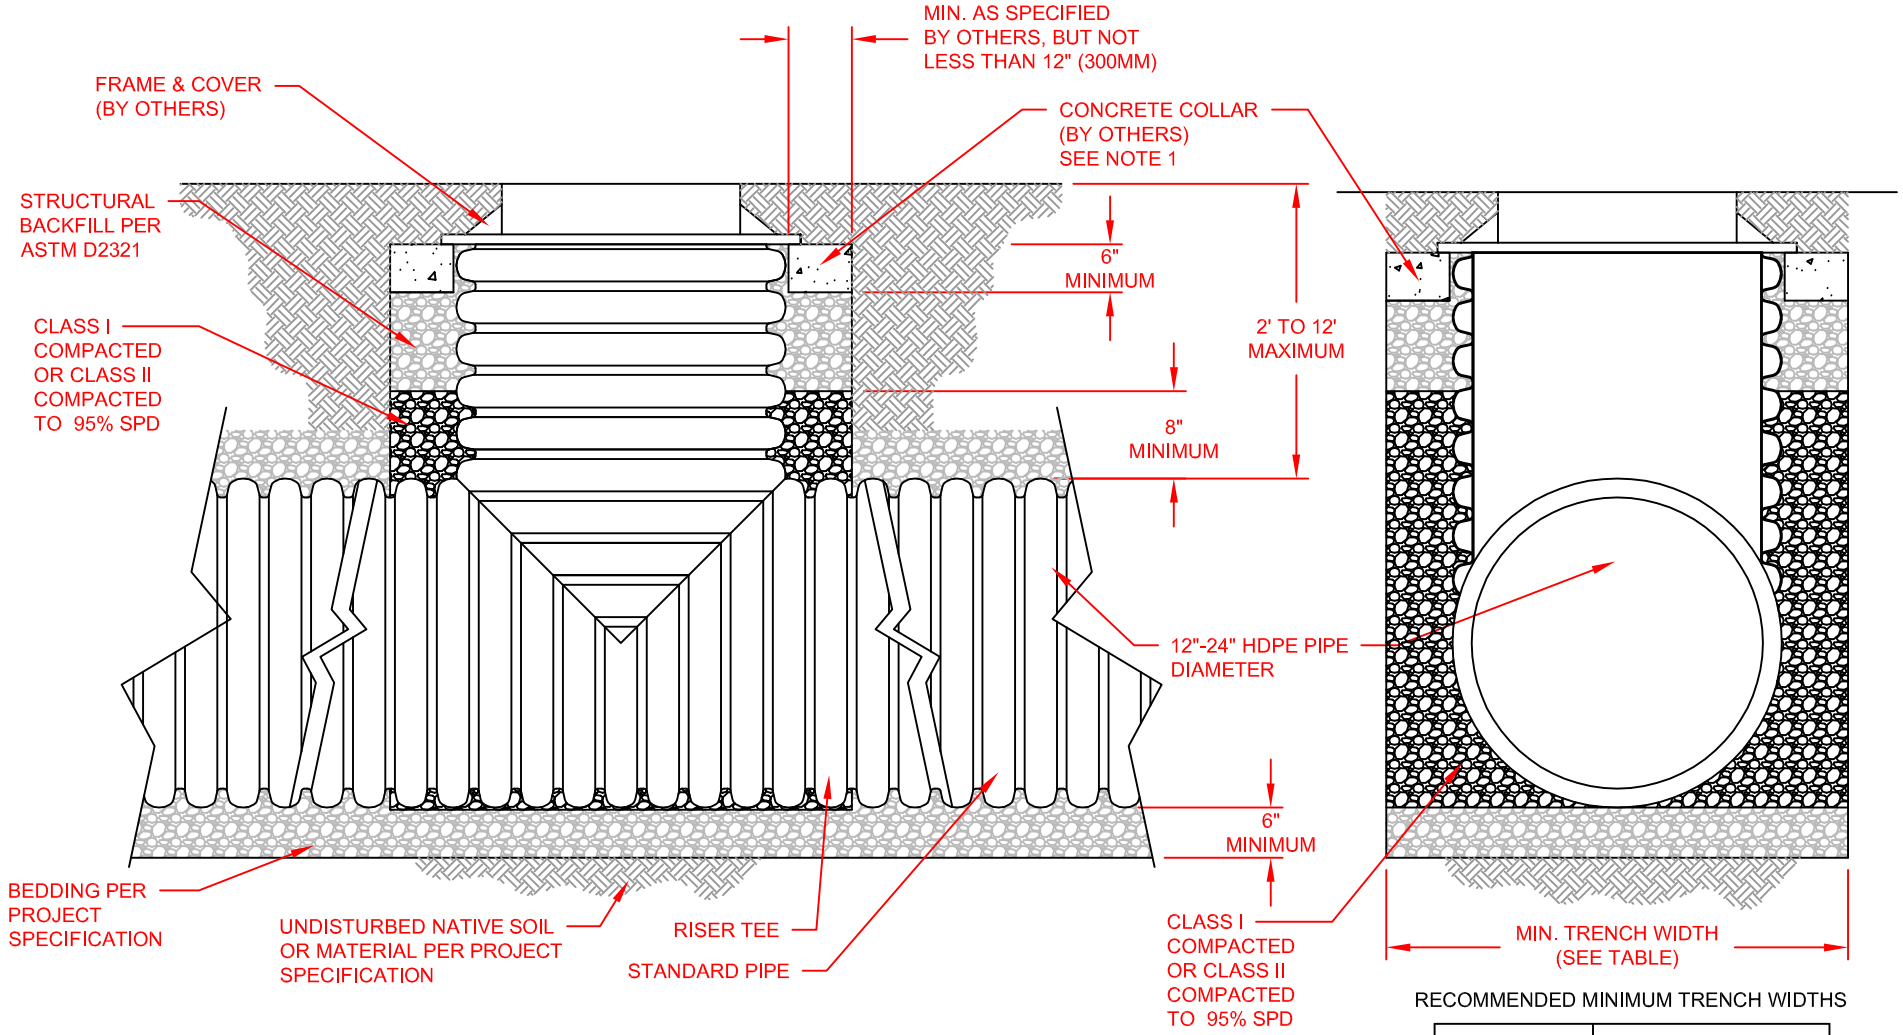

RECOMMENDED MINIMUM TRENCH WIDTHS

PIPE DIAM.	MIN. TRENCH WIDTH
12" (300mm)	30" (762mm)
15" (375mm)	34" (864mm)
18" (450mm)	39" (991mm)
24" (600mm)	48" (1219mm)

NOTES:

1. CONCRETE COLLAR SHALL BE DESIGNED BY OTHERS (ENGINEER OF RECORD, CONTRACT ENGINEER, ETC.) FOR THE SPECIFIC PROJECT AND SITE CONDITIONS TO CARRY ALL ANTICIPATED LOADING.
2. FOR PROJECTS WHERE COVER EXCEEDS THE MINIMUM OR MAXIMUM VALUES SHOWN, CONTACT ADS FOR SPECIFIC DESIGN CONSIDERATIONS.

REV.	DESCRIPTION	BY	MM/DD/YY	CHK'D
3	RENAMED AND RENUMBERED	TJR	02/16/16	

© 2016 ADS, INC.

ADVANCED DRAINAGE SYSTEMS, INC. ("ADS") HAS PREPARED THIS DETAIL BASED ON INFORMATION PROVIDED TO ADS. THIS DRAWING IS INTENDED TO DEPICT THE COMPONENTS AS REQUESTED. ADS HAS NOT PERFORMED ANY ENGINEERING OR DESIGN SERVICES FOR THIS PROJECT, NOR HAS ADS INDEPENDENTLY VERIFIED THE INFORMATION SUPPLIED. THE INSTALLATION DETAILS PROVIDED HEREIN ARE GENERAL RECOMMENDATIONS AND ARE NOT SPECIFIC FOR THIS PROJECT. THE DESIGN ENGINEER SHALL REVIEW THESE DETAILS PRIOR TO CONSTRUCTION. IT IS THE DESIGN ENGINEERS RESPONSIBILITY TO ENSURE THE DETAILS PROVIDED HEREIN MEETS OR EXCEEDS THE APPLICABLE NATIONAL, STATE, OR LOCAL REQUIREMENTS AND TO ENSURE THAT THE DETAILS PROVIDED HEREIN ARE ACCEPTABLE FOR THIS PROJECT.

HDPE RISER TEE INSTALLATION (12-24in PIPE)

DRAWING NUMBER: STD-404

ADS Advanced Drainage Systems, Inc.
4640 TRUEMAN BLVD
HILLIARD, OHIO 43026

DRAWN BY: TJR
DATE: 01/29/10
CK'D BY:
SCALE: NTS
SHEET: 1 OF 1