

The Right Parts, Right Away



Same-Day Shipping



Custom Cables



24/7 Tech Support




PRODUCT GUIDE

# Electromechanical Relay Switches







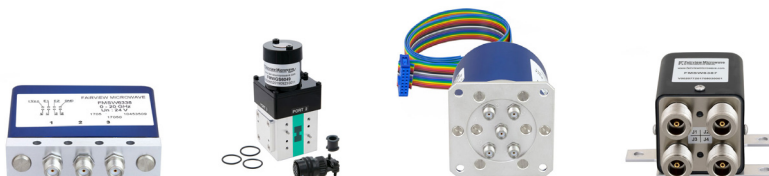




# Broad Selection of Ready-to-Ship Electromechanical Switches

Fairview Microwave's electromechanical relay switches cover broadband frequencies ranging from DC to 50 GHz. Our broad selection includes over 290 models that are available in coaxial, waveguide, and SMT packaged configurations that incorporate common configurations of actuators and features, and provide reliable performance rated up to 10 million lifecycles and are classified as EAR99. Fairview's switches are specifically designed for use in a variety of applications, including defense, wireless communications, radar, and test instrumentation. These electromechanical relay switches are part of Fairview's broad inventory of RF, microwave and mmWave components and assemblies. All products are in-stock and available for same-day shipping and can be viewed at [www.fairviewmicrowave.com](http://www.fairviewmicrowave.com).



<b>Electromechanical Relay Switches.....</b>	<b><u>2</u></b>
<b>10M Life Cycles.....</b>	<b><u>2</u></b>
<b>5M Life Cycles.....</b>	<b><u>2</u></b>
<b>2.5M Life Cycles.....</b>	<b><u>6</u></b>
<b>2M Life Cycles.....</b>	<b><u>6</u></b>
<b>1M Life Cycles.....</b>	<b><u>12</u></b>
<b>RF Relay A/B Coax.....</b>	<b><u>13</u></b>
<b>Waveguides.....</b>	<b><u>14</u></b>
<b>Electromechanical Relay Switches.....</b>	<b><u>14</u></b>
<b>Double Ridge Electromechanical Relay Switches.....</b>	<b><u>18</u></b>


















## 10M Life Cycles Relay Switches

FM P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ECCN
<a href="#">SEMS-4050-SPDT-SMA</a> 	SPDT	18 GHz	Failsafe/Non-Terminated	SMA Female	60	0.35	28	100	EAR99
<a href="#">FMSW6335</a> 	SPDT	20 GHz	Latching/Indicators, Self Cut Off, Non-Terminated/Low IL Repeatability	SMA Female	65	0.5	24	1	EAR99
<a href="#">FMSW6337</a> 	SPDT	20 GHz	Latching/Indicators, Self Cut Off, Terminated/Low IL Repeatability	SMA Female	65	0.5	24	1	EAR99
<a href="#">FMSW6336</a> 	SPDT	20 GHz	Latching/Indicators, Self Cut Off, TTL Logic, Non-Terminated/Low IL Repeatability	SMA Female	65	0.5	24	1	EAR99
<a href="#">FMSW6338</a> 	SPDT	20 GHz	Latching/Indicators, Self Cut Off, TTL Logic, Terminated/Low IL Repeatability	SMA Female	65	0.5	24	1	EAR99
<a href="#">FMSW6333</a> 	SP4T	20 GHz	Latching/Indicators, Self Cut Off, Reset, Terminated/Low IL Repeatability	SMA Female	80	0.6	24	70	EAR99
<a href="#">FMSW6341</a> 	SP4T	20 GHz	Latching/Indicators, Self Cut Off, TTL Logic, Reset, Terminated/Low IL Repeatability	SMA Female	80	0.6	24	70	EAR99
<a href="#">FMSW6331</a> 	SP6T	20 GHz	Latching/Indicators, Self Cut Off, Reset, Terminated/Low IL Repeatability	SMA Female	80	0.6	24	70	EAR99
<a href="#">FMSW6339</a> 	SP6T	20 GHz	Latching/Indicators, Self Cut Off, TTL Logic, Reset, Terminated/Low IL Repeatability	SMA Female	80	0.6	24	70	EAR99
<a href="#">SEMS-4054-SPDT-K</a> 	SPDT	40 GHz	Failsafe/Indicators, Non-Terminated	2.92mm Female	50	0.8	28	10	EAR99
<a href="#">SEMS-4055-SPDT-K</a> 	SPDT	40 GHz	Latching/Indicators, Self Cut Off, Non-Terminated	2.92mm Female	50	0.8	28	10	EAR99
















## 5M Life Cycles Relay Switches

FM P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ECCN
<a href="#">FMSW6413</a> 	SPDT	8 GHz	Latching/Hot Switching, Non-Terminated	SMT	40	0.5	12	5	EAR99
<a href="#">FMSW6414</a> 	SPDT	8 GHz	Latching/Hot Switching, Non-Terminated	SMT	40	0.5	24	5	EAR99














## 5M Life Cycles Relay Switches Continued

FM P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ECCN
<b>FMSW6399</b> 	SPDT	12 GHz	Latching/Indicators, Non-Terminated	N Female	70	0.5	28	200	EAR99
<b>FMSW6349</b> 	SPDT	12 GHz	Latching/Non-Terminated	N Female	70	0.5	12	200	EAR99
<b>FMSW6425</b> 	SPDT	12 GHz	Latching/TTL Logic,	N Female	70	0.5	28	600	EAR99
<b>FMSW6387</b> 	Transfer	12 GHz	Latching/Non-Terminated	N Female	60	0.7	12	200	EAR99
<b>FMSW6390</b> 	Transfer	12 GHz	Latching/Non-Terminated	SMA Female	60	0.3	12	75	EAR99
<b>FMSW6439</b> 	Transfer	12 GHz	Latching/TTL Logic,	N Female	60	0.7	28	600	EAR99
<b>FMSW6461</b> 	DPDT	12 GHz	Latching/Indicators, Self Cut Off, TTL Logic, Non-Terminated	N Female	60	0.7	28	1000	EAR99
<b>FMSW6415</b> 	SPDT	18 GHz	Latching/Hot Switching, Non-Terminated	SMT	40	1	12	3	EAR99
<b>FMSW6416</b> 	SPDT	18 GHz	Latching/Hot Switching, Non-Terminated	SMT	40	1	24	3	EAR99
<b>FMSW6353</b> 	SPDT	18 GHz	Latching/Indicators, Non-Terminated	SMA Female	65	0.35	12	60	EAR99
<b>FMSW6395</b> 	SPDT	18 GHz	Latching/Indicators, Non-Terminated	SMA Female	65	0.35	28	60	EAR99
<b>FMSW6396</b> 	SPDT	18 GHz	Latching/Indicators, Non-Terminated	SMA Female	65	0.35	12	60	EAR99
<b>FMSW6406</b> 	SPDT	18 GHz	Latching/Indicators, Terminated	SMA Female	65	0.35	24	60	EAR99
<b>FMSW6407</b> 	SPDT	18 GHz	Latching/Indicators, TTL Logic, Terminated	SMA Female	65	0.35	28	60	EAR99
<b>FMSW6352</b> 	SPDT	18 GHz	Latching/Non-Terminated	SMA Female	65	0.35	12	60	EAR99







## 5M Life Cycles Relay Switches Continued

FM P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ECCN
<b>FMSW6393</b> 	SPDT	18 GHz	Latching/Self Cut Off, Indicators, Non-Terminated	SMA Female	65	0.35	28	60	EAR99
<b>FMSW6394</b> 	SPDT	18 GHz	Latching/Self Cut Off, Indicators, Non-Terminated	SMA Female	65	0.35	12	60	EAR99
<b>FMSW6358</b> 	SPDT	18 GHz	Latching/Terminated	SMA Female	65	0.35	12	60	EAR99
<b>FMSW6359</b> 	SPDT	18 GHz	Latching/Terminated	SMA Female	65	0.35	28	60	EAR99
<b>FMSW6364</b> 	SP4T	18 GHz	Latching/Terminated	SMA Female	80	0.4	12	60	EAR99
<b>FMSW6365</b> 	SP4T	18 GHz	Latching/Terminated	SMA Female	80	0.4	28	60	EAR99
<b>FMSW6372</b> 	SP6T	18 GHz	Latching/Non-Terminated	SMA Female	80	0.4	28	60	EAR99
<b>FMSW6376</b> 	SP6T	18 GHz	Latching/Terminated	SMA Female	80	0.4	12	60	EAR99
<b>FMSW6377</b> 	SP6T	18 GHz	Latching/Terminated	SMA Female	80	0.5	28	60	EAR99
<b>FMSW6402</b> 	Transfer	18 GHz	Latching/Indicators, Non-Terminated	SMA Female	60	0.5	28	60	EAR99
<b>FMSW6401</b> 	Transfer	18 GHz	Latching/Self Cut Off, Indicators, Non-Terminated	SMA Female	60	0.5	28	60	EAR99
<b>FMSW6405</b> 	DP3T	18 GHz	Latching/Indicators, Non-Terminated	SMA Female	65	0.35	28	60	EAR99
<b>FMSW6362</b> 	SP3T	18 GHz	Latching/Non-Terminated	SMA Female	80	0.4	28	60	EAR99
<b>FMSW6417</b> 	SPDT	26.5 GHz	Latching/Hot Switching, Non-Terminated	SMT	40	1.6	12	1	EAR99
<b>FMSW6418</b> 	SPDT	26.5 GHz	Latching/Hot Switching, Non-Terminated	SMT	40	1.6	24	1	EAR99




## 5M Life Cycles Relay Switches Continued

FM P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ECCN
<b>FMSW6440</b> 	SPDT	26.5 GHz	Latching/Self Cut Off, Diodes, Non-Terminated	SMA Female	50	0.6	28		EAR99
<b>FMSW6441</b> 	SPDT	26.5 GHz	Latching/Self Cut Off, Indicators, TTL Logic, Non-Terminated	SMA Female	50	0.6	12		EAR99
<b>FMSW6442</b> 	SPDT	26.5 GHz	Latching/Self Cut Off, Indicators, TTL Logic, Non-Terminated	SMA Female	50	0.6	28		EAR99
<b>FMSW6471</b> 	SPDT	26.5 GHz	Latching/Self Cut Off, Indicators, TTL Logic, Terminated	SMA Female	40	0.5	12		EAR99
<b>FMSW6470</b> 	SPDT	26.5 GHz	Latching/Self Cut Off, TTL Logic, Terminated	SMA Female	40	0.5	12		EAR99
<b>FMSW6360</b> 	SPDT	26.5 GHz	Latching/Terminated	SMA Female	50	0.6	12	50	EAR99
<b>FMSW6361</b> 	SPDT	26.5 GHz	Latching/Terminated	SMA Female	50	0.6	28	50	EAR99
<b>FMSW6473</b> 	SP4T	26.5 GHz	Latching/Self Cut Off, Indicators, TTL Logic, Solder Pins, Terminated	SMA Female	70	0.7	12		EAR99
<b>FMSW6474</b> 	SP4T	26.5 GHz	Latching/Self Cut Off, Indicators, TTL Logic, Solder Pins, Terminated	SMA Female	70	0.7	28		EAR99
<b>FMSW6366</b> 	SP4T	26.5 GHz	Latching/Terminated	SMA Female	70	0.7	12	50	EAR99
<b>FMSW6367</b> 	SP4T	26.5 GHz	Latching/Terminated	SMA Female	70	0.7	28	50	EAR99
<b>FMSW6378</b> 	SP6T	26.5 GHz	Latching/Terminated	SMA Female	70	0.7	12	50	EAR99
<b>FMSW6379</b> 	SP6T	26.5 GHz	Latching/Terminated	SMA Female	70	0.7	28	50	EAR99
<b>FMSW6475</b> 	SP6T	26.5 GHz	Normally Open/Indicators, TTL Logic, Solder Pins, Terminated	SMA Female	70	0.7	28		EAR99
<b>FMSW6448</b> 	DPDT	26.5 GHz	Latching/Self Cut Off, Diodes, Non-Terminated	SMA Female	60	0.8	12		EAR99



## 5M Life Cycles Relay Switches Continued

FM P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ECCN
<b>FMSW6449</b> 	DPDT	26.5 GHz	Latching/Self Cut Off, Indicators, TTL Logic, Non-Terminated	SMA Female	60	0.8	28		EAR99
<b>FMSW6445</b> 	SPDT	40 GHz	Latching/Self Cut Off, Indicators, TTL Logic, Non-Terminated	2.92mm Female	60	0.7	12		EAR99
<b>FMSW6334</b> 	SP4T	40 GHz	Latching/Indicators, Self Cut Off, Reset, Terminated/Low IL Repeatability	2.92mm Female	80	0.5	24	5	EAR99
<b>FMSW6342</b> 	SP4T	40 GHz	Latching/Indicators, Self Cut Off, TTL Logic, Reset, Terminated/Low IL Repeatability	2.92mm Female	80	0.5	24	5	EAR99
<b>FMSW6332</b> 	SP6T	40 GHz	Latching/Indicators, Self Cut Off, Reset, Terminated/Low IL Repeatability	2.92mm Female	80	0.9	24	5	EAR99
<b>FMSW6340</b> 	SP6T	40 GHz	Latching/Indicators, Self Cut Off, TTL Logic, Reset, Terminated/Low IL Repeatability	2.92mm Female	80	0.9	24	5	EAR99
















## 2.5M Life Cycles Relay Switches

FM P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ECCN
<b>SEMS-4068-DPDT-N</b> 	Transfer	12.4 GHz	Failsafe/Indicators, Non-Terminated	N Female	60	0.5	28	200	EAR99
<b>SEMS-4063-DPDT-SMA</b> 	Transfer	18 GHz	Failsafe/Non-Terminated	SMA Female	60	0.5	28	100	EAR99
<b>SEMS-4069-DPDT-K</b> 	Transfer	40 GHz	Latching/Indicators, Self Cut Off, Non-Terminated	2.92mm Female	50	0.8	28	10	EAR99

## 2M Life Cycles Relay Switches
















FM P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ECCN
<b>SEMS-4090-SPDT-SM</b> 	SPDT	8 GHz	Failsafe/Hot Switching, Non-Terminated	SMT	30	0.8	24	35	EAR99
<b>FMSW6426</b> 	SPDT	10 GHz	Failsafe	N Female	70	0.5	12	600	EAR99

## 2M Life Cycles Relay Switches Continued
















FM P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ECCN
<b>FMSW6435</b> 	SPDT	12 GHz	Failsafe	N Female	70	0.5	12	600	EAR99
<b>FMSW6438</b> 	SPDT	12 GHz	Failsafe	N Female	70	0.5	28	600	EAR99
<b>FMSW6460</b> 	SPDT	12 GHz	Failsafe/Indicators, TTL Logic, Non-Terminated	N Female	70	0.5	12	1000	EAR99
<b>FMSW6348</b> 	SPDT	12 GHz	Failsafe/Non-Terminated	N Female	70	0.5	12	200	EAR99
<b>FMSW6397</b> 	SPDT	12 GHz	Failsafe/Non-Terminated	N Female	70	0.5	28	200	EAR99
<b>FMSW6398</b> 	SPDT	12 GHz	Failsafe/Non-Terminated	N Female	70	0.5	12	200	EAR99
<b>FMSW6434</b> 	SP4T	12 GHz	Normally Open	N Female	70	0.5	12	600	EAR99
<b>FMSW6466</b> 	SP4T	12 GHz	Normally Open/Indicators, Solder Pins, TTL Logic, Non-Terminated	N Female	60	0.5	28	1000	EAR99
<b>FMSW6464</b> 	SP4T	12 GHz	Normally Open/Solder Pins, Non-Terminated	N Female	60	0.5	12	1000	EAR99
<b>FMSW6465</b> 	SP6T	12 GHz	Normally Open/Indicators, Solder Pins, TTL Logic, Non-Terminated	N Female	60	0.5	12	1000	EAR99
<b>FMSW6385</b> 	Transfer	12 GHz	Failsafe/Non-Terminated	N Female	60	0.7	28	200	EAR99
<b>FMSW6403</b> 	Transfer	12 GHz	Failsafe/Non-Terminated	N Female	60	0.7	28	200	EAR99
<b>FMSW6386</b> 	Transfer	12 GHz	Failsafe/TTL Logic, Non-Terminated	N Female	60	0.7	28	200	EAR99
<b>FMSW6463</b> 	DPDT	12 GHz	Failsafe/Indicators, TTL Logic, Non-Terminated	N Female	60	0.7	12	1000	EAR99
<b>FMSW6462</b> 	DPDT	12 GHz	Failsafe/Non-Terminated	N Female	60	0.7	12	1000	EAR99


















## 2M Life Cycles Relay Switches Continued

FM P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ECCN
<b>FMSW6429</b> 	SPDT	18 GHz	Failsafe	SMA Female	65	0.6	28	90	EAR99
<b>FMSW6436</b> 	SPDT	18 GHz	Failsafe	SMA Female	65	0.35	12	90	EAR99
<b>FMSW6351</b> 	SPDT	18 GHz	Failsafe/Indicators, Non-Terminated	SMA Female	65	0.35	12	60	EAR99
<b>FMSW6347</b> 	SPDT	18 GHz	Failsafe/Non-Terminated	SMA Female	65	0.35	12	60	EAR99
<b>FMSW6391</b> 	SPDT	18 GHz	Failsafe/Non-Terminated	SMA Female	65	0.35	28	60	EAR99
<b>FMSW6392</b> 	SPDT	18 GHz	Failsafe/Non-Terminated	SMA Female	65	0.35	12	60	EAR99
<b>SEMS-4058-SPDT-SMA</b> 	SPDT	18 GHz	Failsafe/Terminated	SMA Female	60	0.5	28	100	EAR99
<b>FMSW6354</b> 	SPDT	18 GHz	Failsafe/Terminated	SMA Female	65	0.35	12	60	EAR99
<b>FMSW6355</b> 	SPDT	18 GHz	Failsafe/Terminated	SMA Female	65	0.35	28	60	EAR99
<b>FMSW6404</b> 	SPDT	18 GHz	Failsafe/Terminated	SMA Female	65	0.4	28	60	EAR99
<b>FMSW6350</b> 	SPDT	18 GHz	Failsafe/TTL Logic, Non-Terminated	SMA Female	65	0.35	12	60	EAR99
<b>FMSW6363</b> 	SP4T	18 GHz	Normally Open/Non-Terminated	SMA Female	80	0.4	12	60	EAR99
<b>FMSW6408</b> 	SP4T	18 GHz	Normally Open/Non-Terminated	SMA Female	80	0.4	28	60	EAR99
<b>FMSW6368</b> 	SP4T	18 GHz	Normally Open/Terminated	SMA Female	80	0.4	12	60	EAR99
<b>FMSW6369</b> 	SP4T	18 GHz	Normally Open/Terminated	SMA Female	80	0.4	28	60	EAR99
















## 2M Life Cycles Relay Switches Continued

FM P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ECCN
<b>FMSW6373</b> 	SP6T	18 GHz	Normally Open/Non-Terminated	SMA Female	80	0.4	12	60	EAR99
<b>FMSW6409</b> 	SP6T	18 GHz	Normally Open/Non-Terminated	SMA Female	80	0.4	28	60	EAR99
<b>FMSW6380</b> 	SP6T	18 GHz	Normally Open/Terminated	SMA Female	80	0.4	12	60	EAR99
<b>FMSW6381</b> 	SP6T	18 GHz	Normally Open/Terminated	SMA Female	80	0.4	28	60	EAR99
<b>FMSW6374</b> 	SP6T	18 GHz	Normally Open/TTL Logic, Non-Terminated	SMA Female	80	0.4	12	60	EAR99
<b>FMSW6375</b> 	SP6T	18 GHz	Normally Open/TTL Logic, Non-Terminated	SMA Female	80	0.4	24	60	EAR99
<b>FMSW6384</b> 	SP8T	18 GHz	Normally Open/Non-Terminated	SMA Female	75	0.5	12	60	EAR99
<b>FMSW6433</b> 	Transfer	18 GHz	Failsafe	SMA Female	60	0.5	28	90	EAR99
<b>FMSW6388</b> 	Transfer	18 GHz	Failsafe/Non-Terminated	SMA Female	60	0.5	12	60	EAR99
<b>FMSW6389</b> 	Transfer	18 GHz	Failsafe/Non-Terminated	SMA Female	60	0.5	24	60	EAR99
<b>FMSW6400</b> 	Transfer	18 GHz	Failsafe/Non-Terminated	SMA Female	60	0.5	28	90	EAR99
<b>FMSW6410</b> 	SP10T	20 GHz	Normally Open/Non-Terminated	SMA Female	70	0.7	28	60	EAR99
<b>FMSW6419</b> 	SPDT	26.5 GHz	Failsafe	SMA Female	50	0.6	28	90	EAR99
<b>FMSW6420</b> 	SPDT	26.5 GHz	Failsafe	SMA Female	50	0.6	12	90	EAR99
<b>FMSW6421</b> 	SPDT	26.5 GHz	Failsafe	SMA Female	50	0.6	28	90	EAR99







## 2M Life Cycles Relay Switches Continued

FM P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ECCN
<b>FMSW6430</b> 	SPDT	26.5 GHz	Failsafe	SMA Female	50	0.6	24	90	EAR99
<b>FMSW6468</b> 	SPDT	26.5 GHz	Failsafe/Indicators, TTL Logic, Terminated	SMA Female	50	0.6	12		EAR99
<b>FMSW6469</b> 	SPDT	26.5 GHz	Failsafe/Indicators, TTL Logic, Terminated	SMA Female	50	0.6	28		EAR99
<b>FMSW6356</b> 	SPDT	26.5 GHz	Failsafe/Terminated	SMA Female	50	0.6	12	50	EAR99
<b>FMSW6357</b> 	SPDT	26.5 GHz	Failsafe/Terminated	SMA Female	50	0.6	28	50	EAR99
<b>FMSW6467</b> 	SPDT	26.5 GHz	Failsafe/Terminated	SMA Female	50	0.6	28		EAR99
<b>FMSW6422</b> 	SPDT	26.5 GHz	Failsafe/TTL Logic,	SMA Female	50	0.6	28	90	EAR99
<b>FMSW6437</b> 	SPDT	26.5 GHz	Failsafe/TTL Logic,	SMA Female	50	0.6	12	90	EAR99
<b>FMSW6472</b> 	SP4T	26.5 GHz	Normally Open/Indicators, TTL Logic, Solder Pins, Terminated	SMA Female	70	0.7	12		EAR99
<b>FMSW6452</b> 	SP4T	26.5 GHz	Normally Open/Solder Pins, Non-Terminated	SMA Female	70	0.7	12		EAR99
<b>FMSW6453</b> 	SP4T	26.5 GHz	Normally Open/Solder Pins, Non-Terminated	SMA Female	70	0.7	28		EAR99
<b>FMSW6370</b> 	SP4T	26.5 GHz	Normally Open/Terminated	SMA Female	70	0.7	12	50	EAR99
<b>FMSW6371</b> 	SP4T	26.5 GHz	Normally Open/Terminated	SMA Female	70	0.7	28	50	EAR99
<b>FMSW6423</b> 	SP4T	26.5 GHz	Normally Open/TTL Logic,	SMA Female	70	0.7	12	90	EAR99
<b>FMSW6424</b> 	SP4T	26.5 GHz	Normally Open/TTL Logic,	SMA Female	70	0.7	28	90	EAR99









## 2M Life Cycles Relay Switches Continued

F/M P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ECCN
<a href="#">FMSW6427</a> 	SP6T	26.5 GHz	Failsafe/TTL Logic,	SMA Female	50	0.6	12	90	EAR99
<a href="#">FMSW6428</a> 	SP6T	26.5 GHz	Failsafe/TTL Logic,	SMA Female	70	0.6	12	90	EAR99
<a href="#">FMSW6454</a> 	SP6T	26.5 GHz	Normally Open/Indicators, Solder Pins, TTL Logic, Non-Terminated	SMA Female	70	0.7	12		EAR99
<a href="#">FMSW6455</a> 	SP6T	26.5 GHz	Normally Open/Indicators, Solder Pins, TTL Logic, Non-Terminated	SMA Female	70	0.7	28		EAR99
<a href="#">FMSW6382</a> 	SP6T	26.5 GHz	Normally Open/Terminated	SMA Female	70	0.7	12	50	EAR99
<a href="#">FMSW6383</a> 	SP6T	26.5 GHz	Normally Open/Terminated	SMA Female	70	0.7	28	50	EAR99
<a href="#">FMSW6446</a> 	DPDT	26.5 GHz	Failsafe/Indicators, TTL Logic, Non-Terminated	SMA Female	60	0.8	12		EAR99
<a href="#">FMSW6447</a> 	DPDT	26.5 GHz	Failsafe/Indicators, TTL Logic, Non-Terminated	SMA Female	60	0.8	28		EAR99
<a href="#">FMSW6444</a> 	SPDT	40 GHz	Failsafe/Indicators, TTL Logic, Non-Terminated	2.92mm Female	60	0.7	12		EAR99
<a href="#">FMSW6443</a> 	SPDT	40 GHz	Failsafe/Non-Terminated	2.92mm Female	60	0.7	12		EAR99
<a href="#">FMSW6431</a> 	SP4T	40 GHz	Normally Open	2.92mm Female	50	0.6	28	90	EAR99
<a href="#">FMSW6456</a> 	SP4T	40 GHz	Normally Open/Indicators, TTL Logic, Non-Terminated	2.92mm Female	50	1.3	12		EAR99
<a href="#">FMSW6457</a> 	SP4T	40 GHz	Normally Open/Indicators, TTL Logic, Non-Terminated	2.92mm Female	60	1.1	28		EAR99
<a href="#">FMSW6459</a> 	SP6T	40 GHz	Normally Open/+ COM, Non-Terminated	2.92mm Female	60	1.1	28		EAR99
<a href="#">FMSW6458</a> 	SP6T	40 GHz	Normally Open/Indicators, TTL Logic, Non-Terminated	2.92mm Female	50	1.3	12		EAR99










## 2M Life Cycles Relay Switches Continued

FM P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ECCN
<b>FMSW6432</b> 	Transfer	40 GHz	Failsafe	2.92mm Female	50	0.6	12	90	EAR99
<b>FMSW6451</b> 	DPDT	40 GHz	Failsafe/Indicators, TTL Logic, Non-Terminated	2.92mm Female	50	1	12		EAR99
<b>FMSW6450</b> 	DPDT	40 GHz	Failsafe/Non-Terminated	2.92mm Female	50	1	28		EAR99
<b>FMSW6476</b> 	DPDT	40 GHz	Failsafe/Non-Terminated	2.92mm Female	50	1	12		EAR99
<b>FMSW6329</b> 	SPDT	50 GHz	Failsafe/Non-Terminated	2.4mm Female	60	0.3	28	80	EAR99
<b>FMSW6330</b> 	SPDT	50 GHz	Latching/Non-Terminated	2.4mm Female	60	1.1	28	80	EAR99



## 1M Life Cycles Relay Switches

FM P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ECCN
<b>FMSW6160</b> 	SPDT	12.4 GHz	Failsafe/Indicators, TTL Logic, Diodes, Non-Terminated	N Female	60	0.6	12	160	EAR99
<b>FMSW6161</b> 	SPDT	12.4 GHz	Failsafe/Indicators, TTL Logic, Diodes, Non-Terminated	N Female	60	0.6	28	160	EAR99
<b>SEMS-4057-SPDT-N</b> 	SPDT	12.4 GHz	Failsafe/Non-Terminated	N Female	60	0.5	12	200	EAR99
<b>FMSW6164</b> 	SPDT	12.4 GHz	Latching/Indicators, TTL Logic, Diodes, Self Cut Off, Non-Terminated	N Female	60	0.6	12	160	EAR99
<b>FMSW6180</b> 	Transfer	12.4 GHz	Latching/Indicators, TTL Logic, Self Cut Off, Diodes, Non-Terminated	N Female	60	0.4	12	160	EAR99
<b>FMSW6293</b> 	SPDT	22 GHz	Failsafe/Terminated	SMA Female	60	0.6	12	20	EAR99
<b>FMSW6300</b> 	SPDT	22 GHz	Latching/Self Cut Off, Diodes, TTL Logic, Indicators, Terminated	SMA Female	60	0.6	28	20	EAR99
<b>FMSW6298</b> 	SPDT	22 GHz	Latching/Self Cut Off, Diodes, TTL Logic, Terminated	SMA Female	60	0.6	28	20	EAR99

## 1M Life Cycles Relay Switches Continued
















FM P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ECCN
<b>FMSW6098</b> 	SPDT	26.5 GHz	Latching/Self Cut Off, Diodes, Non-Terminated	SMA Female	50	0.5	12	20	EAR99
<b>FMSW6110</b> 	Transfer	26.5 GHz	Failsafe/Non-Terminated	SMA Female	60	0.5	12	20	EAR99
<b>FMSW6140</b> 	SP4T	40 GHz	Latching/Indicators, TTL Logic, Self Cut Off, Diodes, Non-Terminated	2.92mm Female	50	1	12	5	EAR99
<b>FMSW6320</b> 	SP4T	40 GHz	Latching/Indicators, TTL Logic, Self Cut Off, Diodes, Terminated	2.92mm Female	50	1	28	3	EAR99
<b>FMSW6318</b> 	SP4T	40 GHz	Latching/Self Cut Off, Diodes, Reset, Terminated	2.92mm Female	50	1	28	3	EAR99
<b>FMSW6321</b> 	SP6T	40 GHz	Latching/Self Cut Off, Indicators, Reset, Terminated	2.92mm Female	60	1	12	3	EAR99
<b>FMSW6322</b> 	SP6T	40 GHz	Latching/Self Cut Off, Indicators, Reset, Terminated	2.92mm Female	60	1	28	3	EAR99
<b>FMSW6323</b> 	SP6T	40 GHz	Latching/Self Cut Off, TTL Logic, Indicators, Reset, Terminated	2.92mm Female	60	1	12	3	EAR99
<b>FMSW6324</b> 	SP6T	40 GHz	Latching/Self Cut Off, TTL Logic, Indicators, Reset, Terminated	2.92mm Female	60	1	28	3	EAR99

## RF Relay A/B Coax Switches
















FM P/N	Switch Type	Frequency (DC to X GHz)	Actuator / Features	Connector Type	Isolation dB (min)	Insertion Loss dB (max)	Operating Voltage (Vdc)	RF Power (Watts CW)	ECCN
<b>FMSW1000</b> 	A/B Coaxial	1,000 MHz		BNC Female	50	0.7	12	5	EAR99
<b>FMSW1002</b> 	A/B Coaxial	1,000 MHz		N Female	50	0.7	12	5	EAR99

# Waveguides

## Waveguide Electromechanical Relay Switches
















FM P/N	Waveguide Type	Switch Type	RF Freq. Range (GHz)	Actuator/Features	Insertion Loss (dB)	Isolation (dB)	DC Power (Volts)	Power Rating (Watts)	ECCN	ECCN
<a href="#">FMWGS6058</a> 	WR-28	SPDT/DPDT	26.5 - 40	FailsafeTTL Logic, Window Indicator, Manual Override	0.15	55	12	550	Yes	EAR99
<a href="#">FMWGS6059</a> 	WR-28	SPDT/DPDT	26.5 - 40	FailsafeTTL Logic, Window Indicator, Manual Override	0.15	55	28	550	Yes	EAR99
<a href="#">FMWGS6056</a> 	WR-28	SPDT/DPDT	26.5 - 40	FailsafeWindow Indicator, Manual Override	0.15	55	12	550	Yes	EAR99
<a href="#">FMWGS6057</a> 	WR-28	SPDT/DPDT	26.5 - 40	FailsafeWindow Indicator, Manual Override	0.15	55	28	550	Yes	EAR99
<a href="#">FMWGS6002</a> 	WR-28	SPDT	26.5 - 40	Break Before Make, Latching, Self Cut Off, Window Indicator, Manual Override	0.15	55	12	550	Yes	EAR99
<a href="#">FMWGS6000</a> 	WR-28	SPDT	26.5 - 40	Break Before Make, Latching, Self Cut Off, Window Indicator, Manual Override	0.15	55	28	550	Yes	EAR99
<a href="#">FMWGS6003</a> 	WR-28	SPDT	26.5 - 40	Break Before Make, Latching, TTL Logic, Self Cut Off, Window Indicator, Manual Override	0.15	55	12	550	Yes	EAR99
<a href="#">FMWGS6001</a> 	WR-28	SPDT	26.5 - 40	Break Before Make, Latching, TTL Logic, Self Cut Off, Window Indicator, Manual Override	0.15	55	28	550	Yes	EAR99
<a href="#">FMWGS6042</a> 	WR-34	SPDT/DPDT	22 - 33	Latching, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.15	60	12	620	Yes	EAR99
<a href="#">FMWGS6040</a> 	WR-34	SPDT/DPDT	22 - 33	Latching, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.15	60	28	620	Yes	EAR99
<a href="#">FMWGS6043</a> 	WR-34	SPDT/DPDT	22 - 33	Latching, TTL Logic, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.15	60	12	620	Yes	EAR99
<a href="#">FMWGS6041</a> 	WR-34	SPDT/DPDT	22 - 33	Latching, TTL Logic, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.15	60	28	620	Yes	EAR99
<a href="#">FMWGS6006</a> 	WR-42	SPDT	18 - 26.5	Break Before Make, Latching, Self Cut Off, Window Indicator, Manual Override	0.15	60	12	800	Yes	EAR99
<a href="#">FMWGS6004</a> 	WR-42	SPDT	18 - 26.5	Break Before Make, Latching, Self Cut Off, Window Indicator, Manual Override	0.15	60	28	800	Yes	EAR99
<a href="#">FMWGS6007</a> 	WR-42	SPDT	18 - 26.5	Break Before Make, Latching, TTL Logic, Self Cut Off, Window Indicator, Manual Override	0.15	60	12	800	Yes	EAR99

## Waveguide Electromechanical Relay Switches Continued
















FM P/N	Waveguide Type	Switch Type	RF Freq. Range (GHz)	Actuator/Features	Insertion Loss (dB)	Isolation (dB)	DC Power (Volts)	Power Rating (Watts)	ECCN	ECCN
<a href="#">FMWGS6005</a> 	WR-42	SPDT	18 - 26.5	Break Before Make, Latching, TTL Logic, Self Cut Off, Window Indicator, Manual Override	0.15	60	28	800	Yes	EAR99
<a href="#">FMWGS6010</a> 	WR-62	SPDT	12.4 - 18	Break Before Make, Latching, Self Cut Off, Window Indicator, Manual Override	0.1	60	12	2,000	Yes	EAR99
<a href="#">FMWGS6008</a> 	WR-62	SPDT	12.4 - 18	Break Before Make, Latching, Self Cut Off, Window Indicator, Manual Override	0.1	60	28	2,000	Yes	EAR99
<a href="#">FMWGS6011</a> 	WR-62	SPDT	12.4 - 18	Break Before Make, Latching, TTL Logic, Self Cut Off, Window Indicator, Manual Override	0.1	60	12	2,000	Yes	EAR99
<a href="#">FMWGS6009</a> 	WR-62	SPDT	12.4 - 18	Break Before Make, Latching, TTL Logic, Self Cut Off, Window Indicator, Manual Override	0.1	60	28	2,000	Yes	EAR99
<a href="#">FMWGS6014</a> 	WR-75	SPDT	10 - 15	Break Before Make, Latching, Self Cut Off, Window Indicator, Manual Override	0.05	75	12	3,500	Yes	EAR99
<a href="#">FMWGS6012</a> 	WR-75	SPDT	10 - 15	Break Before Make, Latching, Self Cut Off, Window Indicator, Manual Override	0.05	75	28	3,500	Yes	EAR99
<a href="#">FMWGS6015</a> 	WR-75	SPDT	10 - 15	Break Before Make, Latching, TTL Logic, Self Cut Off, Window Indicator, Manual Override	0.05	75	12	3,500	Yes	EAR99
<a href="#">FMWGS6013</a> 	WR-75	SPDT	10 - 15	Break Before Make, Latching, TTL Logic, Self Cut Off, Window Indicator, Manual Override	0.05	75	28	3,500	Yes	EAR99
<a href="#">FMWGS6062</a> 	WR-90	SPDT/DPDT	8.2 - 12.4	FailsafeTTL Logic, Window Indicator, Manual Override	0.07	80	12	5,000	Yes	EAR99
<a href="#">FMWGS6066</a> 	WR-90	SPDT/DPDT	8.2 - 12.4	FailsafeTTL Logic, Window Indicator, Manual Override	0.07	80	12	5,000	Yes	EAR99
<a href="#">FMWGS6063</a> 	WR-90	SPDT/DPDT	8.2 - 12.4	FailsafeTTL Logic, Window Indicator, Manual Override	0.07	80	28	5,000	Yes	EAR99
<a href="#">FMWGS6067</a> 	WR-90	SPDT/DPDT	8.2 - 12.4	FailsafeTTL Logic, Window Indicator, Manual Override	0.07	80	28	5,000	Yes	EAR99
<a href="#">FMWGS6060</a> 	WR-90	SPDT/DPDT	8.2 - 12.4	FailsafeWindow Indicator, Manual Override	0.07	80	12	5,000	Yes	EAR99
<a href="#">FMWGS6064</a> 	WR-90	SPDT/DPDT	8.2 - 12.4	FailsafeWindow Indicator, Manual Override	0.07	80	12	5,000	Yes	EAR99



## Waveguide Electromechanical Relay Switches Continued

FM P/N	Waveguide Type	Switch Type	RF Freq. Range (GHz)	Actuator/Features	Insertion Loss (dB)	Isolation (dB)	DC Power (Volts)	Power Rating (Watts)	ECCN	ECCN
<a href="#">FMWGS6061</a> 	WR-90	SPDT/DPDT	8.2 - 12.4	Failsafe Window Indicator, Manual Override	0.07	80	28	5,000	Yes	EAR99
<a href="#">FMWGS6065</a> 	WR-90	SPDT/DPDT	8.2 - 12.4	Failsafe Window Indicator, Manual Override	0.07	80	28	5,000	Yes	EAR99
<a href="#">FMWGS6018</a> 	WR-90	SPDT	8.2 - 12.4	Break Before Make, Latching, Self Cut Off, Window Indicator, Manual Override	0.07	80	12	5,000	Yes	EAR99
<a href="#">FMWGS6016</a> 	WR-90	SPDT	8.2 - 12.4	Break Before Make, Latching, Self Cut Off, Window Indicator, Manual Override	0.07	80	28	5,000	Yes	EAR99
<a href="#">FMWGS6019</a> 	WR-90	SPDT	8.2 - 12.4	Break Before Make, Latching, TTL Logic, Self Cut Off, Window Indicator, Manual Override	0.07	80	12	5,000	Yes	EAR99
<a href="#">FMWGS6017</a> 	WR-90	SPDT	8.2 - 12.4	Break Before Make, Latching, TTL Logic, Self Cut Off, Window Indicator, Manual Override	0.07	80	28	5,000	Yes	EAR99
<a href="#">FMWGS6038</a> 	WR-102	SPDT/DPDT	7 - 11	Latching, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.06	80	12	6,000	Yes	EAR99
<a href="#">FMWGS6036</a> 	WR-102	SPDT/DPDT	7 - 11	Latching, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.06	80	28	6,000	Yes	EAR99
<a href="#">FMWGS6039</a> 	WR-102	SPDT/DPDT	7 - 11	Latching, TTL Logic, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.06	80	12	6,000	Yes	EAR99
<a href="#">FMWGS6037</a> 	WR-102	SPDT/DPDT	7 - 11	Latching, TTL Logic, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.06	80	28	6,000	Yes	EAR99
<a href="#">FMWGS6070</a> 	WR-112	SPDT/DPDT	7.05 - 10	Failsafe TTL Logic, Window Indicator, Manual Override	0.05	80	12	7,000	Yes	EAR99
<a href="#">FMWGS6071</a> 	WR-112	SPDT/DPDT	7.05 - 10	Failsafe TTL Logic, Window Indicator, Manual Override	0.05	80	28	7,000	Yes	EAR99
<a href="#">FMWGS6068</a> 	WR-112	SPDT/DPDT	7.05 - 10	Failsafe Window Indicator, Manual Override	0.05	80	12	7,000	Yes	EAR99
<a href="#">FMWGS6069</a> 	WR-112	SPDT/DPDT	7.05 - 10	Failsafe Window Indicator, Manual Override	0.05	80	28	7,000	Yes	EAR99
<a href="#">FMWGS6022</a> 	WR-112	SPDT	7.05 - 10	Break Before Make, Latching, Self Cut Off, Window Indicator, Manual Override	0.05	80	12	7,000	Yes	EAR99

## Waveguide Electromechanical Relay Switches Continued

FM P/N	Waveguide Type	Switch Type	RF Freq. Range (GHz)	Actuator/Features	Insertion Loss (dB)	Isolation (dB)	DC Power (Volts)	Power Rating (Watts)	ECCN	ECCN
<a href="#">FMWGS6020</a> 	WR-112	SPDT	7.05 - 10	Break Before Make, Latching, Self Cut Off, Window Indicator, Manual Override	0.05	80	28	7,000	Yes	EAR99
<a href="#">FMWGS6023</a> 	WR-112	SPDT	7.05 - 10	Break Before Make, Latching, TTL Logic, Self Cut Off, Window Indicator, Manual Override	0.05	80	12	7,000	Yes	EAR99
<a href="#">FMWGS6021</a> 	WR-112	SPDT	7.05 - 10	Break Before Make, Latching, TTL Logic, Self Cut Off, Window Indicator, Manual Override	0.05	80	28	7,000	Yes	EAR99
<a href="#">FMWGS6026</a> 	WR-137	SPDT	5.85 - 8.2	Break Before Make, Latching, Self Cut Off, Window Indicator, Manual Override	0.02	70	12	12,000	Yes	EAR99
<a href="#">FMWGS6024</a> 	WR-137	SPDT	5.85 - 8.2	Break Before Make, Latching, Self Cut Off, Window Indicator, Manual Override	0.02	70	28	12,000	Yes	EAR99
<a href="#">FMWGS6027</a> 	WR-137	SPDT	5.85 - 8.2	Break Before Make, Latching, TTL Logic, Self Cut Off, Window Indicator, Manual Override	0.02	70	12	12,000	Yes	EAR99
<a href="#">FMWGS6025</a> 	WR-137	SPDT	5.85 - 8.2	Break Before Make, Latching, TTL Logic, Self Cut Off, Window Indicator, Manual Override	0.02	70	28	12,000	Yes	EAR99
<a href="#">FMWGS6034</a> 	WR-159	SPDT/DPDT	4.9 - 7.05	Latching, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.06	70	12	12,000	Yes	EAR99
<a href="#">FMWGS6032</a> 	WR-159	SPDT/DPDT	4.9 - 7.05	Latching, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.06	70	28	12,000	Yes	EAR99
<a href="#">FMWGS6035</a> 	WR-159	SPDT/DPDT	4.9 - 7.05	Latching, TTL Logic, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.06	70	12	12,000	Yes	EAR99
<a href="#">FMWGS6033</a> 	WR-159	SPDT/DPDT	4.9 - 7.05	Latching, TTL Logic, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.06	70	28	12,000	Yes	EAR99
<a href="#">FMWGS6030</a> 	WR-187	SPDT/DPDT	3.95 - 5.85	Latching, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.02	80	12	22,000	Yes	EAR99
<a href="#">FMWGS6028</a> 	WR-187	SPDT/DPDT	3.95 - 5.85	Latching, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.02	80	28	22,000	Yes	EAR99
<a href="#">FMWGS6031</a> 	WR-187	SPDT/DPDT	3.95 - 5.85	Latching, TTL Logic, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.002	80	12	22,000	Yes	EAR99
<a href="#">FMWGS6029</a> 	WR-187	SPDT/DPDT	3.95 - 5.85	Latching, TTL Logic, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.02	80	28	22,000	Yes	EAR99


## Double Ridge Waveguide Electromechanical Relay Switches

FM P/N	Waveguide Type	Switch Type	RF Freq. Range (GHz)	Actuator/Features	Insertion Loss (dB)	Isolation (dB)	DC Power (Volts)	Power Rating (Watts)	ECCN	ECCN
<a href="#">FMWGS6054</a> 	WRD-180	SPDT/DPDT	18 - 40	Latching, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.4	50	12	2,000	Yes	EAR99
<a href="#">FMWGS6052</a> 	WRD-180	SPDT/DPDT	18 - 40	Latching, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.4	50	28	2,000	Yes	EAR99
<a href="#">FMWGS6055</a> 	WRD-180	SPDT/DPDT	18 - 40	Latching, TTL Logic, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.4	50	12	2,000	Yes	EAR99
<a href="#">FMWGS6053</a> 	WRD-180	SPDT/DPDT	18 - 40	Latching, TTL Logic, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.4	50	28	2,000	Yes	EAR99
<a href="#">FMWGS6046</a> 	WRD-650	SPDT/DPDT	6.5 - 18	Latching, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.35	60	12	8,500	Yes	EAR99
<a href="#">FMWGS6044</a> 	WRD-650	SPDT/DPDT	6.5 - 18	Latching, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.35	60	28	8,500	Yes	EAR99
<a href="#">FMWGS6047</a> 	WRD-650	SPDT/DPDT	6.5 - 18	Latching, TTL Logic, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.35	60	12	8,500	Yes	EAR99
<a href="#">FMWGS6045</a> 	WRD-650	SPDT/DPDT	6.5 - 18	Latching, TTL Logic, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.35	60	28	8,500	Yes	EAR99
<a href="#">FMWGS6050</a> 	WRD-750	SPDT/DPDT	7.5 - 18	Latching, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.3	60	12	8,500	Yes	EAR99
<a href="#">FMWGS6048</a> 	WRD-750	SPDT/DPDT	7.5 - 18	Latching, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.3	60	28	8,500	Yes	EAR99
<a href="#">FMWGS6051</a> 	WRD-750	SPDT/DPDT	7.5 - 18	Latching, TTL Logic, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.3	60	12	8,500	Yes	EAR99
<a href="#">FMWGS6049</a> 	WRD-750	SPDT/DPDT	7.5 - 18	Latching, TTL Logic, Self Cut Off, Set Indicators, Manual Override, Viewing Window	0.3	60	28	8,500	Yes	EAR99

# Get the Right Parts Right Away at fairviewmicrowave.com

## Your Parts are In-Stock and Ready to Ship!

- ✓ Parameter-based online search for quick and easy product selection
- ✓ Same-day shipping on orders placed by 4 pm CST, with no minimal order requirements
- ✓ Online pricing and inventory for thousands of components and assemblies
- ✓ Detailed product datasheets with specifications and CAD drawings
- ✓ RF calculators, conversion tools, technical articles and more
- ✓ Downloadable product selling guides
- ✓ Payment terms available to qualified businesses

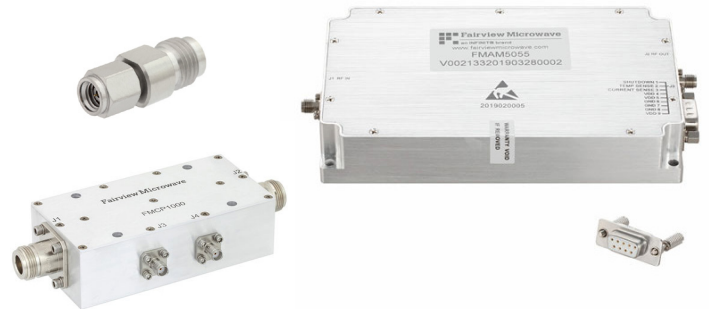


## Who We Are

Since 1992, Fairview Microwave has been a leading supplier of high-quality RF and microwave components in the U.S. and across the globe and specializes in immediate product needs by offering same-day shipping on thousands of in-stock items with no minimum purchasing requirements.

We know that having the correct parts shipped directly to you the same day you order them can mean the difference between project success and failure. That's why Fairview maintains an inventory of thousands of RF products including adapters, connectors, amplifiers, attenuators, coaxial cables, waveguide, terminations and more. In addition, Fairview holds an extensive component inventory to build custom cable assemblies that can be designed to your exact specifications and shipped same day.

All orders are shipped from our ISO 9001:2015 certified production facilities in Lewisville, Texas and backed by expert technical service and engineering support so that no matter the project, timeline, or requirements you can get the right parts, right away.

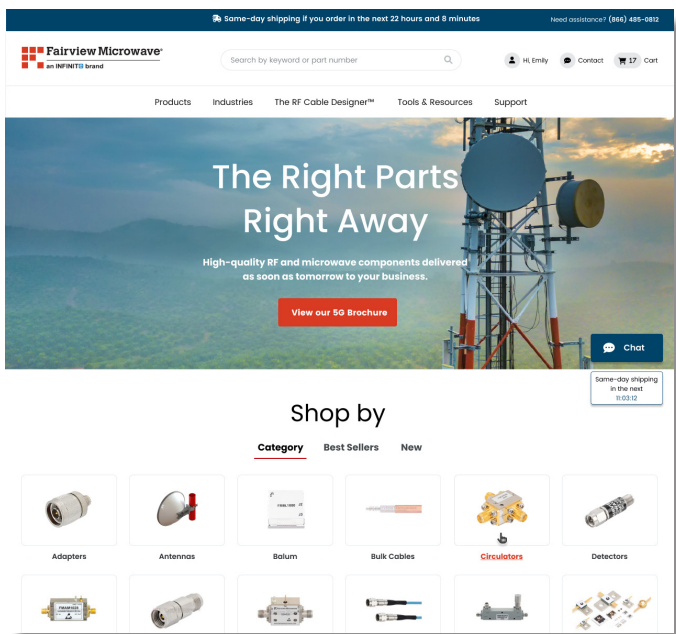

# Create Your Own Custom Cable Assemblies with The RF Cable Designer™

Over 250,000 Custom Cable  
Configurations Available to Ship  
Same-Day!

- Choose from over 2,030 RF coax connectors
- 123 coaxial cable types, including Twinax
- Choose your desired length (metric or standard)
- Includes high-reliability and low PIM assembly types



Full-Service Testing Including:

- RF testing to 65 GHz
- PIM testing up to -117 dBm (-160 dBc)
- Phase Matching +/- 2 degrees per GHz
- Hi Pot testing to 5,000 volts DC and 6,000 volts AC



Value-Added Services for  
Custom Assemblies Include:

- Custom booting/heat shrink
- Special labeling
- Test plots provided for an additional fee
- Custom connector clocking of right angle connectors
- Serialized test data available for high performance test cables



The information contained in this document is accurate to the best of our knowledge at time of publication. It may be necessary to make modifications to the parts and/or the documentation of the parts, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the parts described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any parts or documentation.



#### About Infinite Electronics

Infinite Electronics has a global portfolio of leading in-stock connectivity solution brands. Infinite's brands help propel the world's innovators forward by working urgently to provide products, solutions and real-time support for their customers. Backed by Warburg Pincus, Infinite's brands serve customers across a wide range of industries with a broad inventory selection, same-day shipping and 24/7 customer service. Learn more at [InfiniteElectronics.com](https://www.InfiniteElectronics.com)

[fairviewmicrowave.com](https://www.fairviewmicrowave.com) | [infiniteelectronics.com](https://www.infiniteelectronics.com)



**Same-Day Shipping**  
on orders placed by 4:00 pm CT



**Secure Online Ordering**  
[fairviewmicrowave.com](https://www.fairviewmicrowave.com)  
[sales@fairviewmicrowave.com](mailto:sales@fairviewmicrowave.com)



**24-Hour Support**  
by phone, chat or email



**USA & Canada: +1 (800) 715-4396**  
International: +1 (972) 649-6678