




 **PavingDirect**

Laying Patterns

www.pavingdirect.com

9.0m² Fairford Contractor Pack

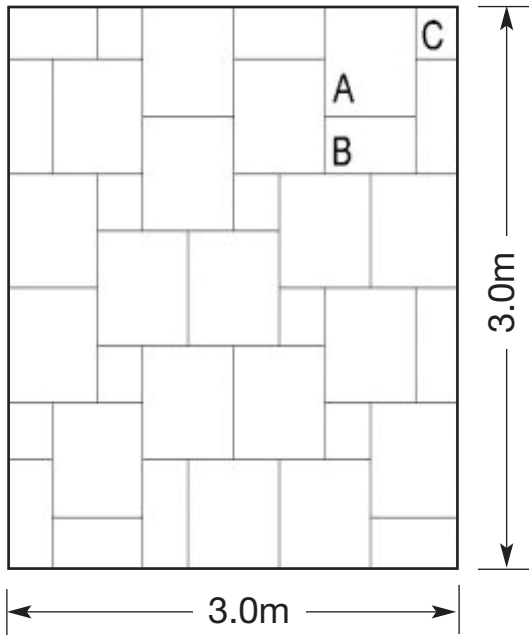


Total coverage per pack 9.0m² when laid with 7 - 14mm joints (10mm average).

A = 18 No. 600x600

B = 10 No. 600x300

C = 08 No. 300x300

9m² Tanners Mill Contractor Pack

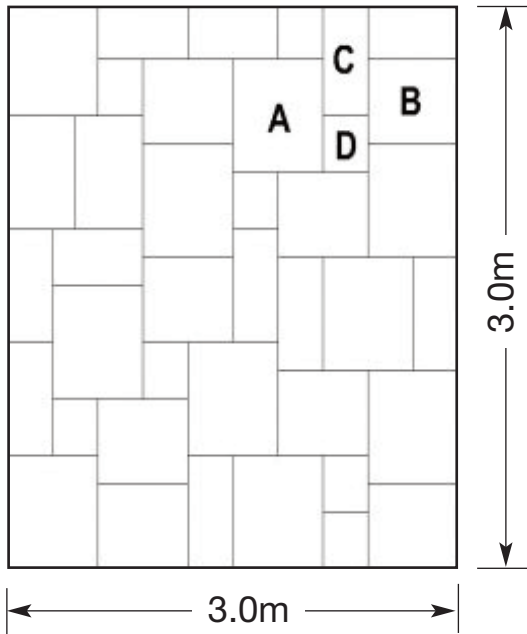

Total coverage per pack 9.0m² when laid with 7 - 14mm joints (10mm average).


A = 10 No. 600x600

B = 10 No. 600x450

C = 12 No. 600x300

D = 08 No. 300x300

15m² Limestone Sawn Contractor Pack

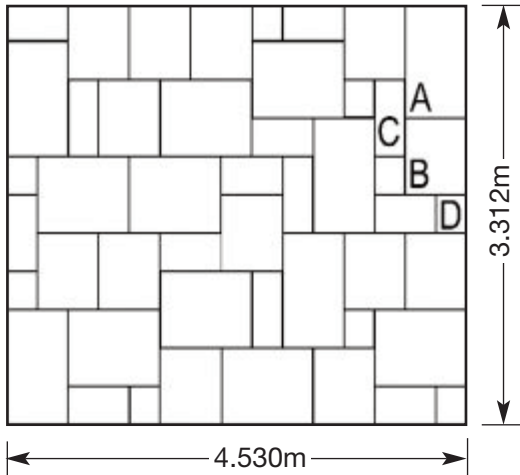

Total coverage per pack 15m² when laid with 8 - 16mm joints (10mm average).


A = 13 No. 900x600

B = 13 No. 600x600

C = 13 No. 600x290

D = 09 No. 290x290

20.7m² Sandstone Contractor Pack

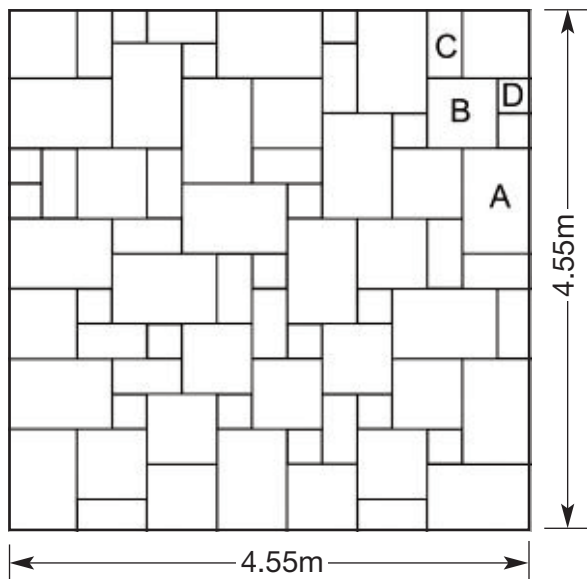

**Total coverage per pack 20.7m²
when laid with 8 - 14mm joints
(10mm average).**


A = 17 No. 900x600

B = 17 No. 600x600

C = 18 No. 900x290

D = 19 No. 290x290

15m² Piazza & Regal Contractor Pack

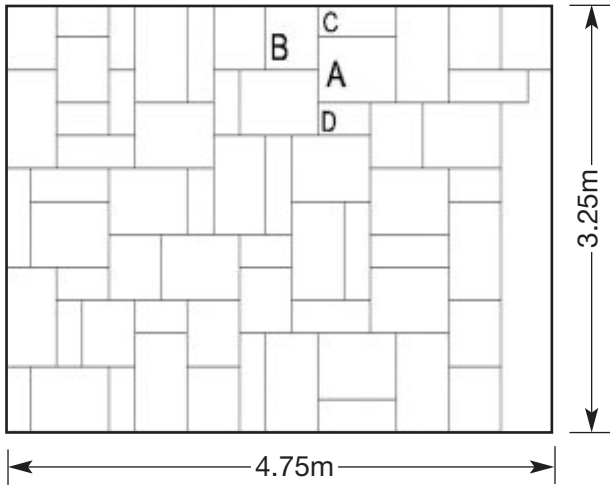

**Total coverage per pack 15.75m²
when laid with 8 - 16mm joints
(10mm average).**


A = 22 No. 750x500

B = 14 No. 500x500

C = 12 No. 750x250

D = 14 No. 500x250

11.47m² Tudor Cobbles Contractor Pack

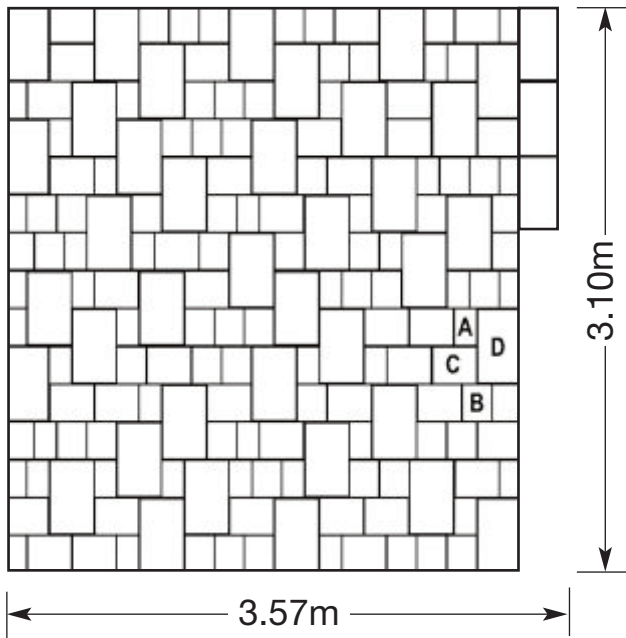

Total coverage per pack 11.47m²
when laid with 7 - 14mm joints
(10mm average).

A = 41 No. 200x150

B = 57 No. 200x200

C = 38 No. 300x200

D = 41 No. 400x400

 **PavingDirect**

Info@pavingdirect.com

www.pavingdirect.com