

# Using Statistical and Symbolic Simulation for Microprocessor Performance Evaluation

**Mark Oskin**

*Department of Computer Science and Engineering  
University of Washington  
Seattle, WA 98195 USA*

OSKIN@CS.WASHINGTON.EDU

**Frederic T. Chong**

*Department of Computer Science  
University of California at Davis  
Davis, CA 95616 USA*

CHONG@CS.UCDAVIS.EDU

**Matthew Farrens**

FARRENS@CS.UCDAVIS.EDU

## Abstract

As microprocessor designs continue to evolve, many optimizations reach a point of diminishing returns. We introduce HLS, a hybrid processor simulator which uses statistical models and symbolic execution to evaluate design alternatives. This simulation methodology enables quick and accurate generation of contour maps of the performance space spanned by design parameters. We validate the accuracy of HLS through correlation with existing cycle-by-cycle simulation techniques and current generation hardware. We demonstrate the power of HLS by exploring design spaces defined by two parameters: code properties and value prediction. These examples motivate how HLS can be used to set design goals and individual component performance targets.

## 1. Introduction

In this paper, we introduce a new methodology of study for microprocessor design. This methodology involves statistical profiling of benchmarks using a conventional simulator, followed by the execution of a hybrid simulator that combines statistical models and symbolic execution. Using this simulation methodology, it is possible to explore changes in architectures and compilers that would be either impractical or impossible using conventional simulation techniques.

We demonstrate that a statistical model of instruction and data streams, coupled with a structural simulation of instruction issue and functional units, can produce instructions per cycle (IPC) results that are within 5-7% of cycle-by-cycle simulation. Using this methodology, we are able to generate statistical contour maps of microprocessor design spaces. Many of these maps verify our intuitions. More significantly, they allow us to more firmly relate previously decoupled parameters, including: instruction fetch mechanisms, branch prediction, code generation, and value prediction.

This work was originally presented in a short paper [1]. While the original version focused upon only one “average” application (*perl*) in the bulk of our design space explorations, this paper presents a broader range of data points for all design parameters examined. In addition to *perl*, *xlisp* and *vortex* are examined in depth – covering the extremes of instruction cache and branch predictor behavior in the SPEC95 suite. Novel material on the relationship of IPC variance and statistical accuracy is also presented. Finally, a more exhaustive set of results is included.

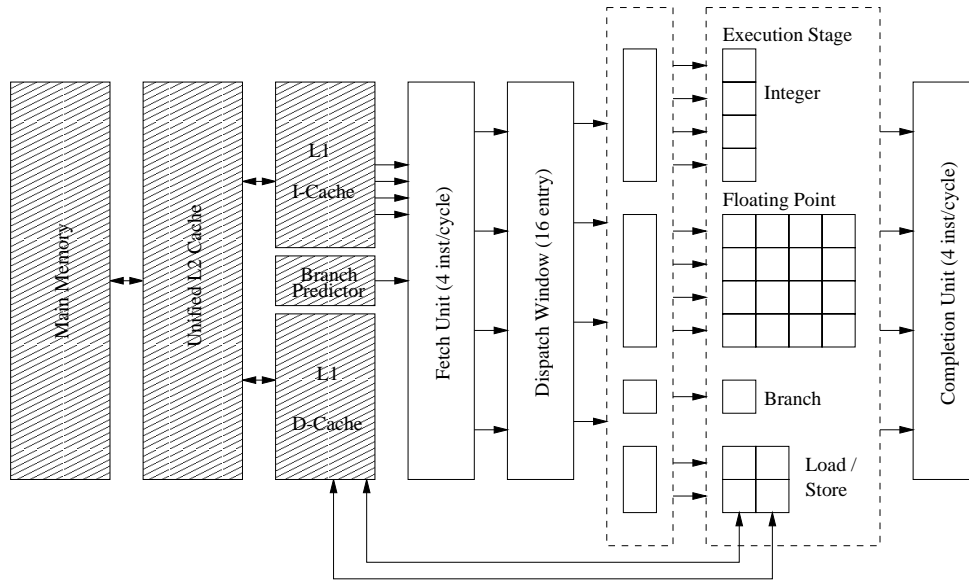


Figure 1: Simulated Architecture

In the next section, we describe the HLS (High Level Simulator) simulator. Next in Section 3 we validate HLS against conventional simulation techniques. In Section 4, the HLS simulator is used to explore various architectural parameters. Then in Section 5, we discuss our results and summarize some of the potential pitfalls of this simulation technique. In Section 6, we discuss related work in this field. Finally, future work is discussed in Section 7, and Section 8 presents the conclusions.

## 2. HLS: A Statistical Simulator

HLS is a hybrid simulator which uses statistical profiles of applications to model instruction and data streams. HLS takes as input a statistical profile of an application, dynamically generates a code base from the profile, and symbolically executes this statistical code on a superscalar microprocessor core. The use of statistical profiles greatly enhances flexibility and speed of simulation. For example, we can smoothly vary dynamic instruction distance or value predictability. This flexibility is only possible with a synthetic, rather than actual, code stream. Furthermore, HLS executes a statistical sample of instructions rather than an entire program, which dramatically decreases simulation time and enables a broader design space exploration which is not practical with conventional simulators. In this section, we describe the HLS simulator, focusing on the statistical profiles, method of simulated execution, and validation with conventional simulation techniques.

### 2.1 Architecture

The key to the HLS approach lies in its mixture of statistical models and structural simulation. This mixture can be seen in Figure 1, where components of the simulator which use statistical models are shaded in gray. HLS does not simulate the precise order of instructions or memory accesses in

Parameter	Value
Instruction fetch bandwidth	4 inst.
Instruction dispatch bandwidth	4 inst.
Dispatch window size	16 inst.
Integer functional units	4
Floating point functional units	4
Load/Store functional units	2
Branch units	1
Pipeline stages (integer)	1
Pipeline stages (floating point)	4
Pipeline stages (load/store)	2
Pipeline stages (branch)	1
L1 I-cache access time (hit)	1 cycle
L1 D-cache access time (hit)	1 cycle
L2 cache access time (hit)	6 cycles
Main memory access time (latency+transfer)	34 cycles
Fetch unit stall penalty for branch mis-predict	3 cycles
Fetch unit stall penalty for value mis-predict	3 cycles

Table 1: Simulated Architecture configuration

a particular program. Rather, it uses a statistical profile of an application to generate a synthetic instruction stream. Cache behavior is also modeled with a statistical distribution.

Once the instruction stream is generated, HLS symbolically issues and executes instructions much as a conventional simulator does. The structural model of the processor closely follows that of the SimpleScalar tool set [2], a widely used processor simulator. This structure, however, is general and configurable enough to allow us to model and validate against a MIPS R10K processor in Section 3.2.

The overall system consists of a superscalar microprocessor, split L1 caches, a unified L2 cache, and a main memory. The processor supports out-of-order issue, dispatch and completion. It has five major pipeline stages: instruction fetch, dispatch, schedule, execute, and complete. The similarity to SimpleScalar is not a coincidence: the SimpleScalar tools are used to gather the statistical profile needed by HLS. We will also compare results from SimpleScalar and HLS to validate the hybrid approach. The simulator is fully programmable in terms of queue sizes and inter-pipeline stage bandwidth; however, the baseline architecture was chosen to match the baseline SimpleScalar architecture. The various configuration parameters are summarized in Table 1.

## 2.2 Statistical profiles

In order to use the HLS simulator, an input profile of a real application must first be generated. Once the profile is generated, it is interpreted, a synthetic code sample is constructed, and this code is executed by the HLS simulator. Since HLS is probability-based, the process of execution is usually repeated several times in order to reduce the standard deviation of the observed IPC. This overall process flow is depicted in Figure 2.

Statistical data collection of actual benchmarks is performed in the following manner:

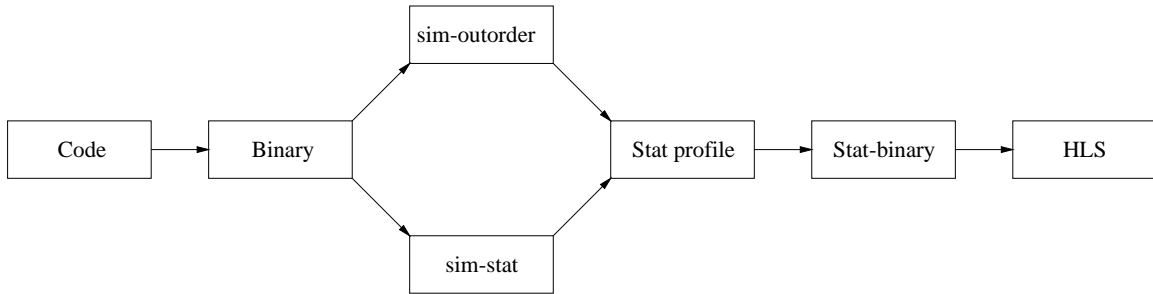


Figure 2: Simulation process

Value	perl	compress	gcc	go	jpeg	li	m88ksim	vortex
Basic block size ( $\mu$ )	5.21	4.69	4.93	5.96	6.26	4.39	6.25	5.78
Basic block size ( $\sigma$ )	3.63	4.91	4.57	5.16	12.65	3.04	5.33	5.54
Integer Instructions	30%	42%	38%	51%	53%	34%	54%	31%
FP Instructions	1%	<1%	0%	0%	0%	0%	0%	0%
Load Instructions	31%	22%	27%	23%	22%	26%	21%	26%
Store Instructions	18%	12%	15%	8%	10%	17%	9%	25%
Branch Instructions	19%	21%	20%	17%	16%	23%	16%	18%
Branch Predictability	91.4%	86.3%	87.6%	81.8%	90.0%	87.9%	91.8%	97.4%
L1 I-cache hit rate	96.4%	99.9%	93.7%	95.0%	99.1%	99.9%	94.1%	90.2%
L1 D-cache hit rate	99.9%	84.6%	97.8%	96.6%	99.1%	98.4%	99.6%	97.8%
L2 cache hit rate	99.9%	99.1%	97.3%	96.9%	94.5%	99.8%	99.1%	97.6%

Table 2: Statistical baseline parameters for SPECint95 (ref input, first 1 billion instructions)

- The program code is compiled and a conventional binary is produced. This binary is targeted for the SimpleScalar tool suite.
- The binary is run on a modified SimpleScalar simulator. The statistical profile consists of the basic block size and distribution and a histogram of the dynamic instruction distance between instructions for each major instruction type (integer, floating-point, load, store, and branch). This dynamic instruction distance forms a critical aspect of the statistical profile and will be discussed further in this section.
- The binary is also run on a standard SimpleScalar simulator. Here, statistics about cache behavior and branch prediction accuracy are collected.

These steps were performed on the SPECint95 benchmark suite. A summary of the results (less dynamic dependence information) is presented in Table 2. Note that the average basic block size is around 5 instructions, and the wide variability in each of these averages (as indicated by the high standard deviation). This variability was modeled in the simulator.

Across most benchmarks, we found a relatively high branch predictability of 86-91%. This figure is a combination of both correctly predicted branches using the 2-level bimodal branch predictor

and those that were statically determined (such as jumps). The exception is the *go* benchmark which has very poor predictor performance.

Table 2 shows that two distinctive L1 I-cache behaviors are occurring. The *compress*, *jpeg*, and *xlisp* benchmarks have L1 I-cache hit rates greater than 99%, while *gcc*, *m88ksim*, *perl* and *go* have I-cache hit rates greater than 90%.


Dynamic instruction distance (DID), or the distance between an instruction and the instructions that are dependent upon it within the dynamic instruction stream, is a significant statistical component in the performance of an application. Intuitively, longer DID permits more overlap of instructions within the execution core of the processor. In order to correctly model a superscalar microprocessor, HLS must use DID information from real programs.

The DID information for the *xlisp*, *perl* and *vortex* SPECint95 benchmark is presented in Figure 3. (Although the DID is program dependent, space considerations permit us to only illustrate the consolidated DID information for only these three benchmarks.) Figure 3 illustrates that the DID information for an application might be parameterizable using an exponential formulation. However, we found DID to be a critical factor in the accuracy of HLS. Hence, we chose to directly extract a histogram from SimpleScalar of DID information. Note that for each instruction type, two histograms of DID are utilized – one for each input register dependence.


### 2.3 Statistical Code Generation

Once the statistical profile is generated, the first step in the simulation process is to generate the symbolic code sample. This symbolic code consists of instructions contained in basic blocks that are linked together into a static program flow-control graph, very much like conventional code. The difference is in the instructions themselves. Instead of containing actual arguments, each “instruction” contains the following set of statistical parameters:


- *Functional unit requirements*: these are described by a single parameter that specifies which functional unit is required inside the execution core of the processor to complete the instruction. This requirement is statically assigned to each instruction at code generation time and the distribution of functional unit requirements follows the breakdown of instruction types as shown in Table 2. This is done on a program-by-program basis.
- *L1I-p, L1D-p, L2I-p, L2D-p*: The L1 I-cache, L1 D-cache and L2 cache behavior is classified into four normal distributions with a mean centered around the hit rate gathered from direct program simulation using SimpleScalar. Although the simulator permits the L2 cache to be split, for this study L2I-p and L2D-p are set equal. This corresponds to the baseline SimpleScalar configuration.
- *Dynamic instruction distances*: These parameters are determined from the histogram profile obtained from simulation with SimpleScalar. They determine which instructions the current instruction is dependent upon, in a dynamic sense. These are not linked statically, but rather only the distance is stored. For instance, instead of an instruction containing explicit register references such as *r2* or *r7*, dependence distances such as *4* and *1* are stored indicating the instruction depends on the 4th and 1st instruction back in the instruction stream. As instructions are fetched, the exact dependencies are resolved at execution-time. Care is taken in the code generator to prevent the DID from pointing to a store or a branch, which would make

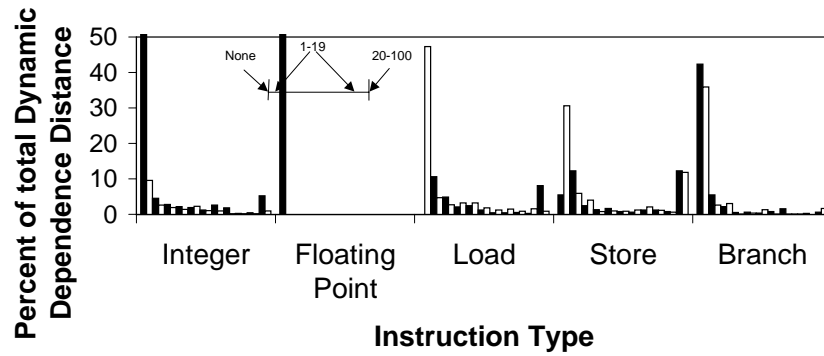

(a) Vortex

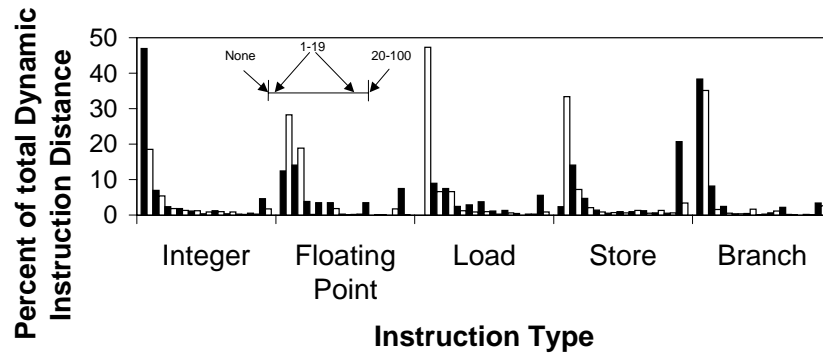

(b) Perl

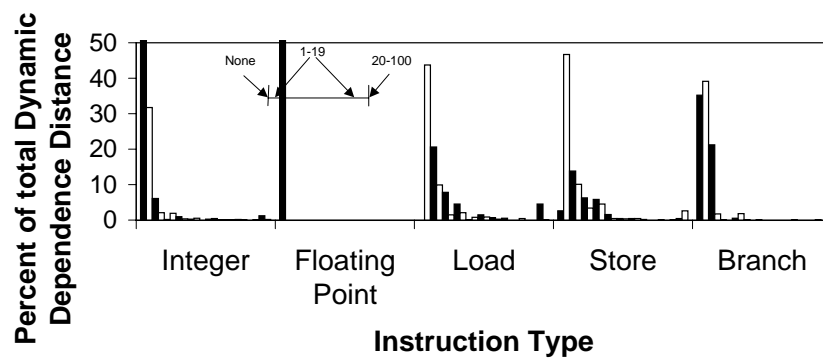

(c) Xlisp

Figure 3: Dynamic instruction distances

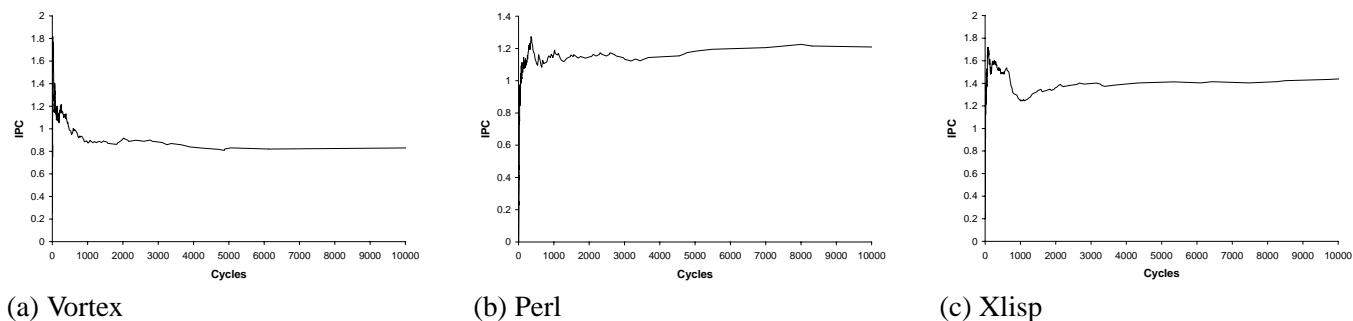


Figure 4: Simulation IPC convergence time (cycles)

an instruction dependent upon another instruction that in real code would not ordinarily form the basis for a dependence.

Finally, each basic block is of a size determined by the normal distribution of code sizes gathered from simulation with SimpleScalar. Each basic block terminates with a branch, and the predictability of that branch is assigned by the code generator based upon the observed predictability from direct simulation. The various branch prediction accuracies and basic block size parameters for each application are shown in Table 2.

### 2.4 Execution

Execution of the HLS simulator is similar to a conventional simulator. The instruction fetch stage interacts with the branch predictor and I-cache system to fetch “instructions” and send them to the dispatch stage. The dispatch stage interprets these instructions and sends them to the reservation stations. Once all input dependencies have been resolved, the instruction moves from the reservation unit to an available functional unit pipeline. After executing in a functional unit, the result is “posted” to the completion unit if a result bus is available.

The observed IPC from HLS converges quickly during execution. Figure 4 depicts the IPC within HLS as instructions flow through the processor core for the first ten-thousand simulated machine cycles. Note that IPC rapidly settles down after the first one-thousand cycles, and after six-thousand cycles remains relatively constant.

The structural resources within the statistical simulator are sized to match the structural resources within the sim-outorder SimpleScalar simulator. This provides the basis for the validation of HLS using SimpleScalar, as well as the use of SimpleScalar as a source of program statistical profiles.

### 3. Validation and Limitations

Once a statistical profile is generated, that profile is executed several times and an average instructions per cycle (IPC) is calculated. The IPC is then used to gauge the relative performance

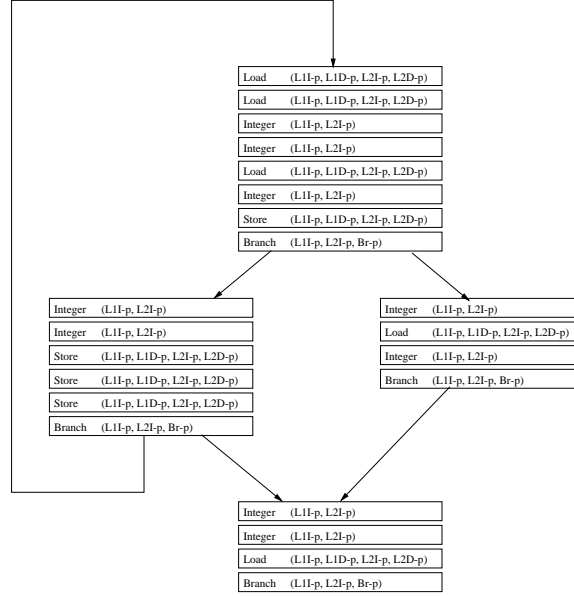


Figure 5: Simulated code example

Benchmark	Simple-scale IPC	HLS IPC	HLS IPC $\sigma$	Error
perl	1.10	1.12	0.03	2.3%
compress	1.70	1.76	0.05	3.2%
gcc	0.89	0.93	0.04	4.4%
go	0.87	0.86	0.02	0.1%
jpeg	1.67	1.74	0.04	3.7%
li	1.40	1.38	0.07	1.8%
m88ksim	1.32	1.30	0.04	1.7%
vortex	0.87	0.83	0.02	4.8%

Table 3: Correlation between SimpleScalar and HLS Simulators for SPECint95 (test input)



Benchmark	Simple-scale IPC	HLS IPC	HLS IPC $\sigma$	Error
perl	1.27	1.32	0.05	4.2%
compress	1.18	1.25	0.06	5.5%
gcc	0.92	0.96	0.03	3.9%
go	0.94	1.01	0.04	6.8%
jpeg	1.67	1.73	0.06	3.9%
li	1.62	1.50	0.06	7.2%
m88ksim	1.16	1.14	0.03	1.5%
vortex	0.87	0.83	0.03	5.1%

Table 4: Correlation between SimpleScalar and HLS Simulators for SPECint95 (ref input)

Benchmark	R10K IPC	HLS IPC	HLS IPC $\sigma$	Error
perl	1.01	1.09	0.05	7.8%
compress	0.70	0.69	0.04	2.6%
gcc	0.93	0.96	0.05	3.8%
go	0.99	0.98	0.06	0.9%
jpeg	1.45	1.40	0.09	4.0%
li	0.85	0.90	0.07	6.0%
m88ksim	1.15	1.15	0.08	0.1%
vortex	0.83	0.82	0.06	1.0%

Table 5: Correlation between MIPS R10k and HLS Simulators for SPECint95 (ref input)

differences between two experiments. It is important, however, to validate this simulation technique and ensure that the IPC reported by HLS is relevant. Furthermore, the statistical model is not perfect. Clearly, we cannot utilize the model to predict with perfect accuracy the performance of a benchmark over all possible ranges of processor configurations and component performances. It is important to find where the model works and where it does not.

### 3.1 Execution Correlations

Tables 3 and 4 list the experimental results from executing the SPECint95 benchmarks on both the test and reference inputs in SimpleScalar versus the statistical simulator. Across the board, we note that the error (the difference between the two simulation techniques) is not more than 4.8% and 7.2% respectively. This is for benchmarks with significantly different cache behaviors and code profiles. This agreement with such small error across eight different benchmark applications and two different input sets is encouraging and a substantial correlation point for the hybrid statistical-symbolic execution model of study.

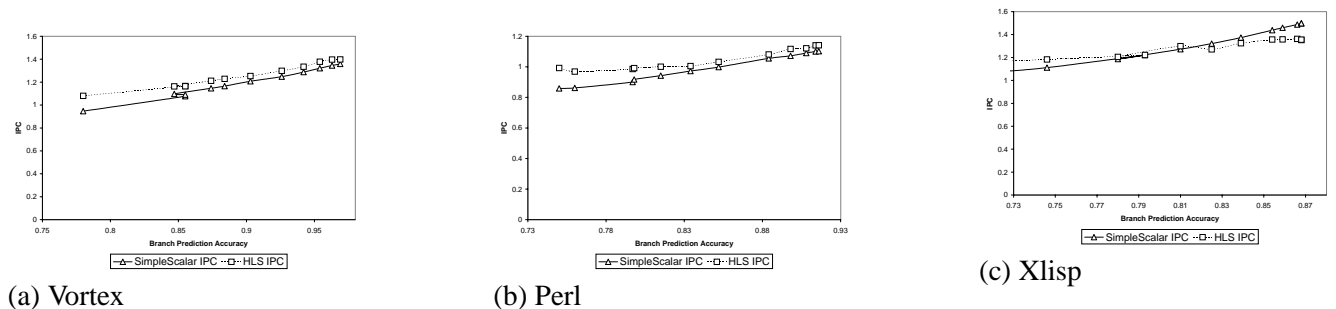


Figure 6: Performance as observed with SimpleScalar and HLS for Branch Prediction Accuracy.

### 3.2 Hardware Correlation

While HLS was designed to model the same architecture as SimpleScalar, it can also be configured to model a MIPS R10K processor. We validated against a 250 MHz MIPS R10K processor in an SGI Octane system running IRIX V6.5. To obtain the statistical profile required for HLS, we gathered the DID from SimpleScalar, and cache and branch predictor behavior using the “Perfex” performance monitoring tool available on the IRIX operating system [3].

The correlations of HLS with this processor are shown in Table 5. Note that HLS correlates to within 7.7%, with an average error of 3.2% across all benchmarks.


There is also one other statistical difference of note between modeling SimpleScalar and modeling the R10K. Cache hit rates for SimpleScalar can be modeled accurately in HLS with a uniform distribution. Hit rates for the R10K, however, require a more complex model which uses a normal distribution with a variance corresponding to the R10K. We suspect that this is necessary to account for machine and operating system effects, such as servicing program I/O and context switching, which alter cache behavior.

### 3.3 Single-value Correlations


Although several validation experiments are possible, in this paper we focus on those that form the first-order effects on performance: cache and branch prediction behavior. We will show that the HLS simulator produces similar IPC values to SimpleScalar under varying branch prediction accuracies, L1 I-cache hit rates, and L1 D-cache hit rates.

There are also ranges of statistical parameters where the HLS simulator is not accurate. Although the HLS simulator precisely models the structure of a superscalar microprocessor, several sources of statistical error can be introduced. It is important to identify where the HLS simulator will have unacceptable error, so that it is not used inappropriately.


Figure 6 plots IPC versus branch prediction accuracy as reported from both SimpleScalar and HLS running the *xlisp*, *perl* and *vortex* SPECint95 benchmark applications. SimpleScalar branch prediction accuracy was varied by modifying the branch prediction table size. For each SimpleScalar run, branch prediction accuracy was measured and input into HLS to produce a corre-



(a) Vortex




(b) Perl

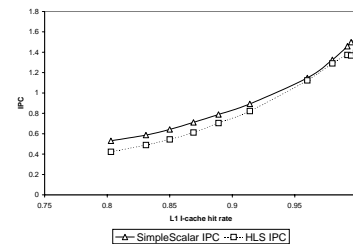


(c) Xlisp


Figure 7: Performance as observed with SimpleScalar and HLS for L1 I-cache hit rate.



(a) Vortex



(b) Perl

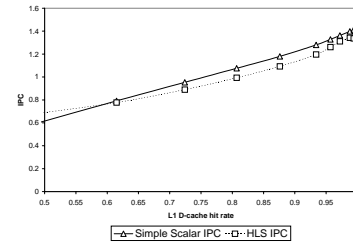

(c) Xlisp

Figure 8: Performance as observed with SimpleScalar and the Statistical Simulator for L1 D-cache hit rate.

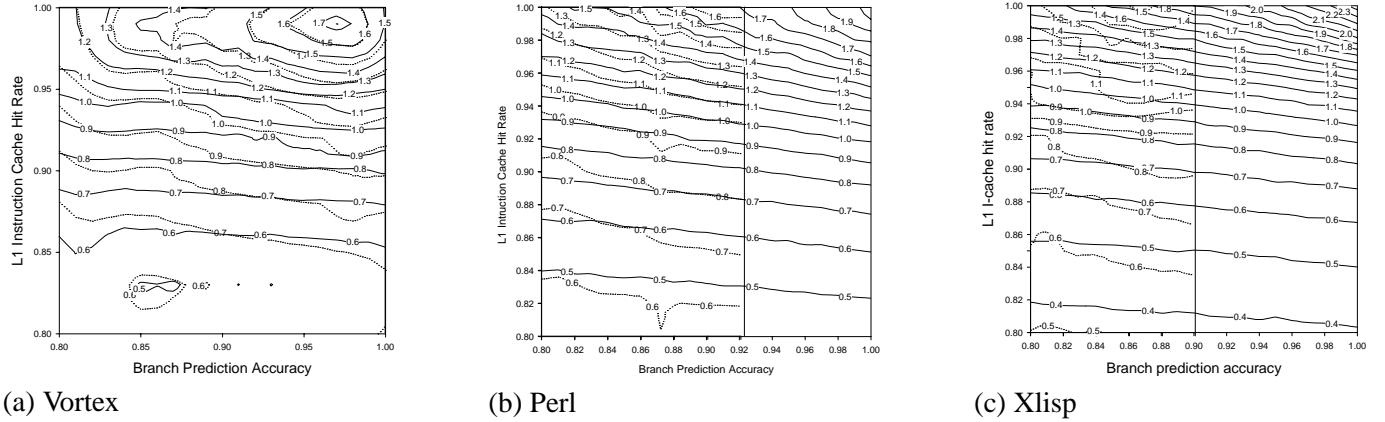


Figure 9: Multi-value correlation between SimpleScalar and the Statistical Simulator for L1 I-cache hit rate and branch prediction accuracy.

sponding data point. Note that above 80% branch prediction accuracy, the HLS and SimpleScalar simulators are within 6% of each other. At less than 80% accuracy, HLS and SimpleScalar begin to diverge. At 75% accuracy, the error between the HLS and SimpleScalar simulators is 15%. From these results it is clear that the branch predictor model within the HLS is usable with branch prediction accuracies greater than 80%.

Figure 7 plots the reported IPC as we vary the L1 I-cache hit rate for *xlisp*, *perl* and *vortex*. Using SimpleScalar, the hit rate is varied by changing the cache size, while in HLS the hit rate is input directly. The figure shows that for I-cache hit rates above 90%, HLS and SimpleScalar produce IPC values that are within 5% of each other. For hit rates in the 80-90% range, they agree within 20%. The simulation model performs well on all of the SPECint95 benchmarks because they all exhibit L1 I-cache hit rates greater than 90% in the baseline configuration. Future work will seek a more accurate L1 I-cache model to bring down the observed performance differences.

Figure 8 is similar to figure 7, except that the IPC is plotted for varying L1 D-cache hit rates. For the *perl* and *xlisp* benchmarks the HLS and SimpleScalar simulators can be seen to be within 7% of each other with L1 D-cache hit rates greater than 80%. Between 70-80% hit rate, the error is 8%. The error climbs to 15-35% with cache hit rates from 50-70%. The *vortex* benchmark has an average 16% error between 80-90% cache hit rate and less than 10% with cache hit rates greater than 90%. Thus, with cache hit rates greater than 80%, the HLS simulator provides reasonable results. Similar to L1 I-cache behavior, more accurate statistical models will be required to model poorly performing data caches. For this study, the focus will be on cache hit rates greater than 80%.

### 3.4 Multi-value Correlations

In Section 3.1, correlations across benchmarks were presented in which several values varied, including basic block size, dynamic instruction distance, cache hit ratios, branch prediction accuracy,

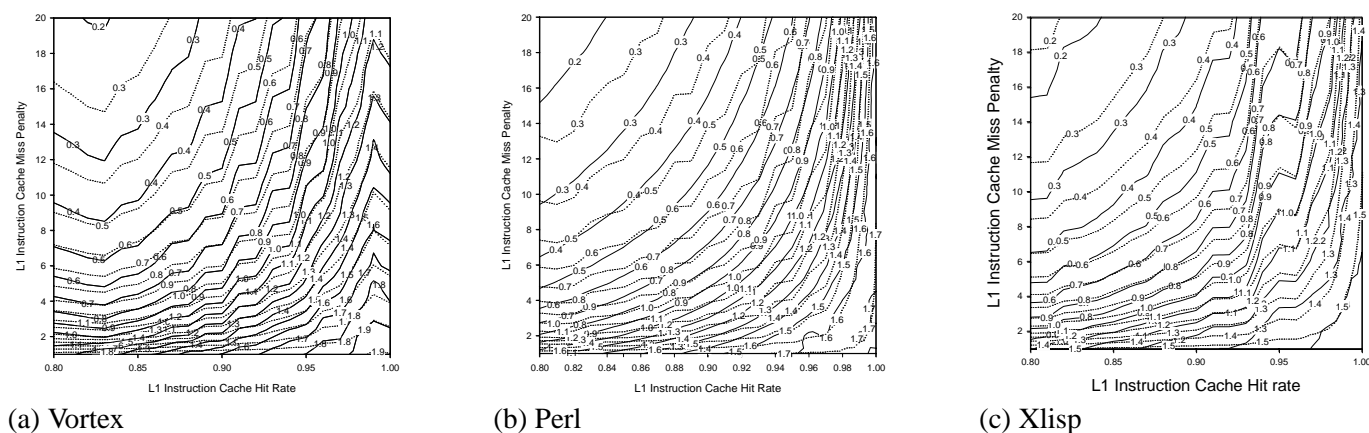


Figure 10: Multi-value correlation between SimpleScalar and the Statistical Simulator for L1 I-cache hit rate vs. L1 I-cache miss penalty.

and instruction mix. In Section 3.3, we presented results varying a single parameter. In this section we will present results in which two parameters are systematically varied, in order to further demonstrate the validity of the HLS model.

Figure 9 depicts the IPC contour space of *vortex*, *perl* and *xlisp* as the L1 instruction cache hit rate is varied against the branch predictor accuracy. The solid lines on the graphs represent contour lines generated from HLS, while the dotted lines were generated in SimpleScalar. To generate the SimpleScalar results we varied the branch predictor table size and instruction cache size. Note that the solid vertical line represents the limit of the branch predictor accuracy attainable in SimpleScalar – it is the point at which further increases in the branch predictor table size did not increase branch prediction accuracy. As depicted in the graph, HLS and SimpleScalar agree quite accurately for instruction cache hit rates greater than 90%. Below 90% a decreasing level of accuracy is observed.

Figure 10 depicts IPC as instruction cache hit rate is varied against cache miss penalty. Here we see a level of accuracy similar to the previous instruction cache correlations. Instruction cache hit rates above 90% are very accurate, while cache hit rates below 90% are suitable for trend analysis only. One interesting feature of Figure 10 for *xlisp* and *vortex* is the non-smooth contour map between 0.93 and 0.97 on the cache hit ratio axis. This non-smooth behavior leads to an interesting discussion about the use of HLS and the caution a user should have interpreting its results. If parameters are varied within a real superscalar processor other machine parameters will not remain constant. For example, variations in branch prediction accuracy affect the L1 instruction cache hit rate. While the HLS simulator allows the user to fix all other machine parameters, one must be aware that in reality they will change. This effect can be seen as the unified L2 cache hit rate and branch prediction accuracy are indirectly altered by varying the cache hit rate and miss penalty. This topic will be discussed further in Section 5.

### 3.5 Summary and Discussion

From these results, we conclude that HLS represents a useful method of simulation within the ranges of statistical profiles that we are interested in. Outside of these ranges, the accuracy of HLS is suitable only for general trend analysis and not for discrimination of closely related points. There are three major sources of error in the HLS simulator:

First, HLS generates random code based upon a statistical profile of the original source. One source of error in this code generation process is that the relationship between instructions is mostly lost. Dynamic dependence information is maintained, but it is used imprecisely with dependencies between instructions that do not correspond exactly to the original source file. Although the generated code and the original code maintain the same statistical nature, they are in fact substantially different.

Second, the cache and branch predictor are modeled as simple normal distributions. Except where noted, these normal distributions are uniform distributions with a prescribed accuracy or hit rate. It is not a coincidence that the most accurate correlation between the SimpleScalar and HLS simulators tend to occur when the rates approach 100%. With a perfect branch predictor or a perfect cache, the HLS and SimpleScalar cache models would be equivalent.


Third, there is no load-value or instruction fetch miss-value correlation modeled in the simulator. We suspect that not modeling these correlation effects contribute to the cache model inaccuracies at hit rates below 90%.

Despite these sources of error, if areas of study are confined to where HLS is accurate, interesting experiments can be performed that would otherwise be extremely hard or impossible to do using conventional simulation techniques. We present the results from two of these experiments in the next section.


## 4. Application of HLS

In order to demonstrate the power of this methodology, we chose to explore two aspects of processor performance that are uniquely suited to study using this hybrid statistical simulation approach: program characteristics and value prediction. The machine model used in this section resembles the baseline SimpleScalar architecture. Our results indicate that HLS correlates well with this architecture for the entire SPECint95 benchmark suite. The results presented in this section will continue to focus on the *vortex*, *perl* and *xlisp* benchmarks, chosen because of their variation in I-cache and branch predictor performances. The *vortex* benchmark has high branch prediction accuracy (97.4%) but poor L1 I-cache hit rate (90.2%). Conversely, the *xlisp* benchmark has relatively poor branch predictor behavior (87.9% accuracy), but a high L1 I-cache hit rate (99.9%). Finally the *perl* benchmark was chosen because for its modest branch predictor (91.4%) and L1 I-cache (96.4%) performance.


Most of our results are presented using iso-instructions-per-cycle (iso-IPC) contour plots, which relate two parameters and plot a two-dimensional view of a three-dimensional space. Each contour line in the graph represents a constant IPC. Such iso-IPC plots graphically depict the design-space of two parameters. Each is generated utilizing over 400 individual data-points collected from 8,000 runs of the HLS simulator. Each contour map presented requires approximately six hours to generate on a 450 Mhz Pentium-II. By lowering the number and length of each iteration it is possible to generate a contour map in 15 minutes. Such a map does have higher standard deviation in the results, but is accurate enough to provide quick insight to the processor designer.

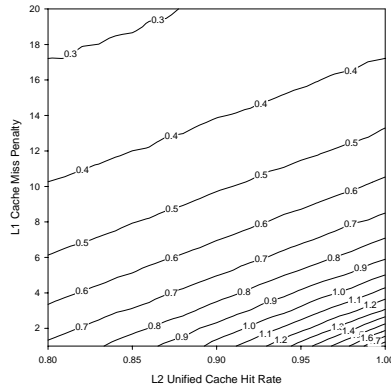

(a) Vortex

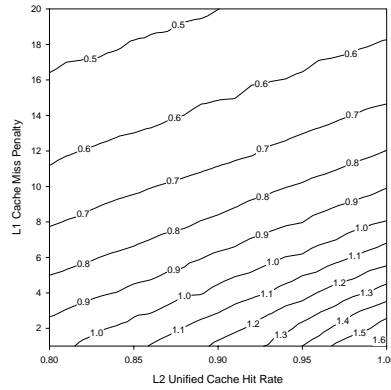


(b) Perl

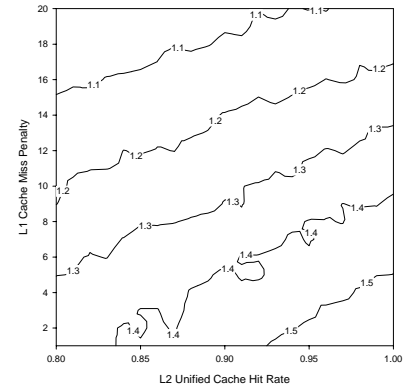


(c) Xlisp


Figure 11: L2 cache hit rate versus L1 cache miss penalty

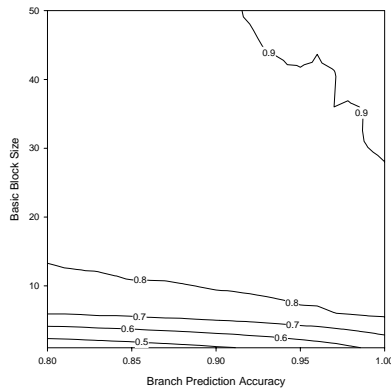

(a) Vortex

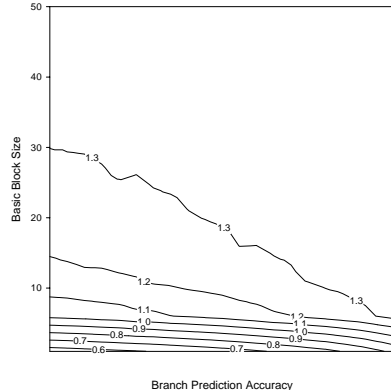

(b) Perl

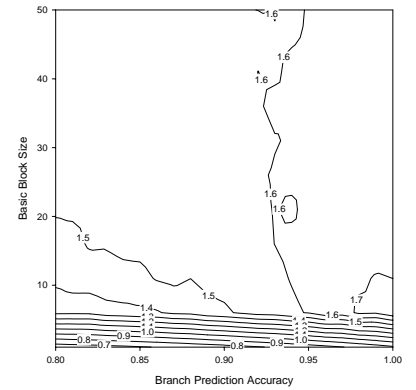

(c) Xlisp

Figure 12: Branch prediction accuracy versus basic block size

### 4.1 Varying Code Properties

The HLS simulation methodology allows the user to systematically vary the properties of the code being simulated. This is a very powerful capability and provides a way to study the effects of two code properties normally very hard to modify: the basic block size and the dynamic instruction distance.

Figure 12 depicts application performance as the branch prediction accuracy and basic block size change. This figure shows that given the accuracy of current branch predictors, moderate in-

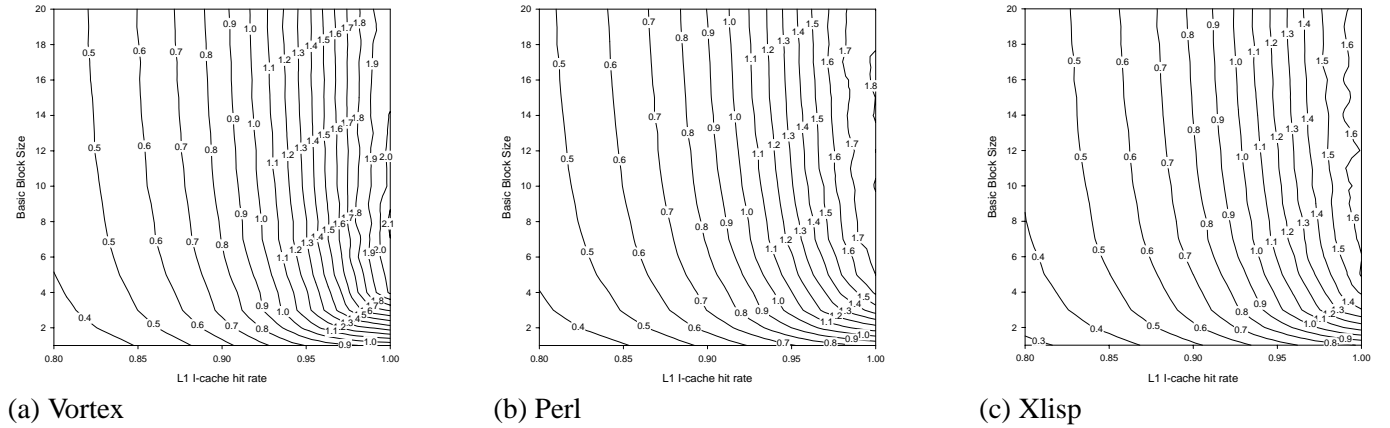


Figure 13: L1 I-cache hit rate versus basic block size

creases in basic block size will bring about noticeable performance improvements. As expected, the largest performance gains occur as basic block sizes grow from one to fifteen instructions. Performance gains quickly diminish after this, with no significant performance gains observed when the block size is greater than 35 instructions.

In Figure 13, the relationship between basic block size and L1 I-cache hit rate is presented. This figure shows that, for basic block sizes between 1 and 4 instructions, the basic block size has the largest effect on performance. Beyond 4 instructions, however, the L1 I-cache becomes the dominating factor.


Similarly, in Figure 14, the basic block size versus dynamic instruction distance is plotted. Two observations can be made from studying these graphs: First, moderate dynamic instruction distances are required for reasonable performance. This is evident from the lower regions of the *perl* and *xlisp* graphs, with DID values of four or less. Second, the basic block size quickly becomes the dominating factor in performance. Note that increases in DID have no significant effect for *vortex*. This is due to the poor front-end machine performance. This indicates that *Vortex* is limited by the instruction fetch mechanism, and not by ILP within the out-of-order core.

As Figure 15 suggests, when I-cache behavior is no longer constraining performance, a clear trade-off is observed for all three applications between instruction fetch performance (here controlled by basic block size) and ILP control within the superscalar core.


## 4.2 Value Prediction

Value prediction is currently an active area of research. Several value prediction schemes have been proposed in the literature, but these schemes have shown only moderate increases in IPC [4] [5] [6] [7] [8] [9]. To simulate value prediction a value predictor and the ability to do speculative execution based on predicted values was added to the basic HLS structural model.




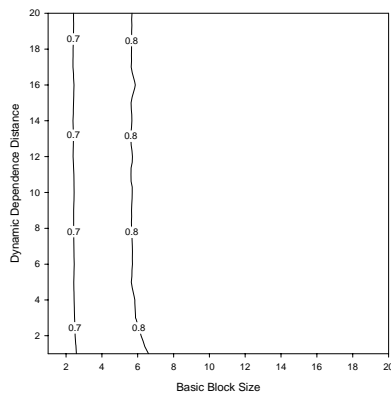

(a) Vortex

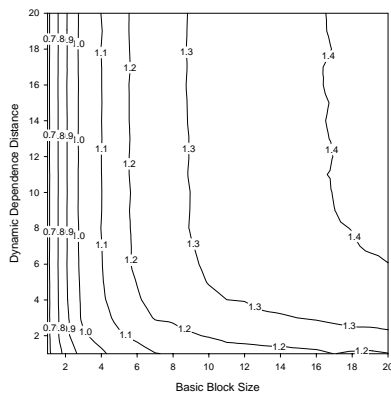


(b) Perl

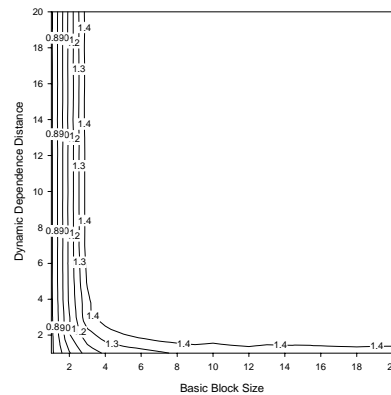


(c) Xlisp


Figure 14: Basic block size versus dynamic instruction distance

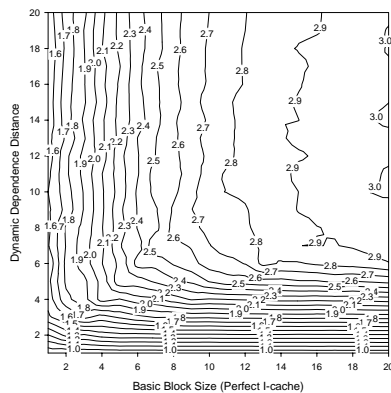

(a) Vortex

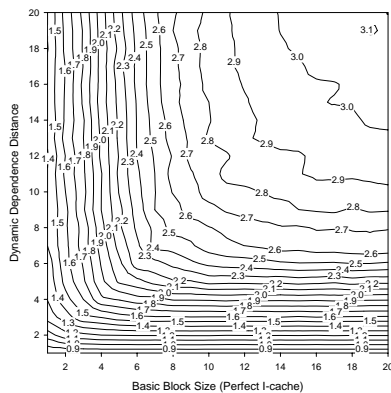

(b) Perl

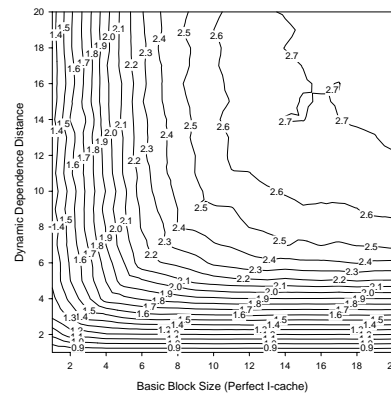

(c) Xlisp

Figure 15: Basic block size versus dynamic instruction distance assuming a perfect I-cache


The value predictor is added to the dispatch stage. Instructions determined to be predictable by the predictor unit are sent speculatively to the completion stage. A copy of that instruction is also sent to the scheduling phase to perform a check. Within the scheduling phase, if an instruction's operands are not directly available, but predicted operand values are, then the instruction may execute speculatively on the predicted operands. In this case, no check of the instruction is performed, because if the instruction was executing on incorrect data values a mis-speculation would have occurred earlier on a predicted instruction sent to the completion stage speculatively by the dispatch stage.

Our value prediction scheme implements two common mechanisms. First, we introduce a confidence threshold and confidence values associated with a prediction [6]. Speculative execution only occurs if the confidence value of the predictor is greater than or equal to the threshold. Second, we use the same mechanism on mis-speculations that the branch predictor uses to roll-back from a mis-speculated branch [6] [8]: The fetch, dispatch, schedule, execution and completion units are flushed of mis-speculated values, and the fetch unit is directed to refetch from the start of the mis-speculation.


To control value prediction the following additional parameters are introduced into the code stream:

- *Value prediction predictability (VPP-p)* informs the simulator of the inherent predictability [10] of the outcome of the instruction. This parameter is modeled using a normal distribution. The simulator models value prediction at a high level, not taking into account how the hardware may achieve a certain prediction level. This parameter along with the next two parameters determines the overall value prediction behavior.
- *Value prediction knowledge (VPK-p)* controls how well the value predictor inside the simulator will be able to predict the instruction given the instruction's inherent predictability. This parameter also is modeled using a normal distribution. To understand the difference between VPK-p and VPP-p, consider a last-value predictor versus a stride predictor on the same instruction stream. The VPP-p of that code remains the same, since there will be a certain intrinsic predictability for the stream, but the VPK-p of the stride predictor will be higher than the VPK-p of the last-value predictor.
- *Value prediction confidence (VPC-p)* specifies how confident the predictor is in the prediction. This parameter is also modeled using a normal distribution. HLS compares this parameter to a cut-off threshold to determine when the superscalar core should use a predicted value. For example, an instruction with a low VPK-p and high VPC-p will be predicted, but probably incorrectly (if VPP-p is low). However, a value with a high VPK-p but low VPC-p may not be predicted, even if the value predictor is likely to make a correct prediction.


The goal of value prediction is to break true data dependencies by predicting the data value instead of waiting for it to be generated. Another way to achieve a similar result is by lengthening the dynamic instruction distance, ensuring that dependent instructions have completed by the time an instruction is ready to execute. This relationship is illustrated in Figure 16, which utilizes a fully knowledgeable predictor and varies both the inherent value predictability and dynamic instruction distance within a code stream. The figure shows the direct relationship between DID and value predictability. Again, note that *vortex* is instruction-fetch limited and even with a perfect predictor

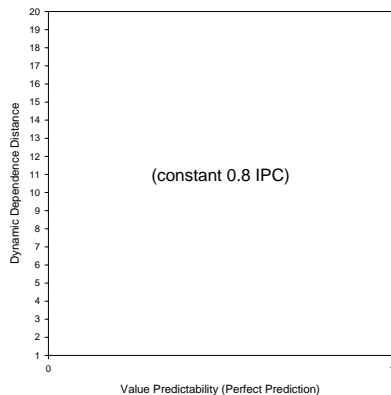

(a) Vortex

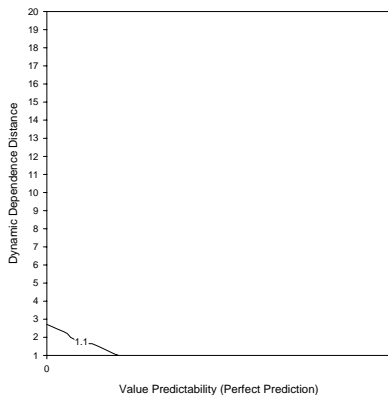


(b) Perl

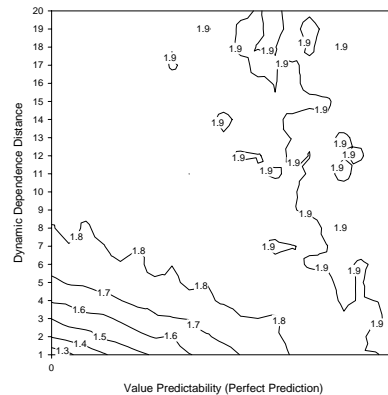


(c) Xlisp


Figure 16: Inherent value predictability versus dynamic instruction distance assuming a perfect predictor

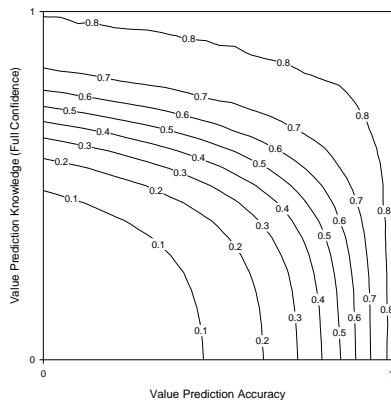

(a) Vortex

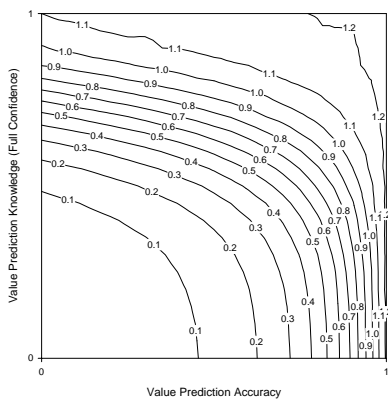

(b) Perl

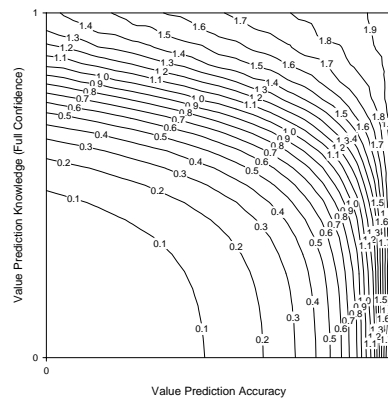

(c) Xlisp

Figure 17: Inherent value predictability versus value predictor knowledge

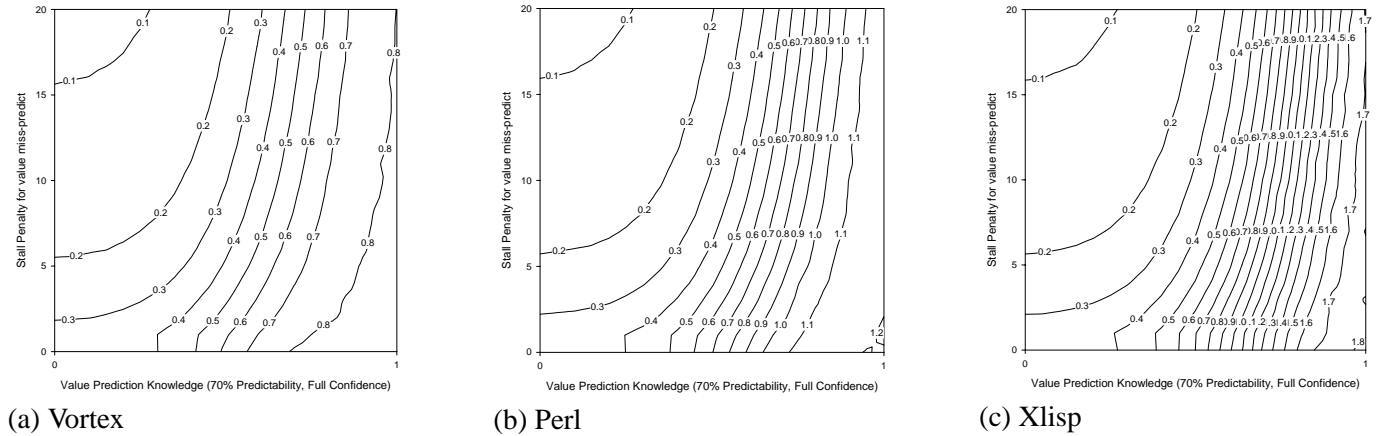



Figure 18: Value prediction knowledge versus mis-speculation penalty

and all instructions being predicted no significant performance increases are observed. Finally, note that unusual contour lines for *xlisp* at 1.9 IPC. This is due to a higher than normal variance in the statistical simulator.


Figure 17 explores the trade-off between inherent value predictability and value prediction accuracy. Note that the baseline IPCs for the *vortex*, *perl* and *xlisp* applications are 0.87, 1.1, and 1.4 respectively. Hence, substantial regions within these graphs equates to performance decreases. This is the reason that accurate confidence prediction is important in value prediction schemes. Following the baseline iso-IPC contour lines, the figure shows that, with moderate predictability, a highly accurate predictor is required to realize any performance gains. As inherent predictability increases beyond 95%, the accuracy of the predictor becomes significantly less important. Finally, these graphs shows that the maximum IPC is under 0.9 for *vortex*, between 1.2 and 1.3 for *perl*, and just under 2.0 for *xlisp*. This indicates no performance improvement for *vortex*, approximately a 20% improvement for *perl*, and a 40% improvement for *xlisp*. However, these improvements are only achieved with substantial predictor knowledge and inherent predictability.

Since Figure 17 suggests that mis-speculations in value prediction will occur often, it is interesting to look at the cost of such mis-speculation. Assuming a moderately high inherent predictability rate of 70%, predictor accuracy versus the mis-speculation penalty is depicted in Figure 18. These graphs suggest that (except for a really poor predictor), performance is dependent upon predictor accuracy, not mis-speculation penalty.


These experiments have explored the relationship between value prediction and dynamic instruction distance and shown that each overcomes data dependencies. However, while increasing dynamic dependence distance does not introduce any negative effects, as previous studies have also demonstrated, a poorly implemented value prediction scheme can substantially reduce processor performance. Hence, designers rightly introduce confidence mechanisms. Furthermore, reducing the stall penalty on a mis-predict is not enough to support highly speculative value prediction. In

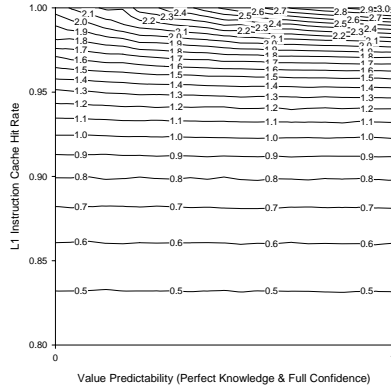

(a) Vortex

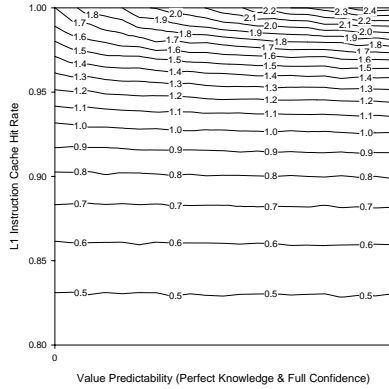


(b) Perl

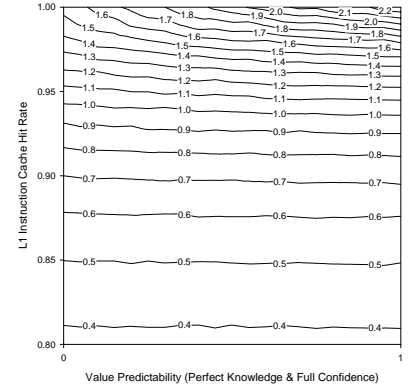


(c) Xlisp


Figure 19: Inherent value predictability versus L1 I-cache hit rate assuming a perfect value predictor

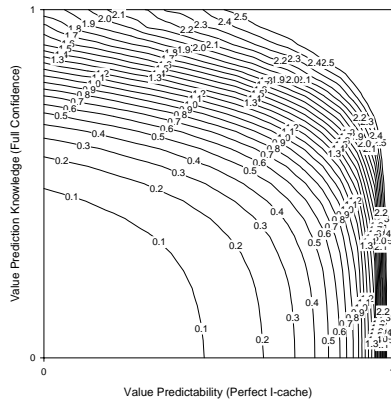

(a) Vortex

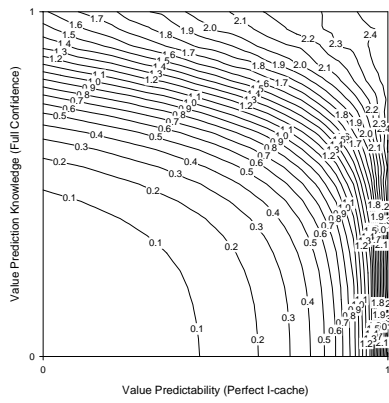

(b) Perl

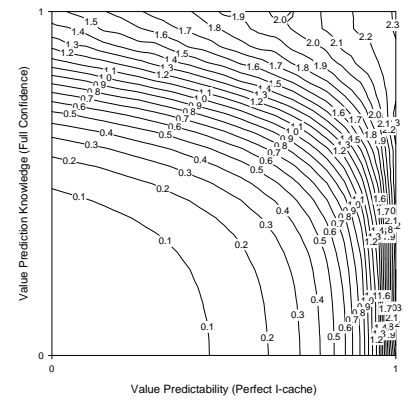

(c) Xlisp

Figure 20: Inherent value predictability versus value predictor knowledge assuming a perfect I-cache

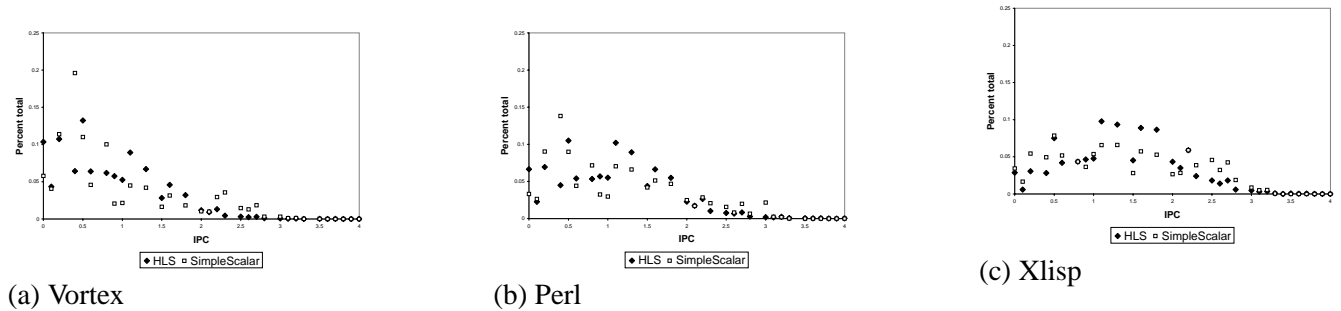


Figure 21: Histogram of IPC samples from HLS and SimpleScalar

addition, Figure 19 demonstrates that without increases in the instruction fetch rate, even highly accurate value predictors will not provide substantial performance gains.

Finally, we note that when instruction fetch is no longer constraining performance the performance of value prediction schemes can be much more favorable. Figure 20 compares the trade-off between value predictability and predictor knowledge under such conditions.

## 5. Discussion

The HLS simulator uses a combination of statistical and structural modeling to simulate a super-scalar microprocessor. One key property of real code that is not modeled by the current HLS simulator is the exact ordering of instructions, control flow and dependencies. Interestingly, the SPECint95 benchmarks can be modeled in the aggregate without this information. As long as the binary code is statistically correlated in terms of instructions, control flow, and dependency information, the exact ordering plays a secondary role in the performance outcome.

Program codes, however, can be deliberately written to be difficult to summarize statistically. One example would be codes that deliberately transition between two (or more) distinctly unique stages of execution. In such cases, the statistical profile used by HLS can be arbitrarily extended to accommodate program peculiarities. In the worst case, an extreme profile would cause HLS to symbolically execute every instruction in the entire program. This would be accurate but would not be any faster than using conventional simulation techniques. If we focus on conventional codes such as SPECint95, however, we can investigate program behavior using a statistical summary of the whole-program execution.

Current work is on-going into additional methods of correlating HLS against traditional simulation techniques. For example, the IPC of an application is not constant. Often times in architecture studies a cumulative “average” total-program execution IPC is presented. However, when IPC is examined over small trace samples a variation or histogram profile of IPCs are observed. Figure 21 depicts the IPC averages over 10 cycle increments for SimpleScalar and HLS. We note the variation in IPCs as well as the general qualitative correlation between the shapes of the histograms for both SimpleScalar and HLS.

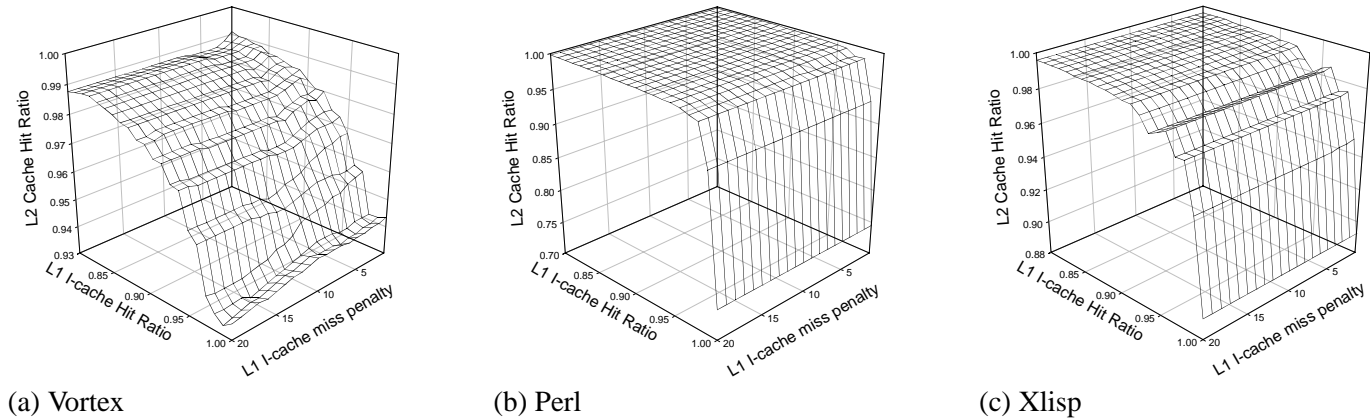


Figure 22: Variation in Unified L2 cache hit rate as L1 I-cache hit rate varies compared to L1 I-cache miss penalty

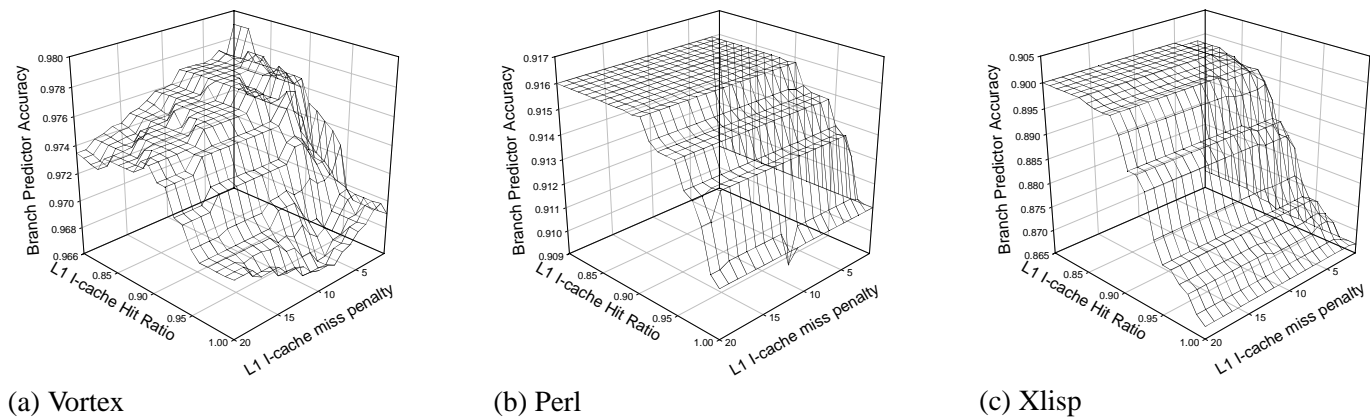


Figure 23: Variation in branch predictor accuracy as L1 I-cache hit rate varies compared to L1 I-cache miss penalty

It is important that this investigative method not be abused. The HLS approach is not meant to be a replacement for detailed performance analysis. The authors envision that the ideal use for HLS is to set performance goals, to size various machine and code parameters and direct research and design efforts at a high level. Clearly, subsequent designs need to be verified with detailed cycle-by-cycle simulation on actual benchmark codes.

Even when HLS is used to set performance goals, unexpected behavior can arise. For instance, as the L1 instruction cache hit rate and miss penalty is varied, cycle-by-cycle simulation results indicate that the L2 cache hit rate and branch predictor accuracy will also change. Figure 22 depicts how the L2 cache hit rate varies as these two parameters vary. Similarly, Figure 23 depicts how the branch prediction accuracy also varies. These two changes are most affected by the instruction cache hit rate; however, slight variations are seen with changes in the cache miss penalty.

In summary, while HLS is a useful tool for quick exploration of the design space, it should be used judiciously.

## 6. Related work

Several research efforts have approached the problem of architecture simulation by statistical means. Perhaps the effort most similar to HLS is that undertaken in Smith et al. [11] [12]. Their approach uses an execution trace derived from SimpleScalar as the starting point for symbolic execution. The program trace is systematically replaced with statistical parameters and the effects measured. Our approach is similar, but uses an execution rather than trace driven model. Efforts are currently underway to reconcile the two approaches.

A different approach to statistical performance modeling was used in Noonburg et al. [13]. A performance model was constructed based on the interactions between machine and program parallelism. This work extended an earlier model presented in Jouppi et al. [14]. With these models, benchmarks are analyzed and performance is estimated directly by application of a formula relating program and machine parallelism. This same research group continued their statistical modeling work in Noonburg et al. [15]. A set of Markov models were constructed to represent machine behavior while executing a specific benchmark. These models were then linked together and performance estimated. This approach is more abstract than the direct symbolic execution method presented here, and the authors focus on more ideal machine models. However, extremely accurate performance estimates are achieved.

In some respects the goals of our approach are similar to the goals of the creators of the synthetic Whetstone [16] and Dhrystone [17] benchmarks. However, we attempt to provide an automated approach to generating a synthetic benchmark. Furthermore this automated approach is based upon analysis of real programs and is demonstrably more representative of actual machine performance.

## 7. Future work

This work can be extended in several directions. In this paper we have focused on current generation microprocessors. We also intend to explore future generation superscalar processors. For instance, Figure 24 compares issue width versus dynamic dependence distance assuming a perfect cache and a basic block size of 100 instructions. The figure shows that as superscalar processors become wider, the DID must increase commensurately. This is not a surprise, but we do note that DID must increase slightly more compared to issue width to achieve comparable performance. Future



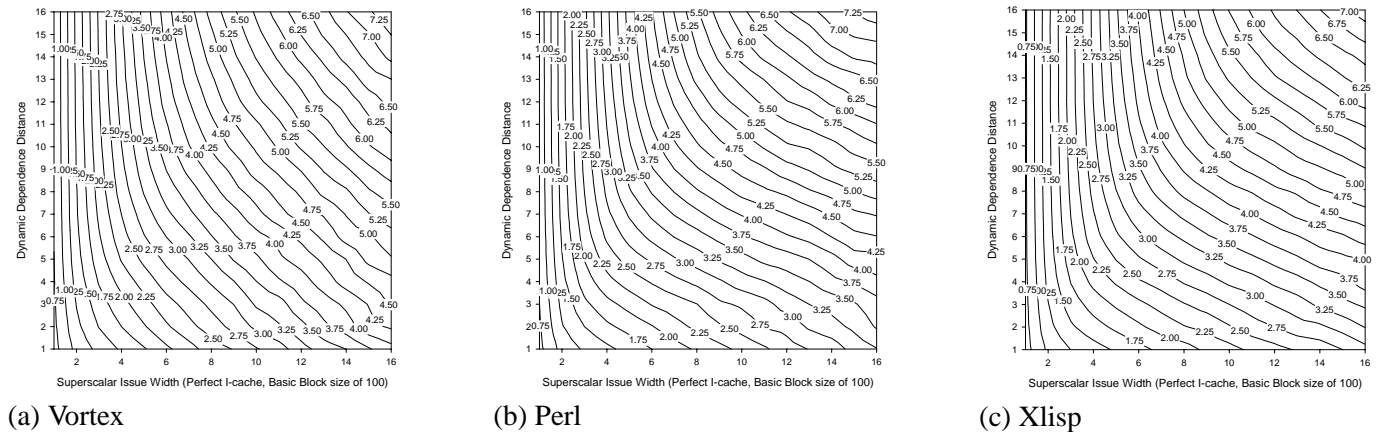


Figure 24: Super-scalar issue width versus dynamic instruction distance assuming a perfect I-cache and basic block size of 100 instructions

work will also explore deeper pipeline depths, since as clock speeds increase pipeline depths will continue to increase throughout the processor.

Our current model focuses on aggregate performance for SPECint95. Clearly, the SPEC benchmarks are not the only programs that are of interest to computer architects. We would like to pursue additional benchmarks, such as OLTP applications, and expect that the statistical collection process may have to change to accurately model these data-intensive applications.

Finally, the current simulation technique does not use any information about correlation between load instructions and misses in the caches. Future work will investigate integrating this knowledge from SimpleScalar back into HLS, in the hopes of further improving the correlations at extreme cache behaviors.

## 8. Conclusion

In this paper, we have presented a new simulation technology. This simulation method combines statistical profiles with symbolic execution. The simulator allows several machine parameters to be varied and their relationship studied in far finer and more accurate detail than previously possible, in a fraction of the time of traditional simulation techniques. Furthermore, by using synthetic code streams, we can easily and systematically vary parameters such as basic block size, dynamic instruction distance, branch predictability and cache behavior. We expect this simulation methodology to be beneficial in the study of both conventional and novel architectures. The simulation technique allows the processor designer to peer into the design space, study how parameters interact, and set performance targets for individual components of an architecture. This can help refine ideas more quickly by providing empirical data to evaluate design decisions.

## Acknowledgments

Thanks to Jim Smith for pointing us to prior work and suggesting the convergence graph in Figure 4. Additional, thanks to Dan Sorin, David Woods, Shubhendu Mukherjee, Tim Sherwood, Deborah Wallach, Diana Keen, and our anonymous referees. This work is supported in part by an NSF CAREER award to Fred Chong, by NSF grant CCR-9812415, by grants from Mitsubishi and Altera, and by grants from the UC Davis Academic Senate. More information is available at <http://arch.cs.ucdavis.edu>.

## References

- [1] M. Oskin, F. T. Chong, and M. Farrens, "Hls: Combining statistical and symbolic execution to guide microprocessor design," in *Proceedings of the 27th Annual International Symposium on Computer Architecture (ISCA'00)*, (Vancouver, Canada), 2000.
- [2] D. Burger and T. Austin, "The SimpleScalar tool set, v2.0," *Comp Arch News*, vol. 25, June 1997.
- [3] M. Zagha, B. Larson, S. Turner, and M. Itzkowitz, "Performance analysis using the MIPS R10000 performance counters," in *Supercomputing '96*, 1996.
- [4] M. H. Lipasti and J. P. Shen, "Exceeding the dataflow limit via value prediction," in *International Symposium on Microarchitecture MICRO29*, (Paris, France), ACM, December 1996.
- [5] D. M. Tullsen and J. S. Seng, "Storageless value prediction using prior register values," in *International Symposium on Computer Architecture ISCA99*, (Atlanta, Georgia), ACM, June 1999.
- [6] B. Calder, G. Reinman, and D. M. Tullsen, "Selective value prediction," in *International Symposium on Computer Architecture ISCA99*, (Atlanta, Georgia), ACM, June 1999.
- [7] T. Makra, R. Gupta, and M. L. Soffa, "Value prediction in VLIW machines," in *International Symposium on Computer Architecture ISCA99*, (Atlanta, Georgia), ACM, June 1999.
- [8] F. Gabbay and A. Mendelson, "The effect of instruction fetch bandwidth on value prediction," in *International Symposium on Computer Architecture ISCA98*, (Barcelona, Spain), ACM, June 1998.
- [9] S.-J. Lee, Y. Wang, and P.-C. Yew, "Decoupled value prediction on trace processors," in *International Symposium on High-Performance Computer Architecture HPCA6*, (Toulouse, France), ACM, January 2000.
- [10] Y. Sazeides and J. E. Smith, "The predictability of data values," in *International Symposium on Microarchitecture MICRO30*, (Research Triangle Park, North Carolina), ACM, December 1997.
- [11] R. Carl and J. Smith, "Modeling superscalar processors via statistical simulation," *Performance Analysis and its Impact on Design (PAID) Workshop*, June 1998.
- [12] Personal communication with J.E. Smith, Daniel Sorin, and David Wood.

- [13] D. B. Noonburg and J. P. Shen, "Theoretical modeling of superscalar processor performance," in *International Symposium on Microarchitecture MICRO27*, ACM, November 1994.
- [14] N. P. Jouppi, "The nonuniform distribution of instruction-level and machine parallelism and its effect on performance," *IEEE Transactions on Computers*, December 1989.
- [15] D. B. Noonburg and J. P. Shen, "A framework for statistical modeling of superscalar processor performance," in *International Symposium on High-Performance Computer Architecture HPCA3*, ACM, 1997.
- [16] Curnow, H. J. Wichmann, and B. Wichmann, "A synthetic benchmark," *The Computer Journal*, 1976.
- [17] R. P. Weicker, "Dhrystone: A synthetic systems programming benchmark," *Comm. ACM*, October 1994.