



# VHX-680-CUT

Dakota Digital VHX Instrument Installation  
For 1968-'69 Oldsmobile Cutlass

Your new VHX-680-CUT kit includes:



Universal Sender Pack



Switch Assembly



VHX Display

Control Box




- (2) 36" CAT5 Cable
- (1) 12" CAT5 Cable



## Installation


1. First, remove the stock gauges from the dash by removing the two (2) mounting screws on the back side of each gauge. Retain all factory hardware for reassembly.

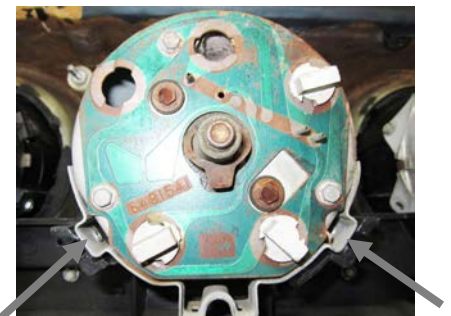


2. Remove each of the three (3) factory gauge bezels and mount them to the VHX system using the four (4) original screws per gauge.




3. Mount the VHX system to the stock dash using the stock screws from disassembly.

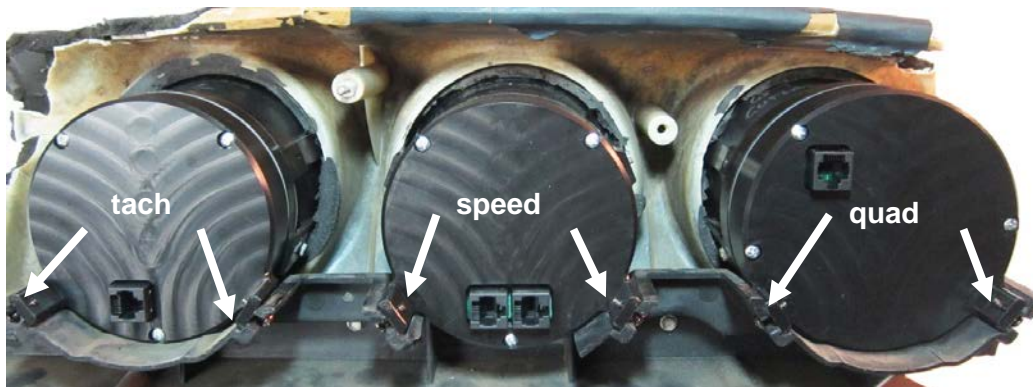

4. With the provided CAT5 cables, attach one end of the provided 36" CAT5 cables to both the back of the VHX system speed and the back of the tach gauge with the other ends carefully routed to the control box mounting location. One end of the 12" CAT5 cable goes to the speed and the other end to the quad.

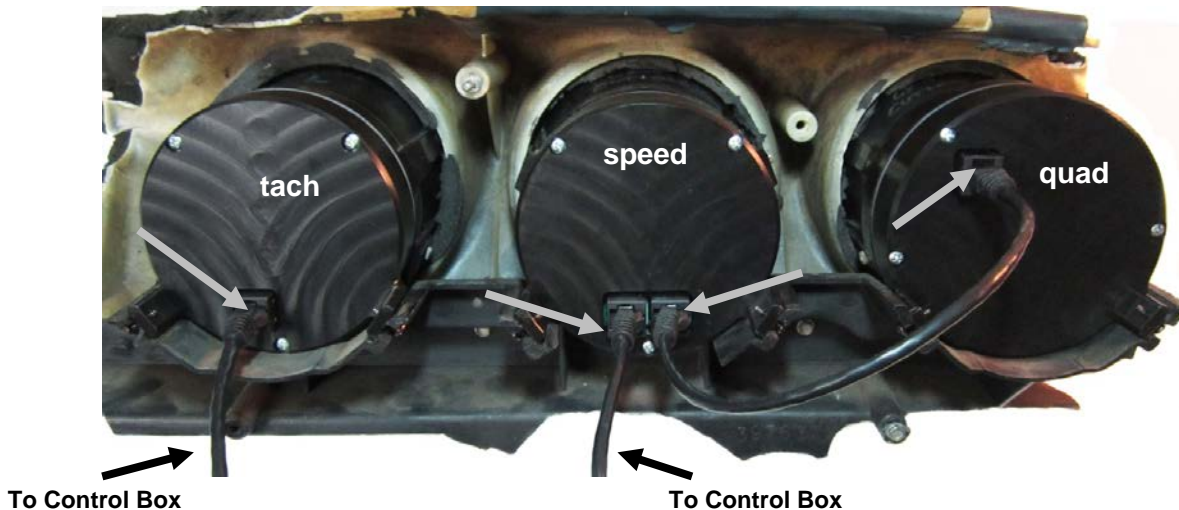

5. Refer to the main manual for wiring instructions to complete the VHX installation.

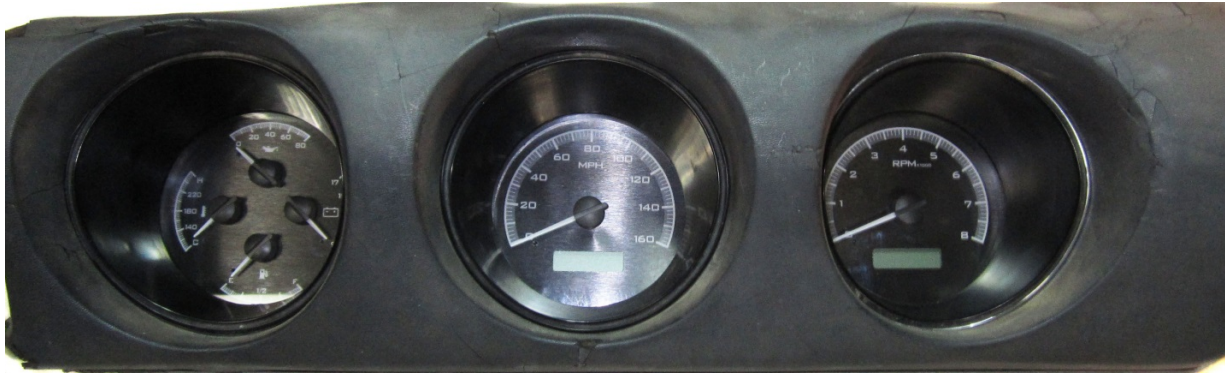

**⚠ WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
[www.dakotadigital.com](http://www.dakotadigital.com)  
[dakotasupport@dakotadigital.com](mailto:dakotasupport@dakotadigital.com)

Phone (605) 332-6513  
Fax (605) 339-4106

© Copyright 2018 - Dakota Digital