



Item#: **35355**
LED 4' WRAP-A-ROUND

DIRECT LINEAR AMBIENT LUMINARIES

FEATURES

- Low-profile which meets limitless range of applications.
- Use 30% less energy than a traditional fluorescent fixture
- Standard knocks on back and ends.
- All steel surfaces are painted after fabrication with high gloss baked white matte powder paint.
- Low-glare prismatic lens

MOUNTING

Designed for surface and suspended mounting.

APPLICATION

Ideal for stairways, bathrooms and low light traffic areas.

ELECTRICAL

Wattage	38W
Voltage	120-277V
Current	0.31A
Power Factor	0.9
Total Harmonic Distortion (THD)	10

LIGHTING PERFORMANCE

Lumens	5130
Lumens Per Watt (LPW)	135
Color Temperature (CCT)	5000K
Color Rendering (CRI)	82
R9 (Red Value)	7
Beam Angle	100°
Light Distribution	Type VS
BUG Rating (Backlight, Uplight, and Glare)	B2 - U3 - G1
Dimmable Lighting Control	<i>Dimmable</i> 0-10V, Range 10% - 100%

ENVIRONMENT

Operating Temperature	-4° ~ 122°F
Suitable Location	DAMP
Ingress Protection Rating	IP40

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	Seoul
Driver	SIE46-I0850

CONSTRUCTION

Housing	24 Gauge Steel
Base / Power Supply	Hard Wired
Finish	White

QUALIFICATIONS




Visit www.designlights.org/search to confirm qualification. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.

Item#: 35355

LED 4' WRAP-A-ROUND

DIMENSIONS (Inches)

Length	48.6"
Width	6.5"
Height	2.5"
Net Weight (Lbs)	--

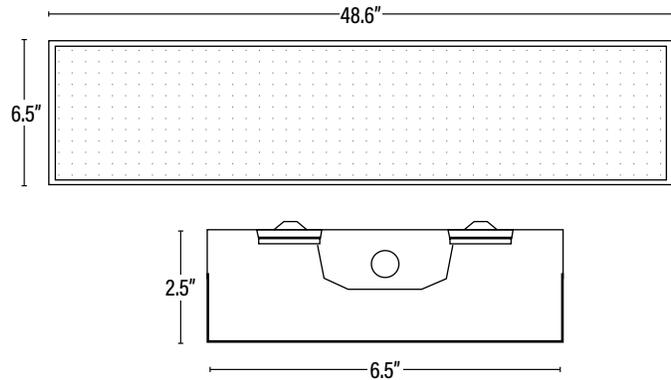

SUPPORTING DOCUMENTS (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW
IES Download from Web Item	VIEW
LM79	VIEW
LM80	VIEW

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	4	10811768028734	--	--
Individual Box	1	811768028737	--	--
Country of Origin	China			
HS Tariff	9405.10.6020			

ORDERING

ITEM#	DESCRIPTION	CASE
35355	LED 4FT WRAP A-ROUND/38W/50K/FR/DIMM/120-277V - DLC®	1

ACCESSORIES

69845	LOW/HIGH BAY FIXTURE OCCUPANCY PIR SENSOR 30FT DIA, 8-40FT HEIGHT 800W/1200W • 120/277V	50
79845	LOW BAY BI-LEVEL AND DAYLIGHT HARVEST MICROWAVE SENSOR 48FT DIA, 8-20FT HEIGHT 800W/1200W • 120/277V	50
89845	360° HIGH BAY BI-LEVEL AND DAYLIGHT HARVEST MICROWAVE SENSOR 60FT DIA, 8-50FT HEIGHT 800W/1200W • 120/277V	50
49845	EXTENDER MOUNT FOR SENSOR 69845/79845/89845	100
09355	EMERGENCY PACK FOR LED FIXTURE 8W/90 MIN- SPLIT TYPE/L - T20C	10
19355	EMERGENCY PACK FOR LED FIXTURE 16W/90 MIN- SPLIT TYPE/L - T20C	10
29355	EMERGENCY PACK FOR LED FIXTURE 25W/90 MIN- SPLIT TYPE/L - T20C	10

ADDITIONAL INFORMATION:

Family Item(s): 25355/4000K