



Consumer

100A 2 Pole Mains Isolation Switch

Specification

Part No: ERS2MS100


- Device can be locked safely in the 'ON' or 'OFF' position using a device lock
- Maximum torque setting: 2.5Nm
- 35mm DIN rail mounting
- CE & SEMKO certified
- BS EN60947-3



Technical Specification

Specification	
Rated Current	100A
Poles	2P
Rated Voltage	230/400V AC
Rated Frequency	50/60Hz
Rated Short-Circuit Making Capacity	3kA
Rated Withstand Current	1.8kA within 1 Second
Electro-Mechanical Endurance	10000 Cycles
Cable Capacity	35mm ²
Connection Capacity	Rigid Conductor 35mm ²
Connection Terminal	Pillar Terminal with Clamp

Dimensions

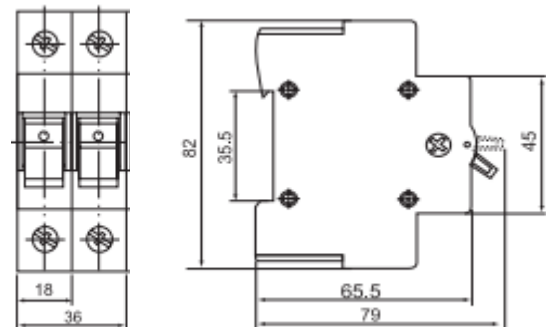

YESSS House, Unit B Foxbridge Way, Normanton, WF6 1TN
AER, Zac du Caillou, Rue Jules Verne, 69630, Chaponost, France

eris-eu.com sales@eris-eu.com