

OCTOBER 2024 CATALOGUE

# From simple to advanced control, we supply products to suit your project...and your budget!

PLCs	6
<b>NEW!</b> HMIs	12
<b>NEW!</b> POWER SUPPLIES	14
COMMUNICATIONS	16
KEPWARE	19
SENSORS-PROCESS	20
SENSORS- PROXIMITY	22
SENSORS- PHOTOELECT	23
ENCODERS	24
WEG SWITCHGEAR	28
VF DRIVES	30
SAFETY PRODUCTS	31
TERMINAL BLOCKS	32
WIRING SOLUTIONS	34
<b>NEW!</b> HANDTOOLS	35
SYSTEM INTEGRATORS	36



[www.directautomation.com.au](http://www.directautomation.com.au)

**NEW!**

CM5-RHMI



**\$1199**

C-MORE CM5 REMOTE HMI

P13



PACK 100

**\$150**

DN-T12-A

SINGLE, DOUBLE OR 3-LEVEL  
TERMINAL BLOCKS = LOW-COST  
SENSOR WIRING

P32

**NEW!**

**\$38**



DW-AS-603-M18-002

CONTRINEX INDUCTIVE  
PROXIMITY SENSORS

P22

**kepware**

SOFTWARE



CONNECT, ACCESS AND CONTROL  
YOUR INDUSTRIAL DATA WITH  
KEPWARE.

P19



Welcome to **Direct Automation**, your trusted reseller of industrial automation supplies for the Australasian marketplace. We proudly represent reputable brands such as AutomationDirect.com and WEG Australia, offering you the highest quality products and solutions. Our dedicated sales and technical support teams are here to assist you, ensuring seamless service and expert support for all your automation needs.

- |                |                |                   |
|----------------|----------------|-------------------|
| PLCs           | HMIs           | ENCLOSURES        |
| COMMUNICATIONS | POWER SUPPLIES | SENSORS           |
| SWITCHGEAR     | PUSHBUTTONS    | CABLING           |
| DRIVES         | SOFTWARE       | TOOLS & EQUIPMENT |

“ Thank you for helping us provide a unique experience to our clients. We provide this so well because of your support. ”  
- Lee at Eurocranes Vic

## SUPERIOR Sales and Support

“ We are a small brewery located in South-Korea. Our canning line is controlled by the CLICK-PLC and operated by NITRA Solenoid valves. As we ran into problems, our usual canning line manufacturer was not being helpful, while Direct Automation (Australia) stepped up to stock the replacement parts we needed and promptly shipped them to Korea. Emails were fast, accurate and professional. A Safety Relay, out of stock elsewhere was even available for us to purchase. **Thanks to Direct Automation, we minimized our downtime and saved ourselves some headaches!** ”

Frederic from The Ranch Brewing Company, South-Korea

## EXPANSIVE Product Range

Did you know we have so many products available to you, that we don't place them all on our website?

Our dedicated sales team is committed to sourcing quality items at competitive prices. If you can't find what you need elsewhere, don't hesitate to reach out—we're here to help you locate products that meet your specifications, budget, and timeline.

With nearly 30 years of experience, our commitment to exceptional sales and technical support sets us apart in the industry.

Call us today and speak to us direct. No ticket numbers, no chat bots, just real, old fashioned service.



**SUPERIOR VALUE!!!!**

WE WORK HARD TO KEEP PRICES LOW ON OUR TOP SELLING PRODUCTS

SKU	PRICE	DESCRIPTION
AAP2T51Z11	\$30	AutomationDirect IEC LIMIT SWITCH, side rotary adjustable metal lever with polyamide roller, 90-degree adjustable head, (1) N.O./ (1) N.C. contact(s), snap action, 20-22mm hole spacing, plastic, (1) PG11 cable entry with 1/2in NPT adapter.
DN-12JL14-A	\$54	DINnector TERMINAL BLOCK JUMPER, 12-pole, red, 20A, 300V rated (UL), screwless type. Use with any DN-TL14-A, DN-TL14S-A, DN-TL14SLP or DN-14SLN-A series terminal block. Cutting tool (DN-J14CUT) is recommended to cut jumper. 10 pieces per package.
BC10F-CSW	\$5	WEG Single CONTACT BLOCK 1 Normally Open contact for CSW series of pushbuttons and pilot lights - Front mount
CSW-BF5-1000000-3VF	\$6	WEG CSW Series PUSHBUTTON Flush Black 1NO + Flange
CSW-BESG-11000000-APE-02-3VF	\$11	WEG CSW Series PUSHBUTTON Twist to release Red + 1NC. Includes 1x N/O + 1x N/C Contact, Emergency Stop Label, Mounting Flange
CM5-T7W	\$899	C-more CM5 series TOUCH SCREEN HMI, 7in colour TFT LCD, analog resistive, widescreen, 800 x 480 pixel, WVGA, LED backlight, (1) Ethernet, (2) serial and (2) USB ports and (1) memory card slot.
C2-01CPU	\$203	CLICK PLUS PLC, 24 VDC required, Ethernet, serial and microB-USB ports, no on-board I/O.
KPR-SCE-24VAC-DC-1	\$22	Klemsan INTERFACE RELAY, 35mm DIN rail mount, finger-safe, 24 VAC/VDC coil voltage, SPDT, (1) N.O., (1) N.C., 6A contact rating, screw terminal(s), LED indicator(s).

**SUPER SAVINGS!!!!**  
**...SUPER SLIM 35MM DESIGN...**  
**SAVINGS FOR YOUR BUDGET AND YOUR CABINET SPACE!**



**COMPETITIVE PRICES!!!!**

WE STRIVE TO OFFER CHOICE WHEN IT COMES TO PRODUCT SELECTION

**CALL OUR SALES STAFF TO HEAR MORE ABOUT OUR 'NEW' PRODUCTS - NOT YET RELEASED ONLINE!**

10" HMI  
 CMS-T10W  
**\$1539**

Don't pay...  
~~\$2053~~



C-more CM5 series TOUCH SCREEN HMI, 10.1in color TFT LCD, analog resistive, widescreen, 1024 x 600 pixel, WSVGA, LED backlight, (2) Ethernet, (3) serial and (4) USB ports and (1) memory card slot.

Compared to EA9-T10WCL

BASIC TEMPERATURE CONTROLLER  
 SLB4848-C2  
**\$114**

Don't pay...  
~~\$259~~

**NEW!**



SOLO BASIC TEMPERATURE CONTROLLER, 1/16 DIN, 2-line LCD, RTD or thermocouple input, 4-20mA, (2) 3A SPST relays output, 100-240 VAC operating voltage.

Compared to SL4848-RR  
 SOLO standard temperature controller

SWITCHING POWER SUPPLY  
 PSA-24-75  
**\$58**

Don't pay...  
~~\$96~~



AchieVe PSA series SWITCHING POWER SUPPLY, 24 VDC @ 3.125A/75W, 120/240 VAC nominal input, 1-phase, enclosed, plastic housing, 35mm DIN rail mount, screw terminals.

Compared to PSB24-060S-P  
 RHINO PSB switching power supply

SWITCHING POWER SUPPLY  
 DW-AS-603-M18-002  
**\$38**

Don't pay...  
~~\$51~~

**NEW!**



Contrinex INDUCTIVE PROXIMITY SENSOR, tubular, 18mm diameter x 63.5mm body, nickel-plated brass housing, PNP, N.O. output, 5mm sensing distance, flush, 2 kHz switching frequency, IP67, 4-pin M12 quick-disconnect.


Compared to AK1-AP-1A  
 Micro Detectors induct prox sensor

OCTOBER 2024. Price comparisons are based on consumer choices. Technical specifications may differ and products may not represent a 'like-for-like' comparison. Always check technical specifications for suitability prior to purchase. Images are for display purposes only and may be generic.



# CLICK PLC

SIMPLE CONTROL

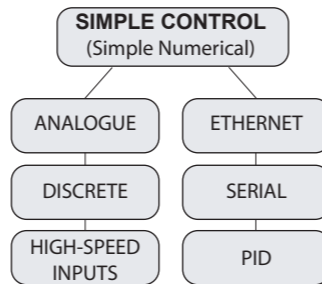

FOR SMALL or BEGINNER APPLICATIONS

FREE SOFTWARE

The CLICK PLC family is ideal for everyday applications. The compact size and simplified programming make CLICK great for small systems and beginner projects. The popular CLICK PLC series has been serving the industry for almost 15 years and has become the go-to choice for many experienced Plant Engineers, Electrical Technicians, Machine Builders, as well as beginners and students.

**EXPAND CLICK FOR MORE COMPLEX APPLICATIONS...**



**...STACK MORE MODULES AVAILABLE!!! CHECK THEM OUT WWW.DIRECTAUTOMATION.COM.AU**


SKU	PRICE	DESCRIPTION
CO-00DD2-D	\$209	CLICK BASIC PLC, 24 VDC required, serial ports, Discrete Input: 8-point, DC, Discrete Output: 6-point, sourcing.
CO-01DD1-D	\$310	CLICK STANDARD PLC, 24 VDC required, serial ports, Discrete Input: 8-point, DC, Discrete Output: 6-point, sinking.
CO-02DD1-D	\$432	CLICK ANALOG PLC, 24 VDC required, serial ports, Discrete Input: 4-point, DC, Analog Input: 2-channel, current/voltage, Discrete Output: 4-point, sinking, Analog Output: 2-channel, current/voltage.
CO-10DD1E-D	\$373	CLICK ETHERNET Basic PLC, 24 VDC required, Ethernet and serial ports, Discrete Input: 8-point, DC, Discrete Output: 6-point, sinking.
CO-11DD1E-D	\$431	CLICK ETHERNET STANDARD PLC, 24 VDC required, Ethernet and serial ports, Discrete Input: 8-point, DC, Discrete Output: 6-point, sinking.
CO-12DD1E-1-D	\$514	CLICK ETHERNET ANALOG PLC, 24 VDC required, Ethernet and serial ports, Discrete Input: 4-point, DC, Analog Input: 4-channel, current, Discrete Output: 4-point, sinking, Analog Output: 2-channel, current.

# CLICK PLUS PLC

CLICK PLUS was announced as a Control Engineering 2022 Engineers' Choice Awards Finalist in the "Controls Systems: PLCs, PACs" category.



SIMPLE + IIOT

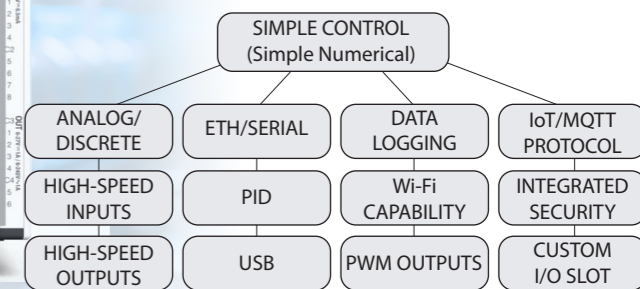

SIMPLE CONTROL WITH IIOT OPTIONS

FREE SOFTWARE

The practical, most popular PLC family has been supercharged with features you wouldn't expect from a simple low-cost controller. Data logging, Wi-Fi connectivity, MQTT communication and increased security measures are just a few of the impressive features offered with the new CLICK PLUS PLC series. Compatible with CLICK modules.



**INTERCHANGEABLE MODULE SLOT!**

SKU	PRICE	DESCRIPTION
C2-01CPU	\$203	CLICK PLUS PLC, 24 VDC required, Ethernet, serial and micro-B-USB ports, no on-board I/O.
C2-01CPU-2	\$283	CLICK PLUS PLC, 24 VDC required, (2) option slots, Ethernet, serial and micro-B-USB ports, no on-board I/O.
C2-02CPU	\$311	CLICK PLUS PLC, 24 VDC required, WiFi LAN/Bluetooth and micro-B USB ports, no on-board I/O.
C2-02CPU-2	\$397	CLICK PLUS PLC, 24 VDC required, (2) option slots, WiFi LAN/Bluetooth and micro-B-USB ports, no on-board I/O.
C2-03CPU	\$419	CLICK PLUS PLC, 24 VDC required, WiFi LAN/Bluetooth, Ethernet, serial and micro-B USB ports, microSD card slot, no on-board I/O.
C2-03CPU-2	\$521	CLICK PLUS PLC, 24 VDC required, (2) option slots, WiFi LAN/Bluetooth, Ethernet, serial and micro-B-USB ports, microSD card slot, no on-board I/O.
C2-08D2-6C	\$182	CLICK PLUS DISCRETE/ANALOG COMBO MODULE, Analog Input: 4-channel, current, Analog Output: 2-channel, current, Discrete Input: 4-point, sinking/sourcing, Discrete Output: 4-point, sourcing.
C2-DCM	\$238	CLICK PLUS COMMUNICATION MODULE, Modbus RTU and ASCII, 2 ports, (2) RS-232/RS-485 (6-pin terminal) port(s). For use with all CLICK PLUS PLCs. (2) C2-6TB terminal blocks included.

**MORE CLICK PLUS MODULES AVAILABLE ONLINE!**



# BRX PLC DO-MORE FAMILY

ADVANCED CONTROL



- Built-In Data Logging
- Protocol conversion
- Integrated Motion Control
- Modbus RTU to TCP conversion

- Modular, easily adaptable PID control loops
- Integrated project, communication and OS security

### INDUSTRY 4.0 READY

HTTP protocol and JSON PARSE/BUILD instructions for Web data exchange

**IIOT/ BIG DATA FEATURES**  
Added Webserver & Rest API for better access to plant-floor data

**Modbus®  
Modbus RTU  
EtherNet/IP  
DMX512**

**HTTP  
ASCII  
MQTT**

**CPU FROM  
(BX-DM1-10AR-D)  
\$417**

**BX-DM1E-36ED13  
(SHOWN)  
\$1202**



BX-DM1E-36ED13

### IIOT ENABLED PROGRAMMING POWERHOUSE


### FREE SOFTWARE

The Do-more PLC family is determined to get it done. This programming powerhouse has one of the most advanced instruction sets in the market and many other features that allow it to stand strong against any challenge. The BRX PLC platform has everything you need to communicate in today's industrial environments. Whether your network is serial or Ethernet, BRX provides the ports and protocols required to navigate evolving communication options.

The BRX platform is a versatile stackable Micro PLC system that combines powerful features in a compact, stand-alone footprint.

A wide variety of expansion modules easily snap onto the side of any BRX Micro PLC Unit, creating a sturdy and rugged PLC platform. Expand with an additional 256 local I/O points using a wide variety of expansion modules.

Four unique form factors that each provide a strong system design to fit precise application requirements, while keeping the cost of the system to a minimum.

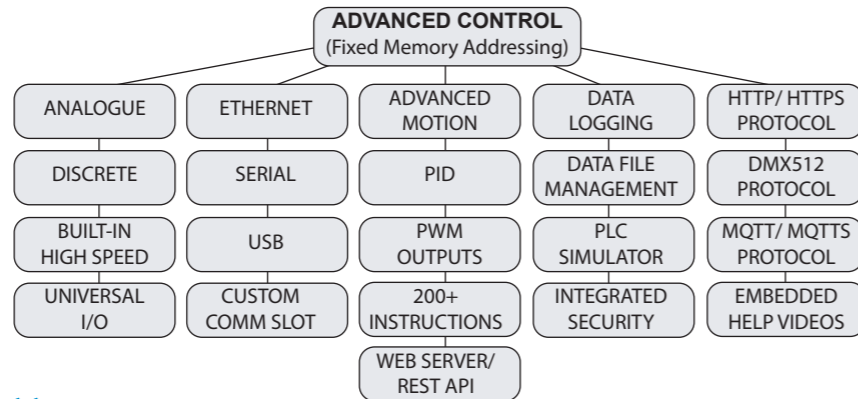

“Advanced capabilities and continuous development adding new features. Extremely good value for money.”  
Daniel, New Zealand

### Full-featured hardware and software features that provide an extensive toolbox to satisfy even the most demanding projects.

- Project simulator
- User defined structure data types
- Support for tasks, programs, subroutines, and interrupt service routines (ISRs)
- Embedded video help
- Dashboard for easy navigation
- Enhanced troubleshooting tools including Debug, trend and PID views
- Complete program, data file and memory management
- Robust instruction set with custom motion profiles and Axis commands
- Seamless integration with high-level IT systems and IIoT/cloud platforms using MQTT(S), HTTP(S), FTP protocols and Rest API capability




**ETHERNET MODELS**  
**STARTING PRICES**

**BX-DM1E-36ER3-D  
\$1114**

**BX-DM1E-18ER3-D  
\$898**

**BX-DM1E-10ER3-D  
\$801**

**BX-DM1E-M-D  
\$715**

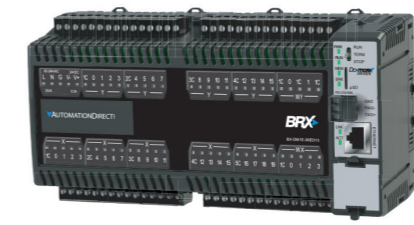

**LARGEST MPU  
36 BUILT-IN I/O**  
14 configurations from which to choose



**MID-RANGE MPU  
18 BUILT-IN I/O**  
2 configurations from which to choose



**SMALL MPU  
10 BUILT-IN I/O**  
2 configurations from which to choose



**SMALLEST MPU  
NO BUILT-IN I/O**  
2 configurations from which to choose

**PLUGGABLE OPTION MODULES**  
**STARTING PRICES**

### PLUGGABLE OPTION MODULES...

Hot-swappable POMs are available with RS232 (with and without flow control), RS422, RS485, USB 2.0, and Ethernet options. These modules can be swapped out as communication needs change - USB now and Ethernet later, or serial now but USB later, the choice is yours.

**BX-P-USB-B \$96** BRX communication POM module, 1 port, (1) USB B port(s).

...FULL LINE UP ON OUR ONLINE STORE!

SKU	PRICE	DESCRIPTION
BX-DM1-10AR-D	\$417	BRX Do-more PLC, 12-24 VDC required, serial port, microSD card slot, Discrete Input: 6-point, AC, Discrete Output: 4-point, relay.
BX-DM1E-M-D	\$715	BRX Do-more PLC, 12-24 VDC required, Ethernet and serial ports, microSD card slot, no on-board I/O.
BX-DM1E-10ER3-D	\$801	BRX Do-more PLC, 12-24 VDC required, Ethernet and serial ports, microSD card slot, Discrete Input: 6-point, AC/DC, Analog Input: 1-channel, current/voltage, Discrete Output: 4-point, relay, Analog Output: 1-channel, current/voltage.
BX-DM1E-18ER3-D	\$898	BRX Do-more PLC, 12-24 VDC required, Ethernet and serial ports, microSD card slot, Discrete Input: 10-point, AC/DC, Analog Input: 1-channel, current/voltage, Discrete Output: 8-point, relay, Analog Output: 1-channel, current/voltage.
BX-DM1E-36ER3-D	\$1114	BRX Do-more PLC, 12-24 VDC required, Ethernet and serial ports, microSD card slot, Discrete Input: 20-point, AC/DC, Analog Input: 4-channel, current/voltage, Discrete Output: 16-point, relay, Analog Output: 2-channel, current/voltage.
BX-P-ECOMEX	\$243	BRX communication POM module, MQTT Client, MQTTs Client, FTP Client, Do-more protocol, EtherNet/IP, Ethernet remote I/O and Modbus TCP, 1 port, (1) Ethernet 10/100Base-T (RJ45) port(s). For use with Ethernet enabled BRX MPUs.
BX-P-SER2-RJ12	\$156	BRX communication POM module, Do-more protocol, Modbus RTU and ASCII, 1 port, buffered, (1) RS-232 (RJ12) port(s). For use with all BRX MPUs.
BX-08THM	\$543	BRX temperature input module, thermocouple, 8-channel, 16-bit resolution, input thermocouple type(s): J, E, K, R, S, T, B, N, C. (1) BX-RTB10 screw terminal block kit included.
BX-16ND3	\$147	BRX discrete input module, 16-point, 12-24 VDC, sinking/sourcing, 4 isolated common(s), 4 point(s) per common. Requires BX-RTB10, BX-RTB10-1 or BX-RTB10-2 terminal block kit or ZIPLink pre-wired cables.
BX-16TD2	\$203	BRX discrete output module, 16-point, 12-24 VDC, sourcing, 4 isolated common(s), 4 point(s) per common, 0.5A/point. Requires BX-RTB10, BX-RTB10-1 or BX-RTB10-2 terminal block kit or ZIPLink pre-wired cables.
BX-16TR	\$216	BRX relay output module, 16-point, 12-48 VDC/24-240 VAC, (16) Form A, 4 isolated common(s), 4 point(s) per common, 2A/point. Requires BX-RTB10, BX-RTB10-1 or BX-RTB10-2 terminal block kit or ZIPLink pre-wired cables.

EXPAND WITH STACKABLE I/O MODULES TO MEET THE INPUT/OUTPUT NEEDS OF THE APPLICATION AT HAND. FULL RANGE ONLINE!



# PRODUCTIVITY PLC FAMILY

ADVANCED CONTROL



P1-540 | P1-550

P3-550E

P2-550 | P2-622

EXPANSIVE BUILT-IN COMMUNICATION

FREE SOFTWARE



The Productivity PLC family offers the utmost versatility in both hardware and software. This scalable PLC line will easily conform to large systems with tons of I/O or smaller/segmented systems using limited I/O. With tag name programming, device integration that includes GS drives, Protos X field I/O and others, and a few WOW factors, like analog data displays, Productivity PLCs are a perfect fit for almost any application.




SKU	PRICE	DESCRIPTION
P1-540	\$444	Productivity1000 CPU, up to 50 MB ladder memory, microSD card slot, (1) Ethernet 10/100Base-T (RJ45), (1) RS-232 (RJ12), (1) RS-485 (4-pin terminal) and (1) microB-USB port(s), external 24 VDC required, battery included.
P1-550	\$499	Productivity1000 CPU, up to 50 MB ladder memory, microSD card slot, (2) Ethernet 10/100Base-T (RJ45), (1) RS-232 (RJ12), (1) RS-485 (4-pin terminal) and (1) microB-USB port(s), external 24 VDC required, battery included.
P2-550	\$666	Productivity2000 CPU, up to 50 MB ladder memory, 4 x 10 character OLED display, microSD card slot, (2) Ethernet 10/100Base-T (RJ45), (1) RS-232 (RJ12), (1) RS-485 (3-pin terminal) and (1) microB-USB port(s), battery included.
P2-622	\$605	Productivity2000 CPU, up to 50 MB ladder memory, 4 x 10 character OLED display, microSD card slot, (2) Ethernet 10/100Base-T (RJ45), (1) RS-232/RS-485 (RJ12), (1) RS-232/RS-485 (4-pin terminal) and (1) USB C port(s), battery included.
P3-550E	\$1076	Productivity3000 CPU, up to 50 MB ladder memory, 4 x 10 character LCD display, USB A storage, (2) Ethernet 10/100Base-T (RJ45), (1) RS-232 (RJ12), (1) RS-485 (3-pin terminal) and (1) USB A expansion port(s), battery included.

The P2-622 PLC was designed to offer you the lowest cost of ownership in its class



The P2-622 CPU, with its configurable Port 2, can act as an inexpensive data bridge, transferring vital process data from the factory floor to upper-level enterprise systems.

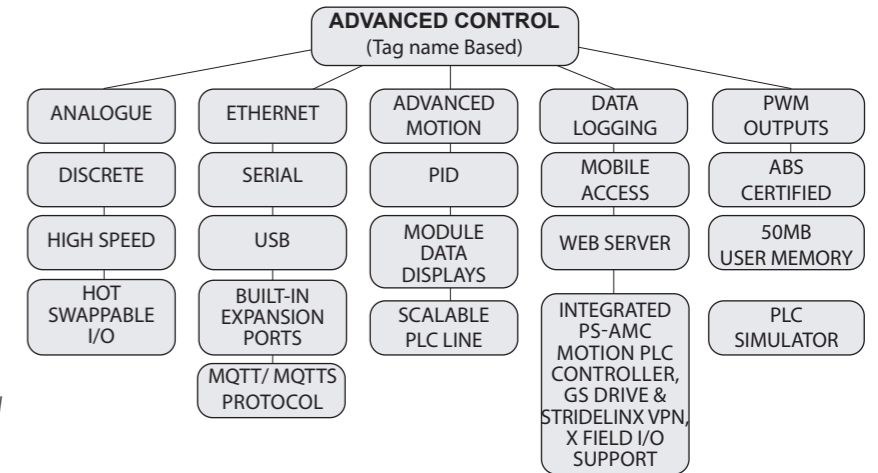

Productivity offers three distinct form factors with two being rack-based and one being stackable. Each series offers different I/O capacities but all use the same programming software, allowing you to easily scale your control up or down depending on the application or machine build. The ProductivitySuite software provides versatile programming with tag name addressing that has no predefined memory structure, and offers convenient device integration for easy plug-and-play operation with our PS-AMC motion controllers, GS drives, Protos X field I/O, and StrideLinx VPNs.

SKU	PRICE	DESCRIPTION
P1-01DC	\$121	Productivity1000 DC power supply, 12-24 VDC nominal input. External power supply optional. For applications not exceeding (8) P1000 modules.
P1-04AD-1	\$280	Productivity1000 analog input module, 4-channel, current, 16-bit, external 24 VDC required. Requires P1-10RTB or P1-10RTB-1 removable terminal block or ZIPLink pre-wired cables.
P1-15CDD2	\$155	Productivity1000 discrete combo module, Input: 8-point, 12-24 VDC, sinking/sourcing, Output: 7-point, 12-24 VDC, sourcing, 1A/point. Requires P2-RTB or P2-RTB-1 removable terminal block or ZIPLink pre-wired cables.
P1-16NE3	\$144	Productivity1000 discrete input module, 16-point, 24 VAC/VDC, sinking/sourcing, 2 isolated common(s), 8 point(s) per common. Requires P2-RTB or P2-RTB-1 removable terminal block or ZIPLink pre-wired cables.
P2-01DCAC	\$230	Productivity2000 AC/DC base power supply, 12-24 VDC/24 VAC nominal input. (1) power supply required per base.
P2-15TD2	\$172	Productivity2000 discrete output module, 15-point, 12-24 VDC, sourcing, 1 common(s), 15 point(s) per common, 1A/point. Requires P2-RTB or P2-RTB-1 removable terminal block or ZIPLink pre-wired cables.
P2-16NE3	\$183	Productivity2000 discrete input module, 16-point, 24 VAC/VDC, sinking/sourcing, 2 isolated common(s), 8 point(s) per common. Requires P2-RTB or P2-RTB-1 removable terminal block or ZIPLink pre-wired cables.
P2-16TR	\$252	Productivity2000 relay output module, 16-point, 6-24 VDC/6-240 VAC, (16) Form A, 2 isolated common(s), 8 point(s) per common, 1A/point, 8A/common. Requires P2-RTB or P2-RTB-1 removable terminal block or ZIPLink pre-wired cables.
P3-01DC	\$369	Productivity3000 DC base power supply, 24-48 VDC nominal input. (1) power supply required per base.
P3-08AD	\$576	Productivity3000 analog input module, 8-channel, current/voltage, 16-bit, external 24 VDC required. Requires P3-RTB removable terminal block or ZIPLink pre-wired cables.
P3-16ND3	\$319	Productivity3000 discrete input module, 16-point, 12-24 VDC, sinking/sourcing, 4 isolated common(s), 4 point(s) per common. Requires P3-RTB removable terminal block or ZIPLink pre-wired cables.
P3-16TR	\$369	Productivity3000 relay output module, 16-point, 6-24 VDC/6-240 VAC, (16) Form A, 2 isolated common(s), 8 point(s) per common, 1.25A/point, 6.3A/common. Requires P3-RTB removable terminal block or ZIPLink pre-wired cables.

**MORE MODULES AVAILABLE ONLINE! EXPLORE THE VERSATILITY AND SCALABILITY OF THE PRODUCTIVITY SERIES TODAY!**



# C-MORE CM5 HMI FAMILY

CM5 HMI SCREENS

## NEW! C-MORE CM5 SERIES HMI

The C-more CM5 series HMIs provide many hardware options with a variety of screen sizes and communication capabilities. CM5 HMIs also support the secure MQTT (with TLS) protocol which has become the frontrunner for many IIoT/ cloud applications. But the best news?? The price tag! Check out how they compare to their EA9 predecessors...

 <p><b>CM5-T4W</b> <del>\$599</del> <b>NEW!</b> C-more CM5 series touch screen HMI, 4.3in colour TFT LCD, analog resistive, widescreen, 480 x 272 pixel, WQVGA, LED backlight, (1) Ethernet, (2) serial and (2) USB ports and (1) memory card slot.</p>	 <p><b>CM5-T12W</b> <del>\$2089</del> <del>\$3249</del> C-more CM5 series touch screen HMI, 12.1in colour TFT LCD, analog resistive, widescreen, 1280 x 800 pixel, WXGA, LED backlight, (2) Ethernet, (3) serial and (4) USB ports and (1) memory card slot.</p>
 <p><b>CM5-T7W</b> <del>\$899</del> <del>\$1425</del> <b>WOW!</b> C-more CM5 series touch screen HMI, 7in colour TFT LCD, analog resistive, widescreen, 800 x 480 pixel, WVGA, LED backlight, (1) Ethernet, (2) serial and (2) USB ports and (1) memory card slot.</p>	 <p><b>CM5-T15W</b> <del>\$2899</del> <del>\$3863</del> C-more CM5 series touch screen HMI, 15.6in colour TFT LCD, analog resistive, widescreen, 1366 x 768 pixel, HD, LED backlight, (2) Ethernet, (3) serial and (4) USB ports and (1) memory card slot.</p>
 <p><b>CM5-T10W</b> <del>\$1539</del> <del>\$2053</del> C-more CM5 series touch screen HMI, 10.1in colour TFT LCD, analog resistive, widescreen, 1024 x 600 pixel, WSVGA, LED backlight, (2) Ethernet, (3) serial and (4) USB ports and (1) memory card slot.</p>	 <p><b>CM5-T22W</b> <del>\$4620</del> <b>NEW!</b> C-more CM5 series touch screen HMI, 21.5in colour TFT LCD, analog resistive, widescreen, 1920 x 1080 pixel, FHD, LED backlight, (2) Ethernet, (3) serial and (4) USB ports and (1) memory card slot.</p>

**FREE! C-MORE CM5 SOFTWARE** *DOWNLOAD & SIMULATE TODAY! NO HARDWARE OR KEY REQUIRED!!*  
**CM5-PGMSW** C-more Programming Software can be downloaded at no charge. The software requires a USB port or Ethernet connection\* on your PC to connect to the C-more panel. Software Help Files are included in the download.

### Supported Drivers

\* Please refer to the technical specifications for further details.

#### AutomationDirect:

- Do-more, Productivity, CLICK, DirectLOGIC, Think & Do PLCs
- GS Drives
- SOLO Temperature Controllers
- K-Sequence
- DirectNET
- ECOM Ethernet

- Modbus RTU
- Modbus TCP/IP

#### Allen-Bradley:

- A-B DF1
- A-B EtherNet/IP Client
- A-B EtherNet/IP Server
- Generic IO Messaging
- **GE:**
- 90/30, 90/70, Micro 90, VersaMax Micro (SNPX)
- 90/30, Rx3i (SRTP Ethernet)

#### Omron:

- Omron Host Link Adapter
- Omron FINS (Serial and Ethernet)
- **Mitsubishi:**
- FX Series CPU
- FX-1N(C), 2N(C), 3U(C) CPU
- Q Series (Q02, Q02H, Q06H, Q12H, Q25H CPU)
- Q/QnA (Serial & Ethernet)

#### Siemens:

- S7-200 (Serial: PPI)
- S7-200 (Ethernet: ISO over TCP/IP)
- S7-300 (Ethernet: ISO over TCP/IP)
- S7-400 (Ethernet: ISO over TCP/IP)
- S7-1200 (Ethernet: ISO over TCP/IP)

# REMOTE HMI

REMOTE/ HEADLESS HMI



**CM5-RHMI**  
**\$1199**  
 DISPLAY UP TO FHD 1920x1080  
 EXPAND YOUR AUDIENCE!

HMIs are no longer confined to the enclosure door! With the C-more CM5-RHMI headless HMI you can display your factory floor data how and where you choose. The CM5-RHMI has all the powerful functionality of the C-more CM5 touch panel HMIs, without display size restrictions.

**SAME FREE CM5 SOFTWARE! & FREE C-MORE REMOTE HMI APP!**



SAVE WITH FREE SOFTWARE!!

## VIEWMARQ LED MESSAGE DISPLAY

The ViewMarq message displays utilize both serial and Ethernet communications and can be connected to a PLC or PC or any device capable of serial ASCII master, Modbus RTU, or Modbus TCP communications. Messages can be controlled by any of the following methods:

- ASCII Input Strings through the RS232 or RS485 port
- Modbus RTU Messages through the RS232 or RS485 port
- Modbus TCP Messages through the Ethernet port.

SKU	PRICE	DESCRIPTION
MD4-0112T-1	<b>\$1286</b>	1 line x 12 characters. 50mm max character size. Approx viewing distance 100ft.
MD4-0124T-1	<b>\$1928</b>	1 line x 24 characters. 50mm max character size. Approx viewing distance 100ft.
MD4-0212T-1	<b>\$2271</b>	2 line x 12 characters. 120mm max character size. Approx viewing distance 200ft.
MD4-0224T-1	<b>\$3483</b>	2 line x 24 characters. 120mm max character size. Approx viewing distance 200ft.
MD4-0412T-1	<b>\$2682</b>	4 line x 12 characters. 241mm max character size. Approx viewing distance 400ft.
MD4-0424T-1	<b>\$4573</b>	4 line x 24 characters. 241mm max character size. Approx viewing distance 400ft.

Other features include; store and trigger up to 200 messages, scrolling messages, blinking text and messages, display embedded PLC string and numeric variables, tri-colour LED (Red, Green, Amber), built-in Ethernet port; RS-232, and RS-485 serial ports, free, easy-to-use configuration software package.



# POWER SUPPLIES- SWITCHING

ACHIEVE AND RHINO



**NEW! ACHIEVE PSA SERIES SWITCHING POWER SUPPLY**  
 AchieVe PSA series power supplies are designed for price-sensitive users who require basic yet reliable power output for general industrial applications. Their overcurrent protection is designed to operate in constant current mode, making the PSA series suitable for inductive and capacitive load applications.

**KNOCK OUT PRICES**

SKU	PRICE	DESCRIPTION
PSA-24-75	\$58	AchieVe PSA series switching power supply, 24 VDC @ 3.125A/75W, 120/240 VAC nominal input, 1-phase, enclosed, plastic housing, 35mm DIN rail mount, screw terminals.
PSA-24-120	\$75	AchieVe PSA series switching power supply, 24 VDC @ 5A/120W, 120/240 VAC nominal input, 1-phase, enclosed, aluminum housing, 35mm DIN rail mount, screw terminals.
PSA-24-240	\$139	AchieVe PSA series switching power supply, 24 VDC @ 10A/240W, 120/240 VAC nominal input, 1-phase, enclosed, aluminum housing, 35mm DIN rail mount, screw terminals.
PSA-24-480	\$265	AchieVe PSA series switching power supply, 24 VDC @ 20A/480W, 120/240 VAC nominal input, 1-phase, enclosed, aluminum housing, 35mm DIN rail mount, screw terminals.



**RHINO PSB SERIES SWITCHING POWER SUPPLY**  
 RHINO switching power supplies provide dependable DC power in easily mounted plastic or metal housings. RHINO offers performance and reliability without the higher cost of full-featured power supplies.

**HUGE SELECTION ONLINE INCLUDING BUFFER AND REDUNDANCY MODULES**

SKU	PRICE	DESCRIPTION
PSB24-060S-P	\$96	RHINO switching power supply, 24 VDC (adjustable) output, 2.5A, 60W, 85-264 VAC / 100-240 VDC input, 1-phase, overvoltage, short circuit and overload protection, voltage monitoring, plastic housing, 35mm DIN rail mount, screw terminals, NEC Class 2, hazardous location rated.
PSB24-060S	\$114	RHINO switching power supply, 24 VDC (adjustable) output, 2.5A, 60W, 85-264 VAC / 120-375 VDC input, 1-phase, overvoltage, short circuit and overload protection, voltage monitoring, aluminum housing, 35mm DIN rail mount, removable screw terminal, hazardous location rated.
PSB24-120S	\$203	RHINO switching power supply, 24 VDC (adjustable) output, 5A, 120W, 85-264 VAC / 120-375 VDC input, 1-phase, overvoltage, short circuit and overload protection, voltage monitoring, aluminum housing, 35mm DIN rail mount, removable screw terminal, hazardous location rated.
PSB24-240S	\$325	RHINO switching power supply, 24 VDC (adjustable) output, 10A, 240W, 85-264 VAC / 120-375 VDC input, 1-phase, overvoltage, short circuit and overload protection, voltage monitoring, aluminum housing, 35mm DIN rail mount, removable screw terminal, hazardous location rated.
PSB48-120S	\$200	RHINO switching power supply, 48 VDC (adjustable) output, 2.5A, 120W, 85-264 VAC / 120-375 VDC input, 1-phase, overvoltage, short circuit and overload protection, voltage monitoring, aluminum housing, 35mm DIN rail mount, removable screw terminal, hazardous location rated.
PSB48-240S	\$326	RHINO switching power supply, 48 VDC (adjustable) output, 5A, 240W, 85-264 VAC / 120-375 VDC input, 1-phase, overvoltage, short circuit and overload protection, voltage monitoring, aluminum housing, 35mm DIN rail mount, removable screw terminal, hazardous location rated.

# DC POWER SUPPLIES- OTHER

RHINO ELECTRICAL



- DIN RAIL MOUNT
- RUGGED MACHINE MOUNT
- SPECIALTY MODULES
- ENCAPSULATED CHASSIS MOUNT
- ENCLOSED CHASSIS MOUNT

SKU	PRICE	DESCRIPTION
PSM24-090S	\$261	RHINO SELECT PSM series switching power supply, 24 VDC @ 3.75A/90W (adjustable), 120/240 VAC nominal input, 1-phase, enclosed, metal housing, 35mm DIN rail mount, removable screw terminal.
PSP24-060S	\$222	RHINO SELECT PSP series switching power supply, 24 VDC @ 2.5A/60W (adjustable), 120/240 VAC or 85-375 VDC nominal input, 1-phase, enclosed, plastic housing, 35mm DIN rail or chassis mount, removable screw terminal.
PSP24-DC12-1	\$205	RHINO DC to DC converter, 9.5-18 VDC input, 24 VDC output, 1A, 25W, plastic housing, 35mm DIN rail mount, screw terminal, removable. DIN rail insert for panel mounting included.
PSE24-DC12-60	\$214	RHINO DC to DC converter, 9.5-36 VDC input, 24 VDC output, 2.5A, 60W, plastic housing, encapsulated, chassis mount, screw terminal.
PSE15-230	\$195	RHINO PSE series switching power supply, +15 VDC @ 1A/30W and -15 VDC @ 1A/30W, 120/240 (47-440 Hz) VAC or 120-370 VDC nominal input, 1-phase, encapsulated, plastic resin and fiberglass housing, chassis mount, screw terminals. <b>NOT YET ON OUR WEBSITE! THOUSANDS OF PRODUCTS AVAILABLE TO YOU! CONTACT OUR SALES STAFF TODAY!!!</b>
PSRP-15-DC24-150	\$408	RHINO PRO DC to DC converter, 9-36 VDC input, 15 VDC output, 10A, 150W, aluminum housing, encapsulated, chassis mount, screw terminal.
PSRP-24-DC24-150	\$408	RHINO PRO DC to DC converter, 9-36 VDC input, 24 VDC output, 6.3A, 150W, aluminum housing, encapsulated, chassis mount, screw terminal.
PH75PG	\$229	Hammond control transformer, encapsulated core, 75 VA, 1-phase, 120/240 VAC primary, 12/24 VAC secondary, 50/60 Hz, panel mount.

# ENCLOSURES



- MILD STEEL GREY RAL 7035 MSBxxx
- MILD STEEL ORANGE RAL 2000 MSBxxx
- STAINLESS STEEL GRADE BSxxx

**\$162**  
 FROM MSB202015G

**IP66 MILD STEEL ENCLOSURE**  
 200H x 200W x 150Dmm  
 Single door can be opened to 110 degrees and is reversible for convenience, tight seal to prevent any moisture or dust from entering the enclosure.



# COMMUNICATIONS

REMOTE ACCESS



## 3ONEDATA MANAGED AND UNMANAGED INDUSTRIAL SWITCHES

Industrial-grade communication products can withstand harsh environments and provide reliable data exchange between control devices that use various transmission media and protocols.

SKU	PRICE	DESCRIPTION
IES2105-5T-P48	\$95	Unmanaged Switch- 5 ports 10/100Base-T(X), DC12-48VDC, DIN Rail, single power supply
<b>NEW!</b> IES2105-4T1F-P48	\$169	Unmanaged Switch- 4 ports 10/100Base-T(X)+1 Fibre port 100Base-FX, Multimode, DC12-48V, SC Connectors <i>FANTASTIC VALUE WITH LOW PRICE TAG AND MIXED PORT OPTIONS!</i>
IES2105-3T2F-P48	\$369	Unmanaged Switch- 3 ports 10/100Base-T(X)+2 Fibre ports 100Base-FX, Single-mode, SC connectors, DC12-48V
IES618	\$518	Web Managed Switch, 8 ports 10/100Base-T(X), DC12-36V
IES618-2F-M-SC	\$715	Web Managed Switch, 6 ports 10/100Base-T(X)+2 ports 100Base-FX Multi-mode SC/ST, DC12-36V
IES608-2F-S-SC	\$715	Web Managed Switch, 6 ports 10/100Base-T(X)+2 ports 100Base-FX Single-mode SC/ST, DC12-36V
IES608-4F-M-SC	\$1065	Web Managed Switch, 4 ports 10/100Base-T(X)+4 ports 100Base-FX Multi-mode SC/ST, DC12-36V
IES2305-5GT-P48	\$330	Industrial Gigabit Unmanaged Ethernet Switch- 5 port Gigabit copper RJ45 ports, 5 ports 10/100/1000Base-T(X). Dipswitch can be used to set Jumbo frame support, one-key VLAN or 100M port and flow control. -40 to +75deg C. Metal housing IP40. 12~48VDC power supply. DIN rail mount. Non-PoE
IES2010-2GS-4F-M-SC	\$883	Industrial Gigabit Ethernet Switch- 4 ports 10/100Base-T(X)+4 ports 100Base-FX Multi-mode SC+ 2 gigabit Ethernet ports (SFP slots),12-48VDC

## SERIAL CONVERTERS

FA-ISOCAN	\$299	AutomationDirect serial converter, RS-232 (RJ12) to RS-422/485 (5-pin terminal), isolation protection, 5 VDC from PLC or 24 VDC external nominal input, encapsulated, DIN rail or panel mount.
MB-GATEWAY	\$528	AutomationDirect Modbus gateway, Ethernet to serial, (1) Ethernet 10/100Base-T (RJ45) and (1) RS-422/485 (6-pin terminal) port(s), (12) simultaneous Ethernet connections, (128) serial device(s), 12-24 VDC required.

## Cables

### COMMUNICATIONS CABLES AND CONNECTORS

Pre-terminated Ethernet patch and crossover cables, fiber optic cables, field wireable connectors, as well as serial and USB accessories, accommodate a variety of connection requirements.  
More cable options page 34...



**\$14**

FROM C5E-STPBL-S3

# COMMUNICATIONS- NETWORK HARDWARE

IIOT COMMUNICATIONS



## ARE YOUR SYSTEMS CYBER SECURE?

Wiesemann & Theis GmbH (W&T) in Germany is a trusted manufacturer of microcomputers with over 40 years experience linking industry, office and IT with reliable network and sensor technology as well as interface converters. As a basic measure for many IT security concepts the W&T micro-firewalls isolate critical systems (older devices, IoT systems, etc.) on a secure island in your network. The Microwall Bridge provides security when needed, quickly and simply, while the Microwall VPN and IO provide additional protection.


SKU	PRICE	DESCRIPTION
55411	\$855	The <b>Microwall Bridge (firewall)</b> segments sensitive network areas without changing the IP configuration of the components which have been isolated. The preferred area of application is therefore the easiest possible, add-on security expansion of existing infrastructures. - 2x Ethernet 100/1000BaseT, Gigabit Ethernet, Screw terminals, 24V-48V DC POE.
55211	\$925	The <b>Microwall VPN</b> with integrated WireGuard VPN server is a firewall that uses appropriate rules to protect your critical machines or systems from undesired or harmful access. Communication from and to the island is restricted to what is essential for operation, thereby significantly reducing the potential attack area. - 2x Ethernet 100/1000BaseT, Gigabit Ethernet, Screw terminals, 24V-48V DC POE.
55212	\$1095	The <b>Microwall IO</b> with innovative I/O control for VPN access includes all the functions of the Microwall VPN. Use the digital in- and outputs to switch remote maintenance and firewall-specific actions in automation and process environments. Using a PLC output, a simple button or switch etc. VPN access, certain firewall rules or the status of the network interfaces can be controlled. - 2x Ethernet 100/1000BaseT, 2 switching inputs + 2 switching outputs, digital inputs + 2 digital 24V outputs, Screw terminals, 24V-48V DC POE.



**\$850** SKU: 55990

The **MQTT.box** is a high quality Mosquitto MQTT broker for DIN rail mounting. It enables communication between network-capable automation components using MQTT protocol. Thanks to the second network interface data can also be made available for an additional network segment without allowing access from one network to the other.

The back-end is based on the Mosquitto broker from the Eclipse Project, a widely tested and robust solution.

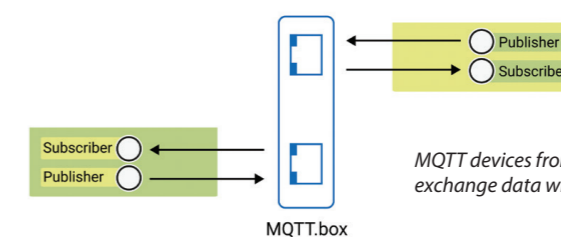

MQTT devices from two different network segments can exchange data with each other.





## STRIDE AND STRIDELINX INDUSTRIAL IOT SOLUTIONS

The StrideLinx remote access solution provides affordable, secure access to remote machines or systems using a low-cost VPN router and FREE cloud service. Beyond free remote access, the StrideLinx platform can be upgraded with easy add-on subscriptions to enhance its capabilities including cloud data logging/reporting and cloud notify/alarming.



**\$21**  
SE-ANT210  
STRIDE whip/straight 2.4 GHz WiFi antenna, IP65, connector mount. For use with SE-SL3011-WF VPN router and CLICK PLUS PLCs.



**\$77**  
SE-ANT250  
STRIDE dome 2.4 GHz WiFi antenna, IP67, panel mount, 9.8ft/3m cable length. For use with SE-SL3011-WF VPN router and CLICK PLUS PLCs.



**\$88**  
SE-ANT150  
STRIDE dome LTE antenna, IP67, panel mount, 9.8ft/3m cable length. For use with SE-SL3011-4G and SE-SL3011-4GG VPN routers.



**\$27**  
SE-ANT110  
STRIDE whip/tilt LTE antenna, connector mount. For use with SE-SL3011-4G and SE-SL3011-4GG VPN routers.



**\$69**  
SE-ANT130  
STRIDE whip/straight LTE antenna, magnetic base mount, 9.8ft/3m cable length. For use with SE-SL3011-4G and SE-SL3011-4GG VPN routers.



**\$997**  
SE-SL3011  
StrideLinx Pro industrial VPN router, wired Internet connectivity, (5) Ethernet Gigabit (RJ45) port(s), Android/iOS with mobile VPN, 12-24 VDC required.




**\$1251**  
SE-SL3011-WF  
StrideLinx Pro industrial VPN router, wired + 802.11 b/g/n WiFi Internet connectivity, WiFi LAN and (5) Ethernet Gigabit (RJ45) port(s), Android/iOS with mobile VPN, 12-24 VDC required.



**\$1464**  
SE-SL3011-4GG  
StrideLinx Pro industrial VPN router, wired + 4G Global LTE and US LTE Verizon Internet connectivity, (5) Ethernet Gigabit (RJ45) port(s), Android/iOS with mobile VPN, 12-24 VDC required.

**NOTE: SIM card and data plan will need to be purchased.**

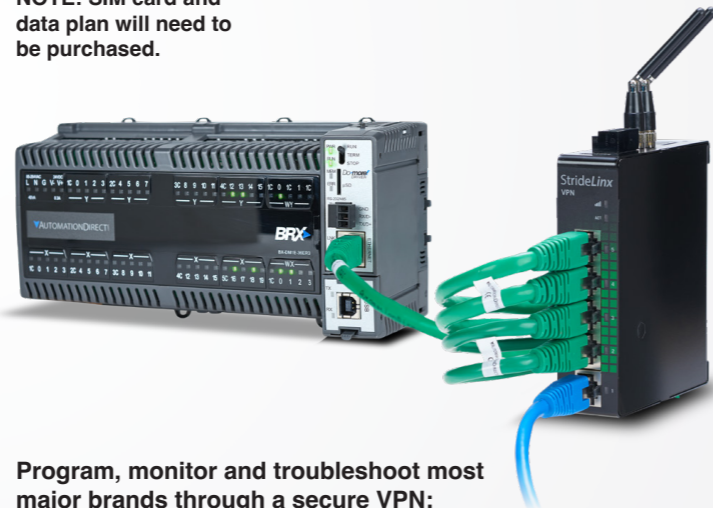

Program, monitor and troubleshoot most major brands through a secure VPN:

- AutomationDirect
- Allen-Bradley
- Siemens
- Omron
- Schneider Electric
- Many More!



**\$672**  
SE-SW5U-ST-WT  
STRIDE industrial unmanaged Ethernet switch, 5 ports, (4) Ethernet 10/100Base-T (RJ45) and (1) multi-mode ST 100FX fiber port(s), -40 to +85 deg C, metal housing, IP40, 35mm DIN rail mount.





**\$556**  
SGW-MQ1611  
STRIDE industrial MQTT gateway, (1) Ethernet 10/100Base-T (RJ45) and (1) RS-485 (2-pin terminal) port(s), wired Internet connectivity, 10-30 VDC required.

## Connect, access, and control your industrial data.



Need to get all your devices and systems talking? Then you need Kepware

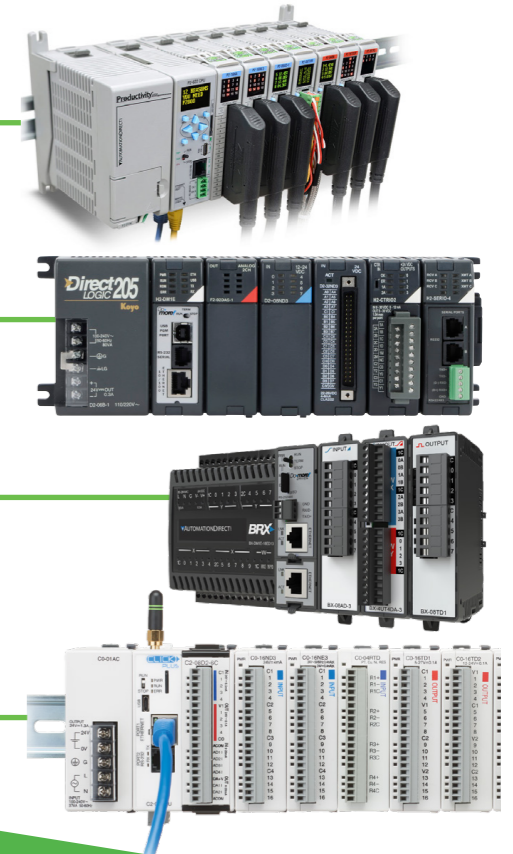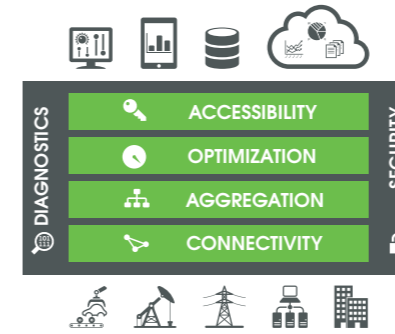

Access the right data at the right time with factory-wide connectivity. Enable disparate industrial equipment and systems to speak the same language to provide real-time data to enterprise applications and IoT platforms.

Kepware is a portfolio of industrial connectivity solutions that help businesses connect diverse automation devices and software applications. Utilizing a scalable, unified architecture, Kepware provides the flexibility to combine drivers and consume multiple protocols in a single server while offering a streamlined interface for simple installation, configuration, maintenance, and troubleshooting.



New to Kepware? Learn more





# SENSORS- PROCESS & MEASUREMENT

TEMP CONTROLLERS



## NEW! SOLO BASIC TEMPERATURE CONTROLLERS

Economical SOLO Basic temperature controllers control a heating or cooling process using input from a temperature sensor and maintaining a setpoint using an output (relay, voltage pulse or current, depending on model). They support PID, ON/OFF, and Manual control modes.

*YOUR ECONOMICAL OPTION! EXCEPTIONAL VALUE!!!*


SKU	PRICE	DESCRIPTION
SLB4848-R0	\$98	SOLO <b>basic</b> temperature controller, 1/16 DIN, 2-line LCD, RTD or thermocouple input, (1) 5A SPST relay output, 100-240 VAC operating voltage.
SLB4848-R2	\$114	SOLO <b>basic</b> temperature controller, 1/16 DIN, 2-line LCD, RTD or thermocouple input, (1) 5A SPST relay, (2) 3A SPST relays output, 100-240 VAC operating voltage.
SLB4848-V0	\$98	SOLO <b>basic</b> temperature controller, 1/16 DIN, 2-line LCD, RTD or thermocouple input, 12 VDC pulse output, 100-240 VAC operating voltage.
SLB4848-V2	\$114	SOLO <b>basic</b> temperature controller, 1/16 DIN, 2-line LCD, RTD or thermocouple input, 12 VDC pulse, (2) 3A SPST relays output, 100-240 VAC operating voltage.
SLB4848-C0	\$98	SOLO <b>basic</b> temperature controller, 1/16 DIN, 2-line LCD, RTD or thermocouple input, 4-20 mA output, 100-240 VAC operating voltage.
SLB4848-C2	\$114	SOLO <b>basic</b> temperature controller, 1/16 DIN, 2-line LCD, RTD or thermocouple input, 4-20 mA, (2) 3A SPST relays output, 100-240 VAC operating voltage.

## SOLO STANDARD TEMPERATURE CONTROLLERS

SL4824-CR-D	\$232	SOLO <b>standard</b> temperature controller, 1/32 DIN, 2-line LED, current, voltage, RTD or thermocouple input, 4-20 mA, 3A SPST relay output, 24 VDC operating voltage, RS-485.
SL4824-RR	\$232	SOLO <b>standard</b> temperature controller, 1/32 DIN, 2-line LED, current, voltage, RTD or thermocouple input, (2) 3A SPST relays output, 100-240 VAC operating voltage, RS-485.
SL4848-CR	\$259	SOLO <b>standard</b> temperature controller, 1/16 DIN, 2-line LED, current, voltage, RTD or thermocouple input, 4-20 mA, 5A SPST relay, (2) 3A SPST relays output, 100-240 VAC operating voltage, RS-485.
SL4848-RR	\$259	SOLO <b>standard</b> temperature controller, 1/16 DIN, 2-line LED, current, voltage, RTD or thermocouple input, (2) 5A SPST relays, (2) 3A SPST relays output, 100-240 VAC operating voltage, RS-485.
SL4848-VV	\$259	SOLO <b>standard</b> temperature controller, 1/16 DIN, 2-line LED, current, voltage, RTD or thermocouple input, (2) 11-15 VDC pulse, (2) 3A SPST relays output, 100-240 VAC operating voltage, RS-485.
SL4896-RRE	\$284	SOLO <b>standard</b> temperature controller, 1/8 DIN, 2-line LED, current, voltage, RTD, thermocouple or event input, (2) 5A SPDT relays, (2) 3A SPST relays output, 100-240 VAC operating voltage, RS-485.
SL4896-CRE	\$284	SOLO <b>standard</b> temperature controller, 1/8 DIN, 2-line LED, current, voltage, RTD, thermocouple or event input, 4-20 mA, 5A SPDT relay, (2) 3A SPST relays output, 100-240 VAC operating voltage, RS-485.

# SENSORS- PROCESS & MEASUREMENT

SENSORS- VARIED

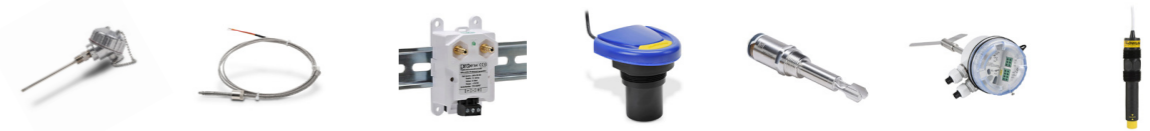

*WE HAVE A HUGE SELECTION OF SENSORS! HERE IS JUST A SAMPLE....*

## PROSENSE TEMPERATURE SENSORS AND TRANSMITTERS

SKU	PRICE	DESCRIPTION
THMK-C06-01	\$161	ProSense <b>Type K thermocouple probe</b> , single element, ungrounded junction, MgO insulated, 6 inch length, 1/4 inch outside diameter, 316 stainless steel sheath, 316 stainless steel hex nipple fitting with 1/2 inch NPT male process threads, NEMA 4X, IP66 rated aluminum screw cover connection head, ceramic terminal base with brass terminals and stainless steel screws, 32 to 1700 deg. F (0 to 927 deg. C) sensing range
THMK-T06L06-01	\$84	ProSense <b>Type K thermocouple probe</b> , single element, ungrounded junction, MgO insulated, 6 inch length, 1/8 inch outside diameter, 316 stainless steel sheath, heavy-duty 400 deg. F (204 deg. C) rated lead wire transition with relief spring, 6-foot stranded conductor lead wires with stripped ends, fiberglass insulation and stainless steel overbraid, 32 to 1700 deg. F (0 to 927 deg. C) sensing range
RTD1-B01L06-01	\$146	ProSense <b>temperature sensor</b> , Pt100 RTD, bolt-on ring, brass sheath, #6-#10 (4mm-5mm) screw or bolt size process connection, 6ft 24 AWG wire leads.

## PROSENSE AIR DIFFERENTIAL PRESSURE TRANSMITTERS

DPTA-20-01	\$297	ProSense air differential pressure transmitter, 0 to 1.0in of water column range, 4-20 mA analog output, 1/4in brass barbed process connection, 12 to 36 VDC operating voltage, screw terminals, 35mm DIN rail or panel mount.
DPTA-20-15	\$297	ProSense air differential pressure transmitter, 0 to 15.0in of water column range, 4-20 mA analog output, 1/4in brass barbed process connection, 12 to 36 VDC operating voltage, screw terminals, 35mm DIN rail or panel mount.
DPTA-20-10	\$297	ProSense air differential pressure transmitter, 0 to 10.0in of water column range, 4-20 mA analog output, 1/4in brass barbed process connection, 12 to 36 VDC operating voltage, screw terminals, 35mm DIN rail or panel mount.

## LEVEL, VIBRATION, ROTATING, FLOAT SENSORS AND SWITCHES

LU27-00	\$1524	Flowline EchoSonic II <b>ultrasonic liquid level sensor</b> , 9.8ft/3m sensing range, 4-20 mA, 14-28 VDC operating voltage, 1in male NPT process connection.
VFL75-100L-3H	\$382	ProSense <b>vibration fork liquid level switch</b> , any orientation mount, 3.44in insertion length, 316L stainless steel wetted parts, -40 to 212 deg F, 3/4in male NPT process connection, switch PNP, 3-wire, N.O./N.C. complementary, 4-pin M12 quick-disconnect.
PLS-4P-1-24D	\$629	ProSense <b>rotating paddle</b> bulk solids level switch, 100mm insertion length, 1-1/4in male NPT process connection, (1) SPDT relay, 20-28 VDC operating voltage. Hinged paddle included.
LP15-1405	\$653	Flowline Switch-Tek guard capacitance <b>liquid level switch</b> , any orientation mount, 2.6in insertion length, polypropylene wetted parts, -40 to 176 deg F, 3/4in male NPT process connection, SPST relay, N.O./N.C. selectable.
FLS-HT-100	\$129	ProSense <b>float liquid level tilt switch</b> , suspendible/submersible mount, EPDM rubber rectangular float, EPDM rubber rectangular, polypropylene, PVC wetted parts, 32 to 158 deg F, mercury-free SPDT switch.



# SENSORS- PROXIMITY

PROXIMITY SENSORS



WE HAVE A HUGE SELECTION OF SENSORS! HERE IS JUST A SAMPLE....

## WOW! CONTRINEX INDUCTIVE PROXIMITY SENSORS- Tubular

SKU	PRICE	DESCRIPTION
DW-AS-603-M18-002	\$38	Contrinex inductive proximity sensor, tubular, 18mm diameter x 63.5mm body, nickel-plated brass housing, PNP, N.O. output, 5mm sensing distance, flush, 2 kHz switching frequency, IP67, 4-pin M12 quick-disconnect.
DW-AS-613-M30-002	\$54	Contrinex inductive proximity sensor, tubular, 30mm diameter x 63.5mm body, nickel-plated brass housing, PNP, N.O. output, 15mm sensing distance, non-flush, 700 Hz switching frequency, IP67, 4-pin M12 quick-disconnect.
DW-AS-611-M30-002	\$54	Contrinex inductive proximity sensor, tubular, 30mm diameter x 63.5mm body, nickel-plated brass housing, NPN, N.O. output, 15mm sensing distance, non-flush, 700 Hz switching frequency, IP67, 4-pin M12 quick-disconnect.

## MICRO DETECTORS INDUCTIVE PROXIMITY SENSORS- Tubular

AK1-AP-1A	\$51	Micro Detectors inductive proximity sensor, tubular, 18mm diameter x 50mm body, nickel-plated brass housing, PNP, N.O. output, 5mm sensing distance, flush, 600 Hz switching frequency, IP67, pigtail.
AT1-AP-3H	\$83	Micro Detectors inductive proximity sensor, tubular, 30mm diameter x 60mm body, nickel-plated brass housing, PNP, N.O. output, 15mm sensing distance, flush, 150 Hz switching frequency, IP67, 4-pin M12 quick-disconnect
AT1-AN-3H	\$83	Micro Detectors inductive proximity sensor, tubular, 30mm diameter x 60mm body, nickel-plated brass housing, NPN, N.O. output, 15mm sensing distance, flush, 150 Hz switching frequency, IP67, 4-pin M12 quick-disconnect.

## MICRO DETECTORS ULTRASONIC PROXIMITY SENSORS

UK1A-GP-0E	\$242	Micro Detectors ultrasonic proximity sensor, tubular, 18mm diameter x 91.6mm body, polybutylene terephthalate housing, PNP, N.O./N.C. selectable output, 50-400mm sensing distance, 10 Hz switching frequency, IP67, 4-pin M12 quick-disconnect.
UK1A-G1-0E	\$264	Micro Detectors ultrasonic proximity sensor, tubular, 18mm diameter x 91.6mm body, polybutylene terephthalate housing, 0-10 VDC analog output, 50-400mm sensing distance, IP67, 4-pin M12 quick-disconnect.
UK1A-G7-0E	\$282	Micro Detectors ultrasonic proximity sensor, tubular, 18mm diameter x 91.6mm body, polybutylene terephthalate housing, PNP, 0-10 VDC analog output, N.O./N.C. selectable output, 50-400mm sensing distance, 10 Hz switching frequency, IP67, 5-pin M12 quick-disconnect.

# SENSORS- PHOTOELECTRIC SENSORS

PHOTOELECTRIC SENSORS



## CONTRINEX PHOTOELECTRIC SENSORS - Rectangular

SKU	PRICE	DESCRIPTION
LHR-C23PA-PMS-101	\$82	Contrinex photoelectric sensor, rectangular, diffuse with background suppression, 15-250mm sensing distance, complementary light-on/dark-on, NPN, potentiometer, 1000 Hz switching frequency, 4-pin M8 quick-disconnect.
LRR-C23PA-NMS-101	\$73	Contrinex photoelectric sensor, rectangular, polarized retroreflective, visible red light emission, 30-6000mm sensing distance, complementary light-on/dark-on, NPN, 4-wire, 4-pin M8 quick-disconnect.
TRR-C23PA-PMS-101	\$111	Contrinex photoelectric sensor, rectangular, polarized retroreflective, visible red light emission, 20-4200mm sensing distance, complementary light-on/dark-on, NPN, potentiometer, 4-wire, 4-pin M8 quick-disconnect.

CAN'T FIND WHAT YOU NEED ELSEWHERE? GIVE US A TRY!!!  
OUR SALES STAFF WILL SEARCH THE MARKET FOR COMPARATIVE PRODUCTS THAT MEET YOUR SPECS AND YOUR TIMELINES

## AUTOMATIONDIRECT PHOTOELECTRIC SENSOR- Rectangular

CXE-0N-1F	\$82	AutomationDirect photoelectric sensor, rectangular, plastic housing, through-beam emitter, infrared light emission, 6m sensing distance, 10-36 VDC operating voltage, 3-wire, 3-pin M8 quick-disconnect.
CXP-AN-1F	\$133	AutomationDirect photoelectric sensor, rectangular, polarized retroreflective, visible red light emission, 2m sensing distance, dark-on, NPN, potentiometer, 3-wire, 3-pin M8 quick-disconnect Purchase reflector separately.
CX3-AN-1F	\$127	AutomationDirect photoelectric sensor, rectangular, diffuse, infrared light emission, 600mm sensing distance, light-on, NPN, potentiometer, 1 kHz switching frequency, plastic housing, 3-pin M8 quick-disconnect.



FREE TECH SUPPORT!  
1800 633 040



Over 35,000 quality industrial control products at great everyday prices are available to you and each one comes with the FREE customer service you deserve.



# SENSORS- ENCODERS



ENCODERS

SKU	PRICE	DESCRIPTION
TRD-SR200AD	\$204	Koyo TRD-SR series incremental (quadrature) rotary encoder, <b>light</b> duty, 5-26 VDC, radial exit, NPN open collector output, <b>200 ppr</b> , 6mm solid shaft, 38mm diameter body, IP50, 6.5ft/2m cable length, pigtail.
TRD-SR360AD	\$204	Koyo TRD-SR series incremental (quadrature) rotary encoder, <b>light</b> duty, 5-26 VDC, radial exit, NPN open collector output, <b>360 ppr</b> , 6mm solid shaft, 38mm diameter body, IP50, 6.5ft/2m cable length, pigtail.
TRD-SR2500AD	\$216	Koyo TRD-SR series incremental (quadrature) rotary encoder, <b>light</b> duty, 5-26 VDC, radial exit, NPN open collector output, <b>2500 ppr</b> , 6mm solid shaft, 38mm diameter body, IP50, 6.5ft/2m cable length, pigtail.
TRD-SR2000AD	\$216	Koyo TRD-SR series incremental (quadrature) rotary encoder, <b>light</b> duty, 5-26 VDC, radial exit, NPN open collector output, <b>2000 ppr</b> , 6mm solid shaft, 38mm diameter body, IP50, 6.5ft/2m cable length, pigtail.
TRD-SHR360A5D	\$218	Koyo TRD-SR series incremental (quadrature) rotary encoder, <b>light</b> duty, 5-26 VDC, radial exit, NPN open collector output, <b>360 ppr</b> , 8mm hollow shaft, 38mm diameter body, IP50, 6.5ft/2m cable length, pigtail.
TRD-SHR500A5D	\$218	Koyo TRD-SR series incremental (quadrature) rotary encoder, <b>light</b> duty, 5-26 VDC, radial exit, NPN open collector output, <b>500 ppr</b> , 8mm hollow shaft, 38mm diameter body, IP50, 6.5ft/2m cable length, pigtail.
TRD-SHR1024V5D	\$226	Koyo TRD-SR series incremental (quadrature) rotary encoder, <b>light</b> duty, 5 VDC, radial exit, line driver (differential) output, <b>1024 ppr</b> , 8mm hollow shaft, 38mm diameter body, IP50, 6.5ft/2m cable length, pigtail.
TRD-N60-RZWD	\$330	Koyo encoder, incremental (quadrature), <b>medium</b> duty, <b>60 ppr</b> , 8mm solid shaft, 50mm diameter body, 5-30 VDC, push-pull (totem pole), IP65 (splash proof), 2-meter (6.5 ft.) cable exit. Mounting screws included.
TRD-N250-RZWD	\$371	Koyo encoder, incremental (quadrature), <b>medium</b> duty, <b>250 ppr</b> , 8mm solid shaft, 50mm diameter body, 5-30 VDC, push-pull (totem pole), IP65 (splash proof), 2-meter (6.5 ft.) cable exit. Mounting screws included.
TRD-N360-RZWD	\$370	Koyo encoder, incremental (quadrature), <b>medium</b> duty, <b>360 ppr</b> , 8mm solid shaft, 50mm diameter body, 5-30 VDC, push-pull (totem pole), IP65 (splash proof), 2-meter (6.5 ft.) cable exit. Mounting screws included.
TRD-N600-RZWD	\$371	Koyo encoder, incremental (quadrature), <b>medium</b> duty, <b>600 ppr</b> , 8mm solid shaft, 50mm diameter body, 5-30 VDC, push-pull (totem pole), IP65 (splash proof), 2-meter (6.5 ft.) cable exit. Mounting screws included.
TRD-NH600-RZWD	\$420	Koyo encoder, incremental (quadrature), <b>medium</b> duty, <b>600 ppr</b> , 8mm hollow shaft, 50mm diameter body, 5-30 VDC, push-pull (totem pole), IP65 (splash proof), 2-meter (6.5 ft.) cable exit.
TRD-N2000-RZWD	\$481	Koyo encoder, incremental (quadrature), <b>medium</b> duty, <b>2000 ppr</b> , 8mm solid shaft, 50mm diameter body, 5-30 VDC, push-pull (totem pole), IP65 (splash proof), 2-meter (6.5 ft.) cable exit. Mounting screws included.
TRD-NA360NWD	\$744	Koyo encoder, absolute, gray code, <b>medium</b> duty, 9-bit <b>360 ppr</b> , 8mm solid shaft, 50mm diameter body, 10-26 VDC, NPN open collector, IP65 (splash proof), 2-meter (6.5 ft.) cable exit. Mounting screws included.
TRD-NA720NWD	\$745	Koyo encoder, absolute, gray code, <b>medium</b> duty, 10-bit <b>720 ppr</b> , 8mm solid shaft, 50mm diameter body, 10-26 VDC, NPN open collector, IP65 (splash proof), 2-meter (6.5 ft.) cable exit. Mounting screws included.

# SENSORS- LIMIT SWITCHES



LIMIT SWITCHES

SKU	PRICE	DESCRIPTION
AAP2T13Z11	\$29	Limit switch, IEC, galvanized <b>steel plunger</b> with polyamide <b>plastic roller</b> , 1 N.O. and 1 N.C. contact with snap action, miniature DIN, 30.3mm wide plastic body, IP65, 1 cable entry, PG11 threads. 1/2 inch NPT adapter included.
AAP2T41Z11	\$30	Limit switch, IEC, <b>side rotary lever</b> with <b>polyamide roller</b> , 1 N.O. and 1 N.C. contact with snap action, miniature DIN, 30.3mm wide plastic body, IP65, 1 cable entry, PG11 threads. 1/2 inch NPT adapter included.
AAP2T51Z11	\$30	Limit switch, IEC, <b>side rotary</b> , adjustable lever with <b>polyamide roller</b> , 1 N.O. and 1 N.C. contact with snap action, miniature DIN, 30.3mm wide plastic body, IP65, 1 cable entry, PG11 threads. 1/2 inch NPT adapter included.
ABM1E11Z11	\$49	Limit switch, IEC, stainless steel <b>plunger</b> actuator, 1 N.O. and 1 N.C. contact with snap action, 40mm wide aluminum body, IP66, 1 cable entry, PG13.5 threads
ABM1E5Z211	\$106	Limit switch, IEC, <b>adjustable lever</b> with stainless steel <b>roller actuator</b> , 1 N.O. and 1 N.C. contact with snap action, 40mm wide aluminum body, IP66, 1 cable entry, PG13.5 threads
ABM1E71Z11	\$105	Limit switch, IEC, stainless steel <b>rod actuator</b> , 1 N.O. and 1 N.C. contact with snap action, 40mm wide aluminum body, IP66, 1 cable entry, PG13.5 threads
ABM1E9Z211	\$54	Limit switch, IEC, 360 degree stainless steel <b>spring</b> with polyamide <b>tip actuator</b> , 1 N.O. and 1 N.C. contact with snap action, 40mm wide aluminum body, IP66, 1 cable entry, PG13.5 threads
ABM1E93Z11	\$103	Limit switch, IEC, 360 degree stainless steel <b>spring actuator</b> , 1 N.O. and 1 N.C. contact with snap action, 40mm wide aluminum body, IP66, 1 cable entry, PG13.5 threads
ABM5E5Z211	\$102	Limit switch, IEC, adjustable lever with stainless steel <b>roller actuator</b> , 1 N.O. and 1 N.C. contact with snap action, 40mm wide aluminum body, IP66, 3 cable entries, PG13.5 threads
ABM2E5Z211	\$106	AutomationDirect IEC limit switch, side <b>rotary adjustable lever</b> with stainless steel <b>roller</b> , 90-degree adjustable head, (1) N.O./1) N.C. contact(s), snap action, 30mm hole spacing, aluminum, (1) 1/2in NPT cable entry.




## 3 inch MICRO HMIs C-MORE EA3 SERIES GRAPHICAL DEVICES

SKU	PRICE	DESCRIPTION
EA3-S3ML-RN	\$302	C-more Micro EA3 series HMI, <b>non-touch</b> , 3in monochrome STN LCD, 128 x 64 pixel, LED backlight, (1) serial port.
EA3-S3ML-R	\$426	C-more Micro EA3 series <b>touch</b> screen HMI, 3in monochrome STN LCD, analog resistive, 128 x 64 pixel, LED backlight, (1) serial port.
EA-MG-PGM-CBL	\$126	AutomationDirect <b>programming cable</b> assembly, USB A to 6-pin RJ12, 6ft cable length. For use with C-more Micro panels, CLICK CPUs, Do-more H2 series CPUs, and DirectLOGIC CPUs.



# SENSORS- SIGNAL CONDITIONERS


SIGNAL CONDITIONERS

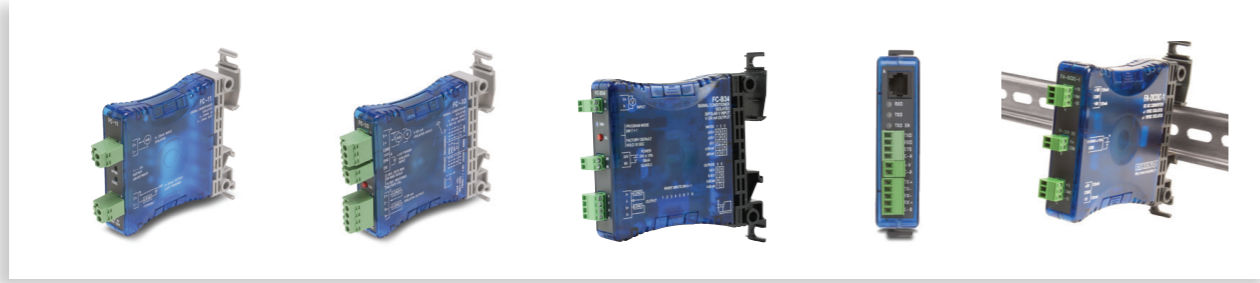

SKU	PRICE	DESCRIPTION
FC-B34	<b>\$358</b>	AutomationDirect signal conditioner, isolated, bipolar voltage input, current or voltage output, 24 VDC operating voltage, 35mm DIN rail or panel mount, removable screw terminal plugs.
FC-ISO-C	<b>\$240</b>	AutomationDirect signal conditioner, isolated, differential or single ended line driver input, open collector output, 7.8-24 VDC operating voltage, 35mm DIN rail or panel mount, removable screw terminal plugs.
FC-ISO-D	<b>\$242</b>	AutomationDirect signal conditioner, isolated, differential or single ended line driver input, differential line driver output, 24 VDC operating voltage, 35mm DIN rail or panel mount, removable screw terminal plugs.
FC-35B	<b>\$359</b>	AutomationDirect signal conditioner, isolated, current or voltage input, bipolar voltage output, 24 VDC operating voltage, 35mm DIN rail or panel mount, removable screw terminal plugs.
FC-P3	<b>\$312</b>	AutomationDirect signal conditioner, isolated, potentiometer input, current or voltage output, 24 VAC/VDC operating voltage, 35mm DIN rail or panel mount, removable screw terminal plugs.
FA-DCDC-1	<b>\$194</b>	AutomationDirect DC to DC converter, 12-24 VDC input, +/- 10 VDC, +/-5 VDC output, 0.125A, 3.75W, plastic housing, 35mm DIN rail mount, screw terminal, removable.
FC-11	<b>\$265</b>	AutomationDirect signal conditioner, isolated, current input, current output, 24 VDC operating voltage, 35mm DIN rail or panel mount, removable screw terminal plugs.
FC-R1	<b>\$316</b>	AutomationDirect temperature transmitter, isolated, RTD input, deg F or deg C, 4-20 mA output, 24 VDC operating voltage, 35mm DIN rail or panel mount, removable screw terminal plugs.
FC-T1	<b>\$313</b>	AutomationDirect temperature transmitter, isolated, thermocouple or millivolt input, deg F or deg C, 4-20 mA output, 24 VDC operating voltage, 35mm DIN rail or panel mount, removable screw terminal plugs.
FC-33	<b>\$314</b>	AutomationDirect signal conditioner, isolated, current or voltage input, current or voltage output, 24 VDC operating voltage, 35mm DIN rail or panel mount, removable screw terminal plugs.
FC-3RLY4	<b>\$306</b>	AutomationDirect limit alarm, current or voltage input, (4) SPST relay output, 24 VAC/VDC operating voltage, 35mm DIN rail or panel mount, removable screw terminal block(s).
FC-5MM	<b>\$37</b>	Terminal block, replacement, 5mm. Package of 5. For use with FC series signal conditioners.
FC-35MM	<b>\$67</b>	Terminal block, replacement, 3.5mm. Package of 14. For use with FC series signal conditioners.

# CURRENT SENSORS & TRANSDUCERS

CURRENT & VOLTAGE SENSORS

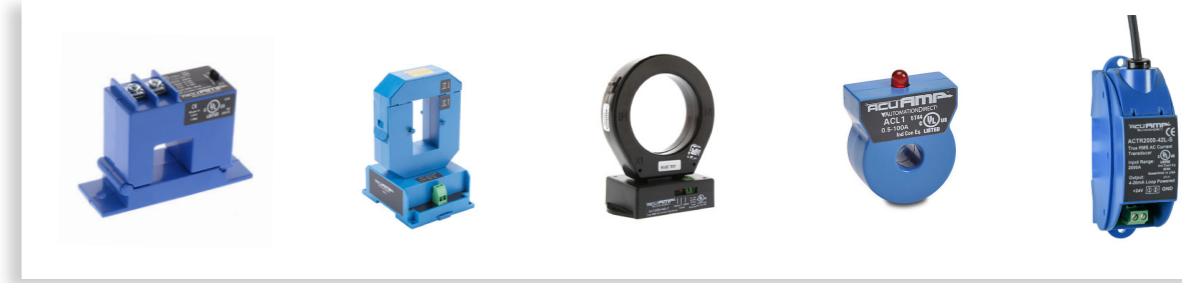

SKU	PRICE	DESCRIPTION
ACS150-AE-F	<b>\$176</b>	AcuAMP AC current switch, fixed core, 1-150A sensing range, 1-150A adjustable trip point, 15-turn potentiometer, solid state switch, N.O. output, 0.15A @ 240 VAC/VDC output rating.
ACS150-CE-S	<b>\$217</b>	AcuAMP AC current switch, split core, 1.75-150A sensing range, 1.75-150A adjustable trip point, 4-turn potentiometer, solid state switch, N.C. output, 0.2A @ 135 VAC/VDC output rating.
ACS200-AD-S	<b>\$223</b>	AcuAMP AC current switch, split core, 1.75-6, 6-40, or 40-200A selectable sensing range, 1.75-200A adjustable trip point, 4-turn potentiometer, solid state switch, N.O. output, 0.15A @ 30 VDC output rating.
ACS200-CD-S	<b>\$223</b>	AcuAMP AC current switch, split core, 1.75-6, 6-40, or 40-200A selectable sensing range, 1.75-200A adjustable trip point, 4-turn potentiometer, solid state switch, N.C. output, 0.15A @ 30 VDC output rating.
ACSX200-AA-S	<b>\$259</b>	AcuAMP AC current switch, split core, 2-12, 12-55, or 55-200A selectable sensing range, 2-200A adjustable trip point, 4-turn potentiometer, solid state switch, N.O., adjustable time delay output, 1A @ 240 VAC output rating.
ACT050-10-S	<b>\$277</b>	AcuAMP AC current transducer, 1-phase, split core, 0-10, 0-20, or 0-50A selectable sensing range, 0-10 VDC output.
ACT050-42L-F	<b>\$220</b>	AcuAMP AC current transducer, 1-phase, fixed core, 0-10, 0-20, or 0-50A selectable sensing range, 4-20 mA output.
ACT200-42L-F	<b>\$310</b>	AcuAMP AC current transducer, 1-phase, fixed core, 0-100, 0-150, or 0-200A selectable sensing range, 4-20 mA output.
ACTR050-42L-F	<b>\$360</b>	AcuAMP AC current transducer, 1-phase, fixed core, 0-10, 0-20, or 0-50A selectable sensing range, True RMS, 4-20 mA output.
ACTR050-42L-S	<b>\$451</b>	AcuAMP AC current transducer, 1-phase, split core, 0-10, 0-20, or 0-50A selectable sensing range, True RMS, 4-20 mA output.
ACT200-42L-S	<b>\$333</b>	AcuAMP AC current transducer, 1-phase, split core, 0-100, 0-150, or 0-200A selectable sensing range, 4-20 mA output.
ACTR200-42L-S	<b>\$459</b>	AcuAMP AC current transducer, 1-phase, split core, 0-100, 0-150, or 0-200A selectable sensing range, True RMS, 4-20 mA output.
DCT100-10B-24-S	<b>\$506</b>	AcuAMP DC current transducer, split core, bi-directional 0-100A input range, 24 VAC/DC powered, bi-polar +/- 0-10 VDC output, UL 508 listed
DCT100-42-24-S	<b>\$444</b>	AcuAMP DC current transducer, split core, 0-50, 0-75, or 0-100A jumper-selectable input ranges, 24 VAC/DC powered, 4-20mA output, UL 508 listed
GFS30-M1B-24-F	<b>\$571</b>	AcuAMP ground fault sensor, fixed core, jumper-selectable 5, 10, or 30 mA setpoint, SPST-N.C. relay output, manual reset, 24 VAC/DC powered, UL 1053 recognized

**OVER 35,000 QUALITY INDUSTRIAL CONTROL PRODUCTS ARE AVAILABLE TO YOU!!**  
**OUR SALES STAFF WILL SEARCH THE MARKET FOR COMPARATIVE PRODUCTS**  
**THAT MEET YOUR SPECS, BUDGET AND YOUR TIMELINES**



# WEG Switchgear CWB Contactors



COMPACT IN SIZE.  
GIANT IN TECHNOLOGY...

## Accessories Compatible with the whole CWB line...

allows the assembly of compact starters with the MPW18, MPW40 and MPW80 motor protective circuit breakers and RW27-D and RW67-5D thermal relays. Choice of up to six auxiliary contacts. Compatible accessories also include, "Zero" mechanical interlocking sets, BLB, BLRB side mounting auxiliary contact blocks, quick connection Busbars for star delta and reversing starters.

## CONTACTORS- CWB SERIES

Up to 80A / 45kW (AC-3)  
Built-in 1NO + 1NC  
Low Consumption DC Coils  
Wide range of accessories  
Type 1 / Type 2 coordination



**CWB9-11-30D25 \$25**  
Contactor 9 Amps 3 N.O Power poles Coil voltage 240 VAC 1 N.O / 1 N.C Auxiliary Contact

**CWB32-11-30D25 \$53**  
Contactor 32 Amps 3 N.O Power poles Coil voltage 240 VAC 1 N.O / 1 N.C Auxiliary Contact

**CWB40-11-30D25 \$101**  
Contactor 40 Amps 3 N.O Power poles Coil voltage 240 VAC 1 N.O / 1 N.C Auxiliary Contact

**CWB50-11-30D25 \$113**  
Contactor 50 Amps 3 N.O Power poles Coil voltage 240 VAC 1 N.O / 1 N.C Auxiliary Contact

**CWB65-11-30D25 \$132**  
Contactor 65 Amps 3 N.O Power poles Coil voltage 240 VAC 1 N.O / 1 N.C Auxiliary Contact

**CWB80-11-30D25 \$145**  
Contactor 80 Amps 3 N.O Power poles Coil voltage 240 VAC 1 N.O / 1 N.C Auxiliary Contact

See our online store for the full selection of CWB range and our complete line up of WEG Motor Control and Circuit Protection. We also offer a large selection of Pushbuttons, Selector Switches, Pilot Lights and Control Stations. We continue to stock the Mini CWC, CWM lines of contactors and relays.



## THERMAL OVERLOADS- CWB SERIES

Bimetallic Amb. Compensated  
Convertible Manual/Auto Reset  
Setting Ranges Up To 840 Amps  
Tripping Class 10A  
UL, IEC, CE Approvals



**RW27-2D3-D063 \$38**  
Thermal overload relay bi-metallic adjustable FLA range 4.0- 6.3 Amps tripping class 10 phase loss sensitive, 45 mm frame hand/ Auto / Reset button.

**RW27-2D3-U040 \$50**  
Thermal overload relay bi-metallic adjustable FLA range 32-40 Amps tripping class 10 phase loss sensitive, 45 mm frame hand/ Auto / Reset button.

## MOTOR CIRCUIT BREAKERS- CWB SERIES

Up to 100A / 55kW  
Adjustable Thermal Protection  
Fixed Magnetic Protection  
13 x Iu Short-Circuit Release  
Type 1 / Type 2 coordination



**MPW18-3-D063 \$42**  
Thermomagnetic Circuit Breaker 3 N.O Power Poles with Pushbutton ON/OFF (Range 4.0-6.3A)

**MPW40-3-U040 \$88**  
Thermomagnetic Circuit Breaker 3 Normally open Power poles 45 mm frame width rotary actuator 32-40 Amps FLA thermal overload trip rating

## ELECTRONIC OVERLOAD RELAYS- CWB SERIES

Solid State overload protection up to 840A / 450kW  
Wide current settings  
Adjustable Thermal Class (10, 20 or 30)  
Self-Supplied Remote Reset



**RWB40E-3-A4U025 \$151**  
Electronic Solid State Relays adjustable FLA range 5-25 A adjustable trip class 10,20,30 manual / automatic reset mode phase loss and phase unbalance protection 1 N.O / 1 N.C auxiliary contacts



NEVER CONSIDERED WEG FOR YOUR SWITCHGEAR?  
PERHAPS IT'S TIME YOU MADE THE SWITCH...



## PUSHBUTTONS, SELECTOR SWITCHES & PILOT LIGHTS

These user-friendly and durable pilot devices are used in many industrial applications and environments. IP66, 4X rated (totally insulated) and includes a complete line of accessories.

**CSW-BF2-1000000-3VF \$6**  
22mm Flush Pushbutton, Green + Flange + 1 N/O Auxiliary Contact.



## EMERGENCY STOP STATIONS

**PBW1Y-G11V03 \$26**  
Emergency Stop Station with 1 N/O and 1N/C contacts, with a legend plate built into an IP66 enclosure.



## CONTROL STATIONS

**CSW-PBW-1Y \$14**  
1 Hole Yellow or Grey Colour

**CSW-PBW-6 \$33**  
6 Holes Gray Colour

**CSW-PBW-4 \$23**  
4 Holes Gray Colour



## MDWH CIRCUIT BREAKERS

- Up to 63A
- Trip curve B or C
- MCB in 1, 2, 3 and 4 poles
- 10kA short circuit breaking capacity (5kA also available)

**MDWH-C32 \$10**  
1P Mini Circuit Breaker C Class 32A 10kA



## MULTI-FUNCTIONAL TIMER RELAYS AND ELECTRONIC RELAYS

**ERWT-MF1-02MT1E05 \$125**  
2 N. O / 2 N.C contacts. 8 selectable functions inc Star-Delta. 24 - 240V AC/DC

**RPW-FSFD66 \$82**  
Protection Relay Phase Loss/Seq



## ENCLOSED DIRECT ON-LINE STARTERS


IP65 surface mount enclosed contactor assembled with thermal overload relay & pre wired control circuit. Knock-out suit M20 cable gland. Available in various types of operation (On+Off; Remote; Reset; HAND/OFF/AUTO switch) **Prices start from \$82 (DLW-B9D25P66-R55)**

## ADDITIONAL CONTACT BLOCKS- CWB SERIES

BFB front mounting (2 or 4 contacts)  
BLB/ BLRB side mounting (2 contacts, only 9mm wide)

Allows combinations that result in up to 6 auxiliary contacts per contactor. For use with CWB9 through to CWB80. Maximum 4 auxiliary contacts per contactor.

**BFB-11 \$10** Aux. Contact (1NO + 1 NC)  
**BFB-20 \$10** Aux. Contact (2NO + 0 NC)  
**BFB-02 \$10** Aux. Contact (0NO + 2 NC)  
**BFB-22 \$19** Aux. Contact (2NO + 2NC)  
**BFB-40 \$19** Aux. Contact (4NO + 0NC)



**BLB-11 \$13** Aux. Contact (1NO + 1 NC)  
**BLB-20 \$13** Aux. Contact (2NO + 0 NC)  
**BLB-02 \$13** Aux. Contact (0NO + 2 NC)  
**BLRB-11 \$13** Aux. Contact (1NO + 1 NC)  
**BLRB-20 \$13** Aux. Contact (2NO + 0 NC)  
**BLRB-02 \$13** Aux. Contact (0NO + 2 NC)



## ACCESSORIES & SPARE PARTS- CWB SERIES

Surge suppressor blocks are easily mounted on the CWB contactors without requiring any kind of tools and without increasing volume.

The WEG mechanical interlock system enables the mechanical interlock between the contactors of the CWB line with "zero" additional side space, and it is possible to mount reversing starters of up to 125 A.

**DIZB C26 \$13** Surge Suppressor Block 12-250 VDC  
**VRB E49 \$13** Surge Suppressor Block 24 VAC  
**VRB E50 \$13** Surge Suppressor Block 240 VAC  
**VRB D73 \$13** Surge Suppressor Block 415 VAC



**IM1 \$6** Mechanical interlock block CWB 9 - 38  
**IM2 \$6** Mechanical interlock block CWB 40...125





# AC VF DRIVES



DURAPULSE

## DURAPULSE GS10 MICRO AC DRIVES

SKU	PRICE	DESCRIPTION
GS11N-20P2	\$291	DURApulse GS10 series AC micro drive, enclosed, 230 VAC, 1/4hp with 1-phase input, SVC or V/Hz mode, A1 frame, RS-485, integrated dynamic braking.
GS11N-21P0	\$315	DURApulse GS10 series AC micro drive, enclosed, 230 VAC, 1hp with 1-phase input, SVC or V/Hz mode, B2 frame, RS-485, integrated dynamic braking.
GS13N-40P5	\$365	DURApulse GS10 series AC micro drive, enclosed, 460 VAC, 1/2hp with 3-phase input, SVC or V/Hz mode, A4 frame, RS-485, integrated dynamic braking.
GS13N-45P0	\$529	DURApulse GS10 series AC micro drive, enclosed, 460 VAC, 5hp with 3-phase input, SVC or V/Hz mode, C1 frame, RS-485, integrated dynamic braking.

## DURAPULSE GS20 GENERAL AND GS20X WASHDOWN AC DRIVES

GS21-20P2	\$350	DURApulse GS20 series AC general purpose drive, enclosed, 230 VAC, 1/4hp with 1-phase input, SVC, V/Hz, FOC or torque mode, A1 frame, RS-485, integrated dynamic braking. Optional EtherNet/IP and Modbus TCP card available.
GS21-21P0	\$392	DURApulse GS20 series AC general purpose drive, enclosed, 230 VAC, 1hp with 1-phase input, SVC, V/Hz, FOC or torque mode, B2 frame, RS-485, integrated dynamic braking. Optional EtherNet/IP and Modbus TCP card available.
GS21X-20P5	\$619	DURApulse GS20X series AC general purpose drive, NEMA 4X, 230 VAC, 1/2hp with 1-phase input, SVC, V/Hz, FOC or torque mode, A frame, RS-485, integrated dynamic braking. Optional EtherNet/IP and Modbus TCP card available.
GS23X-40P5	\$753	DURApulse GS20X series AC general purpose drive, NEMA 4X, 460 VAC, 1/2hp with 3-phase input, SVC, V/Hz, FOC or torque mode, A frame, RS-485, integrated dynamic braking. Optional EtherNet/IP and Modbus TCP card available.

## DURAPULSE GS4 SERIES HIGH-PERFORMANCE AC DRIVES

GS4-21P0	\$1206	DURApulse GS4 series AC high-performance drive, NEMA 1, 230 VAC, 1hp with 3-phase input, 1/2hp with 1-phase input, SVC or V/Hz mode, A frame, RS-485, integrated dynamic braking. Optional EtherNet/IP and Modbus TCP cards available.
GS4-23P0	\$1462	DURApulse GS4 series AC high-performance drive, NEMA 1, 230 VAC, 3hp with 3-phase input, 1hp with 1-phase input, SVC or V/Hz mode, A frame, RS-485, integrated dynamic braking. Optional EtherNet/IP and Modbus TCP cards available.
GS4-42P0	\$1312	DURApulse GS4 series AC high-performance drive, NEMA 1, 460 VAC, 2hp with 3-phase input, SVC or V/Hz mode, A frame, RS-485, integrated dynamic braking. Optional EtherNet/IP and Modbus TCP cards available.
GS4-4010	\$2098	DURApulse GS4 series AC high-performance drive, NEMA 1, 460 VAC, 10hp with 3-phase input, SVC or V/Hz mode, B frame, RS-485, integrated dynamic braking. Optional EtherNet/IP and Modbus TCP cards available.

# SENSORS- SAFETY

SAFETY SWITCHES



**WE HAVE A HUGE SELECTION OF SAFETY PRODUCTS! HERE IS JUST A SAMPLE....**

## SAFETY RELAYS AND SWITCHES

SKU	PRICE	DESCRIPTION
LPC-110005	\$271	IDEM safety switch set, non-contact coded magnetic, (2) N.C. safety output(s), (1) N.O. monitoring output(s), plastic housing, 88 x 25mm, pigtail, 6.5ft/2m cable length.
LG5925-48-61-24	\$339	Dold safety relay module, emergency stop and safety gate circuits, dual channel, manual or automatic restart, 24 VAC/DC coil voltage, 3 N.O. positive guided safety contact(s), 1 N.C. monitoring contact(s)
UG6961-02PS100-300	\$488	Dold safety relay, emergency stop, multi delay functions, 0.1 to 300 seconds, 2-channel, 24 VDC, (2) N.O. time delay safety output(s), (1) N.O. time delay monitoring output(s), pluggable screw terminals.
SCR2H-180030	\$443	IDEM safety relay, two-hand control, 2-channel, 24 VAC/VDC, (2) N.O. safety output(s), fixed screw terminals.
MGL-2P-U-461003	\$1037	IDEM safety switch set, non-contact uniquely coded RFID, magnetic, 24 VDC to lock, 1000N holding force, (2) N.C. safety output(s), plastic housing, 64 x 96 x 37mm, (1) 8-pin M12 quick-disconnect, 9.8in/250mm cable length.
KL1-P-221302	\$565	IDEM safety switch, tongue (key) interlock, solenoid, 24 VAC/VDC to unlock, 180-degree adjustable head, 1400N holding force, (2) N.C. safety output(s), (1) N.O. monitoring output(s), plastic body, (1) 1/2in NPT cable entry.
BH5932-22-113-24	\$864	Dold safety relay, speed monitoring, (2) PNP sensor inputs, 2-channel, 24 VAC/VDC, (2) N.O. and (1) N.C. safety output(s), fixed screw terminals
UH6937-02PS-24	\$1,313	Dold safety relay, frequency monitoring, multi delay functions, 1 to 600Hz, 2-channel, 24 VDC, (2) N.O. safety output(s), (2) N.O. monitoring output(s), pluggable screw terminals.
LSPS-171002	\$53	IDEM safety limit switch, polyester plunger, (2) N.C. safety output(s), (1) N.O. monitoring output(s), slow action break before make, polyester, (1) 1/2in female NPT conduit.
GLHL-141057	\$417	IDEM safety switch, cable-pull interlock, with reset, 125m maximum pull cable length, left hand head, (4) N.C. safety output(s), (2) N.O. monitoring output(s), die-cast aluminum body, (4) 1/2in NPT cable entries
HLM-EX-174065	\$1238	IDEM safety limit switch, hazardous location rated, plunger with stainless steel roller, (2) N.C. safety output(s), (2) N.O. monitoring output(s), slow action break before make, die-cast zinc aluminum, pigtail.
CMC-F-135006	\$525	DEM safety switch set, <b>non-contact coded magnetic</b> , rear mount, (2) N.C. safety output(s), (1) N.O. monitoring output(s), 316 stainless steel housing, 83 x 20mm, pigtail, 16.4ft/5m cable length.
KM-203002	\$176	DEM safety switch, <b>tongue (key) interlock</b> , 90-degree adjustable head, (2) N.C. safety output(s), (1) N.O. monitoring output(s), 40 x 118 x 41mm, die-cast aluminum body, die-cast aluminum head.


**Warning:** Safety products sold by AutomationDirect are Safety components only. The purchaser/installer is solely responsible for the application of these components and ensuring all necessary steps have been taken to assure each application and use meets all performance and applicable safety requirements and/or local, national and/or international safety codes as required by the application. AutomationDirect cannot certify that our products, used solely or in conjunction with other AutomationDirect or other vendors' products, will assure safety for any application. Any person using or applying any products sold by AutomationDirect is responsible for learning the safety requirements for their individual application and applying them, and therefore assumes all risks, and accepts full and complete responsibility, for the selection and suitability of the product for their respective application.

Direct Automation Pty Ltd (Australia) does not provide design or consulting services, and cannot advise whether any specific application or use of our products would ensure compliance with the safety requirements for any application.



# DIN RAIL TERMINALS & CONNECTORS

TERMINAL BLOCKS

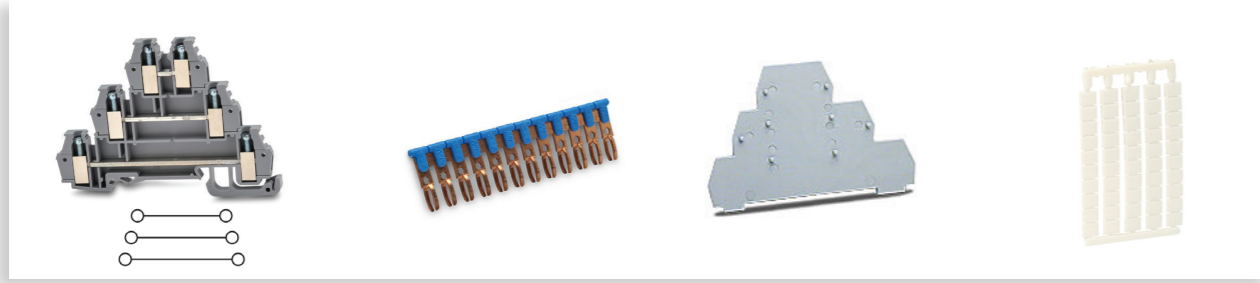

## TRIPLE-LEVEL FEEDTHROUGH TERMINAL BLOCKS

SKU	PRICE	DESCRIPTION
DN-TL14-A	\$153	DINnector screw triple-level feedthrough terminal block, accepts wire size 26-14 AWG, gray, 10A, 35mm DIN rail mount, 10kA SCCR. <b>Package of 25.</b> For use with jumpers DN-12JL14B-A, DN-12JL14-A, DN-2JL14B-A, DN-2JL14-A, DN-3JL14B-A, and DN-3JL14-A.
DN-12JL14B-A	\$54	DINnector terminal block jumper, push-in type, 12-pole, blue, 20A, 300V rated (UL). <b>Package of 10.</b> For use with DN-TL14-A, DN-TL14S-A, DN-TL14SLP or DN-14SLN-A series terminal block.
DN-T10-A	\$174	DINnector screw single-level feedthrough terminal block, accepts wire size 24-10 AWG, gray, 30A, 35mm DIN rail mount, 100kA SCCR. <b>Package of 100.</b> For use with jumpers DN-24J4Y, DN-2J4Y and DN-3J4Y.
DN-EC14	\$39	DINnector terminal block end cover, gray. <b>Package of 25.</b> For use with DN-TL14 series terminal blocks.
DN-LATB-A	\$74	DINnector marking tag, 5 x 6mm, blank. <b>Package of 500.</b> For use with DN-TL14, DN-TL14S, DN-TL14SLP and DN-TL14SLN terminal blocks.
DN-EB35	\$159	DINnector screw-down end bracket, 9mm wide. <b>Package of 50.</b> For use with 35mm DIN rail.
DN-LATB-A	\$74	DINnector mini <b>supplementary protector</b> , with reset, 1A, 250 VAC/75 VDC, blade connection, 1-pole, UL 1077 recognized. For use with DN-FE2 and DN-FE4 series socket.
DN-SUPP-1-1	\$36	DINnector mini <b>supplementary protector</b> , with reset, 1A, 250 VAC/75 VDC, blade connection, 1-pole, UL 1077 recognized. For use with DN-FE2 and DN-FE4 series socket.

## INSULATED FERRULES

V30AE000045	\$20	Z+F ferrule, 18 AWG, red, follows DIN standard, 8mm ferrule length. <b>Package of 500.</b>
V30AE000038	\$20	Z+F ferrule, 20 AWG, white, follows DIN standard, 8mm ferrule length. <b>Package of 500.</b>
V30AE000049	\$33	Z+F ferrule, 16 AWG, black, follows DIN standard, 10mm ferrule length. <b>Package of 500.</b>

## DIN RAIL AND SUPPORT BRACKET

DN-R35SAL1	\$180	DINnector DIN rail, slotted, 35mm, 10mm height, 1m length, aluminum. <b>Package of 10.</b>
DN-SSB25-10	\$61	AutomationDirect standard DIN rail support bracket, 25mm height, zinc plated steel. <b>Package of 10.</b> For use with 35mm DIN rail.
DN-SSB90-10	\$95	AutomationDirect standard DIN rail support bracket, 90mm height, zinc plated steel. <b>Package of 10.</b> For use with 35mm DIN rail.

# FOOT SWITCHES

SAFETY SWITCHES



## ELECTRIC AND PNEUMATIC MANUAL VALVE MODELS

SKU	PRICE	DESCRIPTION
APS1211-V0	\$138	Electric foot switch, <b>single</b> , yellow ABS plastic foot guard, gray ABS plastic base and pedal, safety anti-trip momentary actuating pedal, 1 N.O. and 1 N.C. snap action contact
APS1113-V0-M	\$186	Electric foot switch, <b>single</b> , yellow die-cast aluminum foot guard, gray ABS plastic base and pedal, free moving momentary actuating pedal, 2 N.O. and 2 N.C. snap action contacts
APS1151-V0	\$136	Electric foot switch, <b>single</b> , red ABS plastic half foot guard, gray ABS plastic base and pedal, free moving momentary actuating pedal, 1 N.O. and 1 N.C. snap action contact
APD1113-V0-M	\$451	Electric foot switch, <b>double</b> , two yellow die-cast aluminum foot guards, gray ABS plastic base and pedals, free moving momentary actuating pedals, each with 2 N.O. and 2 N.C. snap action contacts
APD1231-V0	\$318	Electric foot switch, <b>double</b> , one yellow and one gray ABS plastic foot guard, gray ABS plastic base and pedals, safety anti-trip momentary actuating pedals, each with 1 N.O. and 1 N.C. snap action contact
CVS-5272-FP	\$128	NITRA manual valve, 5-port (4-way), 2-position, non-locking foot pedal, spring return, 1/4in female NPT inlet(s), 1/4in female NPT outlet(s), Cv=0.8.



## VISUAL & AUDIBLE DEVICES TOWER LIGHTS AND SOUND MODULES

### 30MM & 70MM MODULAR TOWER UNITS AND ALARMS

SKU	PRICE	DESCRIPTION
0570TBS01KH	\$12	70mm Black Standard Cone Base with tube length 10mm.
0570RDWFH	\$26	70mm Red Light Module (12-24VDC), continuous or flashing.
0530TBS01W	\$15	30mm White S-Type with Cap - Standard cone base with tube length 10mm.
0530RDWL	\$14	30mm Red Light Module (12/24VDC) continuous.
0570ZDWFKH	\$20	Audible beeper element, up to 85dB at 1m, continuous or intermittent sounds.
0570PDWAK	\$49	Audible music or messaging element 85dB at 1m, 12-24VDC.



# WIRING SOLUTIONS

## ETHERNET CABLES- Cat5e & Cat6a

SKU	PRICE	DESCRIPTION
C5E-STPGY-S3	\$14	Ethernet patch cable, Cat5e STP (twisted pairs with overall foil shield), 3 ft. (0.9m) length, gray PVC cable jacket. RJ-45 male connectors, 350 MHz, 4-pair 24 AWG stranded copper. Can support 10 / 100 / 1000 Mbps; exceeds Category 5e cable specifications.
C5E-STPBK-S7	\$21	Ethernet patch cable, Cat5e STP (twisted pairs with overall foil shield), 7 ft. (2.1m) length, black PVC cable jacket. RJ-45 male connectors, 350 MHz, 4-pair 24 AWG stranded copper. Can support 10 / 100 / 1000 Mbps; exceeds Category 5e cable specifications.
C5E-STPPL-S10	\$26	Ethernet patch cable, Cat5e STP (twisted pairs with overall foil shield), 10 ft. (3.0m) length, purple PVC cable jacket. RJ-45 male connectors, 350 MHz, 4-pair 24 AWG stranded copper. Can support 10 / 100 / 1000 Mbps; exceeds Category 5e cable specifications.
C5E-STPOR-S14	\$25	Ethernet patch cable, Cat5e STP (twisted pairs with overall foil shield), 14 ft. (4.3m) length, orange PVC cable jacket. RJ-45 male connectors, 350 MHz, 4-pair 24 AWG stranded copper. Can support 10 / 100 / 1000 Mbps; exceeds Category 5e cable specifications.
C5E-STPGN-S25	\$44	Ethernet patch cable, Cat5e STP (twisted pairs with overall foil shield), 25 ft. (7.5m) length, green PVC cable jacket. RJ-45 male connectors, 350 MHz, 4-pair 24 AWG stranded copper. Can support 10 / 100 / 1000 Mbps; exceeds Category 5e cable specifications.
C5E-STPYL-S50	\$76	Ethernet patch cable, Cat5e STP (twisted pairs with overall foil shield), 50 ft. (15.2m) length, yellow PVC cable jacket. RJ-45 male connectors, 350 MHz, 4-pair 24 AWG stranded copper. Can support 10 / 100 / 1000 Mbps; exceeds Category 5e cable specifications.
<b>NEW!</b> C6A-STPBL-S3	\$21	AutomationDirect Cat6a Ethernet straight-through patch cable, STP (overall foil shield), RJ45 male to RJ45 male, 3ft cable length, blue. For use with 10/100/1000/10000 Mbps networks. <b>CAT6A ETHERNET CABLES NOW AVAILABLE!!</b>

ZIPLINKS & CABLES

## ZIPLink

Why spend the time wiring each PLC I/O point to a terminal when you can get them pre-wired? ZIPLink pre-wired cables and modules save valuable time, keep your installation clean and efficient, and use half the space at a fraction of the cost of standard terminal blocks.

### ZIPLink PRE-WIRED CONNECTION CABLES AND MODULES

SKU	PRICE	DESCRIPTION
ZL-C0-CBL20	\$61	ZIPLink PLC I/O cable, 20-position terminal block to 24-pin connector, 1.6ft/0.5m cable length. For use with CLICK PLC modules.
ZL-RFU20	\$268	ZIPLink fuse module, 16-point, user-supplied external fuse, 0-75 VDC/0-250 VAC, 2A/ circuit, DIN rail mount. (Fuses not included)
ZL-RTB20	\$58	ZIPLink feedthrough module, 20-pole, DIN rail mount
ZL-RTB40	\$96	ZIPLink feedthrough module, 40-pole, DIN rail mount.
ZL-BX-CBL40-S	\$66	ZIPLink PLC I/O cable, 40-pin connector to 40-pin connector, shielded, 1.6ft/0.5m cable length. For use with BRX series high-speed modules.
ZL-P1-CBL18-1P	\$42	ZIPLink PLC I/O cable, 18-position terminal block to pigtail, 90-degree connector angle, 3.2ft/1m cable length. For use with Productivity1000 modules.



# HANDTOOLS

**NEW!**



SCREWDRIVERS

## STANDARD SCREWDRIVERS AND SETS

SKU	PRICE	DESCRIPTION
TW-SD-SET-1	\$90	Wera Kraftform Plus 300 series screwdriver set, 6 pieces
TW-SD-SL-1	\$12	Wera Kraftform Plus 3.0mm slotted standard screwdriver, 3.1in (80mm) shaft length.
05008715055	\$25	Wera Kraftform Plus #1 Phillips standard screwdriver, 11.8in (300mm) shaft length.

## INSULATED SCREWDRIVERS AND SETS

TW-SD-SET-2	\$99	Wera Kraftform Plus 100 VDE series insulated screwdriver set, 6 pieces, 1000V insulation rating.
TW-SD-VSL-1	\$12	Wera Kraftform Plus 2.5mm slotted insulated screwdriver, 1000V insulation rating, 3.1in (80mm) shaft length.
05006440055	\$27	Wera Kraftform Plus 3.5mm slotted insulated screwdriver, 1000V insulation rating, 3.9in (100mm) shaft length, reduced shank.

## WRENCHES, RATCHETS AND SOCKET SET

05004018055	\$248	Wera socket set with Zyklop Metal switch lever ratchet, 1/4in drive, metric, 28 pieces.
05004004055	\$102	Wera Zyklop Metal ratchet, switch lever, 1/4in drive, 5 degree return angle, all-metal construction.
05006440055	\$27	Wera Kraftform Plus 3.5mm slotted insulated screwdriver, 1000V insulation rating, 3.9in (100mm) shaft length, reduced shank.

## COMBINATION WRENCHES AND WRENCH SETS

05020013055	\$687	Wera Joker ratcheting combination wrench set, metric, 11 pieces, includes 8, 10, 11, 12, 13, 14, 15, 16, 17, 18 and 19mm wrenches. Durable cloth pouch included.
05073268055	\$48	Wera Joker combination wrench, ratcheting, 8mm, 9.3in (235mm) overall length, special nut holding feature and fine tooth ratchet.

**HUGE SELECTION- CHECK OUR ONLINE STORE!!**



# SYSTEM INTEGRATORS

Do you need local service and support for your Direct Automation equipment or projects?



As primarily a supply company, our SI Direct program strives to extend our customer service and support into the field of industrial automation. We have connected with experienced system integration services who are fully versed in our core product range. Members of our system integrator program have demonstrated specific product and application expertise with particular emphasis on our Programmable Controller, HMI and Motion Products.

## VICTORIA

<b>AUTOMATION ASAP</b> 03 9551 8383	<b>DW Controls Pty Ltd</b> 03 5336 2018
--	--

## QUEENSLAND

<b>CWE Automation</b> 0481 322 144	<b>Tesla Edison</b> 0434 643 408	<b>AM Automation Pty Ltd</b> 0410 685 522
---------------------------------------	-------------------------------------	--

## WESTERN AUSTRALIA

<b>Dalin Electrical Controls</b> 0402 825 363	<b>KAPP Engineering Pty Ltd</b> 08 6103 1234	<b>ASAP Power Pty Ltd</b> 0420 226 880	<b>WestWater Enterprises Pty Ltd</b> 08 9248 2411
--	---	---	--

## NEW SOUTH WALES

<b>Anything Electrical</b> 0412 461 276	<b>Redare</b> 02 6688 2140	<b>Dark Knight Electrical</b> 02 9755 1166	<b>Logic Automation</b> 0409 081 218	<b>Labcraft</b> 0428 282 288
<b>Mat-Tech Electrical</b> 02 6642 7599	<b>MS Industrial</b> 0423 700 599	<b>Kelycon Electrical</b> 02 9680 3868	<b>Griffith Electronic Services</b> 02 6964 2200	

## SOUTH AUSTRALIA

**iMove Enterprises**  
08 8162 9666

## NEW ZEALAND

<b>IGP Systems Ltd</b> 64 2 1962220	<b>Prolec Automation &amp; Electrical Services</b> 64 9 2732233
--	--

## SOUTH-EAST ASIA

**Bestari Integration Sdn Bhd**  
+6011 3996 8663



(AUS) 1800 633 040  
(NZ) 0800 633 040

22 Leonard Parade  
Currumbin Waters  
QLD, 4223

ABN 86 641 073 458

[www.directautomation.com.au](http://www.directautomation.com.au)

AUTOMATION | COMMUNICATIONS | INDUSTRIAL IOT | PROCESS | SWITCHGEAR | TOOLS

OCTOBER 2024. This publication may contain references to products produced and/or offered by other companies. The product and company names may be trademarked and are the sole property of their respective owners. Direct Automation Pty Ltd disclaims any proprietary interest in the marks and names of others. All prices shown are trade prices and are exclusive of GST. Prices are subject to change, orders will be accepted at the pricing ruling at the time of our acceptance of orders. Please refer to our online store for current prices. Images for display purposes only and may be generic.

