

ENG
distar.tools



2024

DiSTAR


product catalogue



DiSTAR

MECHANIC[®]

Multiplier Displays for Your Business

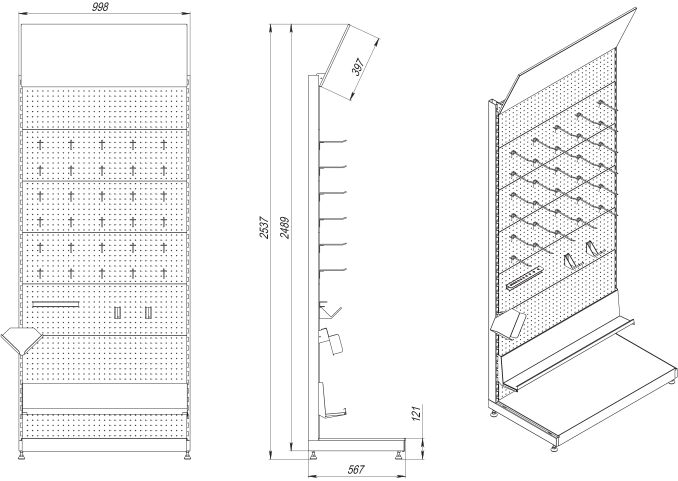

Why Distar? The main benefits:




Unique products,
most of which have no
analogues on the market



Complex sales,
increasing
the average check



Having sold once, we create
regular customers

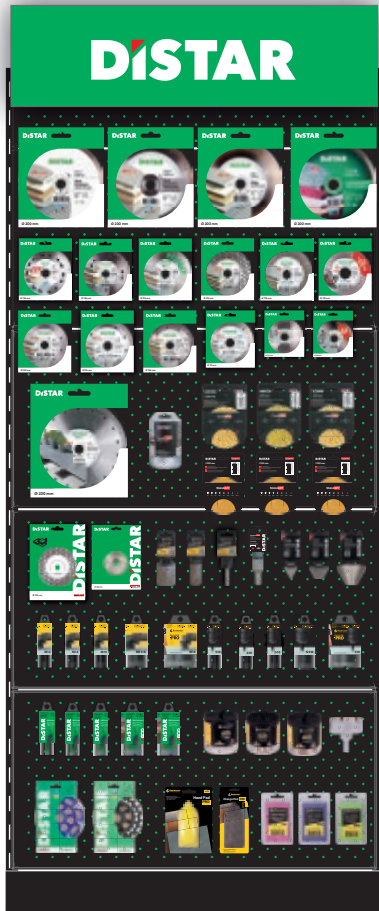

All for Tilers

A wide range of tools FOR PROFESSIONALS:

- Advanced discs for fast and super clean cutting
- High-performance grinding tools
- Cool solutions for drilling without dust and dirt
- Devices for dust extraction during cutting
- Sliders for easy and controlled cutting
- Stencils for quick marking

Everything that is on the display - without exception is necessary for the master.

If one disc is needed, the customer will purchase additional devices and diamond consumables tools, significantly increasing the PURCHASE AMOUNT.

As experience shows, customers who have purchased TM Distar products at least once, no longer consider other brands.

The tool leaves a great impression of use, works even better than it looks.

Your customers will come back for products again and again!

This is the key to **CONSTANT PROFIT** for many years to come!



**SLIDER 90
CUTTING
WITHOUT DUST
AND CHIPS**



JUST PERFECT

1A1R PERFECT

Edge quality ●●●●●+
Speed ●●●●
Lifetime ●●●●



- The blade gives an even cleaner cut while being more robust and reliable.
- The extra 1.5 mm diamond layer-thickness and additional flange design ensure reliability.
- The blade's unique sandwich gullet design ensures clean results.

Art. 102 160 25 018	Ø 115 mm
Art. 101 150 28 015	Ø 125 mm



1A1R ESTHETE

Edge quality	•••••
Speed	•••
Lifetime	•••••



- High quality cutting of ceramic tiles and glazed porcelain.
- Ultra-thin diamond layer of 1.1 mm allows to perform precise and delicate cut.
- The core of the blade has "see through" effect, which allows to control the line of the cut.
- Laser segmentation provides effective cooling of the cutting layer and provides cutting stability.

Art. 111 154 21 009	Ø 115 mm
Art. 111 154 21 010	Ø 125 mm



1A1R ESTHETE 2.0

Edge quality	••••• +
Speed	•••••
Lifetime	•••••



- High quality cutting of ceramic tiles and glazed porcelain.
- Ultra-thin diamond layer of 1.1 mm thickness allows to perform precise and delicate cut.
- The core of the blade has "see through" effect, which allows to control the line of the cut.
- Laser segmentation provides effective cooling of the cutting layer and provides cutting stability.
- For use on cordless and corded angle grinders.

Art. 102 160 25 019	Ø 115 mm
Art. 101 260 24 010	Ø 125 mm



1A1R EDGE DRY

Edge quality	•••••
Speed	•••••
Lifetime	•••••



- Wide bilateral diamond layer of 25 mm width provides the strength and rigidity of the steel core.
- The bond layer with a hexagone pattern makes cutting soft and highly productive.
- The large working area creates the effect of "support", directing the blade strictly in a straight line. Additionally, you can grind the edge of the porcelain gres.

Art. 111 155 46 009	Ø 115 mm
Art. 111 155 37 010	Ø 125/22,23 mm
Art. 111 175 46 010	Ø 125 mm x M14F



1A1R GRES MASTER

Edge quality	•••••
Speed	•••••
Lifetime	•••••



- Turbo grooves of the diamond layer effectively cut the hard material, cooling the cutting area. The blade gently cuts even thick porcelain gres.
- Gres Master is the fastest blade in the entire Distar line. The blade cuts different porcelain gres with a very high speed.
- The edge quality is lower than after Esthete and Decor Slim blades, but very often there is no need for such fine edge, especially where the joint of tile is closed by molding.

Art. 111 151 60 009	Ø 115 mm
Art. 111 151 60 010	Ø 125 mm
Art. 811 205 28 026	Ø 230 mm



1A1R MULTIGRES

Edge quality	•••
Speed	•••••
Lifetime	••••



- Fast cutting of porcelain gres with 20 mm thickness.
- High cutting speed.



1A1R DECOR SLIM

Edge quality	•••••
Speed	•••••
Lifetime	•••••



- Designed for fast and precise cutting of wall and floor tiles and porcelain gres.
- Thin clean cut is achieved by special technology of core production, lighter weight of the blade and super-thin diamond layer of 1.2 mm.



1A1R Ceramic

Edge quality	••
Speed	••
Lifetime	•••



- For accurate, fine cutting with angle grinder.
- Fast cutting speed, best for decorative cutting of natural stone.



1A1R PRO Gres

Edge quality	••••
Speed	••••
Lifetime	••••



- Wide diamond layer - 20 mm.
- Effective grinding of tile edge, roughness, curvilinear cutting.
- Used for shutter operation.
- The diamond layer additionally grinds the edge, gives a clean surface.

Art. 111 154 94 009	Ø 115 mm
Art. 111 154 94 010	Ø 125 mm

Art. 111 154 27 009	Ø 115 mm
Art. 111 154 27 010	Ø 125 mm

Art. 101 700 85 072	Ø 115 mm
Art. 101 700 85 073	Ø 125 mm

Art. 902 151 29 019	Ø 115 mm
Art. 902 151 29 020	Ø 125 mm



1A1R CLEANER

Edge quality	••••
Speed	•••••
Lifetime	•••




- The blade has a diamond layer thickness of 0.8 mm, so it fits most grout lines without damaging the tile edge.
- The appropriate segment mix effectively works in any grout material - cementitious, sand, or even epoxy.

Art. 101 154.21.006	Ø 100 mm
---------------------	----------



1A1R ELEGANT

Edge quality	•••••+
Speed	••••
Lifetime	•••••



- The small diameter of the 100 mm blade is an advantage for finishing cuts compared to 115 and 125 mm, reducing vibration and side guidance.
- The blade provides such a clean cut that it is almost impossible to find even the smallest bit of work, even on glazed tiles.
- There is no need for further work on the periphery. The cut also leaves no chipping on the reverse side of the tile.

Art. 101 150.29.020	Ø 100 mm
---------------------	----------



1A1R GREEN CUT


Edge quality	••••
Speed	•••••
Lifetime	•••••



- Designed for quick and precise cutting of wall and floor tiles and porcelain stoneware.
- Clean and thin cutting thanks to the special production of the steel core, thin segmentation of 1.2 mm and low weight.

Art. 101 790.23.013	Ø 115 mm
Art. 101 790.23.015	Ø 125 mm

Positioning of gres diamond cutting blades for angle grinders

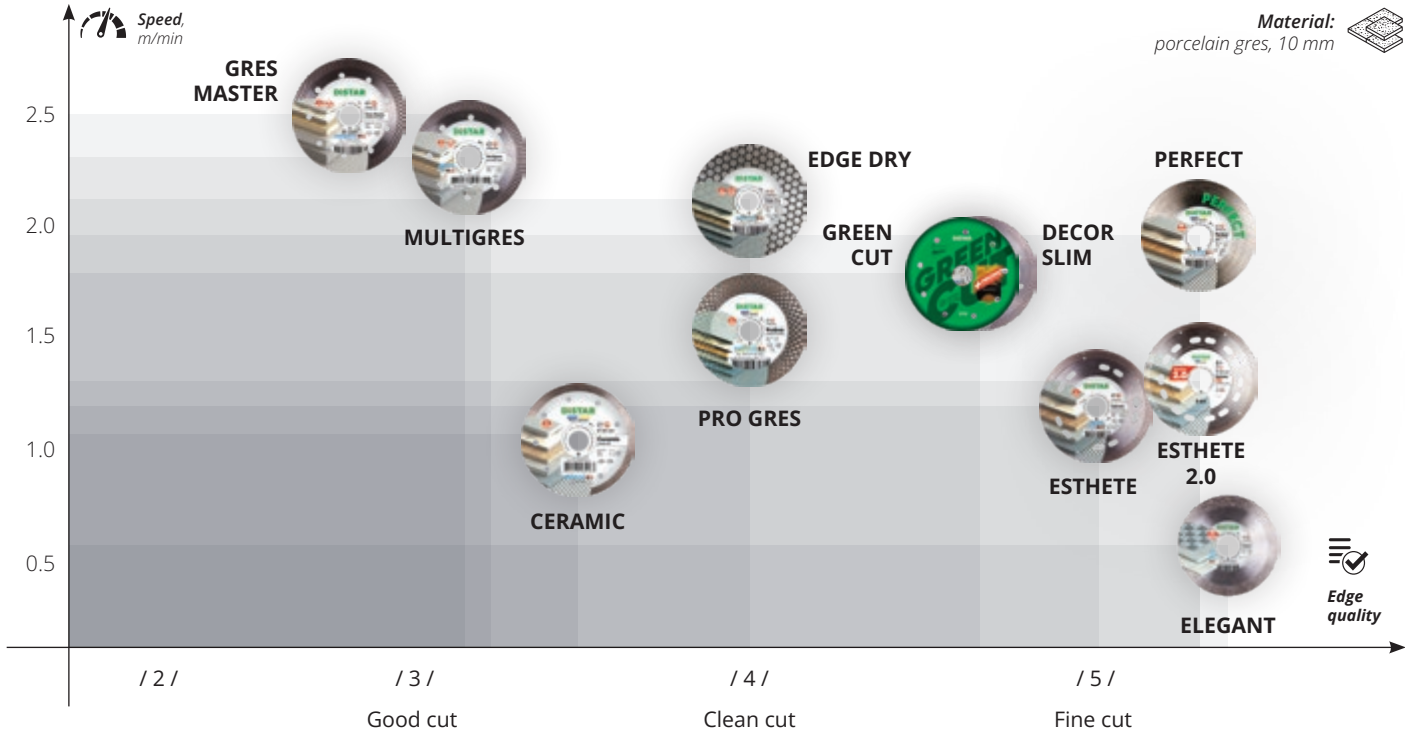

Performance parameters are given for following conditions:

- cutting the material indicated on the charts;
- cutting with 100, 125 mm blade diameter;
- working with operational angle grinder with a power of 1.4 kW, with a rotational speed of 11 000 rpm;
- at an air temperature of +25 °C.


The data is for information only. Under other operating conditions the performance parameters may vary.



5D
CLASS



SOFT GRINDING OF PORCELAIN GRES

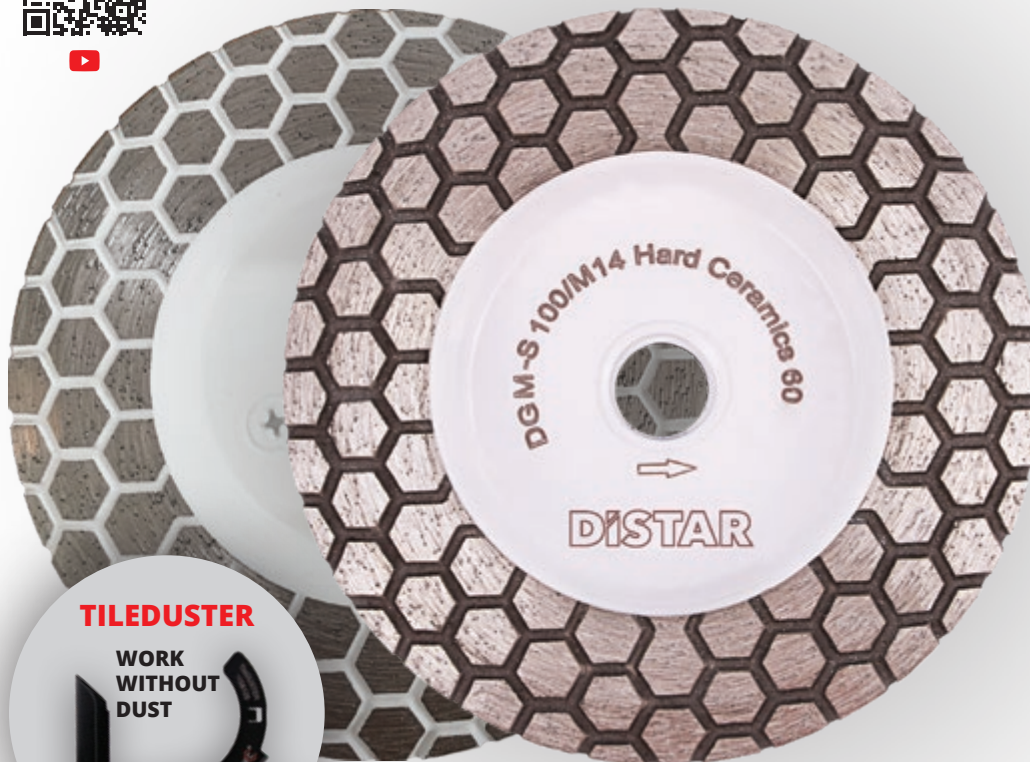

TILEDUSTER

**WORK
WITHOUT
DUST**



DGM-S HARD CERAMICS

Edge quality	•••••
Speed	•••••
Lifetime	•••••



- The honeycomb profile layer provides smooth soft grinding.
- Minimum weight provides controlled and comfortable operation.



BALANCED

Art. 174 835 22 005	#100
Art. 174 835 24 005	#60



POLISHING PADS COOLPAD



- Dry grinding of ceramics, porcelain gres on the angle grinder.
- The profile of the layer in the "involute" form effectively removes the sludge from the grinding zone.
- Due to such properties, one blade number replaces three polishers of different grain sizes.

Art. 90238082018	№1/Ø 100 mm
Art. 90238082019	№2/Ø 100 mm
Art. 90238082020	№3/Ø 100 mm

POLISHING PADS STANDART



- Designed for polishing flat or (due to its flexibility) curved granite surfaces and for working on ceramic tiles of different hardnesses.
- Can be used with or without cooling.

Art. 910278018048	№30/Ø 100 mm
Art. 910278018056	№60/Ø 100 mm
Art. 910278018009	№120/Ø 100 mm
Art. 910278018046	№220/Ø 100 mm
Art. 910278018053	№400/Ø 100 mm
Art. 910278018058	№800/Ø 100 mm
Art. 910278018044	№1500/Ø 100 mm
Art. 910278018050	№3000/Ø 100 mm





DiSTAR

Ø100 mm

- EN** Polishing pad for gres
- IT** Mola diamantata e lucidante per gres porcellanato
- PL** Torcza polerska do gresu
- RU** Полировальный круг для керамогранита
- UA** Полірувальний круг для керамограніту

**PROFESSIONAL
DIAMOND TOOLS**

#200

100x15 CleanPad
Art. 80115429036
80115429037

Clean PAD



MAX RPM
3500

**CLICK-LOCK
PRO**



**CLICK-LOCK
UNI**



WHITE. CLEAN.

POLISHING PADS CLEANPAD



- Metalized diamonds ensure stable performance and high service life throughout the entire working process.
- The white color of the Clean PAD ensures that there are no marking lines on the processed surface.

Art. 80115429034	№50/Ø 100 mm
Art. 80115429035	№100/Ø 100 mm
Art. 80115429036	№200/Ø 100 mm
Art. 80115429037	№400/Ø 100 mm
Art. 80115429038	№800/Ø 100 mm



**7D
CLASS**



Perfect 45°

1A1R
EDGE

Edge quality ●●●●●+
Speed ●●●●
Lifetime ●●●●



- Fine angle cutting.
- Fine cutting (no chips) of wide range of materials .
- High diamond layer 25mm.



DISTAR

Ø 200 mm

**Edge
porcelain gres**

**25
mm**

SAŁO Ø 200 x 25,4 mm, 1A mm, 1,25 mm, Max depth 3,00 mm, Max speed 125 m/min

**7D
CLASS**

Art.: 111 204 21 015



Edge quality *****
Speed ****
Lifetime *****



ABRASIVE

**SZTABKA
OSTRZĄCA
DLA TARCZ
DIAMENTOWYCH**



**SCORPION
PODWÓJNE
ZASILANIE
WODĄ**

BALANCED

Art. 111 204 21 014	Ø 180 mm
Art. 111 204 21 015	Ø 200 mm
Art. 111 204 21 017	Ø 230 mm
Art. 111 204 21 019	Ø 250 mm



1A1R HARD CERAMICS

Edge quality	•••••
Speed	••••
Lifetime	•••••



- High quality cutting of ceramic tile and porcelain gres with decorative surfaces.
- Clean cut (without chipping), wide choice of work material.
- Long lifetime and low unit costs for material processing.

Art. 111 150 48 011	Ø 115 mm
Art. 111 150 48 010	Ø 125 mm
Art. 111 200 48 012	Ø 150 mm
Art. 111 200 48 014	Ø 180 mm
Art. 111 200 48 015	Ø 200 mm
Art. 111 200 48 017	Ø 230 mm
Art. 111 200 48 019	Ø 250 mm
Art. 111 270 48 022	Ø 300 mm
Art. 111 270 48 024	Ø 350 mm
Art. 111 270 48 026	Ø 400 mm



1A1R HARD CERAMICS ADVANCED

Edge quality	•••••
Speed	•••••
Lifetime	••••



- Graphite chips in its metal bond create a fine-pored structure and work as a hard lubricant.
- Laser segmentation of the diamond layer decreases the thermal load on the blade.
- Ultra thin layer 1.3 mm provide fine edge without chips.
- Specially created for cutting of thick gres.

Art. 111 155 28 010	Ø 115 mm
Art. 111 205 28 014	Ø 180 mm
Art. 111 203 49 015	Ø 200 mm
Art. 111 205 28 017	Ø 230 mm
Art. 111 203 49 019	Ø 250 mm
Art. 111 203 49 019	Ø 250 mm
Art. 111 205 28 022	Ø 300 mm
Art. 111 200 49 015	Ø 350 mm
Art. 101 000 00 019	Ø 400 mm



1A1R GRANITE PREMIUM

Edge quality	••••
Speed	•••••
Lifetime	••••



- Fast cutting of natural stone and porcelain gres.
- Universal application, high cutting speed of granite, marble.

Art. 113 150 61 010	Ø 125 mm
Art. 113 200 61 014	Ø 180 mm
Art. 113 200 61 015	Ø 200 mm
Art. 113 200 61 017	Ø 230 mm
Art. 113 200 61 019	Ø 250 mm
Art. 113 270 61 022	Ø 300 mm
Art. 113 270 61 024	Ø 350 mm
Art. 113 270 61 026	Ø 400 mm



1A1R CERAMIC SILENT


Edge quality	•••••
Speed	•••••
Lifetime	•••••



- Whispering blade.
- The core of the shield is designed in a multi-layer structure. This core design reduces high frequencies.
- The noise level is approximately 10 dB lower than regular blade.
- The discs are manufactured on the basis of Hard Ceramic Advanced. The diamond layer contains graphite chips.

Art. 101 705 16 019	Ø 200 mm
Art. 101 705 16 020	Ø 230 mm
Art. 101 705 16 021	Ø 250 mm

Positioning of gres diamond cutting blades for table saws

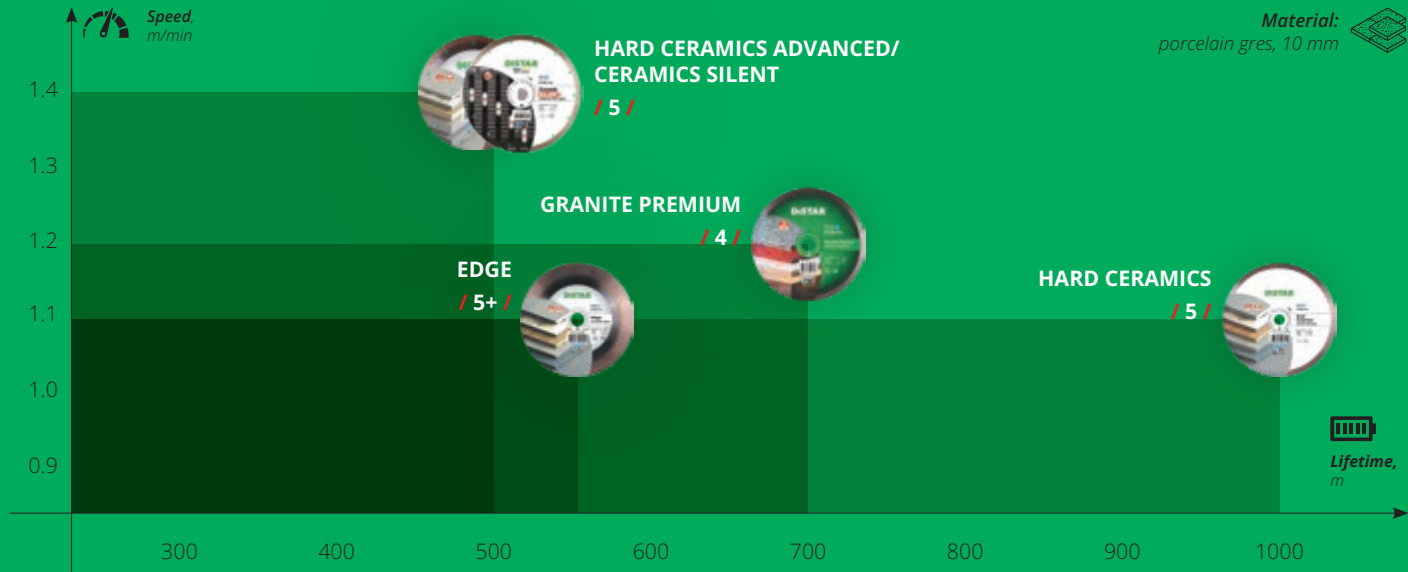

Performance parameters are given for following conditions:

- cutting the material indicated on the charts;
- cutting with 200 mm blade diameter;
- working with operational table saw with a power of 0.8 kW, with a rotational speed of 2900 rpm;
- water feed 3,0 l/min
- at an air temperature of +25 °C.

The data is for information only. Under other operating conditions the performance parameters may vary.

/ # / — Edge quality

/ 3 / — Good cut

/ 4 / — Clean cut

/ 5 / — Fine cut

**TILETEMPLATE
PRECISE MARKING**



**TILETEMPLATE XL
PRECISE MARKING**



**EASYFIX 70
PRECISE DRILLING**



**5D
CLASS**



300*
HOLES
IN PORCELAIN GRES

DDS-W CERAMICS


Edge quality	••••
Speed	••••
Lifetime	•••••



- Small turbo grooves provides high speed drilling with minimum chips.
- Laser welded segments provides high reliability of work.
- Completed with foam rubber sponge that acts as a battery of water.

* 300 holes in porcelain gres.
The data is provided under the following conditions: drilling of the 10 mm porcelain gres with water cooling.
The data is for reference only. Parameters may be significantly different under other conditions.

Art. 179 780 18 185	Ø 70
---------------------	------



DGW-S HARD CERAMICS

Edge quality	•••••
Speed	•••••
Lifetime	•••••



- The nut cutter is screwed onto the spindle of the angle grinder, clamping the cutting diamond disk instead of the usual nut.
- Allows you to cut and grind with the same angle grinder.

Art. 174 835 22 216	#100
Art. 174 835 23 216	#70



DIAMOND CUTTER CONE

Speed	•••••
Lifetime	•••••



- Tapered design.
- It is possible to process holes of a wide range of diameters with one cutter, as well as create facets and dull the sharp edges of the hole.
- The cutter has M14 for installation on the angle grinder. Used in dry mode.

Art. 89568442047	Ø 18-55 M14
Art. 89568442048	Ø 2-35 M14
Art. 89568442049	Ø 27-82 M14



Contour PRO

Edge quality	•••••
Speed	•••••
Lifetime	•••••



- This unique cutter has two working diameters of 10 mm and 25 mm, which allows you to quickly ream holes of small and large diameters.
- Also, thanks to the radius fillets, you can effectively chamfer, correct the edge of the tile.

Art. 895 684 42 045	10/25 mm
Art. 910 583 552 174	50 mm
Art. 910 583 552 059	25 mm
Art. 910 583 552 045	10 mm



LevelCUT

Speed	•••••
Lifetime	•••••

- Thanks to its small diameter of 60 mm and aluminum flange, performing cuts even in hard-to-reach areas is incredibly convenient.
- The disc is compatible with angle grinders of 115 and 125 mm, featuring an outer diameter of 60 mm and an M14 mounting hole.
- It can be used without cooling.

Art. 80115429032	60 mm
------------------	--------------



20 sec

S10



DDR-V KERAMIK PRO

**COOL GEL
GEL FOR DRILLING**



7 sec



M14



NEW

Rocket

Speed
Lifetime



• High speed drills for any types of ceramics and porcelain. High-strength diamonds, fixed in a tight bond, creates micro-cutters that create effectively penetrate into the ceramic material.

• Average drilling speed of porcelain with thickness 10 mm, drill diameter 35mm is 20 sec (10-40sec depending on the hardness of the material and drilling modes). The lifetime is 30-100 holes.

• It is recommended to set the minimum rotation speed.

• Used with water cooling on drills, perforators without hummer mode and screwdrivers.



S10

M14

Art. 910 278 01 9041	Ø 6 mm	Art. 910 2830 18041
Art. 910 278 01 8043	Ø 8 mm	Art. 910 2830 18043
Art. 910 278 01 8045	Ø 10 mm	Art. 910 2830 18045
Art. 910 278 01 8047	Ø 12 mm	Art. 910 2830 18047
Art. 910 278 01 8049	Ø 14 mm	Art. 910 2830 18049
Art. 910 278 01 8052	Ø 16 mm	Art. 910 2830 18052
Art. 910 278 01 8055	Ø 18 mm	Art. 910 2830 18055
Art. 910 278 01 8057	Ø 20 mm	Art. 910 2830 18057
Art. 910 278 01 8059	Ø 25 mm	Art. 910 2830 18059
Art. 910 278 01 8063	Ø 30 mm	Art. 910 2830 18063
Art. 910 278 01 8066	Ø 35 mm	Art. 910 2830 18066
Art. 910 278 01 8104	Ø 40 mm	Art. 910 2830 18104
Art. 910 278 01 8173	Ø 45 mm	Art. 910 2830 18173
Art. 910 278 01 8174	Ø 50 mm	Art. 910 2830 18174
Art. 910 278 01 8185	Ø 70 mm	Art. 910 2830 18185
Art. 910 278 01 8005	Ø 100 mm	Art. 910 2830 18005
Art. 910 278 01 8008	Ø 110 mm	Art. 910 2830 18008
Art. 910 278 01 8179	Ø 120 mm	Art. 910 2830 18179

• High-speed drills for all types of ceramics and porcelain. High-strength diamond, fixed in a tight bond, create micro-cutters that effectively penetrate into the ceramic material.

• The average drilling speed of porcelain with thickness of 10 mm on angle grinder is 7 sec (5-15 sec depending on the material hardness). The lifetime is 20-70 holes.

• It is recommended to set the maximum rotation speed.

• Used on 115-125mm angle grinder without water coolant.

- Dry drilling of porcelain gres.
- M14 thread.
- Rpm - 7000 - 11,000 rpm.
- Drilling thickness 6 - 20 mm.

Art. 11120049020	20 mm
Art. 11109034018	35 mm
Art. 11120049021	45 mm
Art. 11120049028	50 mm
Art. 11120049023	55 mm
Art. 11120049025	65 mm
Art. 11120049027	68 mm



DRILLING SET+ COOLGEL

DrillKIT 6-70

Edge quality	•••••
Speed	•••••
Lifetime	•••••



- Super durable diamond drills offering 20-50 holes lifespan in ceramic granite, maintaining precision and quality.
- Compatible with drills and screwdrivers, these drills work with water cooling or CoolGel, ensuring cleanliness in the work area.

Art. 895 68 442 140	6-70 mm
---------------------	---------



DRILLING SET

DrillKIT 6-12

Edge quality	● ● ● ● ●
Speed	● ● ● ● ●
Lifetime	● ● ● ● ●



- Super durable diamond drills offering 20-50 holes lifespan in ceramic granite, maintaining precision and quality.
- Compatible with drills and screwdrivers, these drills work with water cooling or CoolGel, ensuring cleanliness in the work area.

Art. 895 68 442 109	6-12 mm
---------------------	---------

DISTAR



Diamond Tools for Communications

DISPLAY FOR A SET OF WORKS ON THE SUPPLY OF COMMUNICATIONS TO THE PREMISES:

- ventilation
- air conditioning
- plumbing
- electrics

THE DISPLAY INCLUDES:

- speed drills for wet and dry drilling
- dry drilling with micro-impact
- centers and extensions for drills
- blades for cutting grooves
- dust extractors for drilling and cutting

BEST SUITED:

- for specialized stores that serve professional craftsmen
- for large tool shops with additional equipment with several displays, for example, a display for a tiler, for communications.



5D
CLASS



BEST FOR CHASING

1A1RSS TECHNIC ADVANCED

Speed
Cutting of reinforcement
Lifetime



- Fast cutting of a wide variety of building materials, including all types of natural stone.
- Effective work in dust removal covers with wall chasers.

DISTAR



Ø 230 mm

**Technic
Advanced**
concrete

12
mm

MATRESS 232 x 232 mm, 1-12 mm, Max RPM 6.650, Max Speed 850 kg
5D
CLASS

Art. 143 150 86 018



Reinforcement #
Speed
Lifetime




EN 13238

AIRCHASER
115-125, 230
CHASING WITHOUT DUST



HANDLE
FOR ANGLE GRINDER



Art. 143 153 47 009	Ø 115 mm
Art. 143 153 47 010	Ø 125 mm
Art. 143 153 47 012	Ø 150 mm
Art. 143 153 47 014	Ø 180 mm
Art. 143 150 86 018	Ø 232 mm



1A1RSS METEOR H12

Speed	••••
Cutting of reinforcement	•••••
Lifetime	••••••



- Designed for large amounts of work with reinforced concrete.
- Long lifetime.

1A1RSS Rapid PRO

Speed	•••••
Cutting of reinforcement	••••
Lifetime	•••••




- Designed for a wide variety of building materials.
- Fast cutting speed.
- Universal application.

Art. 123 150 55 110	Ø 125 mm
Art. 123 150 55 017	Ø 230 mm

Art. 101 700 85 269	Ø 125 mm
Art. 101 700 85 256	Ø 230 mm

Positioning of diamond cutting blades for chasing concrete with angle grinder

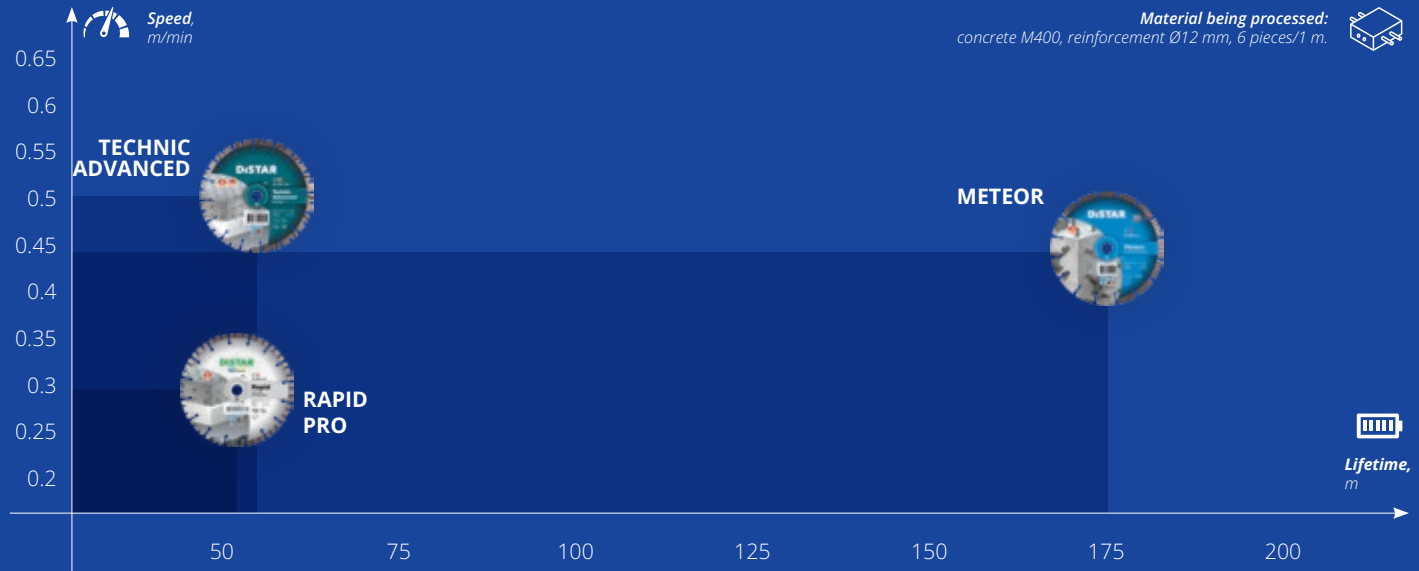

Performance parameters are given for following conditions:

- cutting the material indicated on the charts;
- cutting with 230 mm blade diameter;
- cutting depth – 6 cm;
- pendular cutting;
- working with operational angle grinder with a power of 2.5 kW, with a rotational speed of 6500 rpm;
- at an air temperature of +25 °C.

The data is for information only. Under other operating conditions the performance parameters may vary.



Faster than ever

20 cm in 2 min.*

*Ø 82 mm

**CENTRATOR
EASY DRILLING**



**DRILLSTREAM
DUST-FREE DRILLING**



DLD RS-TX

Speed ●●●●●
 Reinforcement ●●●●●
 Lifetime ●●●●●



Parameters of drilling machine:

- Rotation speed 400-3000 rpm.
- The number of hammers 24 000 - 50 000 in a minute.
- Power: 1.8 - 3.0 kW.

- For dry drilling of holes for the conditioner, ventilation, etc.
- Used on drilling machines with hammer mode.
- Turbo-segment with positioned diamonds and the screw body allow to have drilling speed 20 cm in 2 minutes (concrete M250).
- Drill length is 300 mm.

Is it possible to work without a micro shock?

Yes, but not on strong abrasive concretes B-10. In this case, the speed decreases in several times. No micro-impact on strong concrete.

Concrete-X is recommended in this case.

Core 300 mm

Art. 10170085311	Ø 32 mm
Art. 10170085529	Ø 42 mm
Art. 10170085411	Ø 52 mm
Art. 10170085317	Ø 62 mm
Art. 10170085549	Ø 72 mm
Art. 10170085318	Ø 82 mm
Art. 10170085312	Ø 92 mm
Art. 10170085548	Ø 102 mm
Art. 10170085313	Ø 112 mm
Art. 10170085316	Ø 122 mm
Art. 10170085448	Ø 132 mm
Art. 10170085563	Ø 142 mm
Art. 10170085567	Ø 152 mm
Art. 10170085564	Ø 162 mm
Art. 10170085327	Ø 172 mm
Art. 10170085499	Ø 182 mm
Art. 10170085500	Ø 200 mm

Core 450 mm

Art. 10170085571	Ø 32 mm
Art. 10170085478	Ø 42 mm
Art. 10170085487	Ø 52 mm
Art. 10170085498	Ø 62 mm
Art. 10170085489	Ø 72 mm
Art. 10215091013	Ø 82 mm
Art. 10170085491	Ø 92 mm
Art. 10170085503	Ø 102 mm
Art. 10170085493	Ø 112 mm
Art. 10170085503	Ø 122 mm
Art. 10170085507	Ø 132 mm
Art. 10170085505	Ø 142 mm
Art. 10170085501	Ø 152 mm
Art. 10170085536	Ø 162 mm
Art. 10170085535	Ø 172 mm
Art. 10170085562	Ø 182 mm
Art. 10170085544	Ø 200 mm
Art. 10170085545	Ø 250 mm
Art. 10170085546	Ø 300 mm



Is it possible to work without a micro shock?

Yes, but not on strong abrasive concretes Ø-10. In this case, the speed decreases in several times. No micro-impact on strong concrete.

Concrete-X is recommended in this case.

DLD 1 1/4 UNC RM-TX

Speed ●●●●
 Reinforcement ●●●●
 Lifetime ●●●●●



Parameters of drilling machine:

- Rotation speed 400-3000 rpm.
- The number of hummers 24 000 - 50 000 in a minute.
- Power: 1.8 - 3.0 kW.

- For dry drilling of holes for the conditioner, ventilation, etc.
- Used on drilling machines with hammer mode.
- Turbo-segment with positioned diamonds and the screw body allow to have drilling speed 15 cm in 2 minutes (concrete M250).
- Drill length is 300 and 450 mm.

Core 300 mm

Art. 10215129011	Ø 32 mm
Art. 10170085021	Ø 42 mm
Art. 10170429020	Ø 52 mm
Art. 10170085023	Ø 62 mm
Art. 10170429022	Ø 72 mm
Art. 10170429024	Ø 82 mm
Art. 10170429026	Ø 92 mm
Art. 10170429028	Ø 102 mm
Art. 10170429030	Ø 112 mm
Art. 10170429032	Ø 122 mm
Art. 10170429034	Ø 132 mm
Art. 10170429036	Ø 142 mm
Art. 10170429038	Ø 152 mm
Art. 10215129013	Ø 162 mm
Art. 10216025012	Ø 172 mm
Art. 10215129015	Ø 182 mm
Art. 10215129020	Ø 200 mm

Core 450 mm

Art. 10215129012	Ø 32 mm
Art. 10170085479	Ø 42 mm
Art. 10170429021	Ø 52 mm
Art. 10170085490	Ø 62 mm
Art. 10170429023	Ø 72 mm
Art. 10170429025	Ø 82 mm
Art. 10170429027	Ø 92 mm
Art. 10170429029	Ø 102 mm
Art. 10170429031	Ø 112 mm
Art. 10170429033	Ø 122 mm
Art. 10170429035	Ø 132 mm
Art. 10170429037	Ø 142 mm
Art. 10170516028	Ø 152 mm
Art. 10215129014	Ø 162 mm
Art. 10215129019	Ø 182 mm
Art. 10215129022	Ø 250 mm
Art. 10215129021	Ø 200 mm
Art. 10215129023	Ø 300 mm



**5D
CLASS**



**5D
CLASS**



DDS-W L320 M16 CONCRETE-X

Speed
Lifetime



• Universal drill bits for dry drilling.
Designed for making straight-through holes
in manual mode.

ATTENTION!

Recommended to use on machines with
power of 0.8-2.4 kW.

Art. 179 840 91 075	Ø 32 mm
Art. 179 845 40 069	Ø 42 mm
Art. 179 845 40 073	Ø 52 mm
Art. 179 845 40 077	Ø 62 mm



DDS-W L450 1 1/4 UNC REINFORCED CONCRETE

Speed
Lifetime



- Designed for use on dense low-abrasion materials and high reinforcement.
- Confident work with high reinforcement.

Art. 178 030 94 059	Ø 25
Art. 179 030 94 065	Ø 32
Art. 179 030 94 069	Ø 42
Art. 179 030 94 071	Ø 47
Art. 179 030 94 073	Ø 52
Art. 179 030 94 074	Ø 57
Art. 179 030 94 077	Ø 62
Art. 179 030 94 529	Ø 67
Art. 179 030 94 080	Ø 72
Art. 179 030 94 082	Ø 77
Art. 179 030 94 083	Ø 82
Art. 179 030 94 086	Ø 92
Art. 179 030 94 087	Ø 102
Art. 179 030 94 089	Ø 112
Art. 179 030 94 090	Ø 122

Art. 179 030 94 091	Ø 126
Art. 179 030 94 092	Ø 132
Art. 179 030 94 093	Ø 142
Art. 179 030 94 094	Ø 152
Art. 179 030 94 096	Ø 162
Art. 179 030 94 097	Ø 172
Art. 179 030 94 098	Ø 182
Art. 179 030 94 015	Ø 200
Art. 179 030 94 101	Ø 225
Art. 179 030 94 019	Ø 250
Art. 179 030 94 102	Ø 302
Art. 178 030 94 024	Ø 350
Art. 178 030 94 026	Ø 400
Art. 178 030 94 028	Ø 450
Art. 178 030 94 031	Ø 500



SDS plus **MAGNET**

5D
CLASS



EASY CONCRETE DRILLING



DDS-W L65

Speed
Lifetime



- Designed for dry drilling of holes for sockets using rotary hammer without a stand or in the soft impact mode.
- Fast drill in. Turbo segments lower the friction and provide effective removal of residue from the drill zone.

**DRILLDUSTER
DRILLING
WITHOUT DUST**



With adapter

Art. 179 820 91 081	Ø 68 mm
Art. 179 824 45 080	Ø 72 mm
Art. 179 824 45 083	Ø 82 mm

Without adapter



Art. 179 844 45 079	Ø 68 mm
Art. 179 844 45 080	Ø 72 mm
Art. 179 844 45 083	Ø 82 mm

Adapter with magnet

Art. 277 326	M16xSDS Plus
--------------	--------------




LASER WELDED DIAFIX

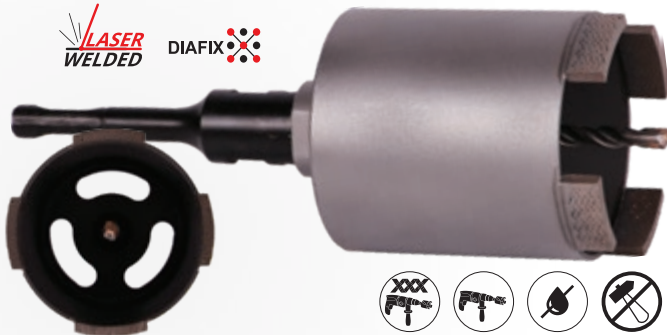

DDS-W Krone PRO

Speed	••••
Drilling of reinforcement	••••
Lifetime	••••



- Dry drilling of socket holes on angle grinders and without hummer mode.
- Applicable for brick, foam concrete and concrete.
- High speed and lifetime.

DLD CS-X

Speed	•••••
Drilling of reinforcement	•••••
Lifetime	•••••



- Optimal lifetime and drilling speed ratio.
- Segments with arranged diamonds.

With adapter

Art. 3798 2017 079	Ø 68 mm
Art. 3798 2017 080	Ø 72 mm
Art. 3798 2017 083	Ø 82 mm

Without adapter

Art. 3798 0017 079	Ø 68 mm
Art. 3798 0017 080	Ø 72 mm
Art. 3798 0017 083	Ø 82 mm

M16xSDS Plus adapter with magnet


Art. 277 326

**SOCKETDUSTER
DUST-FREE
DRILLING**



Art. 979 840 08 079	Ø 68 mm
Art. 979 840 08 080	Ø 72 mm
Art. 979 840 08 083	Ø 82 mm

Lifetime and speed of diamond drill bits on different building materials

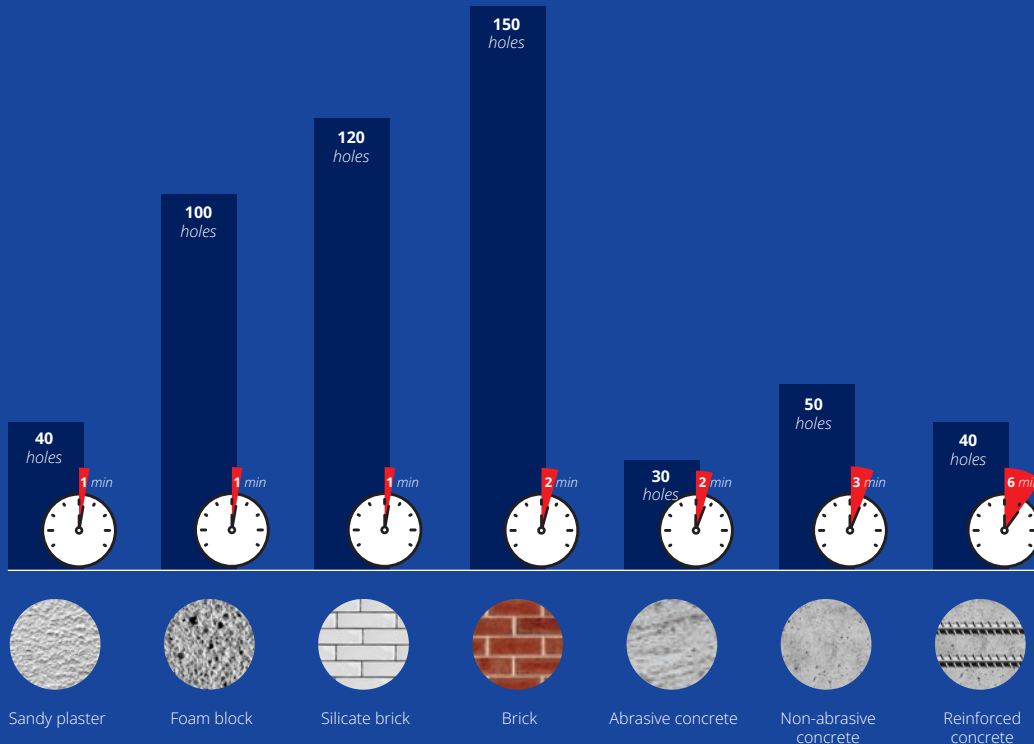

The data is provided under the following conditions:

- Drilling of the material specified on graphs;
- Drilling diameter is 68 mm;
- Drilling depth is 50 mm;
- Work with hammer drill power of 0.8 kW with rotational speed 700 rpm;
- Air temperature +25 C °.

The data is for reference only. Parameters may be significantly different under other conditions.

Diamond Tools for General Construction Materials

This display is FOR MAIN WORKS at the first stages of construction:

- dismantling
- cutting holes
- road construction
- laying paving stones
- grinding works, etc.

The display contains TM Distar that allows you to choose a tool in different price categories.

-for specialized stores that serve professional craftsmen

-for large tool shops with additional equipment

with several displays, for example, a display for a tiler, for communications.



Universal Diamond Tools

This display incorporated the most popular samples of products with which you can perform ALL TURNKEY REPAIRS.

Quickly, efficiently and without dirt.

FOR ALL NEEDS.

Each master will find the right tool for himself:

- bricklayer
- plumber
- electrician
- tiler
- dismantler
- road builder

BEST SUITED for small tool and hardware stores visited by craftsmen of various profiles.



Diamond tools for general construction

5D
CLASS



MAXIMUM CUTTING SPEED

TURBO EXTRA / EXTRA MAX

Speed
Cutting of reinforcement

Lifetime



- Designed for hard concrete, reinforced concrete.
- Ability to work with hard reinforcement.

Art. 101 150 28 009	Ø 115 mm
Art. 101 150 28 010	Ø 125 mm
Art. 101 150 28 012	Ø 150 mm
Art. 101 150 28 014	Ø 180 mm
Art. 101 150 27 018	Ø 232 mm

DISTAR



Ø 230 mm

Extra Max
reinforced concrete

12
mm

Art.: 101 150 27 018



Reinforcement #
Speed
Lifetime #



ERC EN13236

AIRDUSTER

115-125, 230

CUTTING WITHOUT DUST





1A1RSS CLASSIC H12

Speed ●●●
Cutting of reinforcement ●●
Lifetime ●●●●



- Designed for processing lightly reinforced concrete.
- High durability when processing abrasive building materials.

TURBO SUPER MAX

Speed ●●●●●
Cutting of reinforcement ●●●●●
Lifetime ●●●



- Efficient cutting of heavily reinforced concrete.
- Smooth cutting. Optimal balance of durability and performance.
- Ideal solution for cutting architectural concrete and performing expansion joints.

TURBO Beton PRO

Speed ●●●●●
Cutting of reinforcement ●●●●●
Lifetime ●●●●



- For processing a wide range of building materials, including moderately reinforced concrete.
- Versatility in application, optimal balance of durability to speed ratio.

Art. 123 150 11 011	Ø 125 mm
Art. 123 150 11 018	Ø 232 mm

Art. 101 155 02 018	Ø 232 mm
---------------------	----------

Art. 101 700 85 392	Ø 125 mm
Art. 101 700 85 391	Ø 230 mm



1A1RSS STAYER

Speed	••••
Cutting of reinforcement	••
Lifetime	•••••




- For cutting of abrasive materials.
- High lifetime.
- Unique decision for cutting the asphalt with angle grinder.

Art. 143 150 05 017	Ø 230 mm
---------------------	----------



1A1RSS REX

Speed	•••••
Cutting of reinforcement	•••••
Lifetime	••



- Designed for a wide variety of building materials.
- Fast cutting speed.
- Universal application

Art. 895 684 42 040	Ø 125 mm
---------------------	----------



1A1RSS METAL CUT


Speed	•••••
Cutting of reinforcement	•••••
Lifetime	••



- Durability of corundum discs - up to 50 cuts, diamond discs - at least 1,000 cuts.
- Dimensional stability.
- After 7 cuts, the corundum disc wears down, preventing it from fully cutting through the pipe.
- Diamond blade - 1,000 cuts of the same diameter. A diamond blade generates significantly more sparks, making the work more enjoyable.

Art. 895 684 42044	Ø 125 mm
--------------------	----------

Positioning of diamond cutting blades for cutting concrete with angle grinder

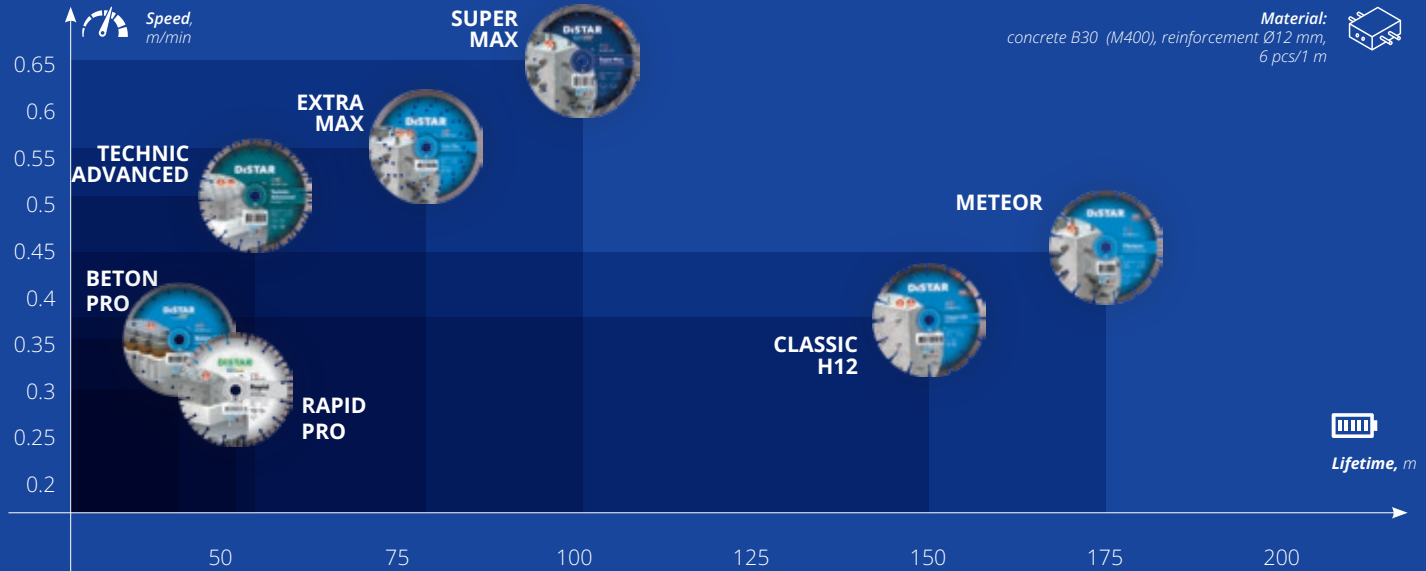

Performance parameters are given for following conditions:

- cutting the material indicated on the charts;
- cutting with 230 mm blade diameter;
- cutting depth – 6 cm;
- pendular cutting;
- working with operational angle grinder with a power of 2.5 kW, with a rotational speed of 6500 rpm;
- at an air temperature of +25 °C.

The data is for information only. Under other operating conditions the performance parameters may vary.

5D
CLASS



BEST FOR STONE

TURBO ELITE MAX

Speed
Lifetime



- Specially designed for professional cutting of colored granite.
- Stable, comfortable cutting ability.

Art. 101 150 23 009	Ø 115 mm
Art. 101 150 23 010	Ø 125 mm
Art. 101 150 23 012	Ø 150 mm
Art. 101 150 23 014	Ø 180 mm
Art. 101 151 27 018	22,23 Ø 232 mm





TURBO FIREBRICK

Edge quality	••••
Speed	•••••
Lifetime	•••••



- The blade is designed and optimized for cutting firebricks and clinker on a machine tools and a tile cutters.

- The ultra-turbocharged diamond-bearing layer with laser segmentation has a constantly high cutting speed with very high edge quality without chipping.

- The diameter of the blade is 250 mm, which allows you to cut a brick in one pass for the entire thickness.

Art. 111 201 59 015	Ø 250 mm
---------------------	----------



TURBO ELITE ACTIVE

Speed	••••
Lifetime	•••



- Designed for deep cutting.
- With moderate lifetime the blade is able to cut most of natural materials.

Art. 102 160 25 017	Ø 230 mm
---------------------	----------




TURBO GABBRO MAX

Speed	•••••
Lifetime	••••



- Special blade for black granite.
- Ability to perform deep long cuts.
- Soft, comfortable cutting.

Art. 101 154 29 018	Ø 232 mm
---------------------	----------



1A1RSS MAESTRO

Speed	••••
Lifetime	•••••



- Professional work with all types of granite.
- High cutting speed and lifetime.
- High resistance of the blade to continuous loads.

Art. 123 150 51 010	Ø 125 mm
Art. 123 150 51 017	Ø 230 mm



TURBO DUPLEX


Speed
Lifetime



- Blade designed for grinding and cutting of natural stone.
- 2 in 1: cutting and grinding.

Art. 101 171 26 010	Ø 125 mm
---------------------	----------

Positioning of diamond cutting blades for cutting natural stone with angle grinder

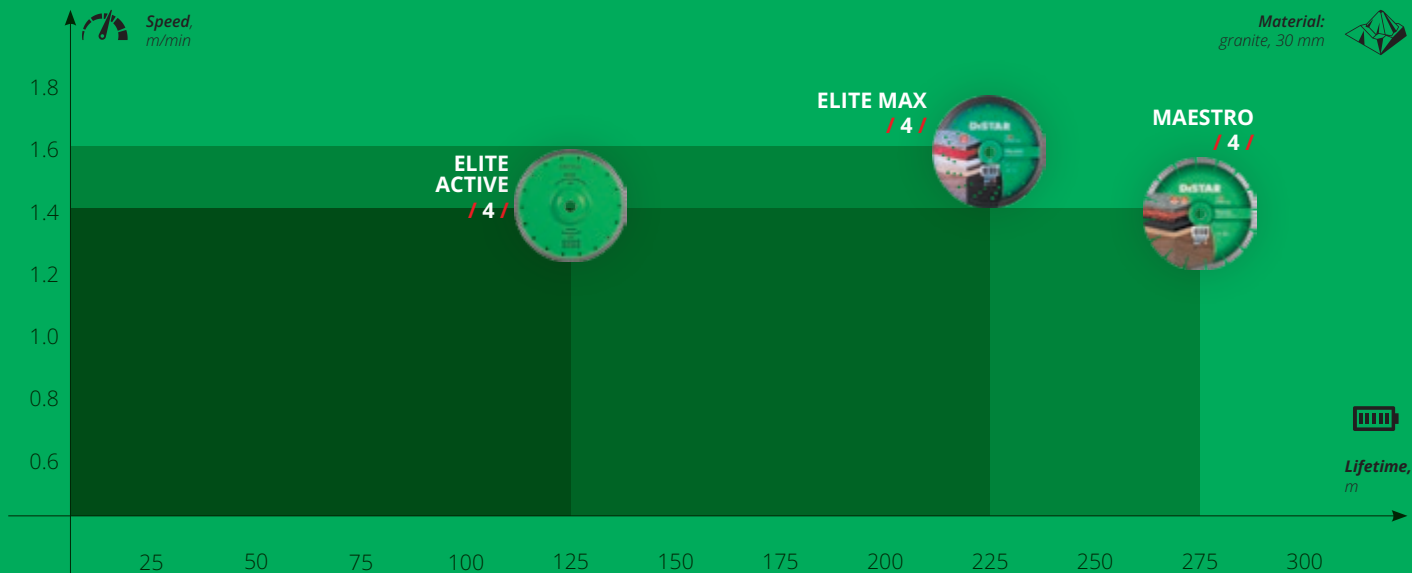

Performance parameters are given for following conditions:

- cutting the material indicated on the charts;
- cutting with 230 mm blade diameter;
- cutting depth – 30 mm;
- straight cutting;
- working with operational angle grinder with a power of 2.5 kW, with a rotational speed of 6500 rpm;
- at an air temperature of +25 °C.

The data is for information only. Under other operating conditions the performance parameters may vary.

/ # / — Edge quality

/ 3 / — Good cut

/ 4 / — Clean cut

/ 5 / — Fine cut



5D
CLASS



DISTAR

Made in Ukraine



Ø 350 mm

**Technic
Advanced**
concrete

Reinforcement 1/2 *****
Speed 7/8 *****
Lifetime 10/11 *****



Art.: 143 203 47 025



4 820067 457946



143 203 47 025

1A1RSS TECHNIC ADVANCED

Speed
Cutting of reinforcement
Lifetime



- Designed for work on low and average power drives (from 4 to 9 kW).
- Universal application.
- Soft, fast cutting.
- Possibility of working with petrol saw without cooling, while cutting non-reinforced construction materials.

Art. 143 203 47 022	Ø 300 mm
Art. 143 203 47 025	Ø 350 mm
Art. 143 203 47 026	Ø 400 mm



1A1RSS METEOR

Speed ●●●●●
Cutting of reinforcement ●●●●●
Lifetime ●●●●●



- Designed for work on average power drives (5-13 kW).
- Ability to work with heavy highly reinforced concrete.

1A1RSS CLASSIC H12

Speed ●●●●●
Cutting of reinforcement ●●●●●
Lifetime ●●●●●



- Designed for work on low and average power drives (from 4 to 9 kW). Floor saws and petrol saws.
- Ability to work on petrol saws without floor adapter, optimal cutting speed to lifetime ratio.

1A1RSS GREEN CONCRETE

Speed ●●●●●
Cutting of reinforcement ●●
Lifetime ●●●●●



- Designed for cutting and pointing of joints in green concrete using self-propelled machines with high power drives.
- Unique composition, providing high lifetime of the blade while working with green concrete.

1A1RSS Universal UNI Plus

Speed ●
Cutting of reinforcement ●●●
Lifetime ●●●



- Designed for floor saws and power cutters with low and medium power (4-9 kW)
- Universal application. Fast and stable cutting speed.

Art. 123 270 55 022	Ø 300 mm
Art. 123 850 55 024	Ø 350 mm
Art. 123 850 55 026	Ø 400 mm
Art. 123 850 55 028	Ø 450 mm
Art. 123 850 55 031	Ø 500 mm
Art. 123 850 55 034	Ø 600 mm

Art. 121 850 04 171	Ø 304 mm
Art. 121 850 04 160	Ø 354 mm
Art. 121 850 04 121	Ø 404 mm
Art. 121 850 04 161	Ø 454 mm
Art. 121 850 04 157	Ø 504 mm
Art. 121 850 04 162	Ø 604 mm

Art. 123 850 42 024	Ø 350 mm
---------------------	----------

Art. 101 704 29 042	Ø 300 mm
Art. 101 700 85 446	Ø 350 mm
Art. 101 704 29 043	Ø 400 mm



1A1RSS Beton PRO

Speed ●
Cutting of reinforcement ●●●
Lifetime ●●



- Designed for floor saws and power cutters with low and medium power (4-9 kWt)
- Universal application. Fast and stable cutting speed.

Art. 101 700 85 424	Ø 300 mm
Art. 101 700 85 389	Ø 350 mm
Art. 101 700 85 425	Ø 400 mm
Art. 101 700 85 152	Ø 450 mm
Art. 101 700 85 111	Ø 500 mm



1A1RSS METEOR H15

Speed ●●●●●
Cutting of reinforcement ●●●●●
Lifetime ●●●●●



- Consistently high performance on reinforced concrete.
- High segment of double turbo 15 mm.
- Suitable for low-power gasoline separators (up to 9 kW), even without a base adapter.

Art. 123 850 55 023	Ø 300 mm
Art. 123 850 55 025	Ø 350 mm
Art. 123 850 55 027	Ø 400 mm
Art. 123 850 55 029	Ø 450 mm
Art. 123 850 55 033	Ø 500 mm
Art. 123 850 55 035	Ø 600 mm



1A1RSS JET CUT


Speed ●●●●●
Cutting of reinforcement ●●●●●
Lifetime ●●●●●



- The JETCut blade is a new, excellent high-speed cutting blade.
- W-shaped segments allow exceptionally fast cutting of heavily reinforced concrete.
- JETCut is 15% lighter than a regular blade due to thinner segments and a slimmer steel core.

Art. 12385085022	Ø 300 mm
Art. 12385551160	Ø 350 mm
Art. 12385085026	Ø 400 mm

Positioning of diamond cutting blades for cutting concrete with floor saws

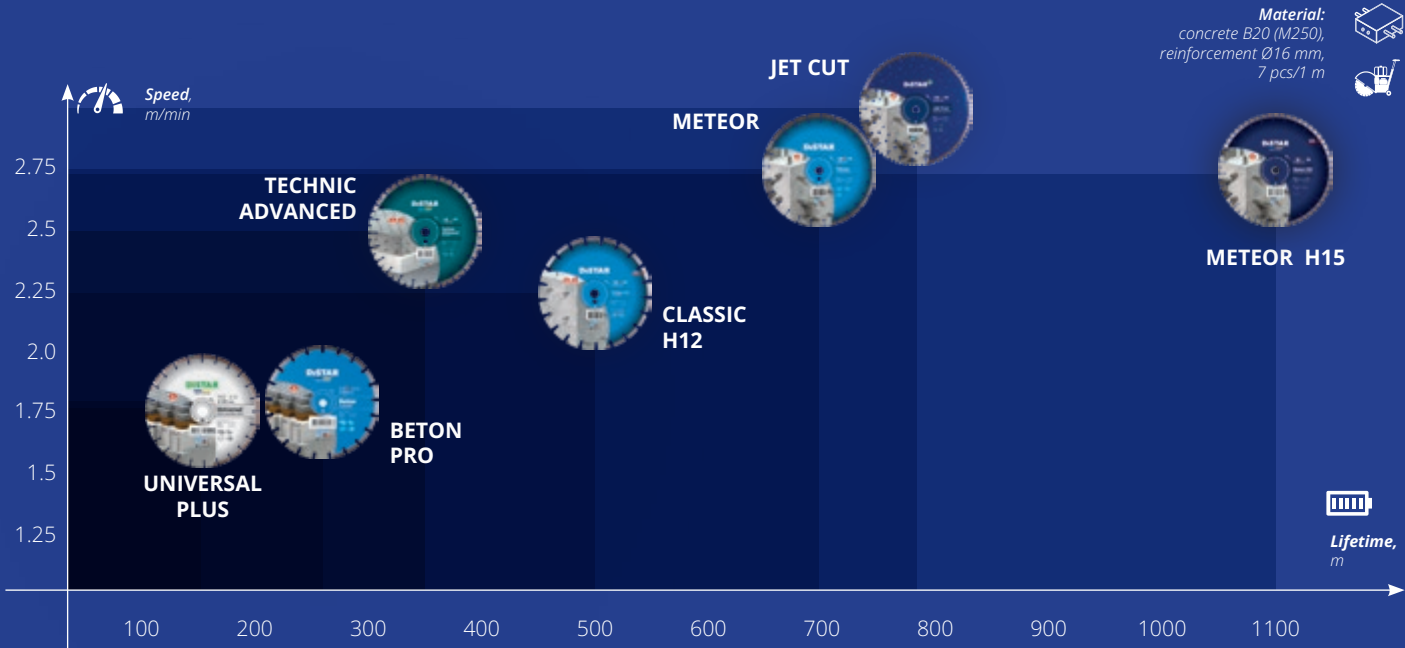


Performance parameters are given for following conditions:

- cutting the material indicated on the charts;
- cutting with 350 mm blade diameter;
- cutting depth – 110 mm;
- straight cutting;
- work with operational **floor saw** with power of 9.6 kW and rotation speed 2500 rpm;
- at an air temperature of +25 °C.

The data is for information only. Under different conditions performance parameters may vary.


Positioning of diamond cutting blades for cutting concrete with petrol saws and power cutters

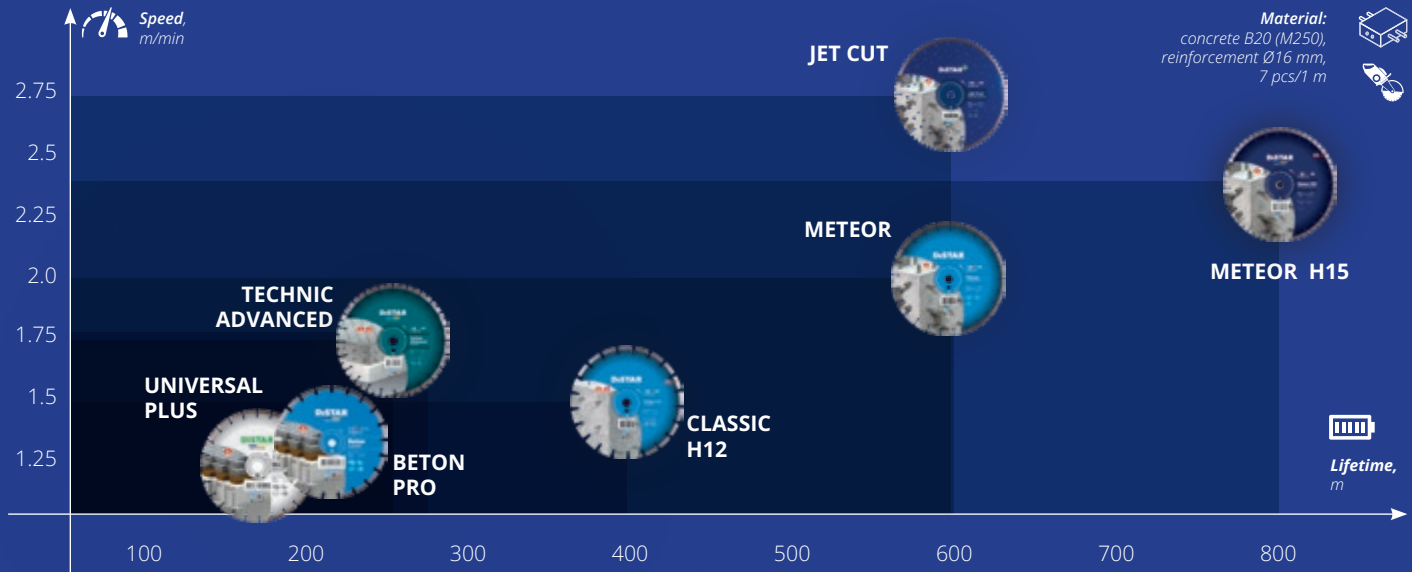

Performance parameters are given for following conditions:

- cutting the material indicated on the charts;
- cutting with 350 mm blade diameter;
- cutting depth – 110 mm;
- straight cutting;
- work with operational **petrol saw** with power of 4.3 kW and rotation speed 4700 rpm;
- at an air temperature of +25 °C.

The data is for information only. Under different conditions performance parameters may vary.

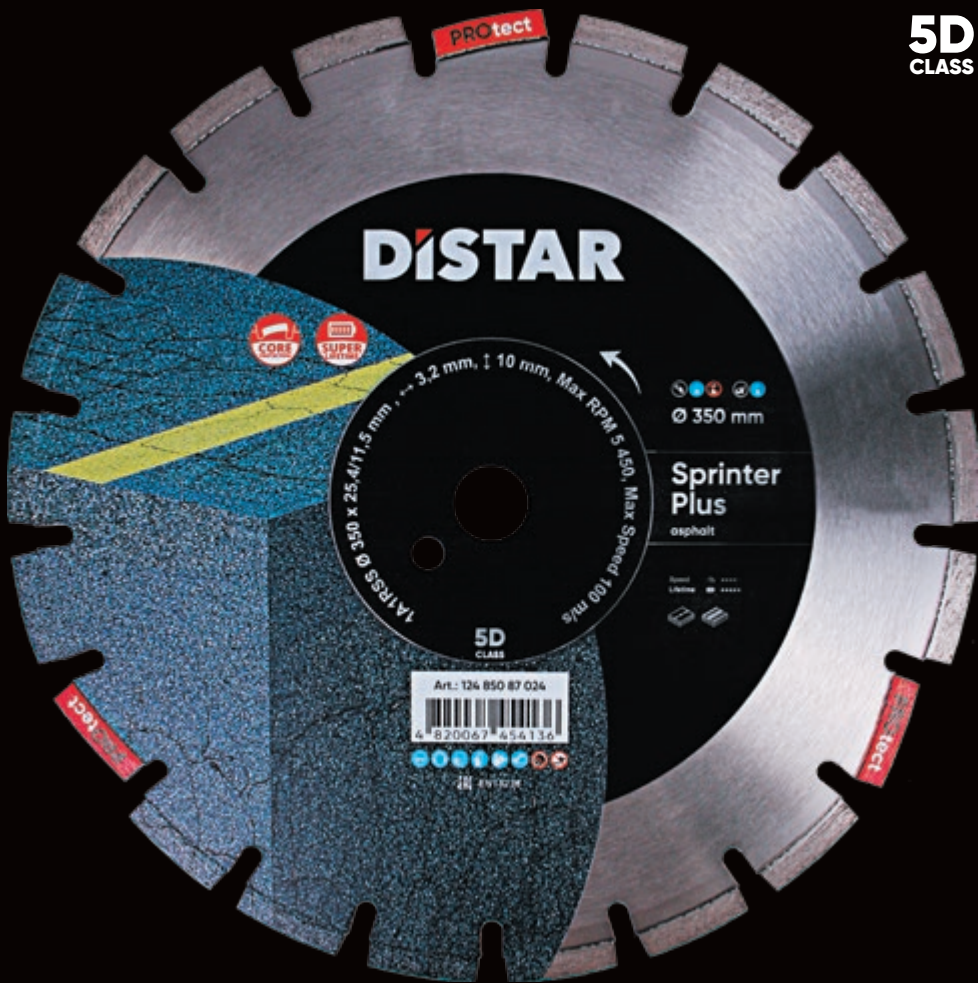

**5D
CLASS**



THE BEST FOR ASPHALT

1A1RSS SPRINTER PLUS

Speed ● ● ● ●
Lifetime ● ● ● ● ●




- Designed for work on average power drives (5-13 kW).
- Optimal cutting speed and lifetime ratio.
- Equipped with protective segments.
- Work with or without cooling.

Art. 124 850 87 022	Ø 300 mm
Art. 124 850 87 024	Ø 350 mm
Art. 124 850 87 026	Ø 400 mm
Art. 124 850 87 028	Ø 450 mm
Art. 124 850 87 031	Ø 500 mm
Art. 124 850 87 034	Ø 600 mm



1A1RSS ABRASIVE

Speed ● ● ● ●
Lifetime ● ● ● ●




- Designed for work on average power drives (5-13kW).
- With protective segments.
- Work with or without cooling.
- High cutting speed.

Art. 130 851 29 022	Ø 300 mm
Art. 124 851 29 014	Ø 350 mm
Art. 130 851 29 026	Ø 400 mm
Art. 124 851 29 028	Ø 450 mm
Art. 130 851 29 031	Ø 500 mm

1A1RSS Asphalt PRO


Speed ● ● ● ●
Lifetime ● ● ● ●



- Designed for floor saws and power cutters with low and medium power (4-9 kWt).
- Provides fast cutting speed even with low power floor saws.

Art. 943 200 05 022	Ø 300 mm
Art. 943 200 05 024	Ø 350 mm
Art. 943 200 05 026	Ø 400 mm
Art. 943 200 05 028	Ø 450 mm
Art. 942 200 05 031	Ø 500 mm


Positioning of diamond cutting blades for cutting asphalt with floor saw

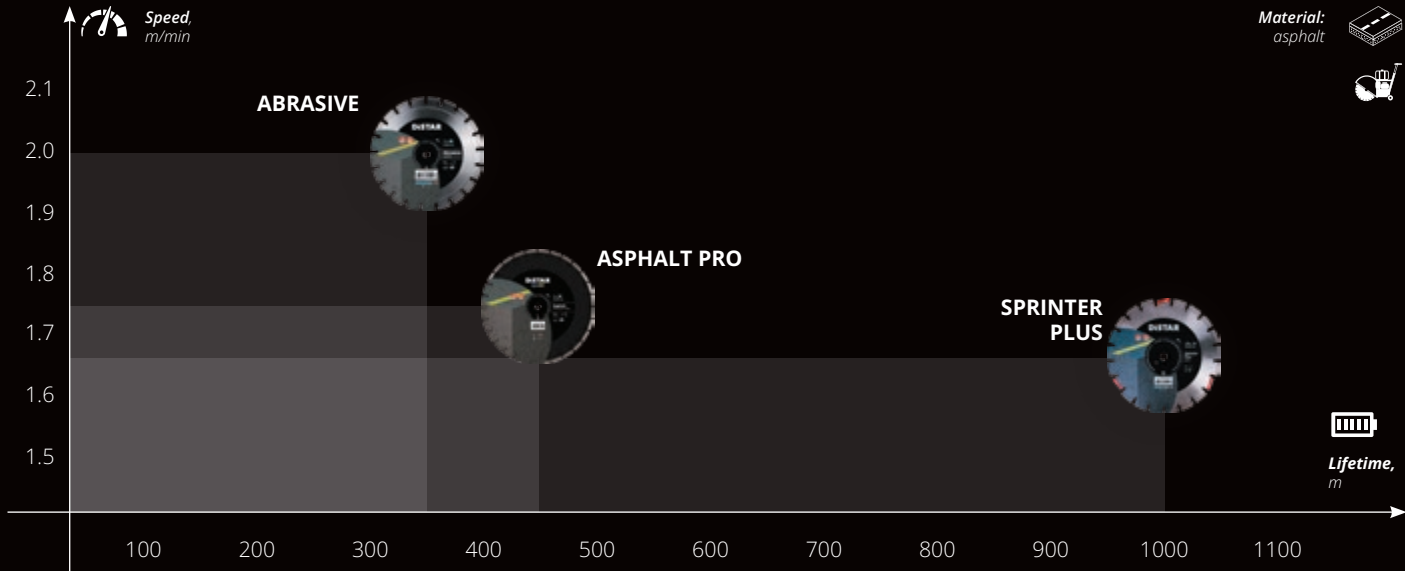

Performance parameters are given for following conditions:

- cutting the material indicated on the charts;
- cutting with 350 mm blade diameter;
- cutting depth - 50 mm;
- straight cutting;
- work with operational floor saw with power of 13 kW and rotation speed 2500 rpm;
- at an air temperature of +25 °C.

The data is for information only. Under different conditions performance parameters may vary.

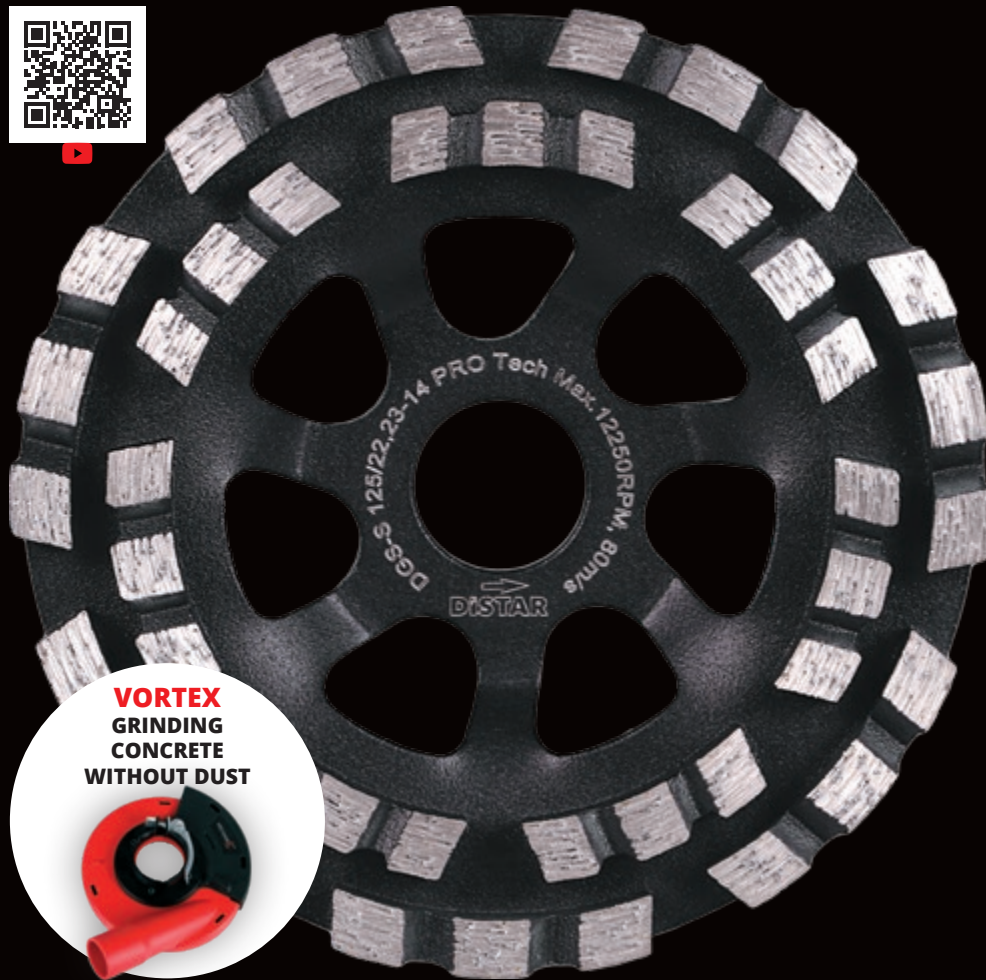

**VORTEX
GRINDING
CONCRETE
WITHOUT DUST**



TURBOCHARGER SPEED



DGS-S ProTECH



- Available diamond grinding cup wheel for machining of concrete and natural stone surfaces.
- The lighter weight body with tear-drop-shaped holes allows you easily to grind walls and ceiling.
- The innovative diamond-bearing layer is designed for machining of materials such as concrete, brick, sandstone, granite, tile adhesive, self-leveling floor, cement screed, interior and exterior concrete panels.

Art. 99 568 442 027

Ø 125 mm



DGS-W RAPTOR

Speed ●●●●●
Lifetime ●●●



- Designed for fast grinding of hard concrete, grinding at a height.
- Light and fast cup wheel. Comfortable work, effective removal of grinding dust from grinding area.

Art. 169 154 80 010	Ø 125 mm
Art. 169 154 80 012	Ø 150 mm
Art. 169 154 80 014	Ø 180 mm

DGS-S Beton PRO

Speed ●●●
Lifetime ●●



- For all concrete types.
- High lifetime on different surfaces. Precise balancing extends the lifetime of angle grinder.

Art. 101 700 85 419	Ø 100 mm
Art. 101 700 85 420	Ø 125 mm
Art. 101 700 85 421	Ø 150 mm
Art. 101 700 85 214	Ø 180 mm

DGS-S EXPERT

Speed ●●●
Lifetime ●●●●



- Designed for grinding of floors.
- Large area of adherence allows to retain flatness level of the surface.

Art. 111 155 46 011	Ø 100 mm
Art. 170 154 24 010	Ø 125 mm

DGS-W ROTEX


Speed ●●●●
Lifetime ●●●●



- Designed for grinding of concrete walls and floors.
- L-type surface allows better dust removal while working with vacuum dust collector.

Art. 169 150 67 010	Ø 125 mm
Art. 169 150 67 012	Ø 150 mm
Art. 169 150 67 014	Ø 180 mm

Positioning of diamond grinding cup wheels

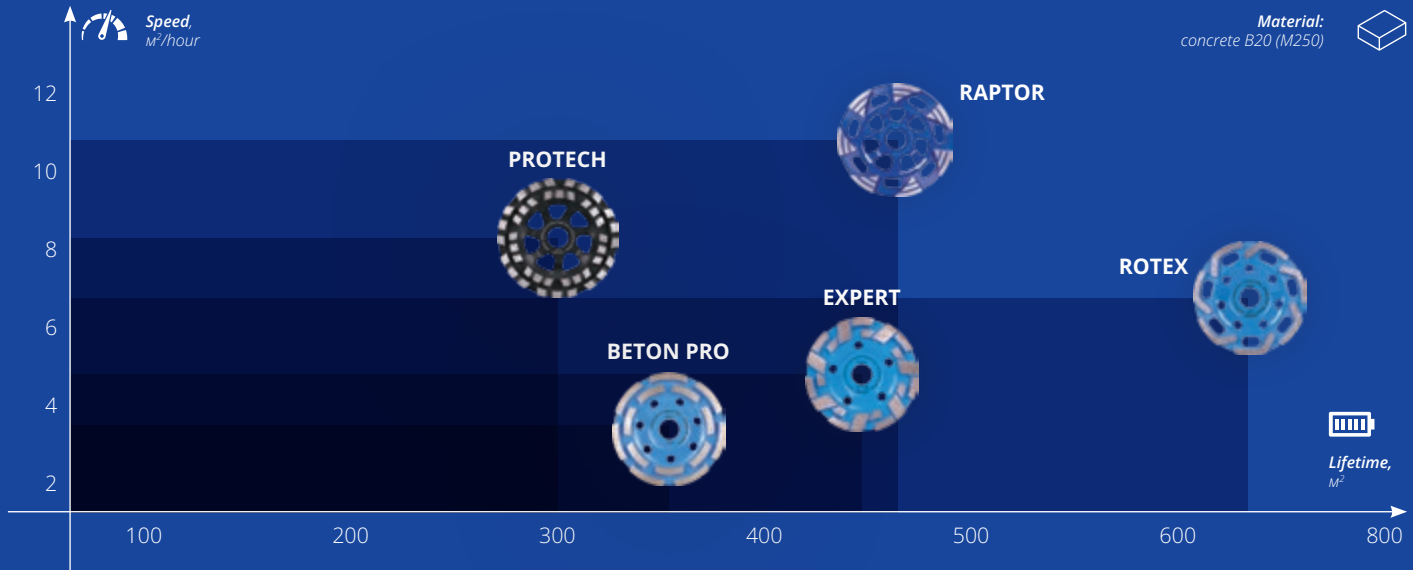

Performance parameters are given for following conditions:

- grinding the material indicated on the charts;
- grinding with 125 mm cup wheel diameter;
- grinding depth – 1.0 mm;
- work with operational angle grinder with power of 1.4 kW and rotation speed 11 000 rpm;
- at an air temperature of +25 °C.

The data is for information only. Under different conditions performance parameters may vary.

5D
CLASS



DGM-S 100 mm ELITE ACTIVE

Speed
Lifetime



- Designed for decorative processing of natural stone, leveling of surfaces, treatment of edges and chamfering. Recommended to use with angle grinders with regulated rotation.
- Provides step-by-step increase in surface finish by decreasing diamond grain size, after №3 the flexible polishing pads are used.

TILEDUSTER

**GRINDING
WITHOUT
DUST**



Art. 174 171 09 005	M14 №00
Art. 174 171 10 005	M14 №0
Art. 174 171 12 005	M14 №2
Art. 174 171 13 005	M14 №3

EASYFIX 70
PRECISELY DRILLING



HOMEDUSTER
MAXIMUM
DRILLING
PRECISION



DRILLDUSTER
DRILLING WITHOUT
DUST



EFFECTIVE DRILLING OF STONE

DDR-B, DDS-B GRANITE ACTIVE

Speed
Lifetime



- Designed for making pocket holes and straight-through holes in granite, marble with water feed.

- Universal application and simple use. Specially made shank allows guaranteed fixation of the drill bit in the socket and excludes its turning during operation.

- The holes in the core body ease the removal of the core sample.

- Sintering technology (unlike vacuum soldering technology) provides high lifetime of the tool.

- Drill bits designed for wet drilling of tile and natural stone. Easy to use.

- Recommended to use with the template for drilling.

Art. 178 080 35 041	Ø 6 mm
Art. 178 080 35 043	Ø 8 mm
Art. 178 080 35 045	Ø 10 mm
Art. 178 080 35 047	Ø 12 mm
Art. 178 080 35 049	Ø 14 mm
Art. 178 080 35 052	Ø 16 mm
Art. 178 080 35 055	Ø 18 mm
Art. 178 080 35 057	Ø 20 mm
Art. 178 080 35 059	Ø 25 mm
Art. 178 080 35 063	Ø 30 mm
Art. 178 080 35 066	Ø 35 mm
Art. 178 080 35 104	Ø 40 mm
Art. 178 370 35 000	Ø 46 mm

Advanced solutions for materials processing

This display contains the MOST POPULAR POSITIONS of TM Mechanic tools for various industries:

- for effective dust extraction during cutting, drilling, grinding, chasing, etc.
- for the convenience of performing standard types of work
- for facilitating the work with diamond tools
- for sharpening diamond tools, etc.

It is best to place next to the display of TM DISTAR, increasing the average sales check due to additional sales of blades, drill bits, grinding cup wheels, etc.

MOST SUITABLE for medium and large tool and hardware stores





AirDUSTER¹¹⁵⁻¹²⁵

Accessory attachment for angle-grinder 115-125



- Dust exhausting with your angle grinder.
- Effective even with low-power vacuum cleaners.
- Complete overview of the cutting zone.
- Effective blade cooling.

AirDUSTER²³⁰

Accessory attachment for angle-grinder 230



- Dust exhausting with your angle grinder.
- Effective even with low-power vacuum cleaners.
- Complete overview of the cutting zone.
- Effective blade cooling.

AirCHASER¹¹⁵⁻¹²⁵

Chasing accessory attachment for angle-grinder 115-125



- Chasing without dust.
- Adjustable chasing depth.
- Complete overview of the chasing zone.
- Effective blade cooling.

AirCHASER²³⁰

Chasing accessory attachment for angle-grinder 230



- Chasing without dust.
- Adjustable chasing depth.
- Complete overview of the chasing zone.
- Effective blade cooling.

Art. 195 684 42 013

Ø 115-125 mm

Art. 195 684 42 014

Ø 230 mm

Art. 195 684 42 224

Ø 115-125 mm

Art. 195 684 42 015

Ø 230 mm



45°? IT`S EASY!

SLIDER 45 2.0 ¹¹⁵⁻¹²⁵ PIPE⁴⁵ 2.0

Sliding accessory attachment for 45° angle cutting with your angle-grinder



- Adjustable size of the miter.
- Does not scratch the surface.
- Dust removal from the cutting zone.

Art. 195 684 42 113	SLIDER 45
Art. 195 684 42 114	PIPE

EDGE DRY



PRO GRES





PROFESSIONAL 45°



**125x30 mm
EDGE DRY FOR
SLIDER 45 PRO**

Art. 101 155 02 020



SLIDER 45 PRO 2.0 115-125

Professional set - accessory attachment
for 45° angle cutting with angle-grinder.



- The perfect edge.
- Set contain a special diamond blade.
- Dust removing from the cutting zone.

Art. 714 190 31 036

Ø 115-125 mm



POLISHING PAD HOLDER CENTRUM PRO 2.0

Perfect in the middle



- The pad is easily and precisely installed on the centering pin, which not only holds it but also prevents sliding during the operation.
- The diameter of the centering pin - 14.7 mm and the height - 2.5 mm. It allows to install polishing pads of other manufacturers with a diameter of 100 mm.



PAD HOLDER CENTRUM FLEX

Perfect in the middle



- The pad is easily and precisely installed on the centering holder, which not only holds it but also prevents sliding during the operation.
- The diameter of the centering holder - 14.7 mm and the height - 2.5 mm. It allows to install polishing pads of other manufacturers.



PAD HOLDER CLICK-LOCK PRO

Easy replacing polishers



- The polishing pads are securely attached to the steel holders until they are completely worn out.
- Change holders with wheels occur instantly in one click due to the magnetic lock.
- And all of this is on one magnetic base.
- The base has a rubber gasket, which makes the grinding soft and full controlled. The maximum rotation speed is 3500 RPM.



Art. 901 151 29 011 M14 / Ø 100 mm

Art. 895 684 42 038 M14 / Ø 100 mm

Art. 993 835 62 005 M14 / Ø 100 mm



PAD HOLDER CLICK-LOCK UNI

Grind without removing the blade



- The polishing base is attached to the diamond blade by magnets, centered on the angle grinder's shaft.
- It allows to use only one angle grinder with the blade, only changing on it the polishing pad with various grains.
- The Click Lock UNI pad is suitable for most angle grinders, just make sure, that the shaft of your angle grinder is above the blade by at least 12 mm.

Art. 795 684 42 018

M14 / Ø 100 mm



SOCKETDUSTER 68-82

Dust removal for holes during the drilling



- The roughness and unevenness of the surface do not matter. Additionally, the airflow pumped through the drill bit body allows effective cooling of the diamond segments and increase the service life of the drill bit.
- The accessory attachment can be installed on drill bits with a diameter from 68 mm to 82 mm.

Art. 795 684 42 113

Ø 125 mm




TileTEMPLATE

Template for tile processing



- Fast marking-out.
- Fine measurement.
- Wide range of angles.

Art. 195 684 42 102

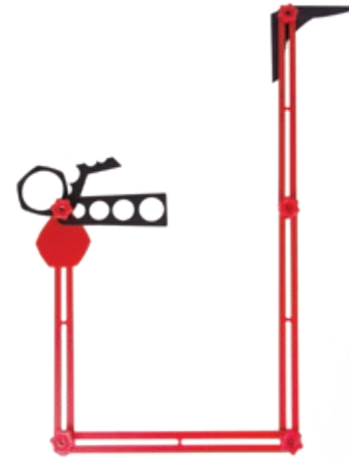

TileTEMPLATE XL

Template for large format tile processing



- Fast marking-out.
- Fine measurement.
- Wide range of angles.

Art. 714 190 31 022



FLAWLESS EDGE!

LINER 115-125

Dust removal cover for grinding



- Move the grinding wheel along the guides of the device for perfect straightness, precision and repeatability.
- Most of the dust from machining is captured by the nozzle of the attachment, connected to a vacuum cleaner.
- The device can be installed on any 115- and 125-mm angle grinder. Perfect. Easy. Without dust.

COOLPAD



HARD CERAMICS



Art. 795 684 42 114

Ø 115-125 mm



TileDUSTER^{115/125}

Accessory attachment for angle grinder



- Effective dust removal.
- Rugged construction. Fits on EVERY angle-grinder.
- Complete overview of the grinding zone.

Art. 195 684 43 013

Ø 115/125 mm



DUSTER 45¹¹⁵⁻¹²⁵

Dust removal cover for miter cutting



- Complete dust removing during the work.
- The plastic support unloads hand.
- Open window for visual process control.

Art. 714 190 31 025

Ø 115-125 mm



AirSLIDER^{90x115-125}

Sliding accessory attachment for angle-grinder



- Adjustable cutting depth.
- Always direct angle 90°.
- Dust exhausting system.

Art. 195 684 42 124

Ø 115-125 mm



TWO SIDE WATER COOLING

SCORPION

WATER SUPPLY ACCESSORIES



- Stability and cutting comfort.
- It is much easier to guide the shield in a straight line.

Art. 801 154 29 045

MULTIGRES



ESTHETE ESTHETE 2.0



GRES MASTER



CUTTING ON ROLLERS

Roller

MECHANIC ROLLER COVER



- The weight of the angle grinder is transferred from the master's hand to the plate, relieving the hands without causing fatigue. The connected vacuum cleaner completely removes dust from the cutting zone.
- The silicone seal prevents dust from entering the room.
- The Roller attachment takes ceramics processing to a new level. Easy, precise and dust-free.



Art. 701 154 29 023

Ø 115-125mm




GRIND WITHOUT DUST

VORTEX

Dust collector cover



- The device has a universal locking system, suitable for any angle grinder 115-125mm.
- Due to the spring-loaded brush, movement during grinding does not require any effort, and dust extraction achieves maximum efficiency.
- Opening the side cover allows you to grind the surface close to the wall or floor.



Art. 895 684 42 104



FireFLY

WORKSPACE LIGHT



- The flashlight has a magnetic mount with rubber reinforcement that securely attaches to the Mechanic's metal attachments.
- The flashlight has two types of lighting.
- Button with adjustable lighting intensity.
- Battery and charging cable included.

Art. 801 154 29 027



HomeDUSTER

Dust extraction attachment for drilling.



- Reliable vacuum clamping.
- Always a right angle of 90°.
- Drilling diameter up to 20 mm.

Art. 195 684 42 022

Ø 20 mm



AquaDUSTER¹⁶²

Attachment for sucking out water while drilling.



- Reliable vacuum clamping.
- Removal of water and cuttings.
- Drilling diameter up to 162 mm.

Art. 195 684 42 162

Ø 162 mm



DrillDuster⁸² 2.0

Dust extraction attachment for drilling




- Reliable vacuum clamping.
- Drilling diameter up to 82 mm.
- Removing dust and debris particles.
- Durable, reliable product material.

Art. 195 684 42 027

Ø 82 mm



DRILLING WITHOUT DUST




1 1/4 UNC x M18 DrillISTREAM

Dust extraction adapter



- Dust removal through the drill body.
- Connection to any vacuum cleaner.
- Effectively removes dust.
- Increases drilling speed.

1 1/4 UNC X M18



RST-X



1 1/4 UNC x 1 1/4 UNC DrillISTREAM

Dust extraction adapter



- Dust removal through the drill body.
- Connection to any vacuum cleaner.
- Effectively removes dust.
- Increases drilling speed.

Art. 195 684 42 025

Art. 795 684 42 115



Abrasive

Sharpening bar



- Effectively sharpens discs for cutting tiles.
- Two sides with large and fine grain.
- Enough to sharpen 10-15 times.

Art. 195 684 44 000



EasyFIX 70

Hole positioning attachment



- Effective vacuum clamping.
- Precise center adjustment.
- Drilling diameter up to 70 mm.

Art. 795 684 42 016



HANDLE 115-125

Angle grinder holder




- Quick and easy assembly of the work table.
- Extremely comfortable grinding and roughing.
- Right/left position.

Art. 714 190 31 021

Ø 115-125 mm



EASY START DRILLING

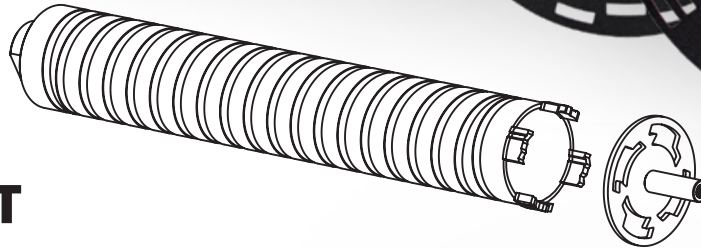

Centrator

Easy drilling



- Easy drilling.
- Smooth hole edge.
- Suitable for RS/RM-TX diamond drill bits and Concrete-X drill bits.

**RS-TX
RM-TX**




CONCRETE-X



Art. 714.190.31.031	42/52 mm
Art. 714.190.31.030	62/72 mm
Art. 714.190.31.029	82/102 mm
Art. 714.190.31.024	112/122 mm
Art. 714.190.31.026	132/142 mm
Art. 714.190.31.027	152/162 mm
Art. 714.190.31.028	182/200 mm



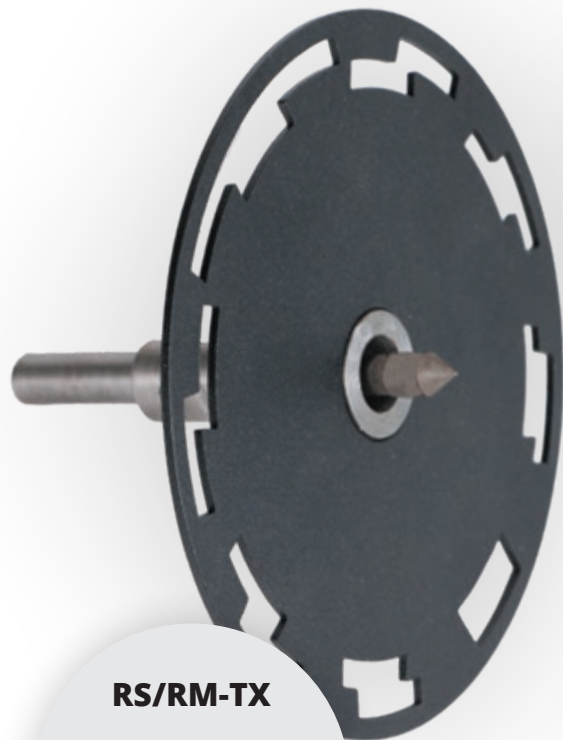

RS/RM-TX



CONCRETE-X



ALWAYS IN THE MIDDLE

Centrator SPRING

Center with spring for pre-drilling



- Spring-loaded steel cone.
- Instant drilling without pre-drilling the hole.
- Two sets are available for diameters 42-122 mm and 112-162 mm.
- Spring centerers are suitable for RS/RM-TX and Concrete-X drill bits intended for dry drilling.

Art. 70115429034	42/122 mm
Art. 71419031039	112/162 mm



TileRepairKit

TILE REPAIR KIT



- Architectural wax fills the damaged area (cracks, chips) using a heated soldering iron.
- The wide color range of Architectural Wax allows you to obtain any shade by mixing. The mechanical properties of the renovation material allow for the renovation of surfaces such as ceramic tiles, natural stone, laminate, wood, plastic and furniture.

Art. 895 684 42 018



Cool GEL

GEL FOR GRILLING



- It sticks even on a vertical surface.
- One bottle for 20-25 holes Ø 35 mm.



Art. 895 684 42 039

250 ml



VACUUM SUCTION CUP

POWERFIX WHITE



- The weight that the suction cup can support is 110 kg.
- A quick vacuum aeration valve is installed to speed up displacement work.
- The installed pressure gauge displays the vacuum strength, optimal indicators are maintained by pumping.

Art. 801 154 29 042



NEW



AUTOMATIC VACUUM SUCTION CUP

POWERFIX **AUTO**



- Automatic maintenance of the suction cup's working pressure,
- Efficient, removable, standard size battery
- White soft rubber work surface that allows you to mount both glossy and textured tiles without leaving rubber marks on the tile surface.

Art. 895 684 42 101



NEW

CUTTING TILES IS EASY

TRACER 1200

MANUAL TILE CUTTER



- Versatility: The Tracer easily cuts tiles up to 1200mm, making it the perfect choice for the most popular sizes. But most importantly - it is equally good at precisely cutting smaller tiles, providing you with unprecedented cutting precision.
- Power: All-metal guides for consistent precision: The Tracer tile cutter is equipped with two parallel guides made of durable metal.



Art. 801 154 29 026

1 200 mm



FOR COMFORTABLE WORK

Ceramax 1200 **TELESCOPE 2.0**

Improved tiling table




- The table has an additional height adjustment function.
- The adjustment range is from 900 to 1200 mm.
- In addition, the table can be set at an angle, which makes cutting and grinding tiles at an angle of 45 degrees very convenient.
- The table size is 1300*780mm. The height is from 900 to 1200 mm. Crossbars allow you to attach a shelf made of any flat material to store your tools.
- The table has handles for mounting the grinder and magnetic knife holders.

Art. 714 190 31 033

1 200 mm

DiSTAR

Advanced diamond tools



DIAMOND SEGMENTS

DIAMOND DRILL BITS

HDP RS6

Speed
 Drilling of reinforcement
 Lifetime



- Universal segment for the most kinds of work.
- Segment has a neutral layer for better attachment to the core.

HDP RS7

Speed
 Drilling of reinforcement
 Lifetime



- Soft segment.
- High drilling speed even on fine-gained hard reinforced concrete.
- Segment has a neutral layer for better attachment to the core.

HDP RS7X

Speed
 Drilling of reinforcement
 Lifetime



- Segment with arranged diamonds.
- Provides stable drilling of hard highly-reinforced concrete.
- Stable drilling speed in different conditions (horizontal, deep drilling).
- Segment has a neutral layer for better attachment to the core.



Art. 3853 7511 052	R 16
Art. 3853 7511 200	R 21
Art. 3853 7511 059	R 25
Art. 3853 7511 063	R 30
Art. 3853 7511 104	R 40
Art. 3853 7511 183	R 55
Art. 3853 7511 003	R 70
Art. 3853 7511 185	R 85
Art. 3853 7511 010	R 125
Art. 3853 7511 015	R 200

Art. 3853 7521 052	R 16
Art. 3853 7521 200	R 21
Art. 3853 7521 059	R 25
Art. 3853 7521 063	R 30
Art. 3853 7521 104	R 40
Art. 3853 7521 183	R 55
Art. 3853 7521 185	R 70
Art. 3853 7521 003	R 85
Art. 3853 7521 010	R 125
Art. 3853 7521 015	R 200

Art. 38 537 074 053	R 16
Art. 38 537 074 201	R 21
Art. 38 537 074 050	R 25
Art. 38 537 074 064	R 30
Art. 38 537 074 105	R 40
Art. 38 537 074 183	R 55
Art. 38 537 074 186	R 70
Art. 38 537 074 004	R 85
Art. 38 537 074 010	R 125
Art. 38 537 074 015	R 200



HD RS8X

Speed	●●●●●+
Drilling of reinforcement	●●●●●
Lifetime	●●●



- New segment for a wide range of materials.
- Works fairly quickly in a variety of conditions with good service life.
- A versatile segment for most jobs.



HD RM7H

Speed	●●●
Drilling of reinforcement	●●●●
Lifetime	●●●●



- Universal segment for the most kinds of work.
- Long lifetime.



KHP RM4

Speed	●●●●
Drilling of reinforcement	●●●●●
Lifetime	●●●●



- Provides stable drilling of reinforced concrete, brick.
- Segment has a neutral layer for better attachment to the core.

NEW



KHP RS-TURBO

Speed	●●●●
Drilling of reinforcement	●●●●●
Lifetime	●●●●



- The composition of diamonds and bonds, the turbocharged shape of the segment allows you to quickly pass solid concrete and even solid metal reinforcement.
- Experience the real turbo-drilling speed.
- The segment can be attached to the steel body of the drill both by soldering or laser welding. It is used on drilling machines with the cc a capacity of up to 2.6 kW.

Art. 3853 7519 052	R 16
Art. 30115017018	R 21
Art. 30117126011	R 25
Art. 30117126018	R 30
Art. 30215032018	R 40
Art. 30215044005	R 55
Art. 30216032018	R 70
Art. 30216126011	R 85
Art. 30217044005	R 125
Art. 30115428019	R 200


Art. 3853 7519 052	R 16 (Ø 32)
Art. 3853 7519 069	R 21 (Ø 42)
Art. 3853 7519 059	R 25 (Ø 52-57)
Art. 3853 7519 063	R 30 (Ø 62-67)
Art. 3853 7519 104	R 40 (Ø 77-92)
Art. 3853 7519 183	R 55 (Ø 102-127)
Art. 3853 7519 185	R 70 (Ø 132-152)
Art. 3853 7519 003	R 85 (Ø 162-182)
Art. 3853 7519 010	R 125 (Ø 200-275)
Art. 3853 7519 015	R 200 (Ø 300-600)

Art. 3853 7325 045	Ø 10 mm
Art. 3853 7325 047	Ø 12 mm
Art. 3853 7325 049	Ø 14 mm
Art. 3853 7325 052	Ø 16 mm
Art. 3853 7325 055	Ø 18 mm
Art. 3853 7325 057	Ø 20 mm
Art. 3853 7325 059	Ø 25 mm
Art. 3853 7325 061	Ø 28 mm
Art. 3853 7325 063	Ø 30 mm
Art. 3853 7325 065	Ø 32 mm
Art. 3853 7325 066	Ø 35 mm

Art. 1017 0429 040 **Ø 35 mm**

Positioning of segments for drill bits

For equipment with 2,9 kW power

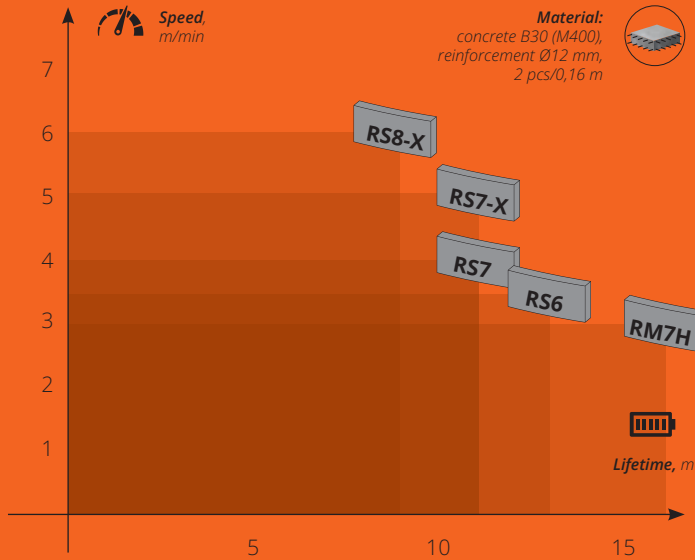


Performance parameters are given for following conditions:

- drill bit diameter **112 mm**;
- concrete **B30 (M400)**;
- armature 2 pcs, diameter **12 mm**;
- rotation speed **640 RPM**;
- water supply **5,0 l/min**;
- machine power **2,0 kW**;
- air temperature **+20 °C**.

The data is for information only. Under different conditions performance parameters may vary.

For equipment with 3,0 kW power

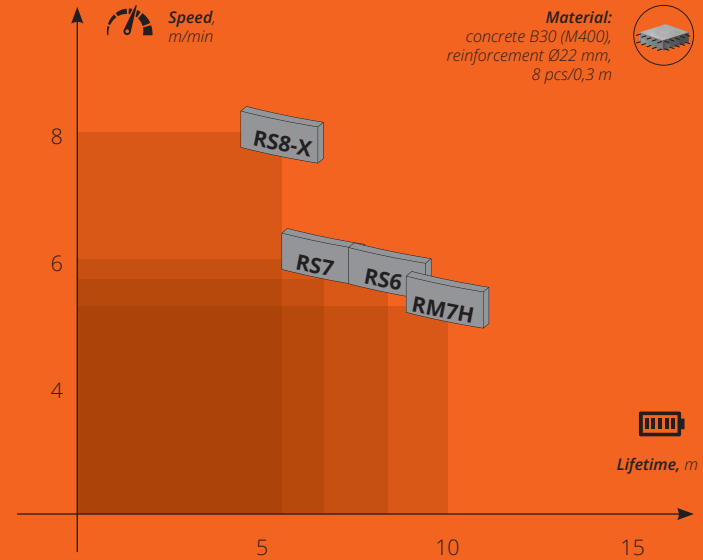

Performance parameters are given for following conditions:

- drill bit diameter **112 mm**;
- concrete **B30 (M400)**;
- armature 8 pcs, diameter **22 mm**;
- rotation speed **640 RPM**;
- water supply **5,0 l/min**;
- machine power **3,2 kW**;
- air temperature **+20 °C**.

The data is for information only. Under different conditions performance parameters may vary.



DBD **RM8-X** 450 1 1/4 UNC

Lifetime ●●●●●
 Drilling of reinforcement ●●●●●
 Lifetime ●●●●●



- Fast drilling of heavily reinforced concrete.
- Easy and comfortable drilling into the material.
- DIAFIX technology provides stable drilling speed on each drilling step.

Art. 10170085169	Ø 42 mm
Art. 10170085170	Ø 47 mm
Art. 10170085182	Ø 52 mm
Art. 10170085155	Ø 62 mm
Art. 10170085173	Ø 72 mm
Art. 10170429050	Ø 77 mm
Art. 10170085232	Ø 82 mm
Art. 10170085229	Ø 92 mm
Art. 10170085224	Ø 102 mm
Art. 10170085185	Ø 112 mm
Art. 10170085561	Ø 122 mm
Art. 10170085213	Ø 126 mm
Art. 10170085218	Ø 132 mm
Art. 10170085235	Ø 142 mm
Art. 10170085188	Ø 152 mm
Art. 10170085143	Ø 162 mm
Art. 10170085140	Ø 172 mm
Art. 10170085137	Ø 182 mm
Art. 10170085205	Ø 200 mm
Art. 10170085221	Ø 250 mm
Art. 10170085510	Ø 280 mm
Art. 10170085202	Ø 300 mm



DLD **RS7-X** 450 1 1/4 UNC

Lifetime ●●●●●
 Drilling of reinforcement ●●●●●
 Lifetime ●●●●●



- Segment with arranged diamonds.
- Provides stable drilling of hard highly-reinforced concrete.
- Stable cutting speed in different conditions (horizontal, deep drilling).

Art. 3790 3450 065	Ø 32 mm
Art. 3790 3450 069	Ø 42 mm
Art. 3790 3450 071	Ø 47 mm
Art. 3790 3450 073	Ø 52 mm
Art. 3790 3450 074	Ø 57 mm
Art. 3790 3450 077	Ø 62 mm
Art. 3790 3450 080	Ø 72 mm
Art. 3790 3450 082	Ø 77 mm
Art. 3790 3450 084	Ø 82 mm
Art. 3790 3450 086	Ø 92 mm
Art. 3790 3450 087	Ø 102 mm
Art. 3790 3450 089	Ø 112 mm
Art. 3790 3450 090	Ø 122 mm
Art. 3790 3450 091	Ø 126 mm
Art. 3790 3450 092	Ø 132 mm
Art. 3790 3450 093	Ø 142 mm
Art. 3790 3450 094	Ø 152 mm
Art. 3790 3450 096	Ø 162 mm
Art. 3790 3450 097	Ø 172 mm
Art. 3790 3450 098	Ø 182 mm
Art. 3790 3450 015	Ø 200 mm
Art. 3790 3450 101	Ø 225 mm
Art. 3790 3450 019	Ø 250 mm
Art. 3790 3450 022	Ø 300 mm
Art. 3780 3450 024	Ø 350 mm
Art. 3780 3450 026	Ø 400 mm
Art. 3780 3450 028	Ø 450 mm
Art. 3780 3450 031	Ø 500 mm



DLD **RS6** 450 1 1/4 UNC

Speed ● ● ● ●
 Drilling of reinforcement ● ● ● ● ● ● ● ●
 Lifetime ● ● ● ●



• Universal segment for the most kinds of work.

EXTENSION
1 1/4"



Art. 3790 3370 065	Ø 32 mm
Art. 3790 3370 069	Ø 42 mm
Art. 3790 3370 071	Ø 47 mm
Art. 3790 3370 073	Ø 52 mm
Art. 3790 3370 074	Ø 57 mm
Art. 3790 3370 077	Ø 62 mm
Art. 3790 3370 080	Ø 72 mm
Art. 3790 3370 082	Ø 77 mm
Art. 3790 3370 083	Ø 82 mm
Art. 3790 3370 086	Ø 92 mm
Art. 3790 3370 087	Ø 102 mm
Art. 3790 3370 089	Ø 112 mm
Art. 3790 3370 090	Ø 122 mm
Art. 3790 3370 091	Ø 126 mm
Art. 3790 3370 092	Ø 132 mm
Art. 3790 3370 093	Ø 142 mm
Art. 3790 3370 094	Ø 152 mm
Art. 3790 3370 096	Ø 162 mm
Art. 3790 3370 097	Ø 172 mm
Art. 3790 3370 098	Ø 182 mm
Art. 3790 3370 099	Ø 202 mm
Art. 3790 3370 101	Ø 225 mm
Art. 3790 3370 009	Ø 250 mm
Art. 3790 3370 022	Ø 300 mm
Art. 3780 3370 024	Ø 350 mm
Art. 3780 3370 026	Ø 400 mm
Art. 3780 3370 028	Ø 450 mm
Art. 3780 3370 031	Ø 500 mm



DLD **RS7** 450 1 1/4 UNC

Speed ● ● ● ●
 Drilling of reinforcement ● ● ● ● ● ● ● ●
 Lifetime ● ● ● ●




• Soft segment.
 • High drilling speed even on hard reinforced concrete.

Art. 3790 3521 065	Ø 32 mm
Art. 3790 3521 069	Ø 42 mm
Art. 3790 3521 071	Ø 47 mm
Art. 3790 3521 073	Ø 52 mm
Art. 3790 3521 074	Ø 57 mm
Art. 3790 3521 077	Ø 62 mm
Art. 3790 3521 080	Ø 72 mm
Art. 3790 3521 082	Ø 77 mm
Art. 3790 3521 083	Ø 82 mm
Art. 3790 3521 086	Ø 92 mm
Art. 3790 3521 087	Ø 102 mm
Art. 3790 3521 089	Ø 112 mm
Art. 3790 3521 090	Ø 122 mm
Art. 3790 3521 091	Ø 126 mm
Art. 3790 3521 092	Ø 132 mm
Art. 3790 3521 093	Ø 142 mm
Art. 3790 3521 094	Ø 152 mm
Art. 3790 3521 096	Ø 162 mm
Art. 3790 3521 097	Ø 172 mm
Art. 3790 3521 098	Ø 182 mm
Art. 3790 3521 015	Ø 200 mm
Art. 3790 3521 101	Ø 225 mm
Art. 3790 3521 019	Ø 250 mm
Art. 3790 3521 022	Ø 300 mm



NEW



DIAMOND SEGMENTS

for wall cutting
saws

RPZ RS-X

Speed
Cutting of reinforcement
Lifetime



- Segment with arranged diamonds for consistently high performance.
- Quick start thanks to a stepped work surface.
- Improved laser welding thanks to a diamond-free layer.
- Laserweldable segments.

RPZ RM-X

Speed
Cutting of reinforcement
Lifetime



ARPV RS-2U

Speed
Reinforcement
Lifetime



- Special segment shape and unique formula provide very fast cutting of highly reinforced concrete.
- Fast cutting of longitudinal reinforcement.
- Recommended for the machines up to 15 kWt.

RS-X

Art. 3863 7074 187	4,5 mm
Art. 3863 7326 187	5,0 mm


RM-X

Art. 3863 7386 187	4,5 mm
Art. 3863 7393 187	5,0 mm

Art. 3863 7068 001	4,5 mm
Art. 3863 7068 000	5,0 mm

Positioning of segments for wall saws

Machines **up to 15 kWt**

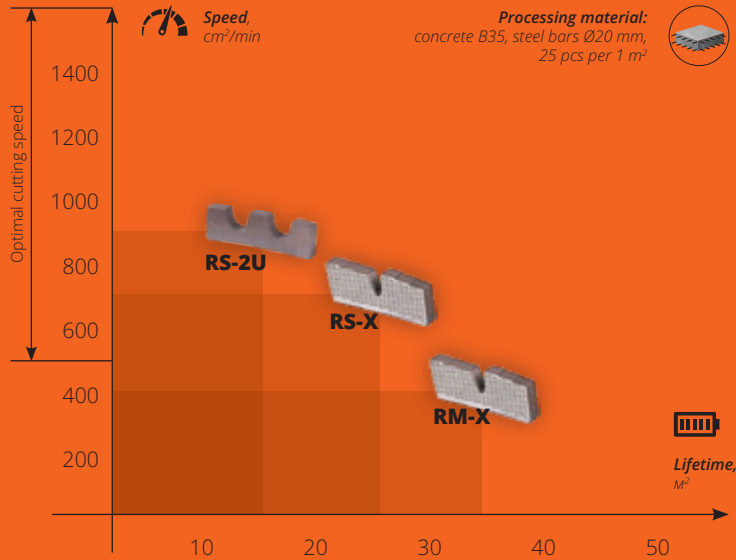


Performance parameters are given for:

- blade diameter 800 mm
- segment thickness 4.5 mm
- concrete B35
- 25 steel bars $\varnothing 20$ mm per meter
- water cooling 15 l/min
- machine power **10 kWt**
- ambient temperature $+20$ °C

The data is for information only. In different operating conditions the performance parameters may vary.

Machines **over 15 kWt**

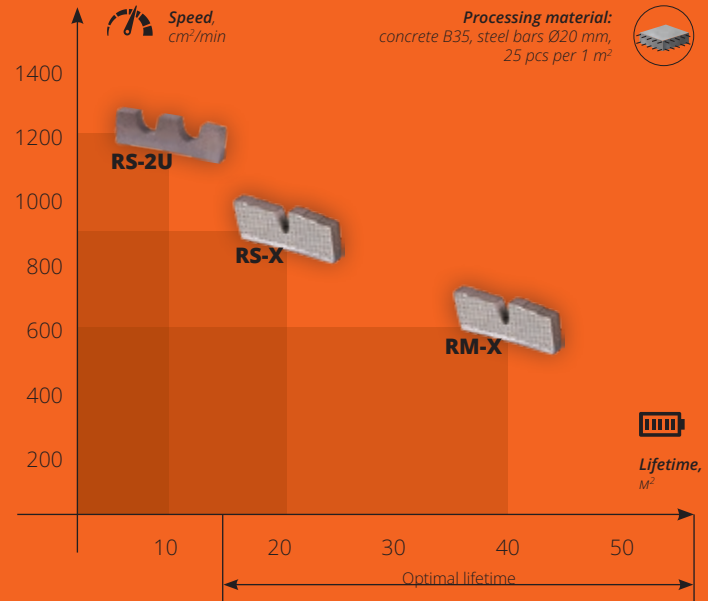

Performance parameters are given for:


- blade diameter 800 mm
- segment thickness 4.5 mm
- concrete B35
- 25 steel bars $\varnothing 20$ mm per meter
- water cooling 15 l/min
- machine power **20 kWt**
- ambient temperature $+20$ °C

The data is for information only. In different operating conditions the performance parameters may vary.




DIAMOND BLADES

for power/electric
cutters
and floor saws

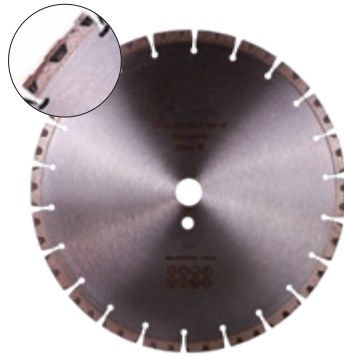

CHG **RM-W**

Speed
Cutting of reinforcement
Lifetime



- This special W-like profile of segments makes this blade very fast when cutting concrete and reinforcements. Affordable price.

Art. 3432 0065 022	Ø 300 mm
Art. 3432 0065 024	Ø 350 mm
Art. 3432 0065 026	Ø 400 mm




CLG **RS-Z**

Speed
Cutting of reinforcement
Lifetime



- Aggressive design of segment in combination with very hard diamonds allows to work with hard heavy-reinforcement concrete.

Art. 3218 5075 171	Ø 300 mm
Art. 3218 5075 160	Ø 350 mm
Art. 3218 5075 121	Ø 400 mm
Art. 3218 5075 161	Ø 450 mm
Art. 3218 5075 157	Ø 500 mm
Art. 3218 5075 162	Ø 600 mm

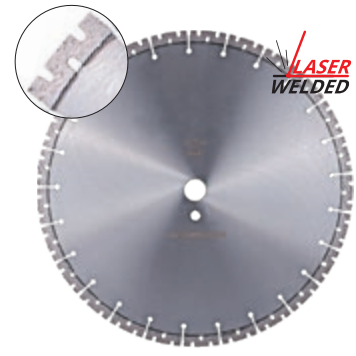

CLG **RS-M**



Speed
Cutting of reinforcement
Lifetime



- Exceptional cutting speed with a specially shaped segment.
- Ultra-easy cutting.
- Recommended for gasoline cutoff saws without an adapter (floor-mounted).

Art. 3238 5073 022	Ø 300 mm
Art. 3238 5073 024	Ø 350 mm
Art. 3238 5073 026	Ø 400 mm
Art. 3238 5073 028	Ø 450 mm

Positioning of diamond cutting blades for concrete cutting on floor saws and power cutters

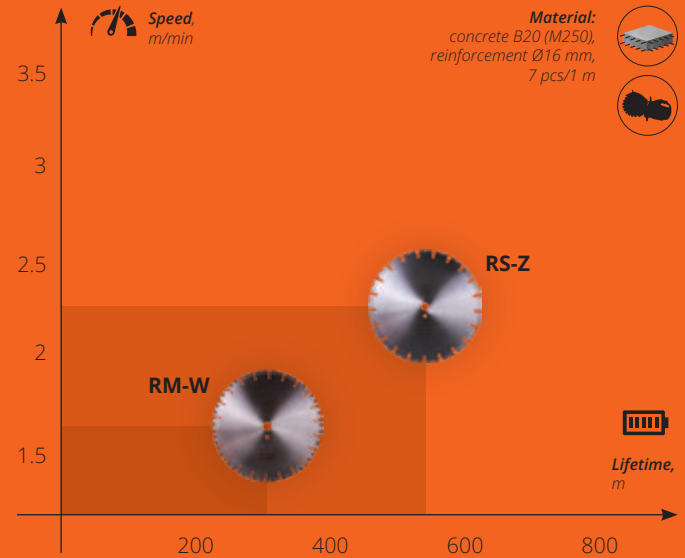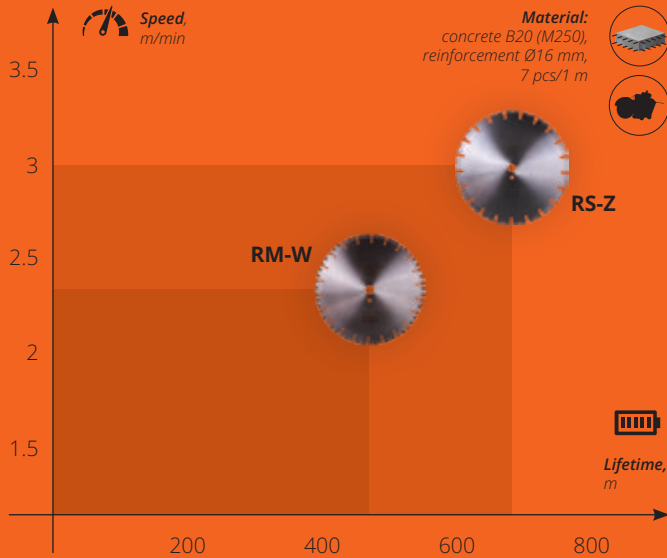

Performance parameters are given for following conditions:

- cutting the material indicated on the charts;
- cutting with 350 mm blade diameter;
- cutting depth – 110 mm;
- straight cutting;
- work with operational **floor saw** with power of 13 kW and rotation speed 2500 rpm, water cooling;
- at an air temperature of +25 °C.

The data is for information only. Under different conditions performance parameters may vary.

Performance parameters are given for following conditions:

- cutting the material indicated on the charts;
- cutting with 350 mm blade diameter;
- cutting depth – 110 mm;
- straight cutting;
- work with operational **petrol saw** with power of 4.3 kW and rotation speed 4700 rpm, water cooling, working with floor adapter;
- at an air temperature of +25 °C.

The data is for information only. Under different conditions performance parameters may vary.



**LASER
WELDED**



DIAFIX

**LASER
WELDED**

NEW



DIAMOND SHIELDS FOR WALL SAWS

CLW **RS-X** / CBW **RS-X**

Speed ●●●●●
Cutting of reinforcement ●●●●●
Lifetime ●●●●●



- For use on wall saws with a power of up to 15 kW.
- For low abrasion concrete with medium and heavy reinforcement.

CLW **RM-X** / CBW **RM-X**

Speed ●●●●●
Cutting of reinforcement ●●●●●
Lifetime ●●●●●



- For use on wall saws with a power of over 15 kW.
- For low abrasion concrete with medium and heavy reinforcement.

CLW **RS-2U**

Speed ●●●●●
Cutting of reinforcement ●●●●●
Lifetime ●●●●●



- The shape of the segment and its composition ensures high cutting speed of reinforced concrete.
- Fast cutting even of longitudinal reinforcement.
- Recommended for use on machines with a power of up to 15 kW.

Diameter, mm	Segment thickness, mm	Number of segments, pcs.	Art. CLW RS-X	Art. CLW RM-X	Art. CLW RS-2U
600	4,5	36	3219 0074 035	3219 0404 134	3218 5068 034
700	4,5	44	3608 5074 182	3609 0404 183	3609 0068 182
800	4,5	46	3609 0074 039	3609 0386 039	-
800	5,0	46	3609 0074 038	3609 0386 040	3609 0068 037
1 000	4,5	54	3609 0074 129	3609 0404 129	3609 0068 129
1 200	4,5	64	3609 0074 119	3609 0386 119	3609 0068 119
1 600	4,5	80	-	-	-




DIAMOND BLADES

for angle grinders

CHH RM-W

Speed
Cutting of reinforcement
Lifetime



- Special profile of segments creates better conditions for cutting of concrete and reinforcements.
- Very high cutting speed at affordable price.
- The indicator changes color to **red** when the blade is overloaded

AIRCHASER
115-125, 230
CHASING WITHOUT DUST



Art. 3431 5380 017 Ø 230 mm


Load indicator



Curvilinear cutting



Extreme loads



Skewness of the blade



Continuous operation

ADAPTERS, EXTENSION CABLES FOR DRILLING



**MAGNET ADAPTER
M16 x SDS PLUS**

- Outer thread M16 with a SDS Plus shank.
- Used for hammer drills with the SDS Plus socket.
- Possible to use with the socket drills.

Art. 277 326



**ADAPTER
1 1/4\"H x 1/2\"H GAS**

- Inner thread 1 1/4\" UNC, inner thread 1/2 GAS.

Art. 200 342



**ADAPTER
1 1/4\"G x 1/2\"G GAS**

- Outer thread 1 1/4\" UNC, outer thread 1/2 GAS.

Art. 257 724



EXTENSION 1/2 GAS

- Shank 1/2 GAS.

Art. 251 222	200 mm
Art. 251 223	300 mm
Art. 251 224	500 mm



EXTENSION 1 1/4"

- Shank 1 1/4 UNC.

Art. 299 050	200 mm
Art. 299 052	300 mm
Art. 299 054	500 mm



EXTENSION 1 1/4G UNC X1/2H GAS DD130/150/160

- The adapter is suitable for diamond drill units DD 130/150/160.


Art. 276 582



EXTENSION 41X25 DD200/DD350

- The adapter is suitable for diamond drill units DD 200/350.

Art. 277 871

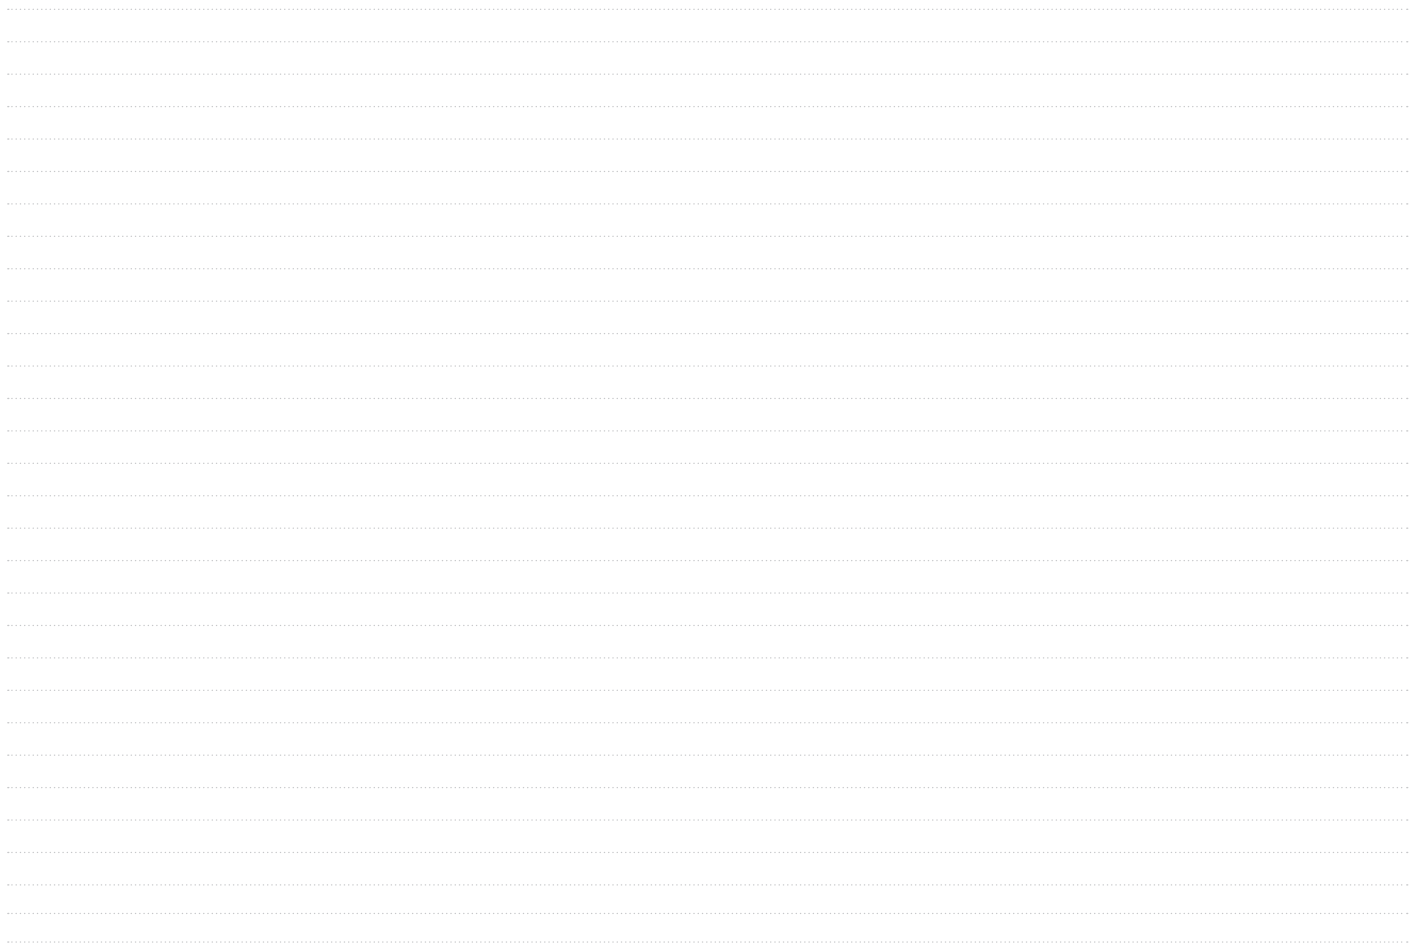

A series of horizontal dotted lines for writing, consisting of 20 rows.

Legend Distar

Materials



Glazed ceramic tile



Hard marble



Porcelain gres



The sandstone



Granite



Sandstone



Fine-grained concrete, paving slabs



Brick



Brick solid solid, clinker



Unreinforced concrete, concrete pipes



Reinforced concrete



High-reinforced concrete



Green concrete



Asphalt

Equipment and working conditions



Chaser



Angle grinder



Floor tile cutter



Drilling rig



Gas cut / electro cut



Floor saw



Stationary equipment



Drill



Battery Drill



Working with/without cooling

EN13236

ISO 9001 : 2015
14001 : 2015
45001 : 2018
MANAGEMENT SYSTEM
CERTIFIED BY **AENOR**

