

L901AE

1RU, 2x 1GbE RJ45, 4x 1/10GbE SFP+,
1x SD/HD/3G-SDI, 1x LTC



PHYSICAL

Dimensions (W x H x D)	43.4 cm x 4.28 cm x 53.45 cm 17.09 in x 1.7 in x 21.04 in Bezel adds 1.27 cm/.5 in to depth
Weight	13.93 kg (Unit) 19.17 kg (Gross)
ECCN	5A992
USHTS Code	8471.50.0150

ELECTRICAL

Max Potential Power	143 Watts (Max)
Heat Dissipation	488 BTU/hr (Max)
AC Power Option	100-240 VAC (Input Voltage) 50-60 Hz (Line Frequency)
AC PSU Connector	C14



ENVIRONMENTAL


Operating Conditions	10 to 35° C (50 to 95° F) 8% to 80% RH (non-condensing)
Storage Conditions	-40 to 65°C (-40 to 149° F) 5% to 95% RH (non-condensing)
Noise Level	58 dBA (Max)
Electromagnetic Compliance	EN 55032 EN 55035 EN 61000
Safety Compliance	EN 62368 IEC 62368 IEC 62311 EN 62479

SYSTEM

System Management	iDRAC9 Enterprise
Storage Capacity	480GB Redundant Storage
I/O Interfaces	2x 1GbE RJ45 4x 1/10GbE SFP+ 1x SD/HD/3G-SDI 1x LTC

This system does not support uncompressed IP inputs or outputs.

PORT CONFIGURATION

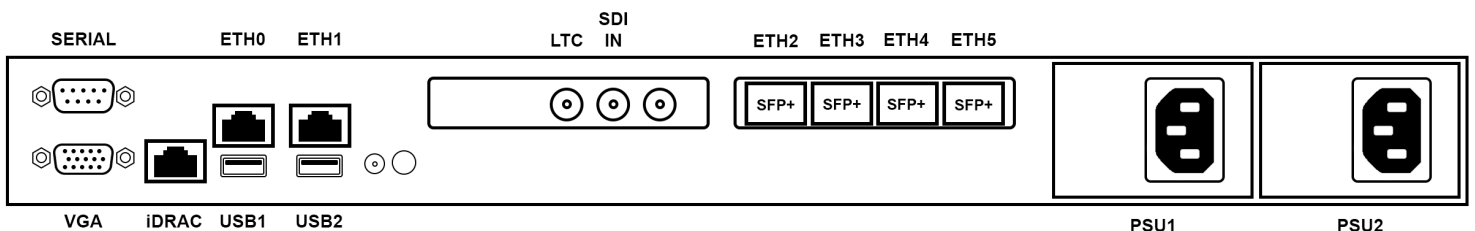

L901AE

1RU, 2x 1GbE RJ45, 4x 1/10GbE SFP+,
1x SD/HD/3G-SDI, 1x LTC

Supported Transceiver Modules

Transceiver	Form	Mode	Link Distance	Spare P/N	OEM	OEM Part Number
1000BASE-T RJ45	SFP	N/A	100 m	SP426	FS.com	SFP-GB-GE-T/112161
10GBASE-LR Fiber Optic	SFP+	Single-mode	10 km	SP477	FS.com	SFP-10GLR-31/36432
10GBASE-SR Fiber Optic	SFP+	Multi-mode	300 m	SP476	FS.com	SFP-10GSR-85/36431

Spare Parts and Services

Part Name	Part Number
600W AC Power Supply	SP446
1RU Bezel Kit	SP440
IO Conversion Service Fee = \$1200	SP493