

# L903AE

1RU, 2x 1GbE RJ45, 4x 1/10GbE SFP+,  
1x SD/HD/3G-SDI, 1x LTC



## PHYSICAL

<b>Dimensions (W x H x D)</b>	43.4 cm x 4.28 cm x 53.45 cm 17.09 in x 1.7 in x 21.04 in Bezel adds 1.27 cm/.5 in to depth
<b>Weight</b>	13.93 kg (Unit) 19.17 kg (Gross)
<b>ECCN</b>	5A992
<b>USHTS Code</b>	8471.50.0150

## ELECTRICAL

<b>Max Potential Power</b>	158 Watts (Max)
<b>Heat Dissipation</b>	539 BTU/hr (Max)
<b>AC Power Option</b>	100-240 VAC (Input Voltage) 50-60 Hz (Line Frequency)
<b>AC PSU Connector</b>	C14



## ENVIRONMENTAL


<b>Operating Conditions</b>	10 to 35° C (50 to 95° F) 8% to 80% RH (non-condensing)
<b>Storage Conditions</b>	-40 to 65°C (-40 to 149° F) 5% to 95% RH (non-condensing)
<b>Noise Level</b>	58 dBA (Max)
<b>Electromagnetic Compliance</b>	EN 55032 EN 55035 EN 61000
<b>Safety Compliance</b>	EN 62368 IEC 62368 IEC 62311 EN 62479

## SYSTEM

<b>System Management</b>	iDRAC9 Enterprise
<b>Storage Capacity</b>	480GB Redundant Storage
<b>I/O Interfaces</b>	2x 1GbE RJ45 4x 1/10GbE SFP+ 1x SD/HD/3G-SDI 1x LTC

This system does not support uncompressed IP inputs or outputs.

## PORT CONFIGURATION

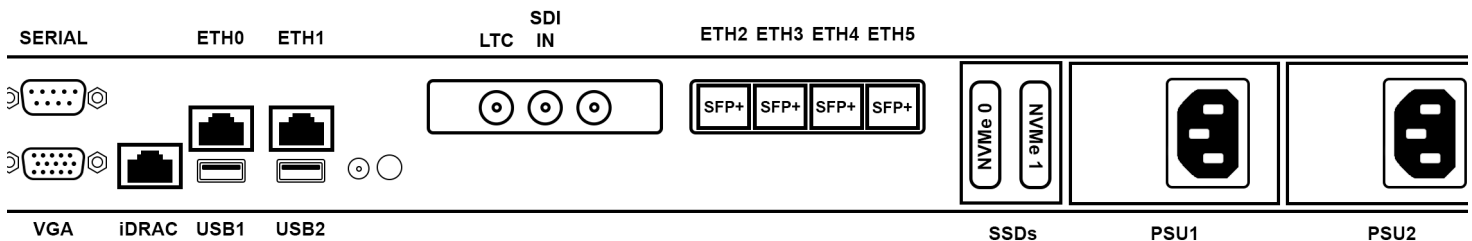

# L903AE

1RU, 2x 1GbE RJ45, 4x 1/10GbE SFP+,  
1x SD/HD/3G-SDI, 1x LTC

---

## Supported Transceiver Modules

Transceiver	Form Factor	Mode	Link Distance	Spare P/N	OEM	OEM Part Number
1000BASE-T RJ45	SFP	N/A	100 m	SP426	FS.com	SFP-GB-GE-T/112161
10GBASE-LR Fiber Optic	SFP+	Single-mode	10 km	SP477	FS.com	SFP-10GLR-31/36432
10GBASE-SR Fiber Optic	SFP+	Multi-mode	300 m	SP476	FS.com	SFP-10GSR-85/36431

## Spare Parts and Services

Part Name	Part Number
600W AC Power Supply	SP446
1RU Bezel Kit	SP440
IO Conversion Service Fee = \$1200	SP493