

RA-20

Remote Annunciator Module

Together with GCU-20 Module or other ECU with Annunciator output

Features

- Works Up to 1500 Meters from The Host Module Using 18 AWG Cable (@12/24VDC)
- Universal LED Graphic Interface, Displays Generator Status and Failures
- Modular Design, Quick Installation
- Circuits are Finger Safe with UL94-V0 Epoxy Protection
- Simplify All Wiring with Pluggable Terminal Block
- Easy Assembly & Maintenance with No Chance of Wiring Mistakes




Icon Reference Table

Icon	Description	Icon?	Description
	Low Oil Pressure Alarm Auxiliary Alarm (Flashing)		Wrong speed Alarm No Speed Signal Alarm (Flashing)
	High Water Temperature Alarm		Engine Running Indicator Engine IDLE Indicator (Flashing)
	Over Crank Alarm		Common Alarm Indicator

Specifications?

Rated Input Voltage	9.0 to 36 VDC	Operating Temperature	-20~+70 ?
Working Distance from Host ECU	1500 Meters	Relative Humidity	Maximum 95%
Standard Cable	18 AWG	Dimensions	88.0 (L) x 88.0 (W) x 37.5 (H) mm
Terminal Block Capacity	300 VAC / 15A	Weight	150 gram
Power Consumption	Under 1.0 VA		

Mechanical Specifications (Unit : mm[inch])

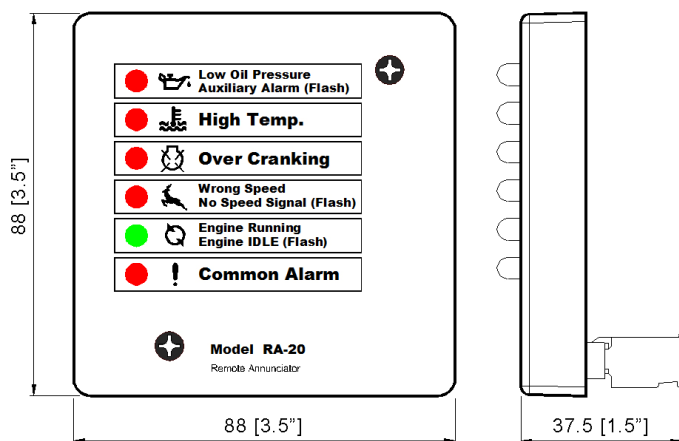

Installing Panel

