



MUSSON RUBBER GRIT-SURFACE ALUMINUM STAIR TREADS

2.5" Single Cavity


[Available with Reflective Stripe Insert]

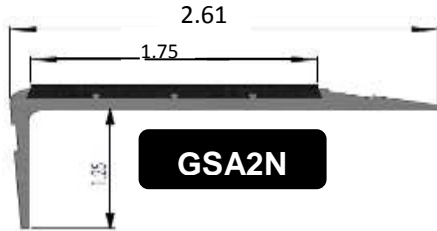


7.5" Double Cavity [Available with Reflective Stripe Insert]

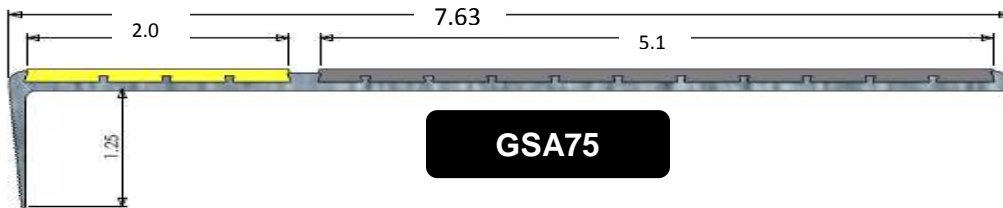

9" Double Cavity [Available with Reflective Stripe Insert]

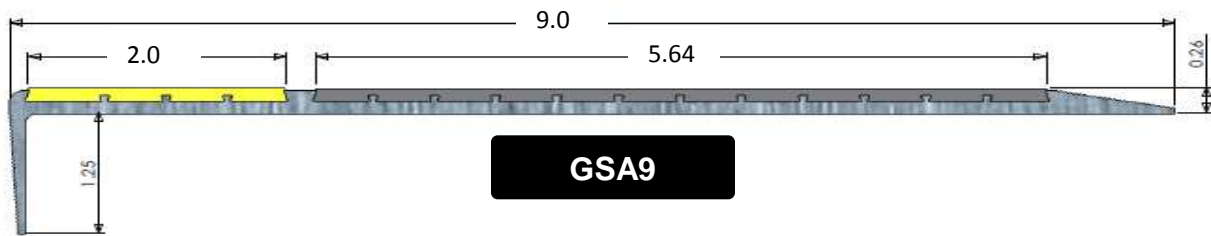

11" Double Cavity

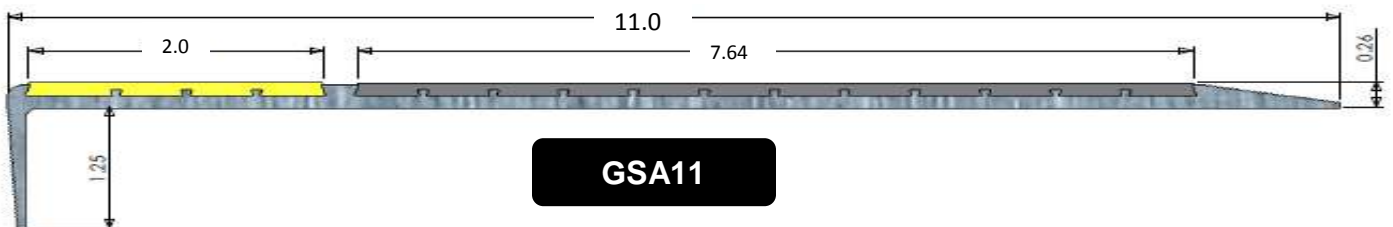

THE R.C. MUSSON RUBBER CO.



1320 E. ARCHWOOD AVE. • P.O. BOX 7038 • AKRON, OH 44306-0038
E-mail: info@mussonrubber.com • www.mussonrubber.com

(330) 773-7651
1-800-321-2381

FAX (330) 773-3254



GRIT SURFACE ALUMINUM STAIR TREADS

Musson Part #	Description	
GSA2N	2.5" Tread	Specify Color & Length up to 120"; optional stripe
GSA75	7.5" Tread; Double Cavity	Specify Color & Length up to 120"
GSA9	9" Tread; Double Cavity	Specify Color & Length up to 120"
GSA11	11" Tread; Double Cavity	Specify Color & Length up to 120"
All NS2 treads are available in 2 color combinations to meet ADA recommendations		
GREY • RED • BROWN • YELLOW • GLOW • BLACK • BLUE • GREEN		

INSTALLATION

Grit Surface Aluminum Treads are made to order and ready to install upon delivery. All treads come with pre-drilled counter-sunk holes. For concrete and wood applications, use stainless steel #10 screws. For steel applications, use a stainless steel machine screw-- all screws should be 1 ¼" – 1 ½" in length. Commercial adhesive such as Liquid Nail should be used when installing the treads to create a gasket between the tread and the step surface. Surface must be level, smooth, dry and clean of debris. Treads should not be installed when surface temperatures are below adhesive recommendations.

MAINTENANCE

Surface can be swept to remove and loosen dirt. Treads can be cleaned using a general purpose industrial floor cleaner. For encrusted dirt, use a stiff bristled brush with industrial cleaner. Treads can be pressure sprayed up to 1000 psi. Aluminum Nose: For spots, marks and scuffs, use green Scotch-Brite pad. Polish in length-wise direction.

THE R.C. MUSSON RUBBER CO.



1320 E. ARCHWOOD AVE. • P.O. BOX 7038 • AKRON, OH 44306-0038
E-mail: info@mussonrubber.com • www.mussonrubber.com

(330) 773-7651
1-800-321-2381

FAX (330) 773-3254