

Sennheiser Documentation App



or online at
www.sennheiser.com/download
 evolution wired_



e 609 silver

Quick Guide
 Kurzanleitung
 Guide rapide
 Guida rapida
 Guía de inicio rápido
 Guia rápido
 Beknopte handleiding
 Krótka instrukcja obsługi
 Snabbguide

Kvikstartguide
 Pikaohje
 Γρήγορος οδηγός
 Kısa Kılavuz
 Краткая инструкция
 快速指南
 快速使用指南
 クイックガイド
 퀵 가이드


Sennheiser electronic GmbH & Co. KG

Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com

Printed in Germany
 Publ. 07/18, 581326/A01


SENNHEISER

Setup




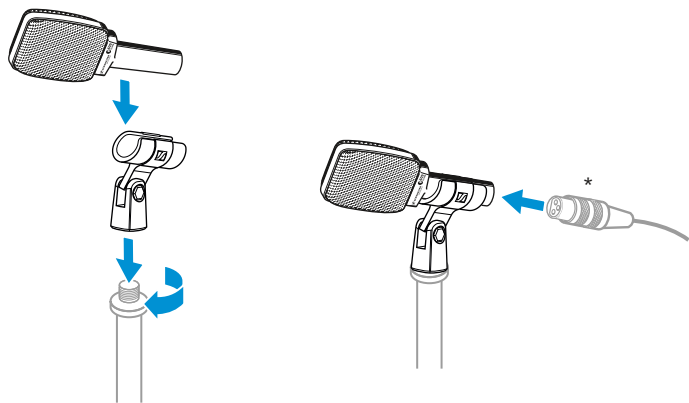


*XLR-3 cable not included


In the box

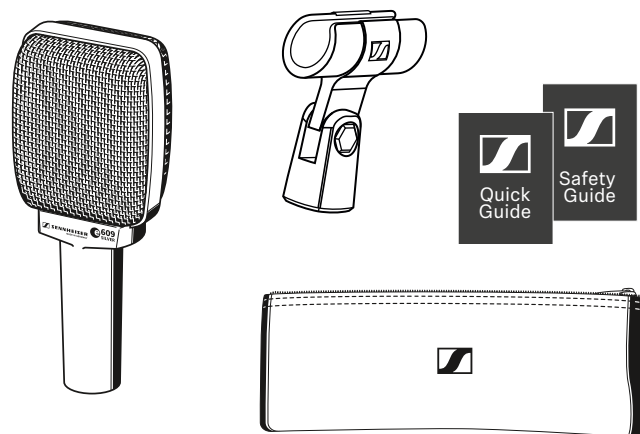

Overview

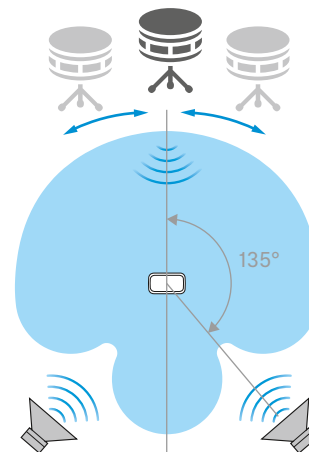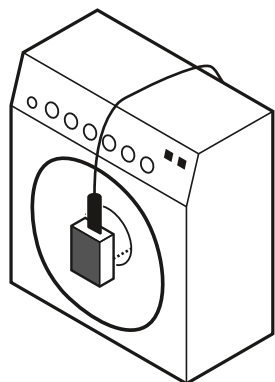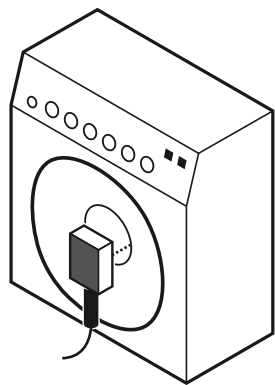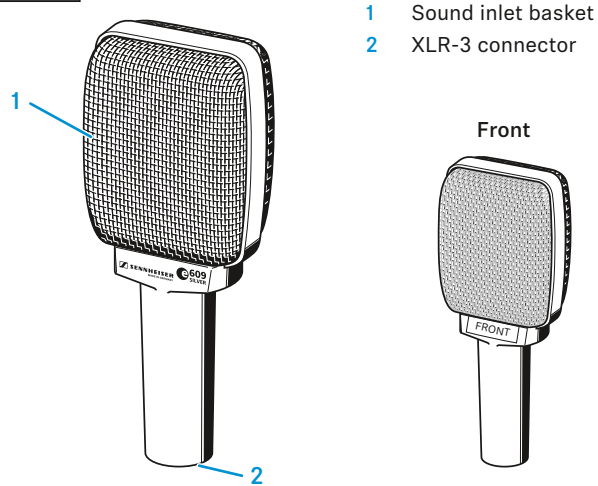


Cleaning

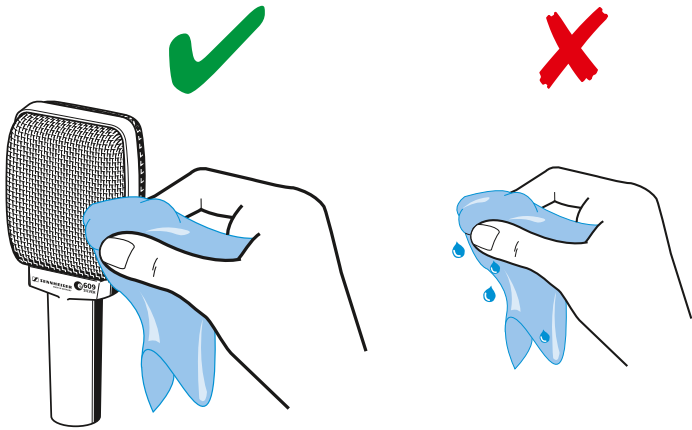

Specifications

Transducer principle	dynamic
Frequency response	40 - 15,000 Hz
Pick-up pattern	super-cardioid
Sensitivity (free field, at 1 kHz)	1.5 mV/Pa
Nominal impedance (at 1 kHz)	350 Ω
Min. terminating impedance	1 kΩ
Connector	XLR-3
Dimensions	134 x 55 x 34 mm
Weight	140 g

Connector assignment

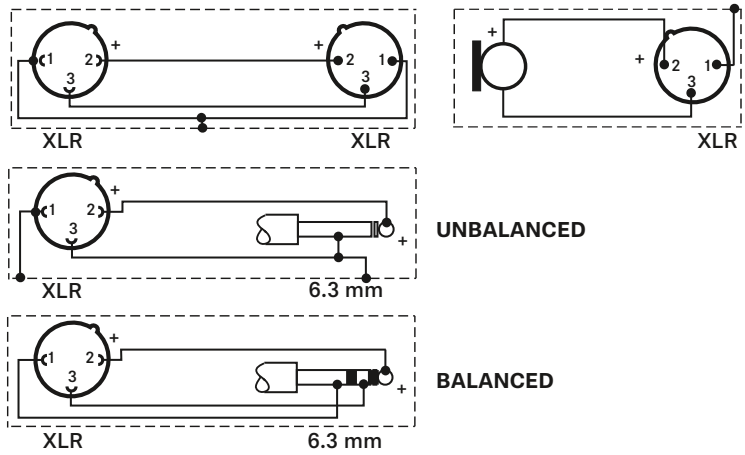

Polar pattern and frequency response

