



Ductless Split Systems

Carrier
turn to the experts™ 

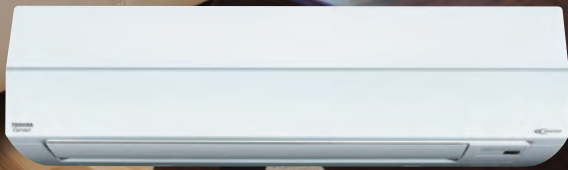

TOSHIBA
Carrier

Right Product for the
Right Application

Ductless Split Systems

Right Product for the Right Application

1:1

2:1 to 5:1



9-24K High Walls




18-24/36/42/60K
High Walls, Cassette,
Underceiling



2:1 to 5:1 High Walls
Outdoor: 18 - 42K
Indoor: 9/12/18K

18.0 - 23.0
SEER

TOSHIBA
Carrier
RAS Series



TOSHIBA
Carrier
RAV Series



16.0
SEER

Carrier
GV Series

Carrier
GVM Series




13.0 SEER/
11.0 EER


Carrier
MV Series

Carrier
QN Series
KM Series
QA Series



Ductless Split Systems



Residential Ductless Split Systems



HIGH WALL						
Model	Appearance	Size	SEER	Series	Compressor Type	Page
RAS		9 - 22K	15.5 - 23.0	TOSHIBA <i>Carrier</i>	Variable-Speed (Inverter)	5
GV		9 - 36K	16.0	Performance SERIES	Variable-Speed (Inverter)	6 - 7
MV		9 - 24K	13.0	Comfort SERIES	Fixed Speed	8 - 9


MULTI-SPLIT HIGH WALL						
Model	Appearance	Size	SEER	Series	Compressor Type	Page
GVM	Up to FIVE 	FCU 9 - 18K CDU 18 - 42K	16.0	Performance SERIES	Variable-Speed (Inverter)	10 - 11

Light Commercial Ductless Split Systems

HIGH WALL						
Model	Appearance	Size	SEER	Series	Compressor Type	Page
RAV		18 - 24K	16.7 - 19.5	TOSHIBA <i>Carrier</i>	Variable-Speed (Inverter)	13
QN		18 - 36K	13.0	Performance SERIES	Fixed Speed	14 - 15

UNDERCEILING						
Model	Appearance	Size	SEER	Series	Compressor Type	Page
RAV		18 - 42K	17.0 - 20.6	TOSHIBA <i>Carrier</i>	Variable-Speed (Inverter)	16
QA		18 - 60K	13.0	Performance SERIES	Fixed Speed	17 - 18

CASSETTE						
Model	Appearance	Size	SEER	Series	Compressor Type	Page
RAV		18 - 42K	19.0 - 21.0	TOSHIBA <i>Carrier</i>	Variable-Speed (Inverter)	19
KM		18 - 36K	13.0	Performance SERIES	Fixed Speed	20 - 21

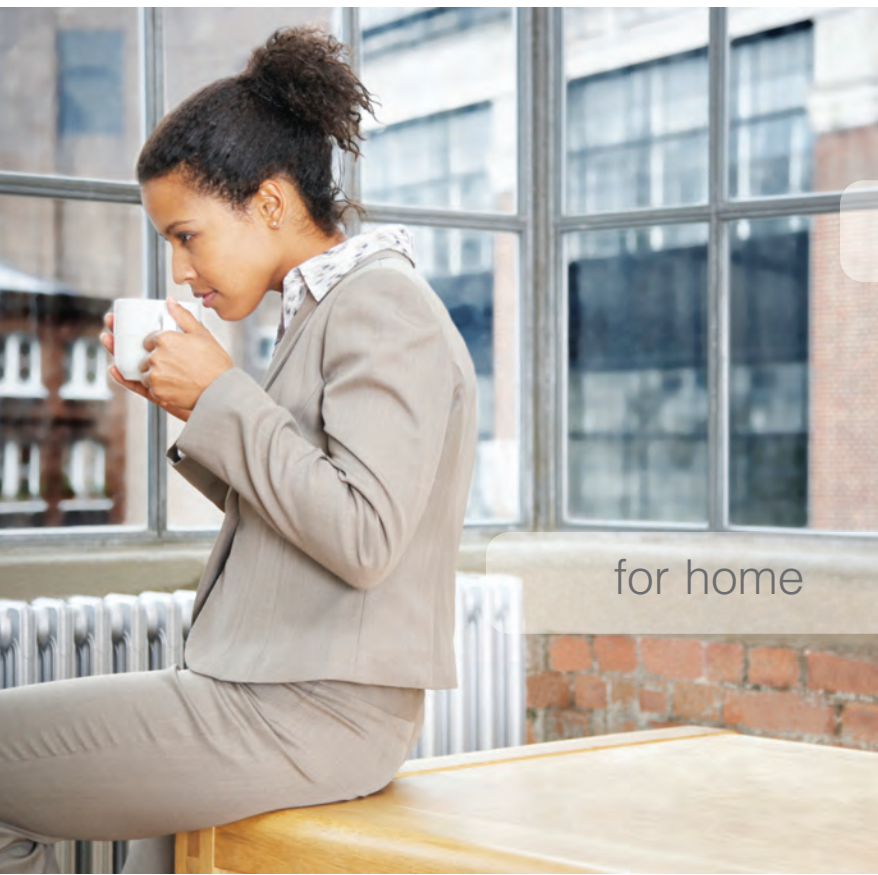

Residential Limited Warranty

To the original owner, Carrier stands behind its ductless products with a five-year parts and seven-year compressor limited warranty. See warranty certificate at carrier.com for complete details and restrictions. Be sure to ask your Carrier dealer about optional labor warranties.

RAS Series High Wall Systems

- Digital inverter compressor technology (9-24K)
- Up to 23.0 SEER, up to 11.0 HSPF
- R410A refrigerant
- Auto louver mode
- Wireless controller
- Turbo mode
- Timer, sleep mode
- One touch memory
- Quiet operation

TOSHIBA
Carrier

INVERTER




Toshiba-Carrier High Wall Heat Pump Systems						
System	Size	9	12	15	17	22
System	Outdoor Model	RAS-09LAV-UL	RAS-12LAV-UL	RAS-15LAV-UL	RAS-17LAV-UL	RAS-22LAV-UL
	Indoor Model	RAS-09LKV-UL	RAS-12LKV-UL	RAS-15LKV-UL	RAS-17LKV-UL	RAS-22LKV-UL
Performance	Tax Credit Eligible	*	*	*	*	*
	Cooling Rated Capacity Btu/h	9,000	12,000	15,000	16,200	21,400
	Cooling Cap. Range Min - Max Btu/h	3,750 - 10,580	2,750 - 13,950	2,750 - 17,050	3,750 - 20,450	4,100 - 22,500
	SEER / EER	20.0 / 13.0	23.0 / 12.6	20.0 / 13.0	19.0 / 12.6	15.5 / 8.3
	Heating Rated Capacity Btu/h	10,800	14,200	18,000	20,200	23,200
	Heating Cap. Range Min - Max Btu/h	3,070 - 16,350	3,070 - 19,000	2,750 - 21,500	2,750 - 21,500	3,450 - 24,350
Controls	HSPF	10		9		
	Wireless (°C, °F, Convertible)	Standard - Convertible				
Operating Range	Wired (°C, °F, Convertible)	Not Available				
	Cooling Outdoor Min - Max DB °F	14 - 115				
	Heating Outdoor WB Min - Max °F	5 - 75				
	Cooling Indoor DB Min - Max °F	70 - 90				
Piping	Heating Indoor DB Min - Max °F	32 - 82				
	Total Piping Length ft.	66'				
	Piping Lift ft.*	33'				
Electrical	Pipe Connection Size - Liq. (in.)	1/4"		1/4"		
	Pipe Connection Size - Vap. (in.)	3/8"		1/2"		
	Voltage	208/230-1-60				
	Power Supply	Indoor unit powered from outdoor unit				
Outdoor	Outdoor - MCA	10	13		15	
	Outdoor - Fuse Rating (MOCP)	15	20		25	
Outdoor	Dimensions (W x H x D) In.	30.7 x 21.7 x 11.4				
	Net Weight (lbs.)	75	88	91	93	
	Sound Pressure dBa (Clg / Htg)	47 / 47	50 / 50	51 / 51	52 / 52	53 / 53
Indoor	Dimensions (W x H x D) In.	31.1 x 10.8 x 8.1		41.3 x 12.6 x 8.9		
	Net Weight (lbs.)	20		29		
	Number of Fan Speeds	5				
	Airflow (lowest to highest) CFM	177 / 211 / 244 / 274 / 303	219 / 262 / 334 / 355 / 406	340 / 396 / 455 / 504 / 562	388 / 447 / 505 / 571 / 636	388 / 447 / 505 / 571 / 636
Sound Pressure dBa (lowest to highest) Clg	27 / 30 / 34 / 36 / 39	26 / 30 / 33 / 36 / 39	30 / 35 / 40 / 42 / 45	32 / 35 / 38 / 41 / 44	35 / 38 / 41 / 44 / 47	
Sound Pressure dBa (lowest to highest) Htg	28 / 32 / 35 / 37 / 40	32 / 36 / 41 / 43 / 46	32 / 35 / 39 / 41 / 44	32 / 35 / 39 / 41 / 44	35 / 38 / 42 / 44 / 47	

Per standard testing as described by ARI270-95
*Condensing unit above or below indoor unit



GV Series High Wall System

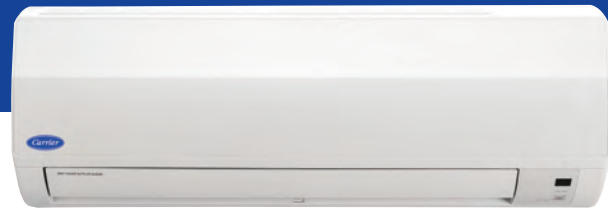

- Inverter compressor technology (9 -36K BTUH)
- Wireless remote, LED Display
- Low-voltage controls
- Sleep mode
- Indoor units powered from outdoor unit
- Auto restart on power failure
- Dehumidification mode


Performance
SERIES



Carrier Inverter High Wall Cooling Only Systems (GVC Series)							
Performance System	Size	9	12	12	18	24	36
Performance System	Outdoor Model	38GVC009---1	38GVC012---1	38GVC012---3	38GVC018---3	38GVC024---3	38GVC036---3
	Indoor Model	40GVC009---1	40GVC012---1	40GVC012---3	40GVC018---3	40GVC024---3	40GVC036---3
Performance	Cooling Rated Capacity Btu/h	9,000	11,800	12,000	18,000	22,000	33,600
	Cooling Cap. Range Min. - Max Btu/h	3,500 - 11,000	3,300 - 12,500	3,300 - 12,500	4,500 - 21,000	6,400 - 24,000	7,400 - 36,000
	SEER / EER	16.0 / 12.0	16.0 / 9.4	16.0 / 9.8	16.0 / 11.1	16.0 / 10.0	16.0 / 8.3
Controls	Wireless (°C, °F, Convertible)	Standard - Convertible					
	Wired (°C, °F, Convertible)	Not Available					
Operating Range	Cooling Outdoor Min - Max DB °F	64.4 - 113		5 - 109		5 - 118	
	Cooling Indoor DB Min - Max °F	61 - 95					
Piping	Total Piping Length ft.	50		82		98	
	Piping Lift ft.*	33					
	Pipe Connection Size - Mixed Phase (In.)	1/4					
	Pipe Connection Size - Vapor (In.)	3/8		1/2		5/8	
Electrical	Voltage	115-1-60		208 / 230-1-60			
	Power Supply	Indoor unit powered from outdoor unit					
	Outdoor - MCA	13	15	10	15	16	24
	Outdoor - Fuse Rating (MOCP)	20	25	15	25	25	35
Outdoor	Dimensions (W x H x D) In.	33.4 x 21.3 x 12.6		28.0 x 21.7 x 12.5	37.9 x 27.6 x 15.6	37.9 x 27.6 x 15.6	38.6 x 31.1 x 16.7
	Net Weight (lbs.)	75		63.8	112.2		161
	Sound Pressure dBa	53	55	52	56	53	65
Indoor	Dimensions (W x H x D) In.	30.3 x 11.1 x 7.9		34.0 x 12.0 x 8.5		39.7 x 12.6 x 8.7	53.1 x 12.8 x 10.0
	Net Weight (lbs.)	18.7	19.8	19.8	26.4	33.1	44.1
	Number of Fan Speeds	4					
	Airflow (L / M / H / T) CFM	188 / 224 / 277 / 330	200 / 235 / 288 / 341		271 / 330 / 400 / 471	353 / 412 / 471 / 588	677 / 706 / 824 / -
Sound Pressure dBa (L / M / H / T)	32 / 35 / 37 / 40		28 / 33 / 39 / 44		34 / 38 / 43 / 48	24 / 39 / 43 / 48	53 / 56 / 59 / -

Per standard testing as described by ARI270-95
*Condensing unit above or below indoor unit

GV Series High Wall System

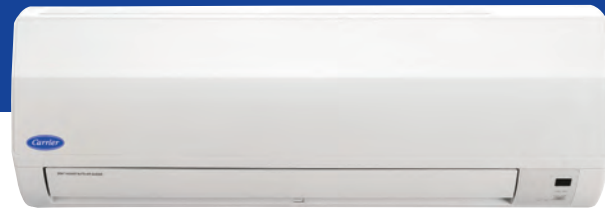

- Inverter compressor technology (9 -36K BTUH)
- Wireless remote, LED Display
- Low-voltage controls
- Sleep mode
- Indoor units powered from outdoor unit
- Auto restart on power failure
- Dehumidification mode

Performance
SERIES



Carrier Inverter High Wall Heat Pump Systems (GVQ Series)									
System	Size	9	12	12	18	24	30	36	
System	Outdoor Model	38GVQ009---1	38GVQ012---1	38GVQ012---3	38GVQ018---3	38GVQ024---3	38GVQ030---3	38GVQ036---3	
	Indoor Model	40GVQ009---1	40GVQ012---1	40GVQ012---3	40GVQ018---3	40GVQ024---3	40GVQ030---3	40GVQ036---3	
Performance	Cooling Rated Capacity Btu/h	9,000	11,800	12,000	18,000	22,000	28,000	33,600	
	Cooling Cap. Range Min. - Max Btu/h	3,500 - 11,000	3,300 - 12,500	3,300 - 12,500	4,500 - 21,000	6,400 - 24,000	9,500 - 30,000	7,400 - 36,000	
	SEER / EER	16.0 / 12.0	16.0 / 9.4	16.0 / 9.8	16.0 / 11.1	16.0 / 10.0	16.0 / 9.3	16.0 / 8.3	
	Heating Rated Capacity Btu/h	10,000	13,000	12,000	19,200	26,600	30,600	36,400	
	Heating Cap. Range Min - Max Btu/h	2,500 - 11,000	3,400 - 13,500	3,400 - 13,500	4,000 - 23,000	4,100 - 26,600	10,000 - 33,000	15,000 - 36,000	
	HSPF	8.6	8.6	8.5	8	9.5	8.2	8.2	
Controls	Wireless (°C, °F, Convertible)	Standard - Convertible							
	Wired (°C, °F, Convertible)	Not Available							
Operating Range	Cooling Outdoor Min - Max DB °F	64.4 - 113		5 - 109		50 - 118		5 - 109	
	Heating Outdoor DB Min - Max °F	5 - 75			19 - 75		5 - 75		17 - 75
	Cooling Indoor DB Min - Max °F	61 - 95							
	Heating Indoor DB Min - Max °F	55 - 80							
Piping	Total Piping Length ft.	50			82		98		
	Piping Lift ft.*	33							
	Pipe Connection Size - Mixed Phase (In.)	1 / 4							
	Pipe Connection Size - Vapor (In.)	3 / 8			1 / 2		5 / 8		
Electrical	Voltage	115-160			208 / 230-1-60				
	Power Supply	Indoor unit powered from outdoor unit							
	Outdoor - MCA	13	15	10	15	16	20	24	
	Outdoor - Fuse Rating (MOCP)	20	25	15	25	25	30	40	
Outdoor	Dimensions (W x H x D) In.	33.4 x 21.3 x 12.6		28.0 x 21.7 x 12.5		37.9 x 27.6 x 15.6		38.6 x 31.1 x 16.7	
	Net Weight (lbs.)	75		63.8		112.2		154	
	Sound Pressure dBa	53	55	52	56	56	62	65	
Indoor	Dimensions (W x H x D) In.	30.3 x 11.1 x 7.9			34.0 x 12.0 x 8.5		39.7 x 12.6 x 8.7		53.1 x 12.8 x 10.0
	Net Weight (lbs.)	18.7	19.8		26.4	33.1		44.1	
	Number of Fan Speeds	4							
	Airflow (L / M / H / T) CFM	188 / 224 / 277 / 330	200 / 235 / 288 / 341		271 / 330 / 400 / 471	353 / 412 / 471 / 588	647 / 677 / 706 / -	677 / 706 / 824 / -	
Sound Pressure dBa (L / M / H / T) Clg	32 / 35 / 37 / 40		28 / 33 / 39 / 44		34 / 38 / 43 / 48	24 / 39 / 43 / 48	48 / 54 / 57 / -	53 / 56 / 59 / -	
Sound Pressure dBa (L / M / H / T) Htg	32 / 35 / 37 / 40		28 / 33 / 39 / 44		34 / 38 / 43 / 48	24 / 39 / 43 / 48	48 / 54 / 57 / -	53 / 56 / 59 / -	

Per standard testing as described by ARI270-95
*Condensing unit above or below indoor unit

MV Series High Wall System

- Fixed speed (9-24K BTUH)
- Cools down to -20°F outdoor ambient
- 100 ft. line length, in 18 and 24K
- Cost competitive

Comfort
SERIES



Carrier High Walls - Cooling Only (MVC Series)						
System	Size	9	12		18	24
System	Outdoor Model	38MVC009---1	38MVC012---1	38MVC012---3	38MVC018---3	38MVC024---3
	Indoor Model	40MVC009---1	40MVC012---1	40MVC012---3	40MVC018---3	40MVC024---3
Performance	Cooling Rated Capacity Btu/h	9,200	11,400	11,800	17,500	22,000
	SEER / EER	13.0 / 12.1	13.0 / 11.4		13.0 / 12.1	13.0 / 11.4
Controls	Wireless (°C, °F, Convertible)	Standard - Convertible				
	Wired (°C, °F, Convertible)	Not Available				
Operating Range	Cooling Outdoor Min - Max DB °F	55 - 125 (-20 w / Low-Ambient Kit)				
	Cooling Indoor DB Min - Max °F	64 - 85				
Piping	Total Piping Length ft.	65		100		
	Piping Lift ft.*	35		50	60	
	Pipe Connection Size - Liq. (in.)	1/4"	1/4"		3/8"	
	Pipe Connection Size - Vap. (in.)	3/8"	1/2"		5/8"	
Electrical	Voltage	115-1-60		208/230-1-60		
	Power Supply	Indoor unit powered from outdoor unit				
	Outdoor - MCA	12	15	9	11	14
	Outdoor - Fuse Rating (MOCP)	20	25	15	20	25
Outdoor	Dimensions (W x H x D) In.	30.7 x 21.3 x 10.9	29.9 x 23.2 x 11.4		33.1 x 27.4 x 13.2	31.2 x 33.9 x 13.1
	Net Weight (lbs.)	70.4	79.2		116.6	149.6
	Sound Pressure dBa	54		57	56	
	Dimensions (W x H x D) In.	32.1 x 11.0 x 7.7	35.7 x 11.3 x 9.3		49.2 x 12.8 x 9.1	
Indoor	Net Weight (lbs.)	17.6	25.3		39.6	
	Number of Fan Speeds	3				
	Airflow (L / M / H) CFM	190 / 260 / 325	340 / 365 / 425		500 / 570 / 630	585 / 660 / 750
	Sound Pressure dBa (L / M / H)	28 / 36 / 42	40 / 42 / 47		43 / 45 / 48	48 / 50 / 53

Per standard testing as described by ARI270-95

*Condensing unit above or below indoor unit

MV Series High Wall System

- Fixed speed (9-24K BTUH)
- Cools down to -20°F outdoor ambient
- 100 ft. line length, in 18 and 24K
- Cost competitive

Comfort
SERIES



Carrier High Walls - Heat Pump (MVQ Series)								
System	Size	9		12		18	24	
System	Outdoor Model	38MVQ009---1		38MVQ012---1		38MVQ012---3	38MVQ024---3	
	Indoor Model	40MVQ009---1		40MVQ012---1		40MVQ012---3	40MVQ024---3	
Performance	Cooling Rated Capacity Btu/h	9,600		11,500		12,000	17,500	
	SEER / EER	13.0 / 12.1		13.0 / 11.4		13.0 / 12.0	13.0 / 11.0	
	Heating Rated Capacity Btu/h	9,400		11,500		17,000	21,500	
	HSPF	7.7						
Controls	Wireless (°C, °F, Convertible)	Standard - Convertible						
	Wired (°C, °F, Convertible)	Not Available						
Operating Range	Cooling Outdoor Min - Max DB °F	55 -125 (-20 w / Low-Ambient Kit)						
	Heating Outdoor DB Min - Max °F	5 - 75						
	Cooling Indoor DB Min - Max °F	64 -85						
	Heating Indoor DB Min - Max °F	55 - 80						
Piping	Total Piping Length ft.	65'			100'			
	Piping Lift ft.*	35'			50'	60'		
	Pipe Connection Size – Liq. (In.)	1/4"		1/4"			3/8"	
	Pipe Connection Size – Vap. (In.)	3/8"		1/2"			5/8"	
Electrical	Voltage	115-1-60			208/230-1-60			
	Power Supply	Indoor unit powered from outdoor unit						
	Outdoor - MCA	12	15	9	11	14		
Outdoor	Outdoor - Fuse Rating (MOCP)	20	25	15	20	25		
	Dimensions (W x H x D) In.	30.7 x 21.3 x 10.9		29.9 x 23.2 x 11.4		33.1 x 27.4 x 13.2	31.2 x 33.9 x 13.1	
	Net Weight (lbs.)	72.6		83.6		117.7	151.0	
	Sound Pressure dBA (Clg / Htg)	53 / 55		52 / 53		57 / 61	54 / 56	
Indoor	Dimensions (W x H x D) In.	32.1 x 11.0 x 7.7		35.7 x 11.3 x 9.3		49.2 x 12.8 x 9.1		
	Net Weight (lbs.)	17.6		25.3		39.6		
	Number of Fan Speeds	3						
	Airflow (L / M / H) CFM	190 / 260 / 325		340 / 365 / 425		500 / 570 / 630	585 / 660 / 750	
	Sound Pressure dBA (L / M / H) Clg	31 / 36 / 41		40 / 43 / 48		43 / 45 / 47	48 / 51 / 54	
	Sound Pressure dBA (L / M / H) Htg	33 / 36 / 43		36 / 40 / 47		43 / 45 / 46	49 / 53 / 55	

Per standard testing as described by ARI270-95

*Condensing unit above or below indoor unit

GVM Series Multi-Split High Wall System

- Inverter compressor technology (18-42K BTUH)
- Connect 2 - 5 fan coils
- Three indoor capacities: 9K, 12K and 18K
- Up to 16.0 SEER, up to 8.2 HSPF
- Wireless remote, LED display
- Low-voltage controls, sleep mode
- Indoor units powered from outdoor unit
- Auto restart on power failure
- Dehumidification mode

Performance
SERIES



Carrier Multi-Split Heat Pumps						
System	Size	18	24	30	36	42
	Outdoor Model		38GVM218---3	38GVM324---3	38GVM430---3	38GVM436---3
Indoor Model		(2) 40GVM009---3	(3) 40GVM009---3	(4) 40GVM009---3	Non-Ducted FCU's	Non-Ducted FCU's
See Additional Combinations on Next Page						
Rated Performance	Cooling Rated Capacity Btu/h	18,000	26,000	29,000	34,400	40,000
	Cooling Cap. Range Min - Max Btu/h	7,000 - 21,000	7,500 - 33,000	7,500 - 33,000	8,530 - 34,000	8,500 - 46,400
	SEER / EER	16.0 / 10.2	16.0 / 8.2	16.0 / 7.3	16.0 / 8.0	16.0 / 9.3
	Heating Rated Capacity Btu/h	19,000	29,000	30,400	37,200	43,000
	Heating Cap. Range Min - Max Btu/h	2,500 - 22,600	7,500 - 35,000	7,500 - 35,000	10,600 - 40,900	10,600 - 47,760
HSPF		8.2				8
Controls	Wireless (°C, °F, Convertible)	Standard - Convertible				
	Wired (°C, °F, Convertible)	Not Available				
Operating Range	Cooling Outdoor Min - Max DB °F	23 - 118				
	Heating Outdoor DB Min - Max °F	5 - 80				
	Cooling Indoor DB Min - Max °F	61 - 95				
	Heating Indoor DB Min - Max °F	55 - 80				
Piping	Total Piping Length ft.	66	230			262
	Piping to Furthest FCU	33	66			82
	Drop (OD above ID) ft.	16.4	33			50
	Lift (OD below ID) ft.	16.4	33			50
Electrical	Voltage	208 / 230-1-60				
	Power Supply	Indoor unit powered from outdoor unit				
	Outdoor - MCA	13	20	26	28	29
	Outdoor - Fuse Rating (MOCP)	20	30	45	45	50
Outdoor	Dimensions (W x H x D) In.	35.4 x 23.5 x 14.4	37.2 x 27.6 x 15.6	37.2 x 27.6 x 15.6	39.1 x 31.1 x 16.8	42.8 x 43.4 x 17.3
	Net Weight (lbs.)	106	146	148	172	247
	Sound Pressure dBa (Clg / Htg)	56 / 56		59 / 59		58 / 58

Indoor	Size	9	12	16
	Model	40GVM009-3	40GVM012-3	40GVM018-3
	Dimensions (W x H x D) In.	33.3 x 10.7 x 7.1		37.0 x 11.7 x 7.9
	Net Weight (lbs.)	22		29
	Airflow (L / M / H / T) CFM	218 / 253 / 294 / 330	217 / 253 / 277 / 341	324 / 383 / 459 / 500
	Number of Fan Speeds	4		
	Sound Pressure dBa (L / M / H / T) Clg	26 / 35 / 37 / 41	28 / 36 / 38 / 42	35 / 40 / 44 / 46

Per standard testing as described by ARI270-95

Multi-Split Combinations



Outdoor Unit Model	Two-Zone	Three-Zone	Four-Zone	Five-Zone
38GVM218---3	9K + 9K 9K + 12K			
38GVM324---3	9K + 9K 9K + 12K 9K + 18K 12K + 12K 12K + 18K 18K + 18K	9K + 9K + 9K 9K + 9K + 12K 9K + 9K + 18K 9K + 12K + 12K 12K + 12K + 12K		
38GVM430---3	9K + 9K 9K + 12K 9K + 18K 12K + 12K 12K + 18K 18K + 18K	9K + 9K + 9K 9K + 9K + 12K 9K + 9K + 18K 9K + 12K + 12K 9K + 12K + 18K 12K + 12K + 12K 12K + 12K + 18K	9K + 9K + 9K + 9K 9K + 9K + 9K + 12K 9K + 9K + 12K + 12K	
38GVM436---3	9K + 9K 9K + 12K 9K + 18K 12K + 12K 12K + 18K 18K + 18K	9K + 9K + 9K 9K + 9K + 12K 9K + 9K + 18K 9K + 12K + 12K 9K + 12K + 18K 9K + 18K + 18K 12K + 12K + 12K 12K + 12K + 18K 12K + 18K + 18K 18K + 18K + 18K	9K + 9K + 9K + 9K 9K + 9K + 9K + 12K 9K + 9K + 9K + 18K 9K + 9K + 12K + 12K 9K + 9K + 12K + 18K 9K + 9K + 18K + 18K 9K + 12K + 12K + 12K 9K + 12K + 12K + 18K 12K + 12K + 12K + 12K	
38GVM542---3	9K + 12K 9K + 18K 12K + 12K 12K + 18K 18K + 18K	9K + 9K + 9K 9K + 9K + 12K 9K + 9K + 18K 9K + 12K + 12K 9K + 12K + 18K 9K + 18K + 18K 12K + 12K + 12K 12K + 12K + 18K 12K + 18K + 18K 18K + 18K + 18K	9K + 9K + 9K + 9K 9K + 9K + 9K + 12K 9K + 9K + 9K + 18K 9K + 9K + 12K + 12K 9K + 9K + 12K + 18K 9K + 9K + 18K + 18K 9K + 12K + 12K + 12K 9K + 12K + 12K + 18K 9K + 12K + 18K + 18K 9K + 18K + 18K + 18K 12K + 12K + 12K + 12K 12K + 12K + 12K + 18K 12K + 12K + 18K + 18K	9K + 9K + 9K + 9K + 9K 9K + 9K + 9K + 9K + 12K 9K + 9K + 9K + 9K + 18K 9K + 9K + 9K + 12K + 12K 9K + 9K + 9K + 12K + 18K 9K + 9K + 9K + 18K + 18K 9K + 9K + 12K + 12K + 12K 9K + 9K + 12K + 12K + 18K 9K + 12K + 12K + 12K + 12K 12K + 12K + 12K + 12K + 12K

Variable Refrigerant Flow

Heat Pumps for Commercial Applications



Toshiba Carrier offers both ductless and ducted comfort solutions for all applications: residential, light commercial and larger commercial buildings.

- Residential solutions include indoor units designed to blend perfectly with home interiors. These products also incorporate advanced filtration systems to deliver optimum comfort.
- Light commercial solutions combine top performance, comfort and energy efficiency.
- Large commercial solutions include VRF systems with an optimized combination of energy efficiency, flexibility and comfort. These systems are designed with a wide choice of stylish indoor units that blend with a variety of interior decors.

Your Toshiba Carrier distributor also handles a full line of Carrier comfort solutions, including chillers, rooftops, and VRF systems. That means you have access to all the solutions you need, all from one convenient, reliable source that you already trust.

Learn more about Toshiba Carrier VRF in catalog 01-VRF-002-10.



RAV Series High Wall System

- Digital inverter compressor technology (18 - 24K BTUH)
- Up to 19.5 SEER, up to 9.8 HSPF
- Line lengths up 165 ft.
- Wireless controller included
- Auto louver mode
- Optional wired controller
- Turbo mode
- Quiet operation
- Diagnostics
- Low-ambient cooling down to 5° F
- Filter maintenance indicator
- Clean mode

TOSHIBA
Carrier

S U P E R
DIGITAL INVERTER



Toshiba-Carrier Inverter High Wall Heat Pump Systems			
System	Size	18	24
System	Outdoor Model	RAV-SP180AT2-UL	RAV-SP240AT2-UL
	Indoor Model	RAV-SP180KRT-UL	RAV-SP240KRT-UL
Performance	Cooling Rated Capacity Btu/h	18,000	25,000
	Cooling Cap. Range Min - Max Btu/h	3,560 - 23,500	4,100 - 32,600
	SEER / EER	19.5 / 10.0	16.7 / 9.1
	Heating Rated Capacity Btu/h	19,000	26,400
	Heating Cap. Range Min - Max Btu/h	2,250 - 23,000	3,480 - 30,400
	HSPF	11.5	9.8
Controls	Wireless (°C, °F, Convertible)	Standard - Convertible	
	Wired (°C, °F, Convertible)	Optional - Convertible	
Operating Range	Cooling Outdoor Min - Max DB °F	23 - 110 (5 with wind baffle)	
	Heating Outdoor WB Min - Max °F	- 4 - 59	
	Cooling Indoor DB Min - Max °F	69.8 - 89.6	
	Heating Indoor DB Min - Max °F	59 - 82.4	
Piping	Total Piping Length ft.	165'	
	Piping Lift ft.*	100'	
	Pipe Connection Size – Liq. (In.)	1/4"	3/8"
	Pipe Connection Size – Vap. (In.)	1/2"	5/8"
Electrical	Voltage	208/230-1-60	
	Power Supply	Indoor unit powered from outdoor unit	
	Outdoor - MCA	17	24
	Outdoor - Fuse Rating (MOCP)	30	40
Outdoor	Dimensions (W x H x D) In.	30.7 x 21.7 x 11.4	35.4 x 35.0 x 12.6
	Net Weight (lbs.)	98	144.5
	Sound Pressure dBa (Clg / Htg)	48 / 49	49 / 50
Indoor	Dimensions (W x H x D) In.	41.3 x 12.6 x 9.0	
	Net Weight (lbs.)	31.0	
	Number of Fan Speeds	3	
	Airflow (L / M / H) CFM	400 / 430 / 490	370 / 420 / 530
	Sound Pressure dBa (L / M / H) Clg	38 / 41 / 43	38 / 41 / 46
	Sound Pressure dBa (H / M / L) Htg	38 / 41 / 43	38 / 41 / 46

Per standard testing as described by ARI270-95

*Condensing unit above or below indoor unit

QN Series High Wall System

- Fixed speed (18-36K BTUH)
- Cools down to -20°F outdoor ambient
- 200 ft. line length, 65-100 ft. elevation
- Optional wired control
 - Room control
 - Zone management system (32 fan coils / eight zones)
- Three-phase, three voltages on size 036
- Cost competitive

Performance
SERIES



Carrier High Wall Cooling Only Systems (QNC Series)

System	Size	18	24	30	36			
System	Outdoor Model	38HDF018---3	38HDF024---3	38HDF030---3	38HDF036---3	38HDF036---5	38HDF036---6	
	Indoor Model	40QNC01824-3	40QNC01824-3	40QNC030---3	40QNC036---3	40QNC036---3	40QNC036---3	
Performance	Cooling Rated Capacity Btu/h	16,600	22,000	27,000	34,200			
	SEER / EER	13.0 / 11.8	13.0 / 11.3	13.0 / 11.7	13.0 / 11.3			
Controls	Wireless (°C, °F, Convertible)	Standard - Convertible						
	Wired (°C, °F, Convertible)	Optional - Convertible						
Operating Range	Cooling Outdoor Min - Max DB °F	55 - 125 (-20°F w / Low-Ambient Kit)						
	Cooling Indoor DB Min - Max °F	62 - 90						
Piping	Total Piping Length ft.	200'						
	Drop (OD above ID) ft.	200'						
	Lift (OD below ID) ft.	65'						
	Pipe Connection Size - Liq. (in.)	3/8"			3/8"			
	Pipe Connection Size - Vap. (in.)	5/8"			3/4"			
Electrical	Voltage	208/230-1-60			208/230-3-60	460-3-60		
	Power Supply	Indoor and outdoor units have dedicated power supply						
	Outdoor - MCA	12.1	16.8	18.4	23.8	18	8.3	
	Outdoor - Fuse Rating (MOCP)	20	25	30	40	30	15	
	Indoor - MCA	0.48			0.55			
	Indoor - Fuse Rating (MOCP)	15						
Outdoor	Dimensions (W x H x D) In.	36.9 x 25.1 x 14.6	36.9 x 31.1 x 14.6		44.6 x 37.2 x 17.1			
	Net Weight (lbs.)	166	176	187	250			
	Sound Pressure dBA	55			61			
Indoor	Dimensions (W x H x D) In.	42.5 x 11.6 x 7.9			57.5 x 13.4 x 9.5			
	Net Weight (lbs.)	31			51			
	Number of Fan Speeds	3						
	Airflow (L / M / H) CFM	460 / 525 / 645			530 / 630 / 730		600 / 750 / 900	
	Sound Pressure dBA (L / M / H)	38 / 42 / 48			42 / 46 / 49		46 / 49 / 51	

Per standard testing as described by ARI270-95
 *Condensing unit above or below indoor unit

QN Series High Wall System

- Fixed speed (18-36K BTUH)
- Cools down to -20°F outdoor ambient
- 200 ft. line length, 65-100 ft. elevation
- Optional wired control
 - Room control
 - Zone management system (32 fan coils / eight zones)
- Three-phase, three voltages on size 036
- Cost competitive

Performance
SERIES



Carrier High Wall Heat Pump Systems (QNQ Series)							
System	Size	18	24	30	36		
System	Outdoor Model	38QRF018---3	38QRF024---3	38QRF030---3	38QRF036---3	38QRF036---5	38QRF036---6
	Indoor Model	40QNQ018---3	40QNQ024---3	40QNQ030---3	40QNQ036---3	40QNQ036---3	40QNQ036---3
Performance	Cooling Rated Capacity Btu/h	17,400	22,800	27,000	32,600		
	SEER / EER	13.0 / 11.3	13.0 / 11.5	13.0 / 11.7	13.0 / 10.9		
	Heating Rated Capacity Btu/h	17,000	22,000	28,200	35,600		
Controls	HSPF	7.7					
	Wireless (°C, °F, Convertible)	Standard - Convertible					
	Wired (°C, °F, Convertible)	Optional - Convertible					
Operating Range	Cooling Outdoor Min - Max DB °F	55 - 125 (-20°F w / Low-Ambient Kit)					
	Heating Outdoor DB Min - Max °F	17 - 75					
	Cooling Indoor DB Min - Max °F	62 - 90					
	Heating Indoor DB Min - Max °F	62 - 81					
Piping	Total Piping Length ft.	200'					
	Drop (OD above ID) ft.	200'					
	Lift (OD below ID) ft.	65'					
	Pipe Connection Size - Vap. (in.)	3/8"			3/4"		
Electrical	Voltage	208/230-1-60			208/230-3-60		460-3-60
	Power Supply	Indoor and outdoor units have dedicated power supply					
	Outdoor - MCA	12.1	16.8	18.4	23.8	18	8.3
	Outdoor - Fuse Rating (MOCP)	20	25	30	40	30	15
	Indoor - MCA	0.48			0.55		
	Indoor - Fuse Rating (MOCP)	15					
Outdoor	Dimensions (W x H x D) In.	36.9 x 25.1 x 14.6	36.9 x 31.1 x 14.6	44.6 x 37.2 x 17.1			
	Net Weight (lbs.)	166	176	187	232		
	Sound Pressure dBa (Clg / Htg)	55 / 55			61 / 61		
Indoor	Dimensions (W x H x D) In.	42.5 x 11.6 x 7.9			57.5 x 13.4 x 9.5		
	Net Weight (lbs.)	31			51		
	Number of Fan Speeds	3					
	Airflow (L / M / H) CFM	460 / 525 / 645		530 / 630 / 730		600 / 750 / 900	
	Sound Pressure (L / M / H) Clg	38 / 42 / 48		42 / 46 / 49		46 / 49 / 51	
	Sound Pressure (L / M / H) Htg	39 / 43 / 49		44 / 47 / 50		47 / 50 / 52	

Per standard testing as described by ARI270-95

*Condensing unit above or below indoor unit

RAV Series Underceiling System

- Digital inverter compressor technology (18-42K BTUH)
- Up to 20.6 SEER, up to 11.0 HSPF
- Slim-line design
- Optional condensate pump
- Optional wired or wireless controller
- Low-ambient cooling down to 5° F
- Auto louver mode
- Power saving mode
- Quiet operation
- Diagnostics
- Filter maintenance indicator
- Clean mode

TOSHIBA
Carrier

SUPER
DIGITAL INVERTER



Toshiba-Carrier Inverter Underceiling Heat Pump Systems						
System	Size	18	24	30	36	42
System	Outdoor Model	RAV-SP180AT2-UL	RAV-SP240AT2-UL	RAV-SP300AT2-UL	RAV-SP360AT2-UL	RAV-SP420AT2-UL
	Indoor Model	RAV-SP180CT-UL	RAV-SP240CT-UL	RAV-SP300CT-UL	RAV-SP360CT-UL	RAV-SP420CT-UL
	Tax Credit Eligible	-	-	*	*	-
Performance	Cooling Rated Capacity Btu/h	17,000	23,700	30,000	36,000	41,000
	Cooling Cap. Range Min - Max Btu/h	3,750 - 19,400	4,700 - 26,900	11,340 - 34,200	11,960 - 41,000	10,980 - 46,700
	SEER / EER	17.0 / 8.6	19.5 / 9.0	20.6 / 13.0	20.4 / 12.0	18.8 / 9.7
	Heating Rated Capacity Btu/h	19,000	28,900	29,800	38,000	44,800
	Heating Cap. Range Min - Max Btu/h	2,800 - 21,700	3,600 - 32,400	9,900 - 33,700	11,700 - 42,750	9,100 - 50,500
	HSPF	10.8		10.3		11.0
Controls	Wireless (°C, °F, Convertible)	Optional - Dedicated °F or °C				
	Wired (°C, °F, Convertible)	Optional - Convertible				
Operating Range	Cooling Outdoor Min - Max DB °F	23 - 110 (5 with wind baffle)				
	Heating Outdoor WB Min - Max °F	-4 - 59				
	Cooling Indoor DB Min - Max °F	69.8 - 89.6				
	Heating Indoor DB Min - Max °F	59 - 82.4				
Piping	Total Piping Length ft.	165'			245'	
	Piping Lift ft.*	100'				
	Pipe Connection Size - Liq. (In.)	1/4"			3/8"	
	Pipe Connection Size - Vap. (In.)	1/2"			5/8"	
Electrical	Voltage	208/230-1-60				
	Power Supply	Indoor unit powered from outdoor unit				
	Outdoor - MCA	17			24	
	Outdoor - Fuse Rating (MOCP)	30			40	
Outdoor	Dimensions (W x H x D) In.	30.7 x 21.7 x 11.4	35.4 x 35.0 x 12.6		35.4 x 52.8 x 12.6	
	Net Weight (lbs.)	98	144.5		211.5	
	Sound Pressure dBa (Clg / Htg)	48 / 49	49 / 50	50 / 51		52 / 52
	Dimensions (W x H x D) In.	35.8 x 8.3 x 26.8	46.5 x 8.3 x 26.8		62.8 x 8.3 x 26.8	
Indoor	Net Weight (lbs.)	46	55		73	
	Number of Fan Speeds	3				
	Airflow (L / M / H) CFM	320 / 360 / 410	330 / 380 / 440	560 / 630 / 720		610 / 690 / 790
	Sound Pressure dBa (L / M / H) Clg	34 / 37 / 40	37 / 40 / 42	38 / 42 / 45		40 / 44 / 47
	Sound Pressure dBa (L / M / H) Htg	34 / 37 / 40	37 / 40 / 42	38 / 42 / 45		40 / 44 / 47

Per standard testing as described by ARI270-95

*Condensing unit above or below indoor unit

QA Series Underceiling System

- Fixed speed (18-60K BTUH)
- Electro-mechanical controls
- Cools down to -20°F outdoor ambient
- 200 ft. line length, 65 ft. - 100ft. elevation
- Optional wired controls with three fan speeds
- Three-phase, three voltages on size 036 / 048 / 060
- Power ventilation kit
- Auxiliary electric heat on heat pumps
- 24 volts controls capable of connecting to an energy management system

Performance
SERIES



Carrier Underceiling Cooling Only Systems							
System	Size	18	24	30	36	48	60
System	Outdoor Model	38HDR018---3	38HDR024---3	38HDR030---3	38HDR036---3/5/6	38HDR048---3/5/6	38HDR060---3/5/6
	Indoor Model	40QAC024 ---3	40QAC024 ---3	40QAC036 ---3	40QAC036---3	40QAC048---3	40QAC060---3
Performance	Cooling Rated Capacity Btu/h	18,000	23,000	29,000	33,000	46,000	57,000
	SEER / EER	13.0 / 11.5		13.0 / 12.0	13.0 / 11.4	13.0 / 11.5	13.0 / 11.4
Controls	Wireless (°C, °F, Convertible)	Not Available					
	Wired (°C, °F, Convertible)	Standard - Convertible					
Operating Range	Cooling Outdoor Min - Max DB °F	55 - 125 (-20°F w / Low-Ambient Kit)					
	Cooling Indoor DB Min - Max °F	67 - 95					
Piping	Total Piping Length ft.	200'					
	Drop (OD above ID) ft.	200'					
	Lift (OD below ID) ft.	65'					
	Pipe Connection Size - Liq. (In.)	3/8"					
	Pipe Connection Size - Vap. (In.)	5/8"		3/4"		7/8"	
Electrical	Voltage	208/230-1-60			-3 = 208/230-1-60, -5 = 208/230-3-60, -6 = 460-3-60		
	Power Supply	Indoor and outdoor units have dedicated power supply					
	Outdoor - MCA	12.1	16.8	19.1	19.1 / 12.7 / 7.8**	28.7 / 18.6 / 8.6**	34.5 / 21.5 / 10.6**
	Outdoor - Fuse Rating (MOCP)	20	25	30	30 / 20 / 15**	50 / 30 / 15**	60 / 35 / 15**
	Indoor - MCA	0.63		1.6		2	
Outdoor	Indoor - Fuse Rating (MOCP)	15					
	Dimensions (W x H x D) In.	36.9 x 25.1 x 14.5	36.9 x 31.1 x 14.5	44.5 x 37.1 x 17		44.5 x 43.1 x 17	
	Net Weight (lbs.)	166	176	187	250	278	306
	Sound Pressure dBA	57	58	61			
Indoor	Dimensions (W x H x D) In.	50.9 x 9.9 x 23.1		58.7 x 9.9 x 23.1		71.5 x 9.9 x 23.1	91.9 x 9.9 x 23.1
	Net Weight (lbs.)	108		117		149	179
	Number of Fan Speeds	3					
	Airflow (L / M / H) CFM	320 / 400 / 500		640 / 740 / 840		670 / 1160 / 1200	1080 / 1220 / 1600
Sound Pressure dBA (L / M / H)	44 / 46 / 47		52 / 55 / 57		NA / 55 / 56	55 / 58 / 59	

Per standard testing as described by ARI270-95
*Condensing unit above or below indoor unit

**MCA and MOCP are for -3, -5 and -6 respectively
†Valve connection size is 7/8". Recommended line size is 1-1/8".



QA Series Underceiling System

- Fixed speed (18-60K BTUH)
- Electro-mechanical controls
- Cools down to -20°F outdoor ambient
- 200 ft. line length, 65 ft. - 100ft. elevation
- Optional wired controls with three fan speeds
- Three-phase, three voltages on size 036 / 048 / 060
- Power ventilation kit
- Auxiliary electric heat on heat pumps
- 24 volts controls capable of connecting to an energy management system

Performance
SERIES



Carrier Underceiling Heat Pump Systems							
System	Size	18	24	30	36	48	60
System	Outdoor Model	38QRR018---3	38QRR024---3	38QRR030---3	38QRR036---3/5/6	38QRR048---3/5/6	38QRR060---3/5/6
	Indoor Model	40QAQ024---3	40QAQ024---3	40QAQ036---3	40QAQ036---3	40QAQ048---3	40QAQ060---3
Performance	Cooling Rated Capacity Btu/h	17,000	23,000	28,000	33,000	45,000	56,000
	SEER / EER	13.0 / 11.7	13.0 / 11.4	13.0 / 11.2	13.0 / 11.6	13.0 / 11.5	13.0 / 11.4
	Heating Rated Capacity Btu/h	17,000	23,800	28,800	32,000	45,000	56,000
	HSPF	7.7					
Electric Heat	KW	2		3		4	
	Controls	Not Available					
Controls	Wireless (°C, °F, Convertible)	Not Available					
	Wired (°C, °F, Convertible)	Standard - Convertible					
Operating Range	Cooling Outdoor Min - Max DB °F	55 - 125 (-20°F w / Low-Ambient Kit)					
	Heating Outdoor DB Min - Max °F	-20 - 75					
	Cooling Indoor DB Min - Max °F	67 - 95					
	Heating Indoor DB Min - Max °F	55 - 80					
Piping	Total Piping Length ft.	200'					
	Drop (OD above ID) ft.	200'					
	Lift (OD below ID) ft.	65'					
	Pipe Connection Size - Liq. (In.)	3/8"					
	Pipe Connection Size - Vap. (In.)	5/8"			3/4"		
Electrical	Voltage	208/230-1-60			-3 = 208/230-1-60, -5 = 208/230-3-60, -6 = 460-3-60		
	Power Supply	Indoor and outdoor units have dedicated power supply					
	Outdoor - MCA	12.1	16.8	17.5	19.1 / 12.7 / 7.8**	28.7 / 18.6 / 8.6**	34.5 / 21.5 / 10.6**
	Outdoor - Fuse Rating (MOCP)	20	25	30	30 / 20 / 15**	50 / 30 / 15**	60 / 35 / 15**
	Indoor - MCA	9.29		17.7		23.8	
	Indoor - Fuse Rating (MOCP)	15		20		25	
Outdoor	Dimensions (W x H x D) In.	36.9 x 25.1 x 14.5	36.9 x 31.1 x 14.5	44.5 x 37.1 x 17		44.5 x 43.1 x 17	
	Net Weight (lbs.)	166	176	187	232	278	306
	Sound Pressure dBa (Clg / Htg)	58 / 58	55 / 55	60 / 60	61 / 61	60 / 60	61 / 61
Indoor	Dimensions (W x H x D) In.	50.9 x 9.9 x 23.1		58.7 x 9.9 x 23.1		71.5 x 9.9 x 23.1	
	Net Weight (lbs.)	110		119		151	
	Airflow (L / M / H) CFM	320 / 400 / 500		640 / 740 / 840		670 / 1160 / 1200	
	Number of Fan Speeds	3					
	Sound Pressure dBa (L / M / H) Clg	47 / 48 / 48		52 / 55 / 57		NA / 55 / 56	
Sound Pressure dBa (L / M / H) Htg	47 / 48 / 48		52 / 55 / 57		NA / 55 / 56		

Per standard testing as described by ARI270-95
*Condensing unit above or below indoor unit


**MCA and MOCP are for -3, -5 and -6 respectively

RAV Series Cassette System

- Digital inverter compressor technology (18-42K BTUH)
- Up to 21.0 SEER, up to 11.9 HSPF
- Line length up to 245 ft.
- Optional fresh air intake
- Built-in condensate pump
- Independent louver control (fixed or swing)
- Optional wired or wireless controller
- Power saving mode
- Quiet operation
- Diagnostics
- Low-ambient cooling down to 5° F
- Filter maintenance indicator
- Clean mode

TOSHIBA
Carrier

SUPER
DIGITAL INVERTER

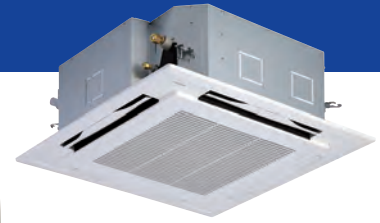

Toshiba-Carrier Inverter Cassette Heat Pump Systems							
System	Size	18	24	30	36	42	
System	Outdoor Model	RAV-SP180AT2-UL	RAV-SP240AT2-UL	RAV-SP300AT2-UL	RAV-SP360AT2-UL	RAV-SP420AT2-UL	
	Indoor Model	RAV-SP180UT-UL	RAV-SP240UT-UL	RAV-SP300UT-UL	RAV-SP360UT-UL	RAV-SP420UT-UL	
Performance	Tax Credit Eligible	-	-	-	-	-	
	Cooling Rated Capacity Btu/h	19,000	25,000	32,000	36,500	40,800	
	Cooling Cap. Range Min - Max Btu/h	3,800 - 21,600	5,670 - 28,500	10,470 - 36,460	11,260 - 41,500	10,990 - 46,100	
	SEER / EER	20.5 / 10.7	20.7 / 11.0	21.0 / 14.0	21.0 / 14.0	19.0 / 11.5	
	Heating Rated Capacity Btu/h	18,800	26,000	33,400	36,000	46,000	
	Heating Cap. Range Min - Max Btu/h	3,100 - 21,200	4,100 - 29,900	8,500 - 38,100	8,240 - 40,300	8,400 - 51,500	
	HSPF	11.5	9.5	11.0	11.9	10.8	
Controls	Wireless (°C, °F, Convertible)	Optional - Dedicated °F or °C					
	Wired (°C, °F, Convertible)	Optional - Convertible					
Operating Range	Cooling Outdoor Min - Max DB °F	23 - 115 (5 with wind baffle)					
	Heating Outdoor WB Min - Max °F	-4 - 59					
	Cooling Indoor DB Min - Max °F	69.8 - 89.6					
	Heating Indoor DB Min - Max °F	59 - 82.4					
Piping	Total Piping Length ft.	165'		245'			
	Piping Lift ft.*	100'					
	Pipe Connection Size - Liq. (in.)	1/4"		3/8"			
	Pipe Connection Size - Vap. (in.)	1/2"		5/8"			
Electrical	Voltage	208/230-1-60					
	Power Supply	Indoor unit powered from outdoor unit					
	Outdoor - MCA	17		24			
	Outdoor - Fuse Rating (MOCP)	30		40			
Outdoor	Dimensions (W x H x D) In.	30.7 x 21.7 x 11.4		35.4 x 35.0 x 12.6		35.4 x 52.8 x 12.6	
	Net Weight (lbs.)	98		144.5		211.5	
	Sound Pressure dBa (Clg / Htg)	48 / 49		49 / 50		50 / 51 52 / 52	
	Unit Dimensions (W x H x D) In.	33.1 x 10.1 x 33.1			33.1 x 12.6 x 33.1		
Indoor	Grille Dimensions (W x H x D) In.				37.4 x 1.2 x 37.4		
	Unit Net Weight (lbs.)	44			53		
	Grille Net Weight (lbs.)				10		
	Number of Fan Speeds				3		
	Airflow (L / M / H) CFM	450 / 500 / 600		400 / 480 / 610		610 / 750 / 1050 630 / 730 / 1070	
	Sound Pressure dBa (L / M / H) Clg	32 / 33 / 35		32 / 35 / 39		36 / 40 / 46 38 / 41 / 47	
	Sound Pressure dBa (L / M / H) Htg	32 / 33 / 35		32 / 35 / 39		36 / 40 / 46 38 / 41 / 47	

Per standard testing as described by ARI270-95

*Condensing unit above or below indoor unit



KM Series Cassette System

- Fixed speed (18-36K BTUH)
- Cools down to -20°F outdoor ambient
- 200 ft. line length, 65 ft. - 100 ft. elevation
- Optional wired control
 - Room control
 - Zone management system (32 fan coils / 8 zones)
- Three-phase, three voltages on size 036
- Power ventilation kit
- Electric heat

Performance
SERIES



Carrier Cassette Cooling Only Systems							
System	Size	18	24	30	36		
System	Outdoor Model	38HDF018---3	38HDF024---3	38HDF030---3	38HDF036---3	38HDF036---5	38HDF036---6
	Indoor Model	40KMC018---3	40KMC024---3	40KMC03036-3	40KMC03036-3	40KMC03036-3	40KMC03036-3
Performance	Cooling Rated Capacity Btu/h	17,000	23,600	29,000	36,400		
	SEER / EER	13.0 / 10.9	13.0 / 10.75	13.0 / 11.5	13.0 / 11.0		
Controls	Wireless (°C, °F, Convertible)	Optional - Convertible					
	Wired (°C, °F, Convertible)	Optional - Convertible					
Operating Range	Cooling Outdoor Min - Max DB °F	55 - 125 (-20°F w / Low-Ambient Kit)					
	Cooling Indoor DB Min - Max °F	62 - 90					
Piping	Total Piping Length ft.	200'					
	Drop (OD above ID) ft.	200'					
	Lift (OD below ID) ft.	65'					
	Pipe Connection Size - Liq. (In.)	3/8"			3/8"		
Pipe Connection Size - Vap. (In.)	5/8"			3/4"			
Electrical	Voltage	208/230-1-60				208/230-3-60	460-3-60
	Power Supply	Indoor and outdoor units have dedicated power supply					
	Outdoor - MCA	12.1	16.8	18.4	23.8	18	8.3
	Outdoor - Fuse Rating (MOCP)	20	25	30	40	30	15
	Indoor - MCA	0.8	0.7	1.3			
Indoor - Fuse Rating (MOCP)	15						
Outdoor	Dimensions (W x H x D) In.	36.9 x 25.1 x 14.5	36.9 x 31.1 x 14.5		44.5 x 37.1 x 17		
	Net Weight (lbs.)	166	176	187	250		
	Sound Pressure dBa	55		61			
Indoor	Dimensions (W x H x D) In.	22.6 x 11.8 x 22.6	32.5 x 12.0 x 32.5				
	Net Weight (lbs.)	49	91	95			
	Number of Fan Speeds	3					
	Airflow (L / M / H) CFM	340 / 420 / 470	470 / 560 / 690	670 / 760 / 910			
Sound Pressure dBa (L / M / H)	37 / 40 / 44	31 / 34 / 38	39 / 44 / 47				

Per standard testing as described by ARI270-95

*Condensing unit above or below indoor unit

KM Series Cassette System

- Fixed speed (18-36K BTUH)
- Cools down to -20°F outdoor ambient
- 200 ft. line length, 65 ft. - 100 ft. elevation
- Optional wired control
 - Room control
 - Zone management system (32 fan coils / 8 zones)
- Three-phase, three voltages on size 036
- Power ventilation kit
- Electric heat

Performance
SERIES



Carrier Cassette Heat Pump Systems							
System	Size	18	24	30	36		
System	Outdoor Model	38QRF018---3	38QRF024---3	38QRF030---3	38QRF035---3	38QRF035---5	38QRF035---6
	Indoor Model	40KMQ01824-3	40KMQ01824-3	40KMQ03036-3	40KMQ03036-3	40KMQ03036-3	40KMQ03036-3
Performance	Cooling Rated Capacity Btu/h	17,900	22,600	29,200	33,400		
	SEER / EER	13.0 / 11.0					
	Heating Rated Capacity Btu/h	16,800	20,800	27,400	32,400		
	HSPF	7.7					
Electric Heat	KW	3					
Controls	Wireless (°C, °F, Convertible)	Optional - Convertible					
	Wired (°C, °F, Convertible)	Optional - Convertible					
Operating Range	Cooling Outdoor Min - Max DB °F	55 - 125 (-20°F w / Low-Ambient Kit)					
	Heating Outdoor DB Min - Max °F	17 - 75					
	Cooling Indoor DB Min - Max °F	62 - 90					
	Heating Indoor DB Min - Max °F	62 - 81					
Piping	Total Piping Length ft.	200'					
	Drop (OD above ID) ft.	200'					
	Lift (OD below ID) ft.	65'					
	Pipe Connection Size - Liq. (in.)	3/8"			3/8"		
	Pipe Connection Size - Vap. (in.)	5/8"			3/4"		
Electrical	Voltage	208/230-1-60			208/230-3-60		460-3-60
	Power Supply	Indoor and outdoor units have dedicated power supply					
	Outdoor - MCA	12.1	16.8	18.4	22.3	14.5	8.7
	Outdoor - Fuse Rating (MOCP)	20	25	30	35	20	15
	Indoor - MCA	16.3			16.9		
Outdoor	Indoor - Fuse Rating (MOCP)	20					
	Dimensions (W x H x D) In.	36.9 x 25.1 x 14.5	36.9 x 31.1 x 14.5	44.5 x 37.1 x 17.0			
	Net Weight (lbs.)	166	176	187	221		
	Sound Pressure dBa (Clg / Htg)	55 / 55			61 / 61		
Indoor	Dimensions (W x H x D) In.	32.5 x 12.0 x 32.5					
	Net Weight (lbs.)	91			95		
	Number of Fan Speeds	3					
	Airflow (L / M / H) CFM	470 / 560 / 690			670 / 760 / 910		
	Sound Pressure dBa (L / M / H) Clg	31 / 34 / 38			39 / 44 / 47		
Sound Pressure dBa (L / M / H) Htg	31 / 34 / 38			39 / 44 / 47			

Per standard testing as described by ARI270-95
*Condensing unit above or below indoor unit



Turn to the Experts

Willis Carrier invented air conditioning in 1902. Over 100 years later, we're proud to say Carrier® systems are trusted in more homes than any other brand.

Carrier continues to be on the forefront of innovative engineering and unsurpassed standards of excellence. So when choosing a home comfort system, you'll want to turn to the experts. Your Carrier dealer will evaluate your home, such as window placement and size, ductwork, other structural specifics and lifestyle to provide a customized indoor comfort plan designed specifically for you. And when you have an expert helping you make an educated decision, you're going to feel more comfortable.



turn to the experts™ 

www.carrier.com

1-800-CARRIER

A member of the United Technologies Corporation family.
Stock Symbol UTX.

© Carrier Corporation 3/2013

01-DFS-031-01

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.



Always look for these symbols, the air conditioning and heat pump industry seals of certified performance, efficiency and capacity.