


Standards :


- ISO 8820-3:2010

Packaging :

- 600 pz.

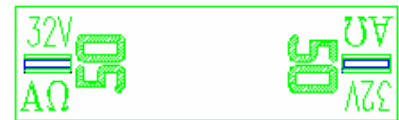

Example Fuse time-current curve (FORM E 40A) :

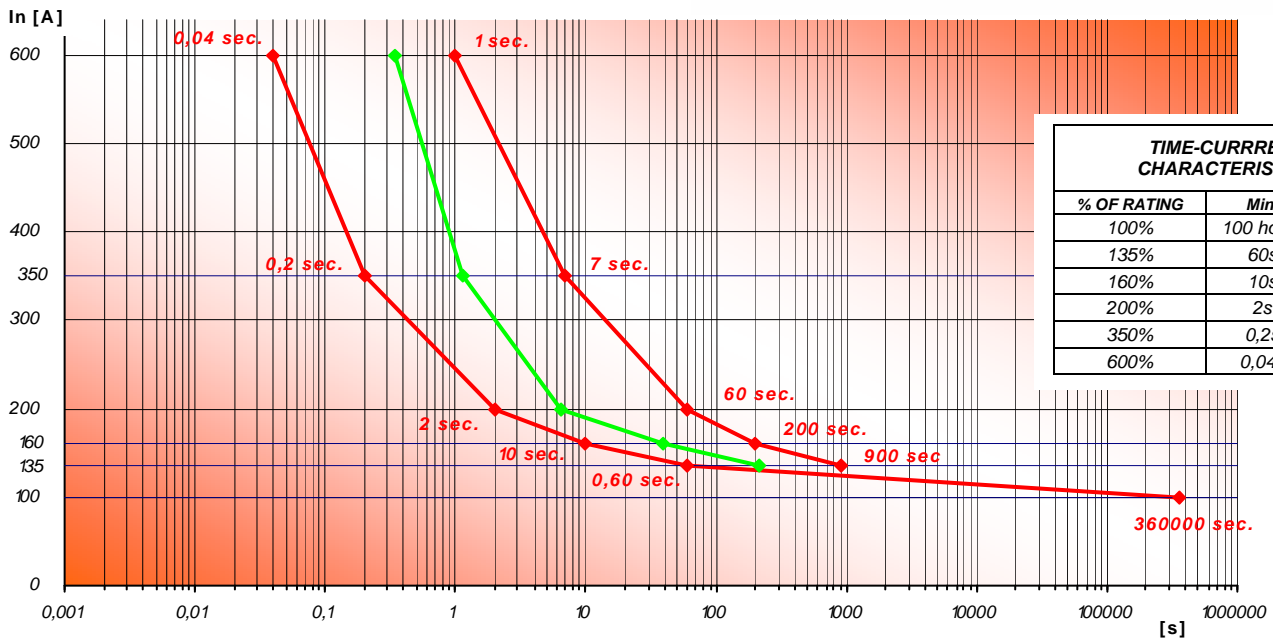

AΩ Part. No	Rated current	Rated voltage	Nominal cold resistance	Colour	Voltage Drop max.	Breaking capacity
61.020.0	20A	32V	3,50mΩ	Yellow	125mV	1000A 32V DC Leakage current To agree upon
61.025.0	25A	32V	2,90mΩ	White	125mV	
61.030.0	30A	32V	2,20mΩ	Green	120mV	
61.035.0	35A	32V	1,80mΩ	Dark green	120mV	
61.040.0	40A	32V	1,50mΩ	Orange	120mV	
61.050.0	50A	32V	1,25mΩ	Red	120mV	
61.060.0	60A	32V	1,00mΩ	Blue	120mV	
61.070.0	70A	32V	0,90mΩ	Tan	110mV	
61.080.0	80A	32V	0,70mΩ	Natural	110mV	
61.100.0	100A	32V	0,50mΩ	Violet	110mV	