



L=As Requirement

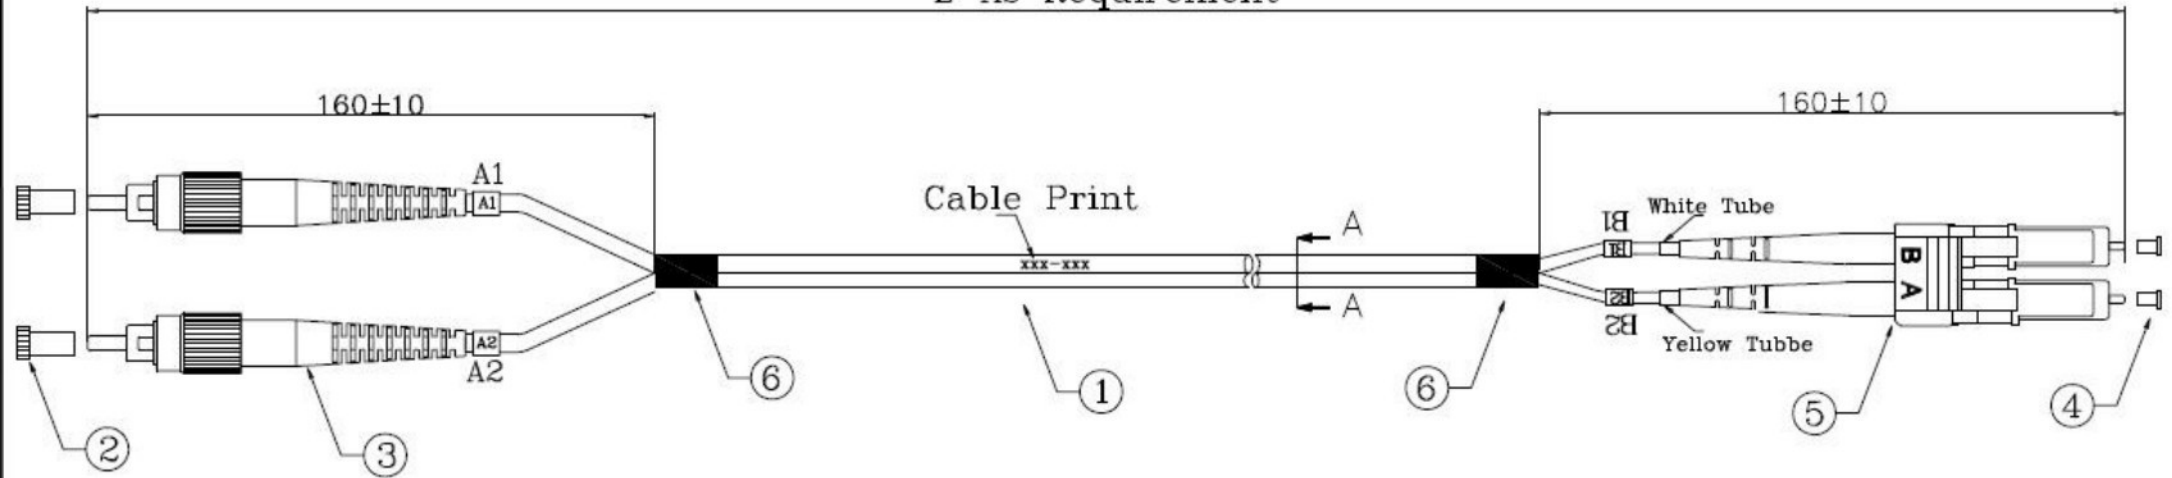

NOTE:

- 1.Connector Specification:
FC Connector comply with IEC 60874-7.
LC Connector comply with IEC 61754-20.
- 2.MM Fiber optical cable is 62.5/125um.
Cable OD 2*4 LSZH Jacket Orange.
- 3.Patch cord Specification :
(a)Insertion Loss: $\leq 0.3\text{dB}$
Wavelength:1310nm
(b)Operating temperature:-20℃~+70℃
Storage temperature: -40℃~+75℃
Humidity :95% R H (NON-condensing)
- 4.Assembly is RoHS compliant.

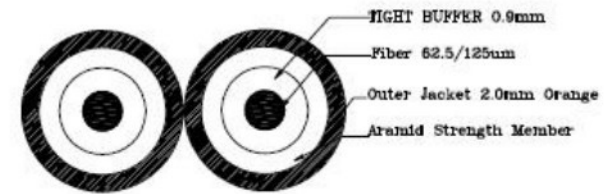

Section A-A

FJ4x

ITEM	DESCRIPTION	MATERIAL	FINISH	Q'TY
6	Heat Shrink Tube	Black	L=30mm	2 PCS
5	LC Connector	Housing:Beige,Boot:Gray,Clip:Beige		1 SET
4	LC Dust cap	PP		2 PCS
3	FC Connector	Housing:Metal,Boot:Black		2 SET
2	FC Dust cap	PE		2 PCS
1	Cable	62.5/125 Duplex 2.0mm LSZH Orange		1 PCS

REV	CHECKED BY	DATE	DESCRIPTION	ITEM	DESCRIPTION	MATERIAL	FINISH	Q'TY	
0	yangzhili	Jun/11-08	FC-LC 62.5/125 2.0mm Duplex LSZH Patch cord						
				DRAWN BY	yangzhili	Jun/11-08	PN: F0PC-FCLC-MD-L		
				DESIGNED BY			SCALE	X	
				APPROVED BY			UNIT	mm	
								SHEET:	1 OF 1
								DRAWING NO.	