



Asian Granito India Ltd.

Regd. & Corp. Office

202, Dev Arc, Opp. Iskcon Temple, S.G. Highway, Ahmedabad - 380 015, Gujarat, INDIA.

Phone: +91 79 66125500/698 | Fax: +91 79 66125600/66058672 CIN: L17110GJ1995PLC027025

E-mail: info@aglasiangranito.com | Web: www.aglasiangranito.com











1800 123 3455 Toll-free: Mon-Sat 10am-6pm







Download Catalogue




Scan to Find



Scan code for 360° Tour





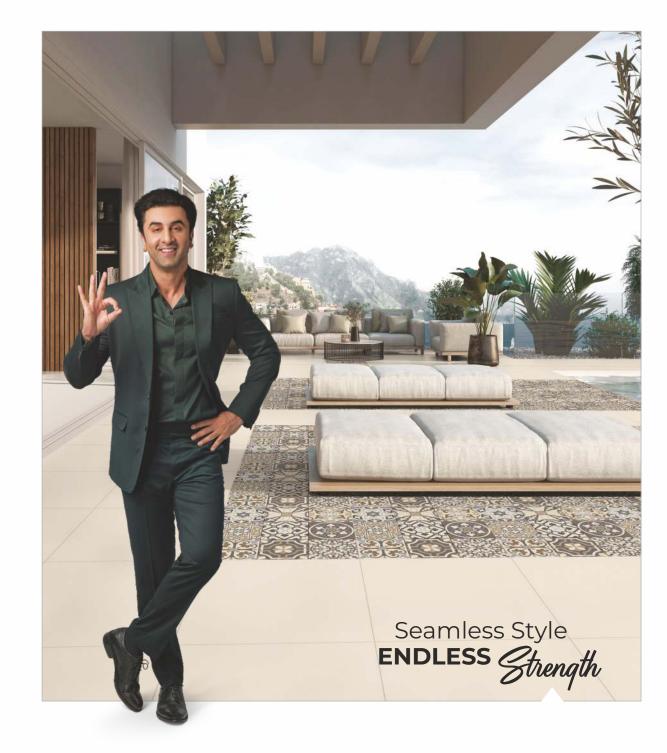



VITRIFIED EXTERIOR TILES

400x4000mm | 300x300mm

ABOUT US


At AGL, we have been leading the change by continuous innovation, setting higher goals, achieving the unthinkable and creating new benchmarks. This has enabled us to clock net consolidated turnover of ₹1562 Crores (US \$190 Million) in FY22-23, making us giant in the space décor industry. In the short span of 23 years, we are one of India's largest groups, with a global footprint across 100 countries. Today,

AGL has enhance its product range from Tile to Marble, Quartz and now in Bathware as well.

The research and development center at every AGL plant is well equipped with all the latest testing methods and the products are thoroughly tested for quality before delivery. It is ensured that every product matches the highest international quality standards.



ADVANCE TECHNOLOGIES & KEY PROCESS

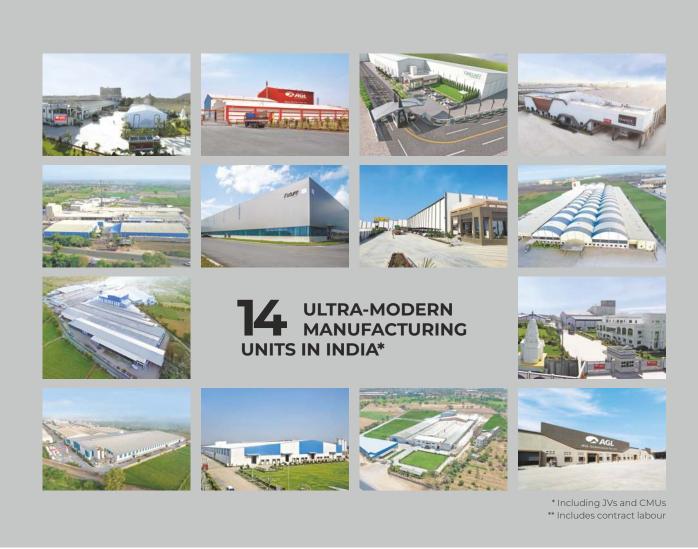

54.5 Million sqm Production Capacity per Annum*	Consolidated Net turnover ₹ 1562 cr. (US \$190 million)	1400+ Designs	30+ Different sizes	12 Display centres
6000+ Employees Includes contract labour	14 Manufacturing Units**	Exports in 100+ Countries	Trade network in 35 States & UTs of India	235+ Showrooms
11+ Digital Printing Technology	First to bring world's largest 5 line Kiln setup in India.	1.4 Million+ Facebook followers	1400+ Touch point	



From ceramic tiles to latest Glazed Vitrified Tiles & Double Charge Vitrified Tiles; Roto Drum to New Digital Technology, AGL dominates the most diverse array of designs across the entire Tile, Marble & Quartz product range. Modernization plays a pivotal role for the company, which becomes evident from our 09 ultra modern plants across Gujarat. Spread over an area of 3,20,000 sqm these plants unfailingly produce unbeatable classy products every day. Therefore, we are proud to acquire the certifications from ISO and Green Building.

A: Latest Press with ultra modern feeder

B : Digital Printing Technology -14 Unit

C: World's Widest Kiln First in India
D: Auto check of planarity & rectangularity of tiles

E: Continua + latest press system from Sacmi, italy

Asian Granito India Limited has debunked the myth that leadership in design is a forte only of foreign players by achieving the position through an ideal mix of creativity and technology. It has been the champion in introducing innovative digital printing technology with a technical collaboration with SACMI, Italy. A world-class Quality Management System has enabled us to build a portfolio that is truly avantgarde.

GLOBAL PRESENCE IN OVER 100+ COUNTRIES

YOUNGEST &
FASTEST GROWING
TILE COMPANY
IN INDIA

LARGEST SINGLE LOCATION PLANT IN INDIA ONE OF TOP 4 LISTED CERAMIC TILES COMPANIES IN INDIA

Achievements of trusted and innovative brand in the ceramic industry

AWARDS AND Today, AGL has been performed the best to give excellent product and services across the globe and in result, AGL has RECOGNITION product and services across the globe and in result, AGL has been recognized by top media houses like Readers' Digest, The Economic Times and Fortune India. AGL is certified with ISO 9001:2015 and ISO 14001:2015 for its quality management and environmental management system and also products are certified with CE standards.

ISO 9001:2015

CERTIFIED

































AGL is now MEGA BRAND Recognition by ARCHITECTURE + DESIGN - 2016



ET INDUSTRY LEADERS 2021



Recognised as one of the Best Brand by The Economic Times -2022




Recognised as one of the Best Brand by The Economic Times -2023



CERTIFICATIONS







ISO 9001: 2015







CE CERTIFIED



GUJARAT BRAND Asian Granito India (AGL Tiles) (A) 150 September 2014 Spillers Berlins Monacole

AWARDED FOR BRAND LEADERSHIP

Samuel And Broken

GRIHA CERTIFIED



IGBC CERTIFIED

MANY NATIONAL & **INTERNATIONAL PROJECTS**

Today AGL is the preferred brand for several National & International Projects. We are partnering several private residential projects, commercial projects, showrooms, port authorities, religious centers, and international projects. Here are selected few of them:







Project : Cleveland Cycle Werks Showroom



PRESTIGIOUS PROJECTS

























































































and many more ...





Asian Granito India Ltd. (AGL) exports sprea across an ever growing network of more than 100 countries.



OUR EXPERIENCE CENTRES

"Team AGL is making efforts to simplify product selections very nearer to you. Keeping in mind better service and easy access to AGL products, your company has opened world class display centres across various metro cities of India. These showrooms are avant-garde with contemporary product applications of Tiles, Marble, Quartz and its latest Bathware range of products. We are sure that your visit to AGL showroom definitely helps you in right product selection and leave long lasting impressions in your mind. Below are few glimpse over the showroom.







AHMEDABAD | MORBI | HIMATNAGAR | MUMBAI | BANGALURU COCHIN | HYDERABAD | JAIPUR | DELHI | KOLKATA

AGL®

TOUGH AND RESILIENT WITH TIMELESS AESTHETIC ELEGANCE





Explore a resilient collection of tiles crafted to make your exterior spaces look and feel robust. The strength & sturdiness of the collection is unmatched & unbeatable in every sense.

400x 400mm

> 300x 300mm

Add grandeur and resilience to your spaces with robust surfaces rich in aesthetics & class-apart features. The surfaces are available in 600x600mm I 400x400mm I 300x300mm sizes, are long-lasting and durable, and add infinite possibilities to outdoor spaces with multiple designs and outstanding features.

TILE FEATURES

FLOOR

TILES

STAIN



HIGH DURABILITY

RESISTANCE



HYGIENIC SURFACES

RESISTANCE

EASY TO

FIRE



LOW WATER ABSORPTION

EASY TO

SCRATCH

CLEAN



NANO POLISHED



FROST RESISTANCE



ECO EDIENDI V



600x 600mm

600mm 12MM Thickness

1200x 1600mm 9MM Thickness

800x 2600mm 15MM Thickness

1200x 2800mm 6MM Thickness



30x30cm 300x300mm





SRI (Solar Reflective Index) measure a roofs ability to reject solar heat (reflectance) and the ability to emit heat out (emitances).

The U.S green building councils LEED 2.2 user SRI as a way to evaluate a eco white. To get LEED accreditation, building should use a roof with minimum SRI value of 78.

Eco white reflects and emit the sun heat instead of absorbing it.

Eco white tile on the roof of a building can reduce inside building temperature by low degree centigrade.

Eco white is one that reflects the sun's heat and emits absorbed radiation back in to the atmosphere. This will keep the inside building cooler.




14




































12mm Thickness





NOVART GREY


































NULUXE GRIS



NULUXE GRIGIO







NULUXE GRIGIO



























VELVETE BROWN DECOR



12mm Thickness











VELVETE GRIGIO

FOGLIA MUSHROOM

VELVETE BROWN

TERRAZON NERO



















DESTREZA CHOCO


HEXARTE NERO DECOR-1

























₩TA



12mm Thickness



















BENZIL STONE



ALBERT STONE

ROOST STONE

















RUSTYZE FUSION

BRICKSO SLATE

SCAN FOR 360















BRICKSO BROWN

KYORO GRIGIO


KYORO BROWN


















ARMANIO BROWN





ARMANIO SHINE








TIMWOOD BROWN

22






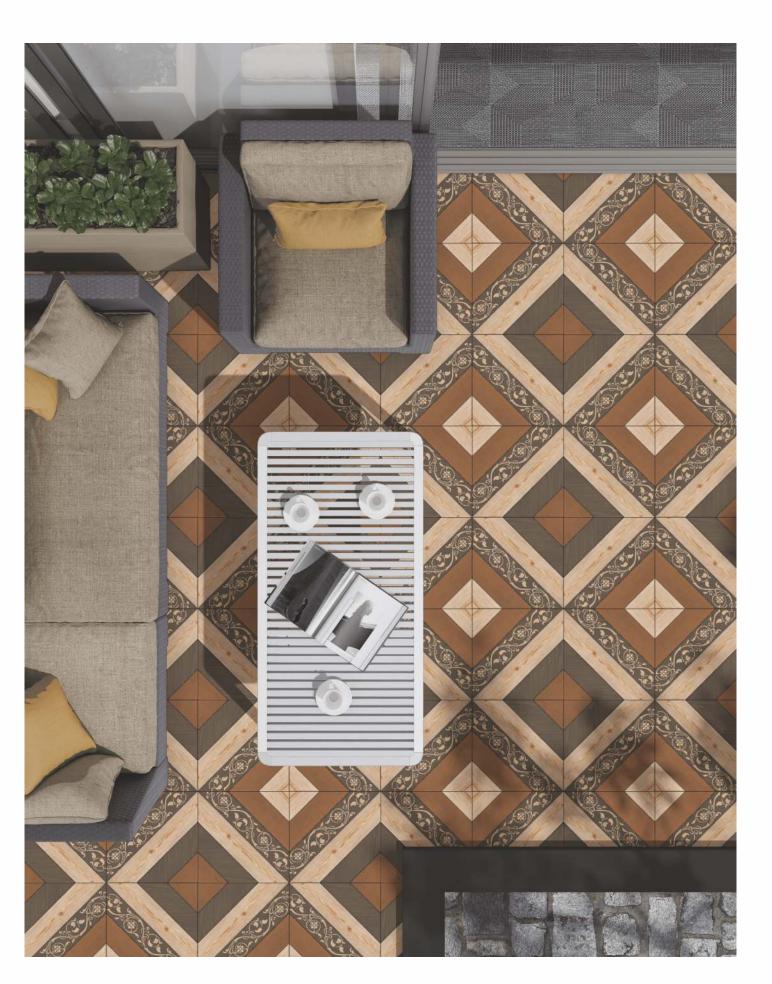




















EMINEM STONA





TIJOLOS GRASS







STRIPEO MAHAGONY





PEBBLEW STONA

12mm Thickness







PEBBLEW SLATE







PEBBLEW GRIGIO























ANCHORE GRASS






ANCHORE GRIS






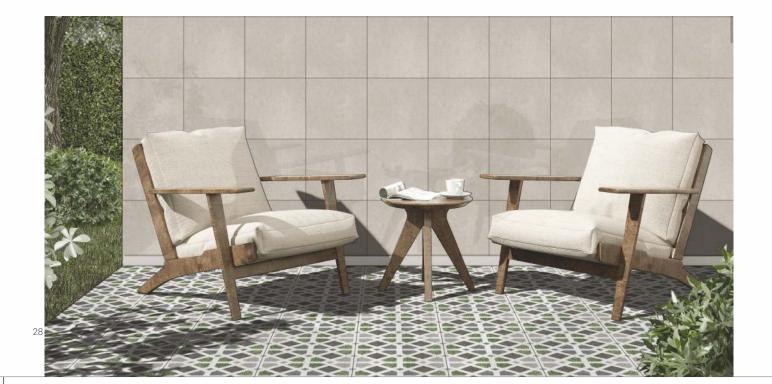




PEBBLON GRIS







PEBBLON BROWN
























BATHWALK FUSION





BATHWALK RUSTY







BATHWALK WOOD







WOODBY BROWN





WOODBY BLUE


























TURFTILE WOOD





TURFTILE STONES






TURFTILE SANDSTONE







ARCAVE BROWN





CENTRIO ORANGE


































MOSAIC EARTH PLUS

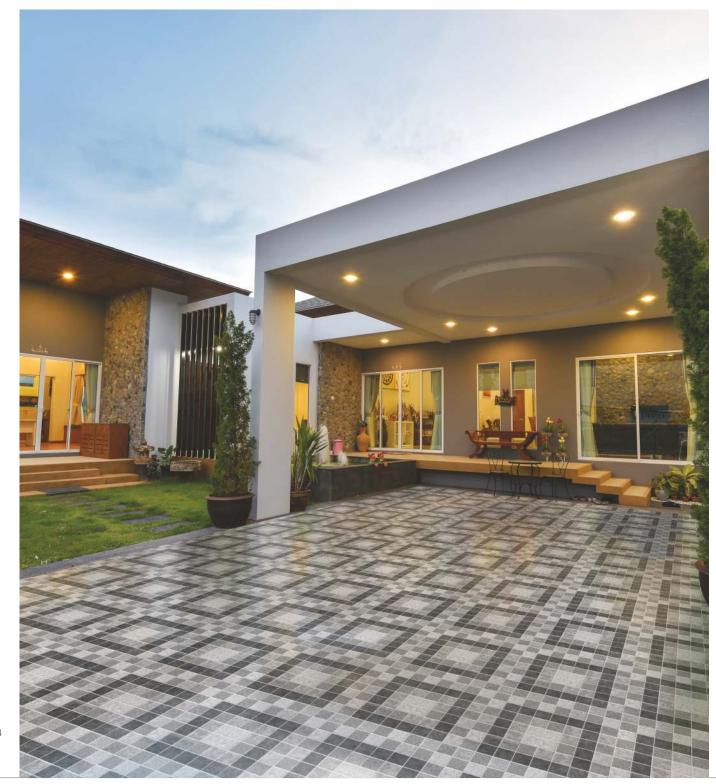





VERTIC GREY



















ROCKSCAPE BROWN PLUS

DOLOROSA COTTO PLUS

















CLASSY GREY PLUS











CLASSY BLUSH PLUS CLASSY WOOD PLUS



RODIZ BLUSH PLUS







RODIZ PISTA PLUS







HOLZ SLATE PLUS





RODIZ BROWN PLUS









PETRA BEIGE PLUS








PETRA SLATE PLUS

RODIZ BLUE PLUS

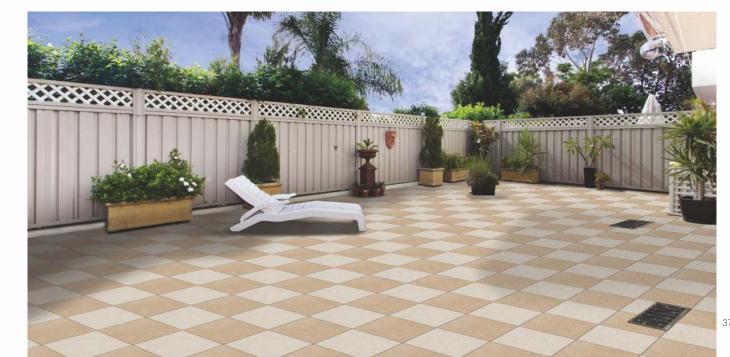




























GRANO GREY PLUS









GRANO BLUE PLUS













GRANO CEMENT PLUS









RUSTICO NERO PLUS









RUSTICO BEIGE PLUS





GEOSAND GREY PLUS

GEOSAND BROWN PLUS









Grandura Vitrified Exteriors

300x300mm










GRIT BEIGE














BULLET BEIGE



GRIT ROSA

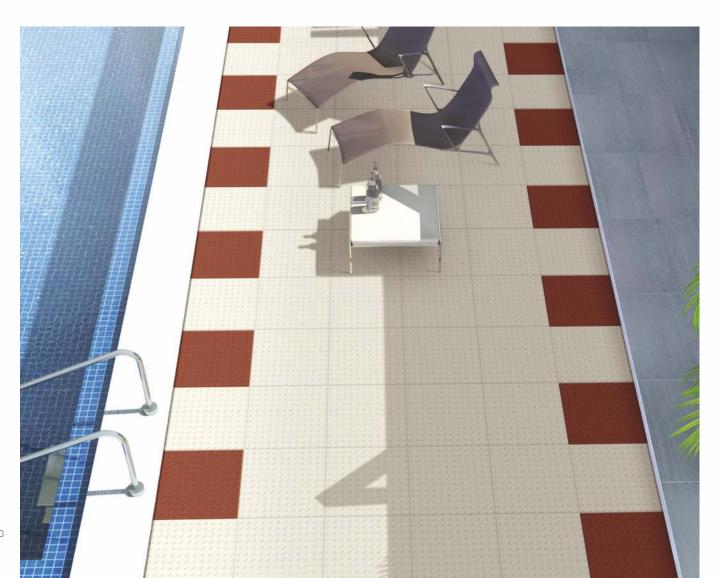






















TINT BEIGE











CURVY ROSA

TINT ROSA







TABULA ROSA





CEPT Research and Development Foundation, CEPT University

Test Report for Solar Reflectance Index (SRI)





ULR-TC702018000000012F

Report No: CRDF/RPT/SRI/391

Report Date: 26th October 2018

Technical Director

3. Results of the measurement:

Solar Direct Reflectance

Sample name	Sample ID	Measurement 1	Measurement 2	Measurement 3	Average
Parking Floor Tiles	SRI/10/18/1392	0.7067	0.7091	0.7083	0.7080

Sample name	Sample ID	Measurement 1	Measurement 2	Measurement 3	Average
Parking Floor Tiles	SRI/10/18/1392	0.918	0.919	0.919	0.919

Solar Reflecta	ance Index (SRI)	under different	wind conditions
----------------	------------------	-----------------	-----------------

Sample name	Sample ID	Solar Reflectance Index (SRI)								
Parking Floor Tiles	SRI/10/18/1392	Low Wi 71-2 K-1)	Medium V' V m-2 K-1)	High Wind(h _c =30 W m ⁻² K ⁻¹)						
	011111011011002	(87)	8/	88						

Sample name	Sample ID		Surface Temperature (°C)					
Parking Floor Tiles SRI/10/18/1392	Low Wind(h _c =5 W m ⁻² K ⁻¹)	Medium Wind(h _c =12 W m ⁻² K ⁻¹)	High Wind(hc=30 W m-2 K-1)					
r arking r loor riles	011/10/10/1002	56.5	49.4	43.2				

4. Certificate of Accuracy:

This is to certify that the test results herein presented are, to the best of my knowledge, true and accurate representations of the samples submitted.





Disclaimer:

Jigar Patel Lab. Technician

- 1. The CEPT Research and Development Foundation, CEPT University is not responsible for any kind of alterations in the physical property of the sample and the customer is solely responsible for it and its consequences.
- 2. Result relates to the sample tested only. Sample will be destroyed after 7 days of issue of the report unless specified by the customer.
- 3. Any complains about this report should be communicated in writing within 7 days of issue of the report.
- 4. The test report shall not be reproduced fully or partially or in parts and cannot be used as an evidence in a court of law and shall be used in advertising media without written approval of Director, CEPT Research and Development Foundation, CEPT University.

CEPT Research and Development Foundation, CEPT University, K. L. Campus, Navrangpura, Ahmedabad- 380 009.
Phone No: 079-26302470- Extn: 383, 26302740 Fax: +91 79 26302075.Email: ashajoshi@cept.ac.in
Page 2 of 2

F/TR/01/SRI, ISSUE No. 6

42

Technical Specification





43

	CHARACTERISTICS	Requirement as per ISO 13006:2018 Gr Bla E ≤ 0.5%	Requirement as per IS 15622:2017 Gr BIb 0.08 ≤ E ≤ 3.0%	AGL Value	Test Method	
4) DI	MENSION & SURFACE QUALITY —					
1	Deviation In Length & Width	± 0.3%, ± 1.0 mm	± 0.1%	± 0.1%	ISO 10545 Part- IS 13630 Part-1	
	Deviation In Thickness	± 5.0%, ± 0.5 mm	± 5.0%	± 3.0%	ISO 10545 Part- IS 13630 Part-1	
	Straightness of Edge	± 0.3%, ± 0.8 mm	± 0.1%	± 0.1%	ISO 10545 Part- IS 13630 Part-	
	Rectangularity	± 0.3%, ± 1.5 mm	± 0.1%	± 0.1%	ISO 10545 Part IS 13630 Part-	
>	Surface Flatness	± 0.4%, ± 1.8 mm	± 0.5%	± 0.2%	ISO 10545 Part- IS 13630 Part-	
•:	Surface Quality	Min. 95% of Tiles shall be free from visible defects that would impair the appearance of a major area of the tiles	Min. 95% of Tiles shall be free from visible defects that would impair the appearance of a major area of the tiles	Min. 95% of Tiles shall be free from visible defects that would impair the appearance of a major area of the tiles	ISO 10545 Part IS 13630 Part-	
\bigvee	Solar Reflectance Index (SRI)			Min 75		
3) PH	HYSICAL & THERMAL PROPERTIES			'		
.	Water Absorption % By Wt.	 ≤ 0.5, Ind. 0.6 Max.	0.08 ≤ E ≤ 3.0, Ind. 3.3 Max.	≤ 0.5%	ISO 10545 Part IS 13630 Part-	
<u>↓</u>	Flexural Strength (MOR) In N/mm ²	Avr. 30, Ind. Min. 27	Avr. 30, Ind. Min. 27	≥ 35 N/mm²	ISO 10545 Part IS 13630 Part-	
\$	Breaking Strength in N	1300 N Min.	1100 N Min.	> 1800 N	ISO 10545 Part IS 13630 Part-	
İ	Bulk Density (gm/cc)	2.0 Min.	2.0 Min.	≥ 2.2	ISO 10545 Part IS 13630 Part-:	
0	Resistance to Surface Abrasion	Manufacturer to State Class	PEI II Min	Min PEI IV	ISO 10545 Part IS 13630 Part-	
$\overline{\leftrightarrow}$	Co-efficient of Linear Thermal Expansion from ambient temp to 100°C (K ⁻¹)	9x10 ⁻⁶ Max.	7x10 ⁻⁶ Max.	≤ 6x10 ⁻⁶	ISO 10545 Part-8 IS 13630 Part-4	
端條	Thermal Shock Resistance	10 Cycle Min.	10 Cycle Min.	No Damage after 10 Cycles	ISO 10545 Part IS 13630 Part-	
4	Moisture Expansion in mm/M	Test Method Available	0.02 Max.	Nil	ISO 10545 Part- IS 13630 Part-	
ş	Crazing Resistance	Required	4 Cycle at 7.5 bar Min.	Resistance	ISO 10545 Part IS 13630 Part-	
桊	Frost Resistance	Resistance	Resistance	Resistance	ISO 10545 Part- IS 13630 Part-1	
*	Moh'S Scratch Hardness	Min. 5	Min. 5	≥ 7	EN 101 IS 13630 Part-1	
				'		
C) CH	HEMICAL PROPERTIES					
S	Resistance To House hold Chemicals	No Damage	Min. Class AA	Class AA	ISO 10545 Part- IS 13630 Part-	
	Resistance To Acids & Alkalis (Except HF Acid)	No Damage	Min. Class AA	Class AA	ISO 10545 Part- IS 13630 Part-	
ĮŁ.	Stain Resistance	Min. Class 3	Min. Class 1	Class 1	ISO 10545 Part- IS 13630 Part-	

Packing Specification

Size (mm)	Thickness (mm)	Weight (Kg.)	No. of Tiles / Box	Area Sq. mtr./ Box
300x300mm	9mm	14	08 pcs.	0.72m ²



	CHARACTERISTICS	Requirement as per ISO 13006:2018 Gr Bla E ≤ 0.5%	Requirement as per IS 15622:2017 Gr BIb 0.08 ≤ E ≤ 3.0%	AGL Value	Test Method
(A) DI	MENSION & SURFACE QUALITY —				
<u>:</u>	Deviation In Length & Width	± 0.3%, ± 1.0 mm	± 0.1%	± 0.1%	ISO 10545 Part-2 IS 13630 Part-1
r	Deviation In Thickness	± 5.0%, ± 0.5 mm	± 5.0%	± 3.0%	ISO 10545 Part-2 IS 13630 Part-1
	Straightness of Edge	± 0.3%, ± 0.8 mm	± 0.1%	± 0.1%	ISO 10545 Part-2 IS 13630 Part-1
	Rectangularity	± 0.3%, ± 1.5 mm	± 0.1%	± 0.1%	ISO 10545 Part-2 IS 13630 Part-1
>	Surface Flatness	± 0.4%, ± 1.8 mm	± 0.5%	± 0.2%	ISO 10545 Part-2 IS 13630 Part-1
•:	Surface Quality	Min. 95% of Tiles shall be free from visible defects that would impair the appearance of a major area of the tiles	Min. 95% of Tiles shall be free from visible defects that would impair the appearance of a major area of the tiles	Min. 95% of Tiles shall be free from visible defects that would impair the appearance of a major area of the tiles	ISO 10545 Part-2 IS 13630 Part-1
(B) PH	HYSICAL & THERMAL PROPERTIES				
.	Water Absorption % By Wt.	≤ 0.5, Ind. 0.6 Max.	0.08 ≤ E ≤ 3.0 Ind. 3.3 Max.	≤ 0.5	ISO 10545 Part-3 IS 13630 Part-2
$\frac{\downarrow}{\uparrow\uparrow}$	Flexural Strength (MOR) In N/mm²	Avr. 30, Ind. Min. 27	Avr. 30, Ind. Min. 27	≥ 35 N/mm²	ISO 10545 Part-4 IS 13630 Part-6
ş	Breaking Strength in N	1300 N Min.	1100 N Min.	> 1800 N	ISO 10545 Part-4 IS 13630 Part-6
	Bulk Density (gm/cc)	2.0 Min.	2.0 Min.	≥ 2.2	ISO 10545 Part-3 IS 13630 Part-2
0	Resistance to Surface Abrasion	Manufacturer to State Class	PEI II Min	Min. PEI IV	ISO 10545 Part-7 IS 13630 Part-11
$\overline{\leftrightarrow}$	Co-efficient of Linear Thermal Expansion from ambient temp to 100°C (K³)	9x10 ⁻⁶ Max.	7x10 ⁻⁶ Max.	≤ 6x10 ⁻⁶	ISO 10545 Part-8 IS 13630 Part-4
剝飾	Thermal Shock Resistance	10 Cycle Min.	10 Cycle Min.	No Damage after 10 Cycles	ISO 10545 Part-9 IS 13630 Part-5
6	Moisture Expansion in mm/M	Test Method Available	0.02 Max.	Nil	ISO 10545 Part-10 IS 13630 Part-3
\$	Crazing Resistance	Required	4 Cycle at 7.5 bar Min.	Resistance	ISO 10545 Part-11 IS 13630 Part-9
*	Frost Resistance	Resistance	Resistance	Resistance	ISO 10545 Part-12 IS 13630 Part-10
**	Moh'S Scratch Hardness	Min. 5	Min. 5	≥ 7	EN 101 IS 13630 Part-13
(C) CH	HEMICAL PROPERTIES ————				
S	Resistance To House hold Chemicals	No Damage	Min. Class AA	Class AA	ISO 10545 Part-13 IS 13630 Part-8
	Resistance To Acids & Alkalis (Except HF Acid)	No Damage	Min. Class AA	Class AA	ISO 10545 Part-13 IS 13630 Part-8
<u>I</u>	Stain Resistance	Min. Class 3	Min. Class 1	Class 1	ISO 10545 Part-14 IS 13630 Part-8
Pac	king Specification				

Size (mm)	Thickness (mm)	Weight (Kg.)	No. of Tiles / Box	Area Sq. mtr./ Box
400x400mm (Grandura+)	12 mm	19.5 kg.	05 pcs.	0.80m²
300x300mm (Grandura+)	9 mm	14.5 kg.	08 pcs.	0.72m ²
300x300mm (Grandura)	9 mm	17.5 kg.	10 pcs.	0.90m²

Notes & Recommendation



UNDERSTANDING ICONS















APPLICATION

































NOTES

- All Technical Specifications in This Catalogue are for Premium Grade Material only.
- SHADE/SIZE VARIATION are inherent characteristics to ceramics. Certain products purposely have variations which are part of design & process. The same have been indicated.
- It is recommended to blend tiles by mixing tiles from various boxes & check for natural hue before fixing the tiles.
- It is recommended to check the tiles before laying/fixing. Quality standards cover 1st/Premium Quality only.
- Company's liability is limited on material that has not been laid.
- NO COMPLAINT SHALL BE ENTERTAINED ON TILES ALREADY FIXED/LAID.
- The liability is also limited to the material supplied by the company: no other claim is entertained under any circumstances.
- No complaint is entertained on decoration done on tiles, other than the ones done by Asian Granito India Ltd.

GENERAL NOTE: Any complaint must be brought to the company's notice within 10 days of purchase & before fixing of tiles.

How to avoid defects & complaints :

- Use good quality Tiles
- Choose good quality Tiles, with proper consideration to area intended of usage.
- Avoid careless laying of Tiles
- Avoid poor maintenance-for instance, by cleaning with strong Chemicals or with abrasive equipment e.g. metallic scrubber
- Always keep Tiled area clean & ensure dusting/mopping regularly
- Put Doormats/Foot-mats at all strategic locations to avoid loose debris/dust from entering the Tiled area

List of Detergents For Removal of Stain

STAIN (Created By)	Beer	Blood	Calcar	Cement	Cigarette	Soft Drinks	Coffee	Edible Oil	Glue	Ice Cream	Ink	Juices	Marker Ink	Nicotine	Paints	Resin	Rust	Tar	Теа	Turmeric	Wine
SOLVENTS (Turpentine, acetone, trichloroety - line etc.)								•	•		•		•			•		•			
SODIUM HYPO (Chlorite (NaOCL)												•							•		
ACIDS DILUTED (Hydrochloric acid*)			•	•	•						•			•	•		•			•	
ALKALI (Sodium hydroxide/potassium hydroxide)	•	•				•	•			•											•

45

DISCLAIMER: Asian Granito India Ltd. reserves the right to delete & amend either totally or partially, any of the colors, shapes, sizes, references and other technical specifications contained in this catalogue at anytime. The colors shown of tiles in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of sizes, colors, references should be verified for typographical errors. All complaints need to be reported within 10 days of purchase. Always follow instructions to avoid complaint due to bad masonry.



CORPORATE OFFICE & BRANCHES

DISPLAY CENTRE & OFFICE

Display Centre - Ahmedabad

AGL Luxury Tile Arcade

S.G. Highway, Nr. Gota Cross Road, Beside Gota over bridge, Ahmedabad - 382481. Mobile: 98258 03713 / 99099 29920

E-mail: asianworld.amd@aglasiangranito.com

AGL Export House - Morbi

Ch-5, Eden Ceramic City, Opp. Honest Hotel, National Highway, Lalpar Road Morbi - 363642. Mobile: 99799 90591

E-mail: exportmorbi@aglasiangranito.com

Factory Display Centre - Morbi

(Sanitaryware & Faucets)

AGL Sanitaryware Pvt. Ltd.

Survey No. 153 P1, 153 P2, 154 P2, 8A National Highway, B/h. Bahadurgadh Bus Stand, At. Bahadurgadh, Morbi-363642. Gujarat, India. Mobile: 11

E-mail: 11

MAHARASHTRA

AGL Display Centre - Mumbai

A- 402, Citi Point, Nr. kohinoor Hotel, Opp. ICICI Bank, J.B. Nagar, Chakala Metro Station, Andheri (East), Mumbai - 400 059. Mobile: 93214 95229 E-mail: mumbaishowroom@aglasiangranito.com

AGL Display Centre - Mumbai (Marblex & Grestek)

Gala Impecca, Gr. Floor, Mathuradas Vasanji Rd, Next to Caurtyard Marriott, J. B. Nagar, Kurla-Andheri Road, Andheri (East) - 400059 Mobile: 7600098595

AGL Display Centre - Pune

Capital Square, 1st & 2nd floor, Plot No.5, Nr. Laxminarayan Sweets, Industrial Estate, Mukund Nagar, Pune - 411037 Maharashtra. Mobile: 93717 65505



TELANGANA

■ AGL Display Centre - Hyderabad (Marblex & Grestek)

202 Kurve Elite, 2nd Floor, 8-3-833/58 & 47, Plot No. 58, Phase-1, Kamala Puri Colony Main Rd, Opp. Krishe Medows, Hyderabad-500073 Mobile: 96420 00336 / 77779 15632 E-mail: hydgvt1@aglasiangranito.com

AGL Display Centre - Hyderabad

8-2-294/82,Plot No. 39, Road No. 5, Jubileehills Land Mark, Near Venkatagiri Bustop. (Dominos Pizza) Metro Piller No.3, Hyderabad-500033 Mobile: 96420 11146 E-mail: hydshowroom@aglasiangranito.com

KARNATAKA

■ AGL Display Centre - Bangalore

Asian Granito India Ltd., Region Office Brahmananda Court, No.37/17, Nr. ICIC Bank, Lalbagh Road, Bangaluru - 560027 Karnataka Mobile: 81605 21204 E-mail: bangloreshowroom@aglasiangranito.com

KERALA

AGL Display Centre - Kochin No.51/2910 D2 Adjacent To Bread World,

Thykoodam Bridge Service Road, Vyttila Kochin - 682019 Mobile: 80866 61920 / 78618 09641 E-mail: cochinshowroom@aglasiangranito.com

WEST BENGAL

AGL Display Centre - Kolkata

5th Floor, Office No. 5A, PS SOLARIS Building, 113/H, Opp. Flaming Hospital. Matheswartala Rd. Topsia. Kolkata 7000046. Mobile: 85840 65565 E-mail: kolkattashowroom@aglasiangranito.com

UTTAR PRADESH

AGL Display Centre - Noida

F-15, Ground Floor, Sector 8, Gautam Buddha Nagar, Noida - 201301 Uttar Pradesh Mobile: 7861806229

OFFICE

GUJARAT

Corp. Office - Ahmedabad ASIAN GRANITO INDIA LTD.

202, Dev Arc, Opp. Iskcon Temple, S. G. Highway, Ahmedabad - 380 015 Gujarat (INDIA) Phone: +91 79 66125500/698 Toll Free: 1800 123 3455 E-mail: info@aglasiangranito.com

AGL Office - Morbi

B - 26, Parshwanath Complex-1 Opp. kuber Cinema, 8-A National Highway, Lalpar Road, Morbi - 363642. Mobile: 9825802077 E-mail: aglmorbi@aglasiangranito.com

RAJASTHAN

AGL Office - Jaipur

Lower Ground, D-5, Vaishali Nagar, Jaipur, Rajasthan - 302021 Mobile: 80085 03660 / 93144 39930

MADHYA PRADESH

AGL Office - Indore

3rd Floor, Plot No 101, WB Scheme No. 94, Sector - B, Opp. HDFC Bank, Nr. Bombay Hospital, Indore - MP - 452010 Mobile: 99092 62533 / 73140 06670 E-mail: acctsindore@aglasiangranito.com

TAMIL NADU

AGL Office - Trichy

Mark Diamond Residency, No-36, V O C Road, cantonment. Trichy - 620001 Mobile: 90161 13976

AGL Office - Coimbatore

No .70, Dr. Alagappa Road, Tatabad. Coimbatore - 641 012 Mobile: 90161 13976

ODISHA

AGL Office - Odisha

Plot No-83/C, Jayadurga Nagar Bomikhal, Bomikhal, Cuttack-Puri Road, Bhubaneswar-751006 Mobile: 78618 09594 / 78944 35425

PUNJAB

AGL Office - Chandigarh

CCC Chandighar City Centre, Block A 3rd Floor, Soho 325, Vip Road, Near Metro Zirakpur, Chandigarh Punjab-140603 Mobile: 93163 13880 / 99882 22471







