
AIRMATE

SUBMITTAL DRAWING

- EXTRUDED ALUMINUM CONSTRUCTION FOR LAY-IN T-BAR APPLICATIONS
- MINIMUM SIZE = 12 INCHES
- MAXIMUM SIZE = 72 INCHES ONE PIECE CONSTRUCTION
- MULTIPLE SECTIONS PINNED FOR PROPER ALIGNMENT
- *DIFFUSERS AVAILABLE WITH ONE TO EIGHT SLOTS, WITH OR WITHOUT PATTERN CONTROLLER
- *FINISH: WHITE (W) ENAMEL OR SATIN ANODIZED (SA)
- PATTERN CONTROLLER BLACK

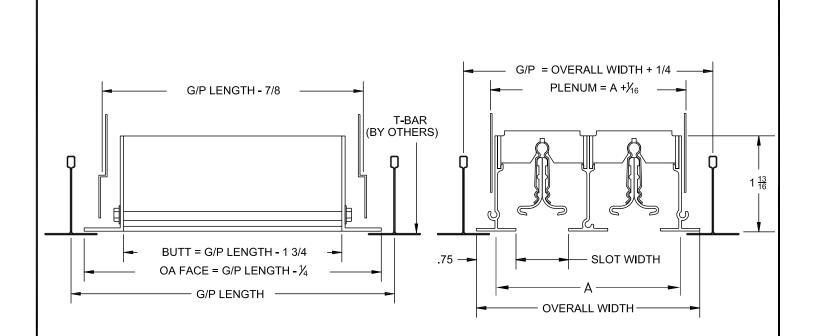

- * NOTE: NOT FOR NARROW LINE CEILING GRID SYSTEMS
- * ORDER 23 3/4" AND 47 3/4" INCH WITH END CAPS FOR 2 AND 4' SLOTS
- * ORDER 23" OR 47" LENGTH FOR THE DP PLENUM

SLOT WIDTH	TYPE	A -NOMINAL WIDTH	DUCT WIDTH*	OVERALL WIDTH
1/2	50	1-1/4 X NO. OF SLOTS	A + 1/16	A + 7/8
3/4	75	1-1/2 X NO. OF SLOTS	A + 1/16	A + 7/8
1	10	1-3/4 X NO. OF SLOTS	A + 1/16	A + 7/8

JOB NAME:	SUBMITTED BY:	DATE: 05/01/2019	AM-ESCD BO
LOCATION:		S SERIES	
ARCHITECT:		Slot Diffuser	
ENGINEER:		Margin BO-Sur	tace Mount
CONTRACTOR:			