

### Specifications:

- 6VDC or 12VDC or 24VDC selectable operation.
- Current draw 30mA.
- 1A/120VAC or 2A/28VDC DPDT contacts.


Board dimensions (W x L x H):

2" x 2.75" x 1" (50.8mm x 69.85mm x 25.4mm)



Relay is factory set for 6VDC.

Cut Jumper 2 for 12VDC or cut Jumper 1 for 24VDC.


### Dry Contacts




### Latching Dry Contacts

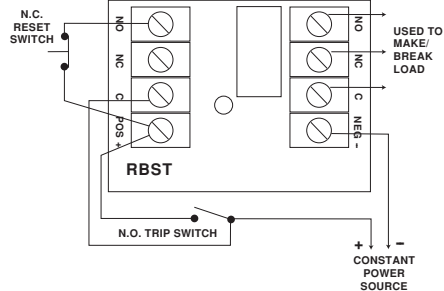

### Polarity Reversal

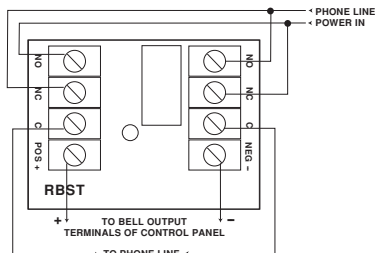

### Line Seizure

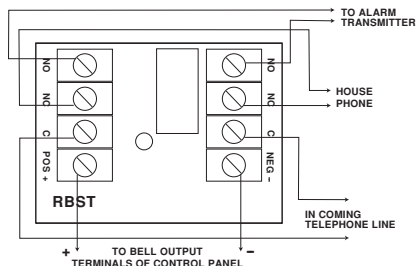

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.

140 58th Street, Brooklyn, New York 11220 USA | phone: 718-567-8181 | fax: 718-567-9056

website: [www.altronix.com](http://www.altronix.com) | e-mail: [info@altronix.com](mailto:info@altronix.com) | Lifetime Warranty

IRBST - Rev. 101007

F21U