



Quality Access Doors- FAST!

SUBMITTAL/TECHNICAL DATA SHEET

DESCRIPTIONS

Newly developed curb mounted fixed skylight, incorporates simplicity of installation, long trouble-free use with the beauty of a sleek, modern design. Following world design trends of electronic devices, FAKRO has developed curb mounted residential skylight with completely (smartphone like) flat surface, allowing installation on any type of roof in any direction you wish.

FEATURES

- Suitable for roof pitches between 0-60 degrees
- Unique "infinity glass" design
- Low-emission and heat-reflecting double glazed glass
- Warm spacer increases condensation resistance
- White PVC frame allows installation of internal blinds
- Internal gasket system protects from condensation
- Range of internal and external accessories
- 360° turn-around installation

SPECIFICATIONS

FRAME STRUCTURE: Multi-chamber white PVC profile

FRAME FINISH: White PVC profiles from the inside and black from the outside

GLAZING: G33 - Low-E tempered over laminated - double-pane glazing unit with warm TGI spacer and Argon gas

GASKET SYSTEM: Two rubber gaskets

WARRANTY: 10 years for skylight and glazing

SKU: **BA-FXC-L**

CURB MOUNTED SKYLIGHT




DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

ADDITIONAL PRODUCTS TO BE USED:

Flashings	EH-C - for roof tiles, corrugated metal and standing seam EL-C - for shingles and shakes
Ice and Water Guard	- Fakro Euroband or similar self-adhesive underlayment
Included mounting accessories	- Bit torx t20 - Installation screws #10 x 2 in.
External accessories	- SMZ solar awning blind
Internal accessories	- SRF blackout blind, SRP light reducing blind

For more details see the second page

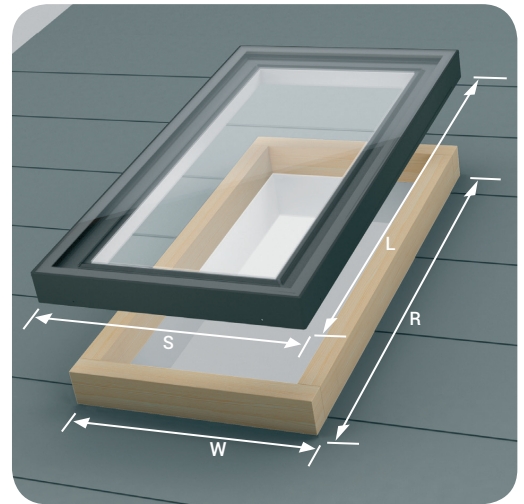

For a complete list of options visit www.BestAccessDoors.com

PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com

BA-FXC-L CURB MOUNTED FIXED SKYLIGHT

DIMENSIONS:

Size		14x30	14x46	22x22	22x30	22x34	22x46	22x70	30x30	30x46	34x34	34x46	46x46
Outside curb dimensions (WxR)	in. mm	17½ x 33½	17½ x 49½	25½ x 25½	25½ x 33½	25½ x 37½	25½ x 49½	25½ x 73½	33½ x 33½	33½ x 49½	37½ x 37½	37½ x 49½	49½ x 49½
Inside curb dimensions (BxK)	in. mm	14½ x 30½	14½ x 46½	22½ x 22½	22½ x 30½	22½ x 34½	22½ x 46½	22½ x 70½	30½ x 30½	30½ x 46½	34½ x 34½	34½ x 46½	46½ x 46½
Outside frame (SxL)	in. mm	19¼ x 35¼	19¼ x 51¼	27¼ x 27¼	27¼ x 35¼	27¼ x 39¼	27¼ x 51¼	27¼ x 75	35¼ x 35¼	35¼ x 51¼	39¼ x 39¼	39¼ x 51¼	51¼ x 51¼
Daylight area (glass)	(sq.ft.)	3.12	4.63	2.45	3.49	4.01	5.58	8.71	4.98	7.95	6.57	9.13	10.70
	m ²	0.29	0.43	0.23	0.32	0.37	0.52	0.81	0.46	0.74	0.61	0.85	1.18

TECHNICAL PARAMETERS:

Technical parameters	Glazing unit type		
	Unit	G33	Rating
U-factor	[BTU/h ft ² F]	0.45	NFRC 100
Solar Heat Gain Coefficient	-	0.22	NFRC 200
Air Leakage	[cfm/ft ²] @ 1,57 psf, tested size 24x70	0.06	NFRC 400
Visible Transmittance	-	0.42	NFRC 200
UV protection	-	99.7	EN 410-2011
Condensation Resistance	-	62	NFRC 500
Water Penetration Resistance Test Pressure	[Pa]	720	(NAFS 2011) & A440S1-17

*for windows wider or longer than 55"

