


Note:
 Materials:
 .Plunger: Brass 0.5um Au over Ni
 .Barrel: Brass 0.5um Au over Ni
 .Spring: SUS 304 Au
 Mechanical:
 .Contact force: 85g±20g at 0.6mm working height
 .Max. compression: 1.4mm
 .Life test: 20,000 cycles
 Electrical:
 .Rated current & voltage: DC 12V; 1A
 .Contact resistance: 50 milliohm Max.
 测试: 1. 碱性人汗: 100毫升无矿物质水, 5克氯化钠, 5克磷酸氢二钠, 检查并调整PH值为9.5;
 2. 酸性人汗: 碱性人汗液体加入约2毫升浓度99%的醋酸, 检查并调整PH值为4.7;
 最少样品数量: 7pcs, 每种汗液3pcs, 1PCS对比。
 测试时间: 48小时
 专利号: 见CFE产品专利说明

To ensure the best usage, please operate it based on the working height.
 Based on the engineering drawings, shall not exceed the maximum allowed compression.



Approve Sign

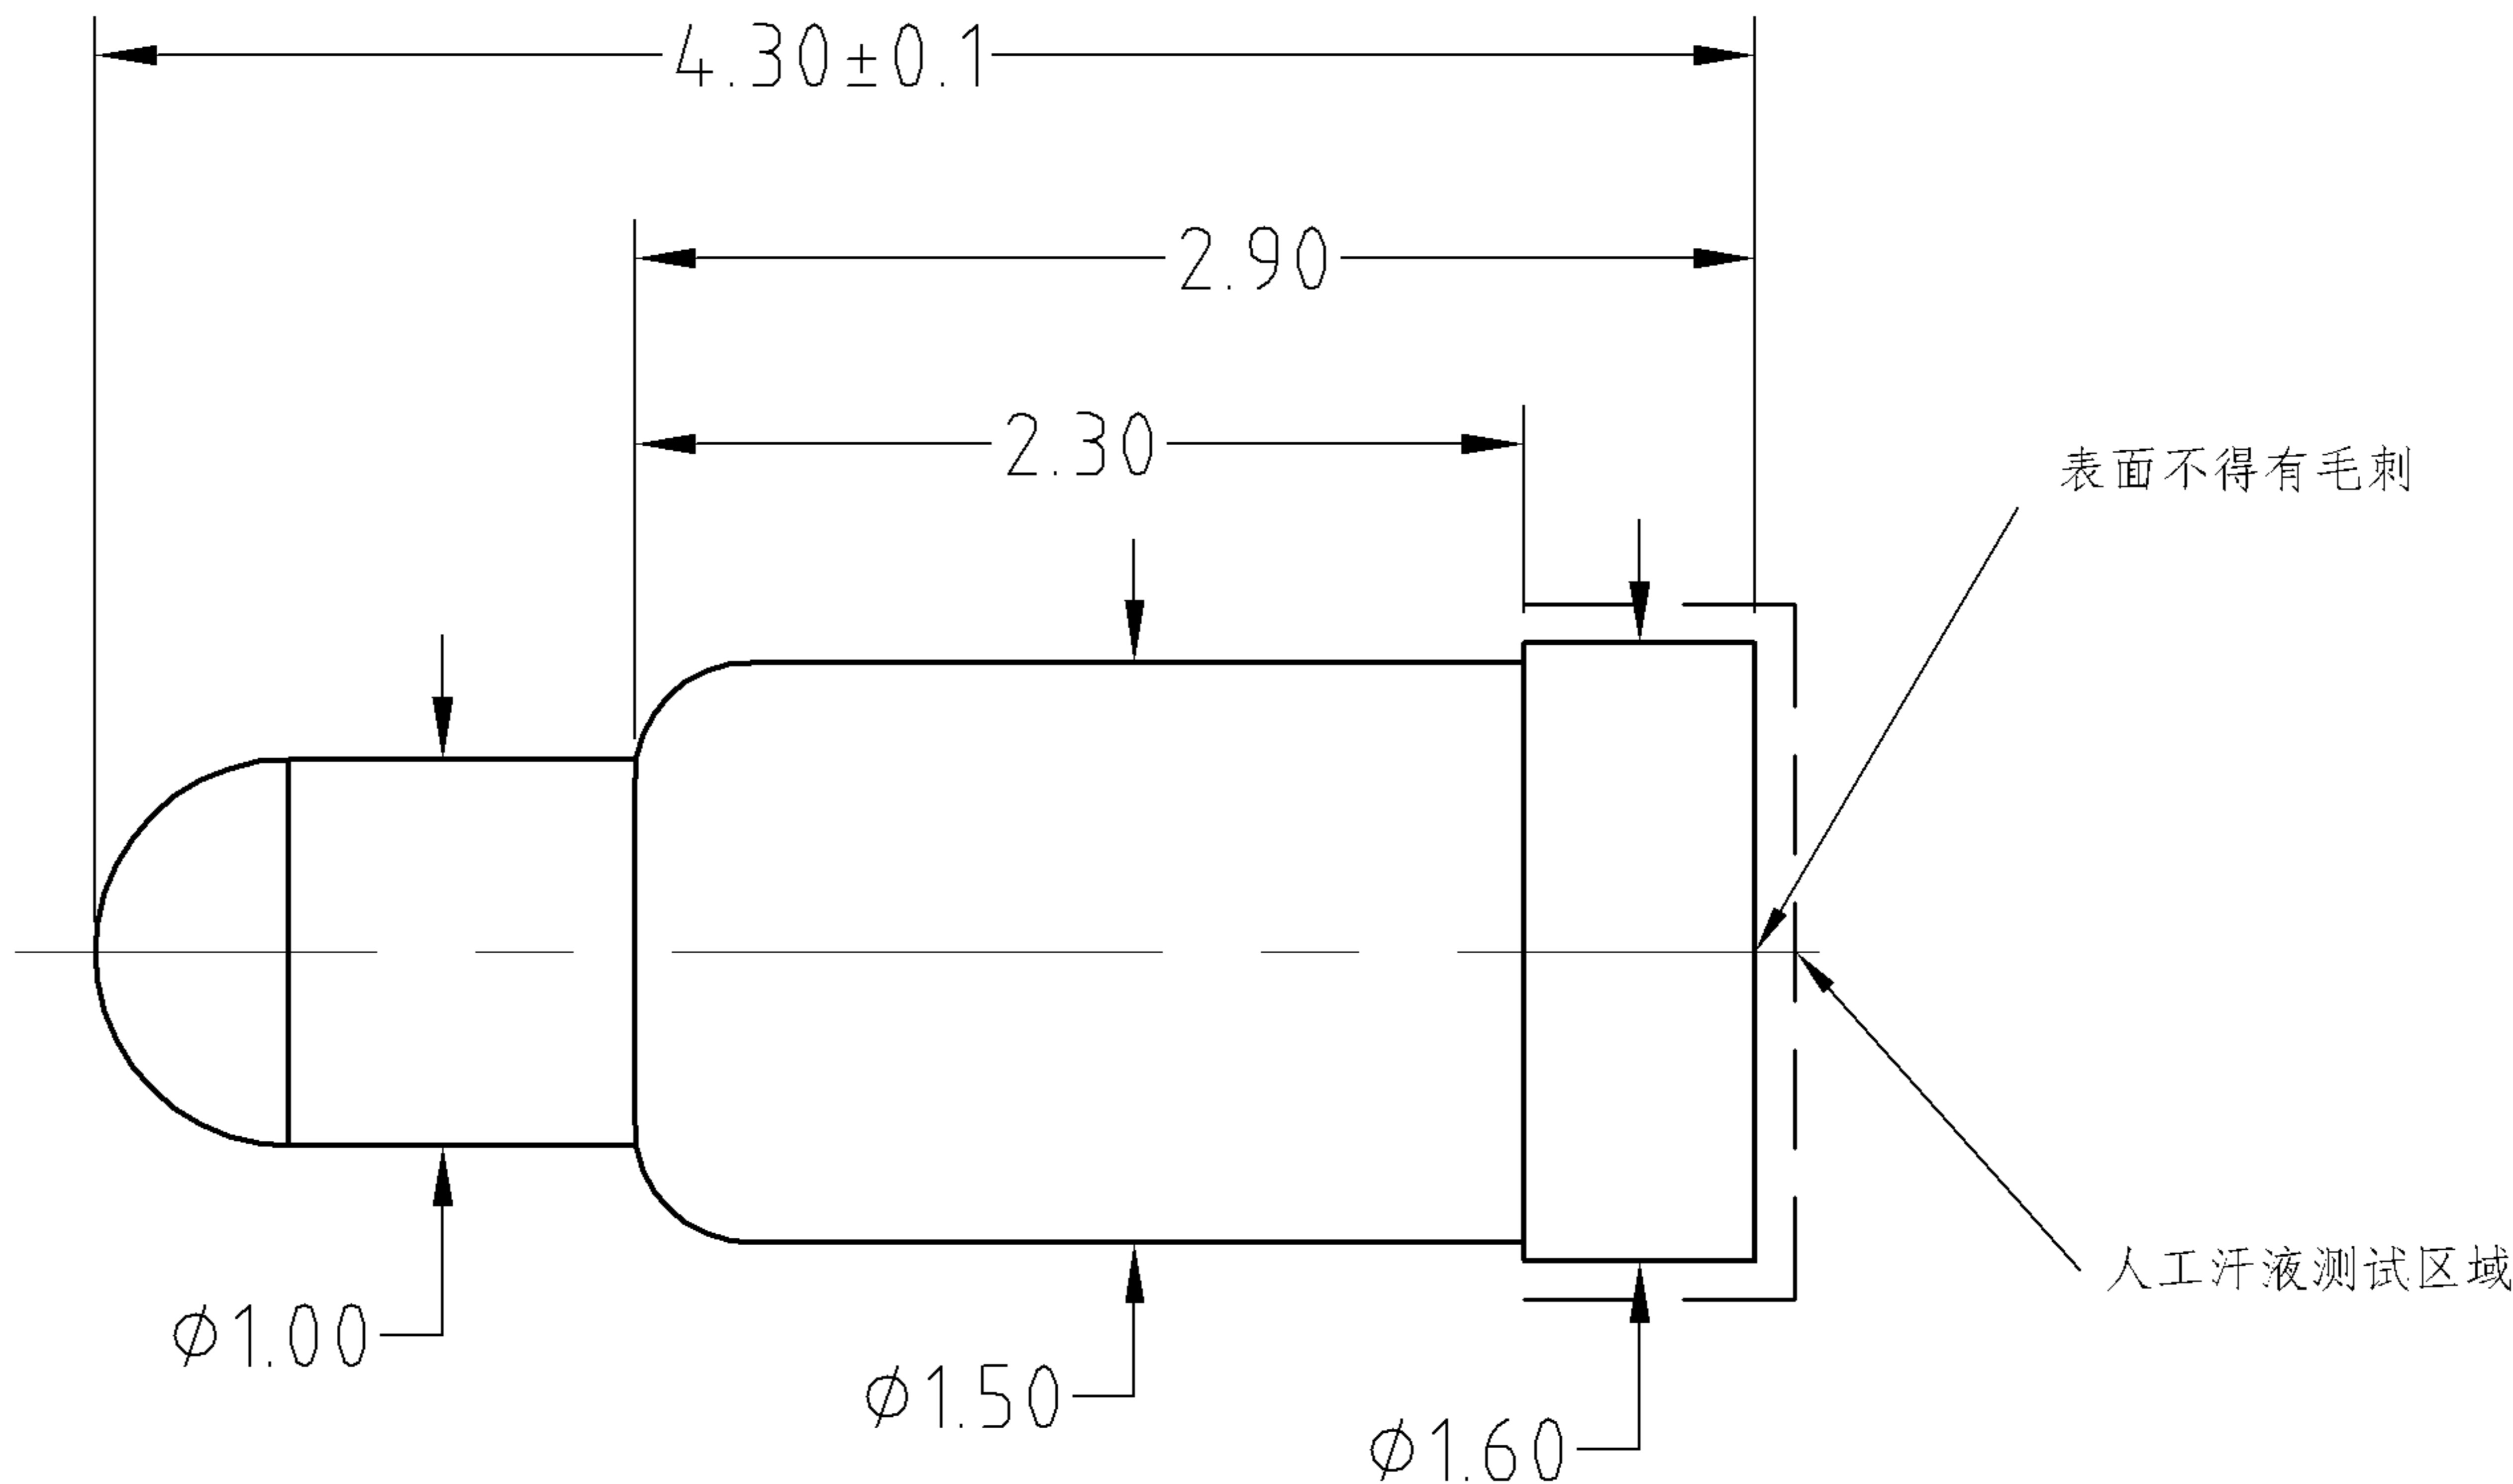

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.	
ANGEL	±2°	A4			
0~6	±0.05		SHEET: 1 of 1	PART NO.	BF99711
6~30	±0.10	DRAW		FILE NAME	BF997XX
30~150	±0.15	CHECK		TITLE.	Pogo pin
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO			

ECN(DCN) NO.	REV	DATE	DESCRIPTION
	D0	2017.03.21	NEW