

General description

Access doors allow easy admittance to the ventilation ducting for the purpose of inspection and cleaning.

Galvanized access door with a double-sided panel insulated with 25 mm of glassfiber wool. Removable panel for easy access into rectangular duct.

They consist of one removable panel and one frame.




Technical description

- Galvanized steel frame 0.8mm – 1mm
- Galvanized steel double sided removable panel with 25 mm fiber glass insulation
- 2 or 4 galvanized steel wedgelock fasteners
- High quality EPDM sealing gasket
- Stainless steel safety wire for model size 24 - 38 - 50

Technical specification

	OPENING		PANEL		OUTSIDE	
	A	B	C	D	E	F
IAD-24	115	205	150	240	185	290
IAD-38	200	335	240	375	290	425
IAD-50	325	460	365	500	415	550
IAD-65	460	610	500	650	550	700

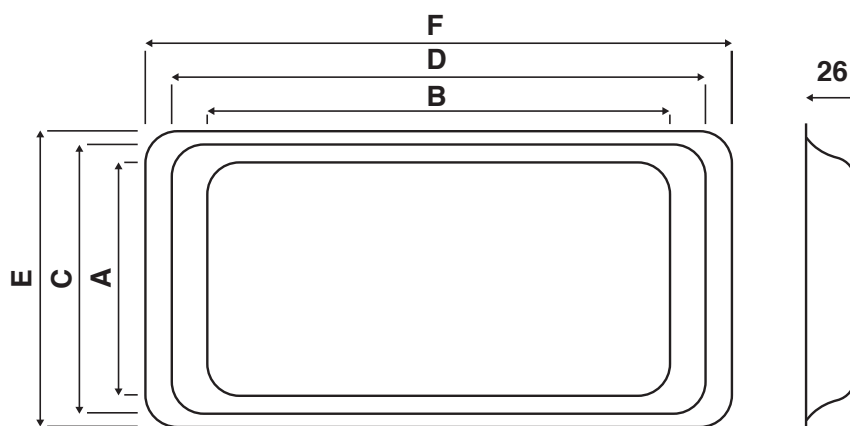

Information contained herein is based on careful tests and experience. It reflects our knowledge and is for guidance purpose only. It is given in good faith and user should ensure that the product is fit for purpose before any application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Manufacturer and distributor are not responsible for any non-recommended use or consequential damage.