




Justrite Safety Group

48  
CATALOG

# INDUSTRIAL AND COMMERCIAL MATTING FULL LINE CATALOG

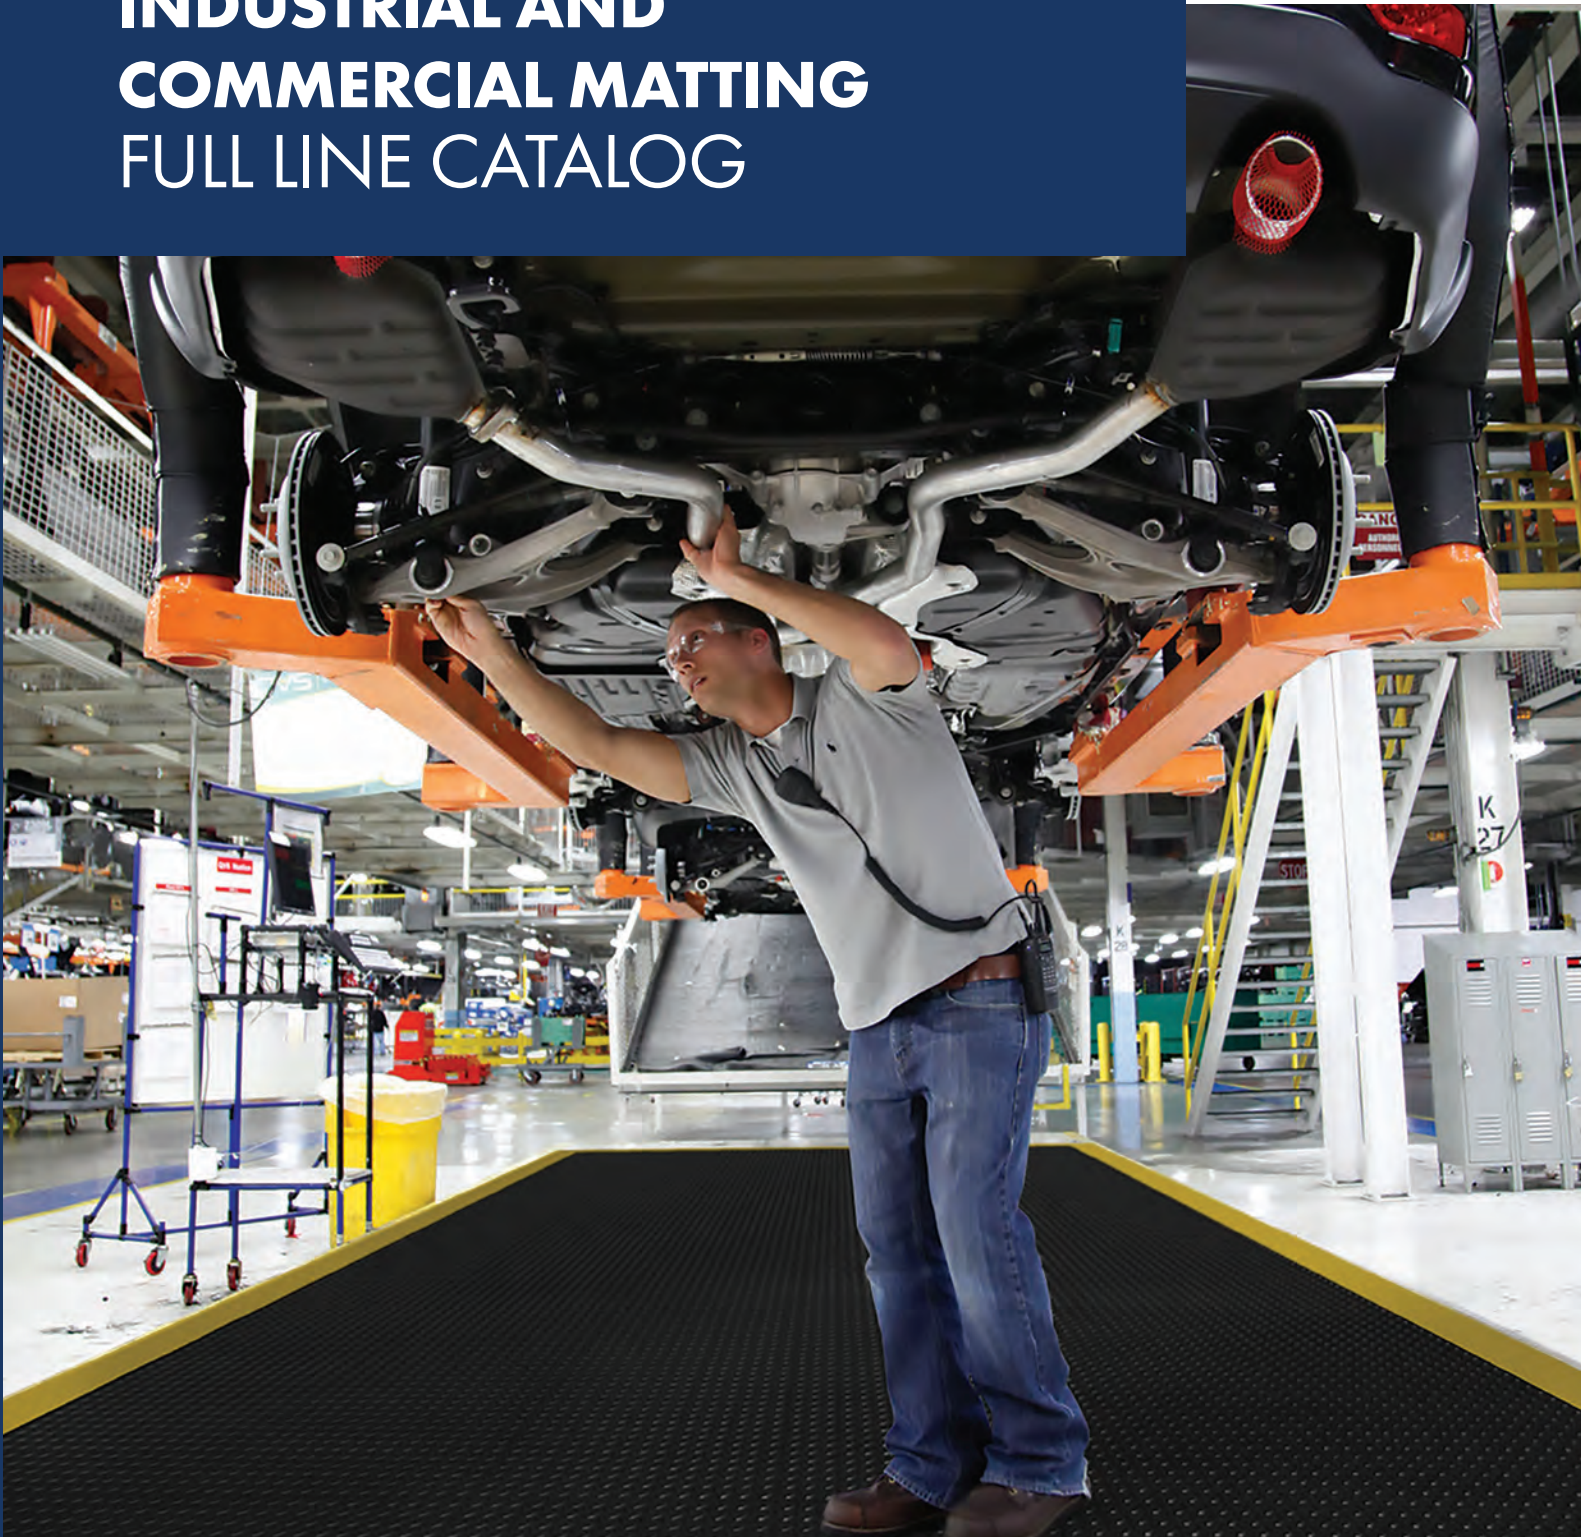

UNSURPASSED QUALITY WORLDWIDE

# GLOSSARY/PRODUCT TESTING

## PRODUCT TERMS

**ANTI-FATIGUE:** Cushioning qualities that alleviates foot pressure, stimulates blood circulation and helps reduce stress on the neck, legs, and lower back.

**CHEMICAL RESISTANCE:** The degree to which industrial matting products can withstand the erosive qualities of chemicals found in applicable environments.

**DECALON®:** An exclusive Notrax® fiber constructed of high Denier polypropylene yarn that offers superb wear resistance, moisture retention, and crisp pattern appearance in coordinating colors.

**DENIER:** Denier is defined as the thickness of the yarn strand. Combined with the face-weight (ounces of yarn per square yard), and the density or volume of yarn strands is a critical factor in the performance, quality and durability of an entrance mat.

**DYNA-SHIELD®:** A process that creates a tough protective barrier on the surface of foam anti-fatigue mats. Dyna-Shield® products are more resistant to wear than traditional sponge matting.

**GSII:** A technology incorporated into Notrax® industrial floor matting products that allow them to excel in harsh industrial environments where aggressive chemicals, oils, and greases are commonly found, and where traditional matting often fails.

**MICROSTOP™:** A unique anti-microbial rubber compound made from a specially formulated blend of raw materials that inhibits the growth of micro-organisms such as bacteria and fungi that can cause odor, stains and product deterioration.

**NEEDLE PUNCH:** A manufacturing process for carpet matting, needle punch is engineered with a unique blend of 4 Denier thicknesses of polypropylene yarn ranging from very fine to very thick. Needle punch products are typically more durable, offering better crush resistance and wearability due to the density of the yarn used in the process.

**NITRILE RUBBER:** A synthetic rubber specifically designed for harsh environments providing superior oil, grease, animal fat, and chemical resistance, abrasion resistance, gas permeability, and thermal stability. Niru® is the Notrax®, trademarked name for Nitrile rubber compound.

**NOTRAX® RECYCLED:** Floor matting products that are manufactured with recycled materials as part of a growing commitment to developing high quality products while reducing the negative impact on the environment.

**PVC COMPOUNDS:** PVC (Polyvinyl Chloride) is a plastic compound used in a variety of manufacturing processes and end products. PVC is known for its durability, resistance to moisture, versatility, and its ability to withstand harsh environments.

**TUFTED:** An alternative process to needle punch for manufacturing carpet matting, tufted products are sewn into a backing using a finer yarn. Tufted mats generally are less dense and offer better moisture retention.

**UNIFUSION™:** A revolutionary bonding technology that uses heat and pressure to fuse a floor matting top surface to a base material. The resulting finished product is virtually a single piece, thereby eliminating the possibility of de-lamination.

**REDSTOP™:** A uniquely engineered technology that virtually eliminates the slipping and sliding of Notrax® floor mats on all types of smooth floor surfaces by increasing the friction between the underside of the mat and a clean, dry floor surface.

**ANTI-MICROBIAL:** Destructive to or inhibiting the growth or pathogenic action of microorganisms.

**PATHOGENIC:** Capable of producing disease

### GRAM POSITIVE/GRAM NEGATIVE

**BACTERIA:** Gram positive and gram negative refers to how a bacteria reacts to a gram stain. The difference is the outer casing of the bacteria. A gram positive bacteria will have a thick layer of peptidoglycan (a polymer made up of amino acids and sugars) that the stain can penetrate. A gram negative bacteria has an outer membrane covering a thin layer of peptidoglycan on the outside. The outer membrane prevents the initial stain from penetrating. This outer membrane also gives the bacteria a greater degree of protection therefore making it more resistant.

## PRODUCT TESTING

All Notrax® Floor Matting products are subject to the following applicable tests, conducted by independent laboratories prior to their introduction to the market:

All Notrax® carpet products passed the Flammability Test (PillTest DOC FF1-70).

Accelerated Soiling Test (ASTM D6540): Designed to simulate the soiling that occurs from foot traffic during normal use.

Accelerated Wear Test (S.I.M. Floor Machine): Designed to simulate the wear an entrance mat will receive under normal foot traffic. The results show the relative wear and crush resistance of the mat.

Water Retention: Designed to simulate the moisture retention of an entrance mat.

Abrasion Resistance (ASTM D3884-92): This is an accelerated wear test with results measured in weight loss.

Compression Deflection (ASTM D3574): This test assesses the anti-fatigue properties of industrial mats.

Coefficient Of Friction (ASTM C 1028-89): Designed to assess the slip resistance of floor matting.

Elongation (ASTM D412): This test measures the weight needed to break, and the % of size increase at the breaking point.

Tear Strength (ASTM D1004): This test measures the force required to initiate the tearing of a mat.

Critical Radiant Flux (ASTM E648-94A): This test measures the level of radiant heat energy required to sustain flame propagation.



# Notrax® Mats for Professional Use—Industry leader since 1948

Established in Chicago, Illinois in 1948, Notrax® is a pioneer in the manufacturing of high quality, performance floor matting. A family-owned and operated business for over 65 years, Notrax® began as a modest manufacturing and repair shop for rubber entrance matting under the guidance of its founder, Charles Wood. Today, Notrax® has grown into one of the largest integrated manufacturers of floor matting products in the world. Notrax® now operates under the corporate umbrella of Justrite® Safety Group, continuing on nearly seven decades of service dedicated to meeting the needs of the floor matting industry with quality products, customer service

and sales support. Floor matting products under the Notrax® brand can be found in a wide variety of markets for industrial, commercial, and food service applications. One thing that truly sets Notrax® apart is that we manufacture our own products in ISO certified facilities and offer global distribution capabilities with distribution centers throughout the United States and Europe. The experience and knowledge gained from manufacturing these products on-site allows us to better adapt to market demands and provide flexibility and a quick response to ever-changing customer requirements. Notrax product is manufactured and warehoused in the facilities below.



**Notrax® Headquarters**  
Chicago, Illinois USA



**Notrax® - Moselle Division**  
Moselle, Mississippi USA  
ISO 9001 / ISO 14001



**Notrax® - Europe B.V.**  
Barendrecht, Netherlands

## TERMS & CONDITIONS

**WARRANTY:** All Notrax® floor mats are guaranteed 100% under normal conditions of use. A full refund or replacement (based on the manufacturer's discretion) will be made. Buyer has the responsibility to determine the suitability of the product and assumes any liability in connection with such use. Seller shall not be liable for damages in excess of purchase price of product. Warranty does not apply to splicing or seaming of mats. Laminate – top products (including UniFusion™ products) with foam backing are not guaranteed against spike heels or stool legs. The bond on all Notrax® laminated mats that incorporate the UniFusion™ process are guaranteed for the lifetime of the mat. The bond is guaranteed under normal conditions of use in reasonable dry application environments, or a full refund or replacement mat (based on the manufacturer's discretion) will be issued. Proof of purchase is required for all refunds or replacements. This lifetime warranty protects against delamination or bond failure, and does not cover issues unrelated to the bond such as wear or foam tears.

**PRODUCT SPECIFICATIONS:** All products are manufactured to meet or exceed normal industry standards. Reasonable variations in size and/or color may occur. Tolerances will vary by manufacturing process. For specific information on any given product, contact our customer service department.

All Entrance mats pass Flammability Test DOC-FF-1-70. Mats should never be stored on end. For proper storage, roll mat with top surface to the outside and lay flat in a protected area. Do not stack any materials or other mats on top of a stored mat. When placing a mat into service, be certain that the floor to be covered and the back of the mat are completely free of dirt and debris. Foreign material on the floor or the mat will cause slippage and possible injury. Manufacturer will not be liable for any injuries resulting from failure to follow recommended housekeeping procedures. Frequent cleaning under mats is also required to maintain warranty.

**TERMS:** 1% 10 Days, Net 30 Days. Discount applies ONLY to invoices paid within 10 days of invoice date. Does not apply to credit card or cash in advance payments. (Shipping charges, handling charges and taxes are excluded.)

**PAYMENT:** Notrax® accepts payments via VISA®, MASTERCARD®, AMERICAN EXPRESS®, C.O.D. payments no longer accepted. \*Credit card payments subject to up to 5% processing fee.

**PRICING:** Pricing quoted only to existing Notrax® Distributors. Prices are subject to change without notice.

**ORDERING:** When ordering, specify product number, size, color, quantity and any special instructions required.

**MINIMUM ORDER CHARGE:** No minimum order required. However, a \$5.00 small-order handling charge will be added to all orders having a net value of \$25.00 or less.

**FREIGHT TERMS:** EXW (ExWorks), -IL, GA or MS (see "Location" shown for each item in distributor price list) - No Freight Allowed. A handling charge will be imposed on all shipments. Any excess fees for transportation, including special handling costs, address correction fees etc., will be charged to the customer.

**DAMAGED GOODS AND SHORTAGES:** All delivered material should be inspected and counted BEFORE accepting shipment. Any damages or shortages must be noted on the bill of lading before signing for delivery. All claims must be reported to our Customer Care Department in writing within five (5) business days of delivery. Claims submitted outside of the required five (5) day notification period will not be accepted and payment for the shipment will be due as invoiced. Please send details of the delivery issue to [customerservice@notrax.com](mailto:customerservice@notrax.com) or via fax at (708) 458 4723. Third-party or collect freight claims will be the responsibility of the payee of the freight invoice, claims against such shipments will not be considered justification for the non-payment or short payment of the corresponding invoice.

**RETURN GOODS AUTHORIZATION:** Factory approval is required prior to product returns. Returns without authorization may be refused. All returns are subject to verification before credit will be issued. Standard stock items in new saleable condition will be accepted for return, freight prepaid subject to a 15% or 20% (depending on product) restocking charge. Custom sizes, cut lengths or special ordered products are non-refundable and non-returnable. Return shipments must be made to the correct plant as noted on the return goods authorization. Failure to do so will incur a transportation fee deducted from the credit.

**RESTOCKING CHARGES:**  
Full Rolls/Stock Sizes-15%  
Broken Cases-20%



**Notrax® is a proud member of  
the U.S. Green Building Council.**



# TABLE OF CONTENTS

Section/Product	Page
<b>Anti-Fatigue - Dry (Laminates)</b>	
485 Ergo Trax™	6
985 Ergo Trax™ Grande™	6
479 Cushion Trax®	8
975 Cushion Trax® Ultra™	8
979 Saddle Trax™ Grande™	8
490 Dura Trax™	10
976 Dura Trax™ Ultra™	10
990 Dura Trax™ Grande™	10
480 Pebble Trax™	10
980 Pebble Trax™ Grande™	10
482 Bubble Trax™	12
782 Bubble Trax™ Ultra™	12
982 Bubble Trax™ Grande™	12
474 Ergo Mat™	12
974 Ergo Mat™ Grande™	12
470 Marble Sof-Tyle™	14
970 Marble Sof-Tyle™ Grande™	14
477 Woodgrain Sof-Tyle™	14
977 Woodgrain Sof-Tyle™ Grande™	14
<b>Anti-Fatigue - Dry (Foam)</b>	
T17P Superfoam® Perf	17
T17 Superfoam®	17
425 Superfoam® Revive RS	18
440 Superfoam® Comfort	18
454 Ergo Comfort	18
419 Diamond Sof-Tred™	20
417 Bubble Sof-Tred™	20
406 Razorback™	20
413 Blade Runner™	20
<b>Anti-Fatigue - Dry (PVC)</b>	
415 Pebble Step Sof-Tred™ w/Dynashield®	22
410 Airug®v	22
411 Sof-Tred™	22
<b>Anti-Fatigue - Dry/Wet (Rubber)</b>	
556 Cushion-Ease® Solid	26
557 Cushion-Ease® Ergo	26
558 Cushion-Ease® ESD Solid	26
656/656FR Niru® Cushion-Ease® Solid	26
856/856FR Niru® Cushion-Ease® GSII™ Solid	26
550 Cushion-Ease®	28
650/650FR Niru® Cushion-Ease®	28
850/850FR Niru® Cushion-Ease® GSII™	28
570 De-Flex™	30
572 De-Flex™ Niru®	30
573 De-Flex™ ESD	30
460 Skymaster™ HD	32
462 Skymaster™ HD Niru®	32
463 Skymaster™ HD ESD	32
465 Skymaster™ HD Niru® FR	32
430 Skymaster™ HD i-Curve™	33
446 Skymaster™ HD o-Curve™	33
432 Skymaster™ HD i-Curve™ Niru®	33
442 Skymaster™ HD o-Curve™ Niru®	33
433 Skymaster™ HD i-Curve™ ESD	33
443 Skymaster™ HD o-Curve™ ESD	33
435 Skymaster™ HD i-Curve™ Niru® FR	33
445 Skymaster™ HD o-Curve™ Niru® FR	33
455 Skystep™	34
457 Skystep™ ESD	34

Section/Product	Page
<b>Anti-Fatigue - Dry/Wet (Rubber) Cont.</b>	
447 Comfort-Eze™	34
549 Safety Stance®	35
543 Cushion-Tred™	35
562 Sanitop®	36
504 Beveled Drain Step™	36
<b>Modular Tiles - Dry/Wet (PVC)</b>	
620 Diamond Flex-Lok™	38
621 Diamond Flex-Lok™ Solid	38
520 Cushion-Lok™	38
522 Cushion-Lok™ w/ Grip-Step®	38
523 Modular Lok-Tyle	38
<b>Industrial Runners - Dry/Wet</b>	
531 Safety Grid™	40
420 Cushion-Dek™	40
755 Niru® Versa Runner®	40
T23 Multi-Mat II®	40
765 Deep Freeze Mat™	41
758 Niru® Knob-Top Runner™	41
730 V-Groove Corr. Runner™ - Vinyl	42
750 V-Groove Corr. Runner™ - Rubber	42
735 Round Rib Runner	42
737 Diamond Plate Runner	42
<b>Electrostatic Discharge (ESD)</b>	
825 Cushion-Stat™ w/Dynashield®	44
827 Anti-Stat P.O.P.™	44
558 Cushion-Ease® ESD Solid	45
573 De-Flex™ ESD	45
463 Skymaster™ HD ESD	45
457 Skystep™ ESD	45
826 Diamond Stat™	46
927 Diamond Stat™ Grande™	46
926 Smooth Stat™	46
<b>Specialty/Sanitation - Dry/Wet</b>	
448 Autoclaveable Bubble Mat	47
080 Clean-Step Tacky Mat	47
346 Sani-Trax®	48
351 Sani-Trax® Plus	48
<b>High Voltage Switchboard</b>	
830 Switchboard Matting	50
831 Diamond Switchboard Matting	50
835,836 Military Switchboard Mats	50
<b>Industrial Specialty</b>	
040 Slabmat	52
045 Weight Room Mat	52
950 Knee Rx™	54
951 Knee Rx™ HD	54
680 Safety Trax™	54
<b>Entrance - Foyer</b>	
592 Masterflex™ Drainage	56
593 Masterflex™ Drainage w/Carpet	56
692 Masterflex™ Heel-Proof	56
693 Masterflex™ Heel-Proof w/Carpet	56
370 Master Trax™	57
371 Master Trax™ Lite	57
<b>Entrance - Outdoor</b>	
340 Soil Guard™	58
350 Slip Guard™ w/Grit Step®	58

Section/Product	Page
<b>Entrance - Outdoor Cont.</b>	
345 Rubber Brush™	58
265 Wayfarer™	59
266 Wayfarer™ Custom HD Unbacked	59
267 Wayfarer™ Custom HD	59
599 Oct-O-Flex™	60
352 Boot Scraper™	60
<b>Entrance - Vinyl-Backed</b>	
231 Prelude™	61
146 Encore™	61
141 Ovation™	61
117 Heritage Rib®	62
118 Arrow Trax™	62
131 Dante™	62
136 Polynib™	63
145 Preference™	63
138 Uptown™	64
132 Estes®	64
137 Opera™	64
<b>Entrance - Logos</b>	
193 Superior Impact™ Logo Mat	65
373 Master Guard™ Logo Mat	66
<b>Entrance - Rubber-Backed</b>	
150 Aqua Trap®	68
161 Barrier Rib™	68
165 Guzzler™ CTE	69
169 Opus™ CTE	69
166 Guzzler™	70
167 Portrait™	70
168 Opus™	70
<b>Value Line</b>	
105 Chevron	71
109 Brush-Step®	71
130 Sabre™	71
151 Diamond CTE	71
152 Waffle CTE	71
408 Achilles	72
409 Textured Cushion Sof-Tred™	72
508 Diamond Cushion™	72
509 Diamond-Tuff™	72
510 Diamond-Tuff™ Max	72
511 Marble Tuff™	72
512 Marble Tuff™ Max	72
514 Sure Step	73
619 Drain Lite	73
501 Cushion Connect™	73
505 Grit-Step™	73
616 Co-Nex	73
<b>Accessories</b>	
083 Standard Beveled Nosing	74
084 Heavy Duty Beveled Nosing	74
085 Velcro® Carpet Anchor	74
082 Splicing Kit	74
090 Mat Hold	74
086 Adhesive	74
<b>Documentation</b>	
Chemical Chart	75
Proposition 65 Warnings	77



# FEATURE ICONS

	<b>Anti-Fatigue:</b> Matting that alleviates foot pressure, stimulates blood circulation and helps reduce stress on body.		<b>Cut Lengths:</b> Mats available in specific lengths and in some cases custom sizes and/or configurations.		<b>Food Service:</b> Matting suitable for use in kitchens, bars and other food service areas.		<b>Modular System:</b> Interlocking mats allow for easy on-site customization and configurations.
	<b>Anti-Slip:</b> Matting designed to provide added traction through aggressive surface patterns and textures.		<b>Drainage:</b> Open construction matting allows for liquids and debris to pass through, providing secure footing in wet environments.		<b>Heavy Traffic:</b> Recommended for use in heavy traffic entranceways.		<b>Non-Conductive:</b> Formulated to provide insulation for the worker, it keeps the worker from being "grounded", thereby preventing electric shock.
	<b>Anti-Static:</b> Formulated to absorb static electricity.		<b>Fire Retardant:</b> Matting designed to resist the spread of fire and withstand heat, tested and certified by independent laboratories.		<b>Insulation:</b> Protects against cold floors, vibrations and noise.		<b>Oil/Grease Resistant:</b> Matting suitable for contact with oils, greases, and animal fats.
	<b>Cleaning:</b> Suitable for cleaning with high pre-sure (hot) power-washer.		<b>Floor Protection:</b> Absorbs impact, reduces breakage and protects floors.		<b>Light Traffic:</b> Recommended for use in light traffic entranceways.		<b>Outdoor Use:</b> Heavy-duty construction designed to act as a first line of defense against tracked-in dirt by scraping soil and moisture from shoes.
	<b>Cold Resistant:</b> Material formulated to withstand freezing temperatures.		<b>Food Processing:</b> Matting suitable for use in food processing plants/areas where exposure to animal fats, greases, and oils are common.		<b>Medium Traffic:</b> Recommended for use in medium traffic entranceways.		<b>Welding:</b> Matting designed to withstand exposure to sparks in areas where welding takes place.

# PRODUCT INDEX (by part number)

No.	Product	Pg.	No.	Product	Pg.	No.	Product	Pg.	No.	Product	Pg.
040	Slabmat	52	371	Master Trax™ Lite	57	501	Cushion Connect™	73	735	Round Rib Runner	42
045	Weight Room Mat	52	373	Master Guard™ Logo Mats	66	504	Beveled Drain Step™	36	737	Diamond Plate Runner	42
080	Clean-Step Tacky Mat	47	406	Razorback™	20	505	Grit-Step™	73	750	V-Groove Corr. Runner™ Rubber	42
105	Chevron	71	408	Achilles	72	508	Diamond Cushion™	72	755	Niru® Versa Runner®	40
109	Brush-Step®	71	409	Textured Cushion Sof-Tred™	72	509	Diamond-Tuff™	72	758	Niru® Knob-Top Runner™	41
117	Heritage Rib®	62	410	Airug®	22	510	Diamond-Tuff™ Max	72	765	Deep Freeze Mat™	41
118	Arrow Trax™	62	411	Sof-Tred™	22	511	Marble Tuff™	72	782	Bubble Trax™ Ultra	12
130	Sabre™	71	413	Blade Runner™	20	512	Marble Tuff™ Max	72	825	Cushion-Stat™ w/Dynashield®	44
131	Dante™	62	415	Pebble Step Sof-Tred™ w/Dyna.	22	514	Sure Step	73	826	Diamond Stat™	46
132	Estes®	64	417	Bubble Sof-Tred™	20	520	Cushion-Lok™	38	827	Anti-Stat P.O.P.™	44
136	Polynib™	63	419	Diamond Sof-Tred™	20	522	Cushion-Lok™ w/ Grip-Step®	38	830	Switchboard Matting	50
137	Opera™	64	420	Cushion-Dek™	40	523	Modular Lok-Tyle	38	831	Diamond Switchboard Matting	50
138	Uptown™	64	425	Superfoam® Revive RS	18	531	Safety Grid™	40	835	Military Switchboard Mats	50
141	Ovation™	61	430	Skymaster™ HD i-Curve™	33	543	Cushion-Tred™	35	836	Military Switchboard Mats	50
145	Preference™	63	433	Skymaster™ HD i-Curve™ ESD	33	549	Safety Stance®	35	850	Niru® Cushion-Ease® GSII™	28
146	Encore™	61	435	Skymaster™ HD i-Curve™ Niru®	33	550	Cushion-Ease®	28	856	Niru® Cushion-Ease® GSII™ Sol.	26
150	Aqua Trap®	68	440	Superfoam® Comfort	18	556	Cushion-Ease® Solid	26	926	Smooth Stat™	46
151	Diamond CTE	71	443	Skymaster™ HD o-Curve™ ESD	33	557	Cushion-Ease® Ergo	26	927	Diamond Stat™ Grande™	46
152	Waffle CTE	71	445	Skymaster™ HD o-Curve™ Niru®	33	558	Cushion Ease® ESD Solid	45	950	Knee Rx™	54
161	Barrier Rib™	68	446	Skymaster™ HD o-Curve™	33	562	Sanitop®	36	951	Knee Rx™ HD	54
165	Guzzler™ CTE	69	447	Comfort-Eze™	34	570	De-Flex™	30	970	Marble Sof-Tyle™ Grande™	14
166	Guzzler™	70	448	Autoclaveable Bubble Mat	47	572	De-Flex™ Niru®	30	974	Ergo Mat™ Grande™	12
167	Portrait™	70	454	Ergo Comfort	18	573	De-Flex™ ESD	45	975	Cushion Trax® Ultra™	8
168	Opus™	70	455	Skystep™	14	592	Masterflex™ Drainage	56	976	Dura Trax™ Ultra™	10
169	Opus™ CTE	69	457	Skystep™ ESD	45	593	Masterflex™ Drain w/Carpet	56	977	Woodgrain Sof-Tyle™ Grande™	14
193	Superior Impact™ Logo Mat	65	460	Skymaster™ HD	32	597	Masterflex™ Safety Ramps	56	979	Saddle Trax™ Grande™	8
231	Prelude™	61	462	Skymaster™ HD Niru®	32	599	Oct-O-Flex™	60	980	Pebble Trax™ Grande™	10
265	Wayfarer™	59	463	Skymaster™ HD ESD	32	616	Co-Nex	73	982	Bubble Trax™ Grande™	12
266	Wayfarer™ Custom HD Unbacked	59	465	Skymaster™ HD Niru® FR	32	619	Drain Lite	73	985	Ergo Trax™ Grande™	6
267	Wayfarer™ Custom HD	59	470	Marble Sof-Tyle™	14	620	Diamond Flex-Lok™	38	990	Dura Trax™ Grande™	10
340	Soil Guard™	58	474	Ergo Mat™	12	621	Diamond Flex-Lok™ Solid	38	T17	T17 Superfoam®	17
345	Rubber Brush™	58	477	Woodgrain Sof-Tyle™	14	650	Niru® Cushion-Ease®	26	T17P	Superfoam®	16
346	Sani-Trax®	48	479	Cushion Trax®	8	656	Niru® Cushion-Ease® Solid	26	T23	Multi-Mat II®	40
350	Slip Guard™ w/Grit Step®	58	480	Pebble Trax™	10	680	Safety Trax™	54			
351	Sani-Trax® Plus	48	482	Bubble Trax™	12	692	Masterflex™ Heel-Proof	56			
352	Boot Scraper™	60	485	Ergo Trax™	6	693	Masterflex™ Heel-Proof Carpet	56			
370	Master Trax™	57	490	Dura Trax™	10	730	V-Groove Corr. Runner™ Vinyl	42			

# BENEFITS OF ANTI-FATIGUE MATTING

## THE PROBLEM


In many industries, employees are required to work or stand in one spot for extended periods of time. The strain and stress applied to the neck, legs, and lower back can be directly linked to the employees overall health and productivity. Leg and lower back pain is highest in workers who stand 4 hours or more per day. Muscles and joints are constricted and blood flow is reduced. The end result, the heart is forced to work harder, sapping energy, and minimizing worker capacity. In addition, long-term standing causes pronation, or excessive flattening of the foot which can lead to plantar fasciitis and other serious and painful foot conditions. Experts agree that anti-fatigue floor matting provides cushion to relieve neck, leg and lower back discomfort and can significantly improve productivity and employee morale while reducing absenteeism and chronic illnesses related to long-term standing.

## HOW DOES AN ANTI-FATIGUE FLOOR MAT WORK?

How anti-fatigue floor matting works is actually quite simple. The cushion or flex of the mat stimulates minute, undetectable muscle movement in the legs and calf muscles as the body continuously adjusts to remain stable. This in turn increases blood flow to-and-from the area, and the improved circulation reduces the pain and discomfort. Floor matting also provides insulation and relief from cold/damp floors, another cause of accelerated fatigue.

There is also a common belief that the reduction of fatigue also reduces the possibility or frequency of accidents and improves general work efficiency. With the use of anti-fatigue mats, there are fewer days lost to injuries, fewer medical claims, as well as compliance with new health and safety requirements.

It is also important to remember, softer is not always better. In other words, too much cushioning can have a negative effect. Too great an amount of softness or "give" will actually cause excessive fatigue because it overworks the muscles. Think of it like jogging on the beach as an extreme example of this concept. Notrax<sup>®</sup> anti-fatigue floor mats are made of specific formulations and designs that provide varying levels of fatigue relief and comfort. The end result, increased productivity and greater employee satisfaction.

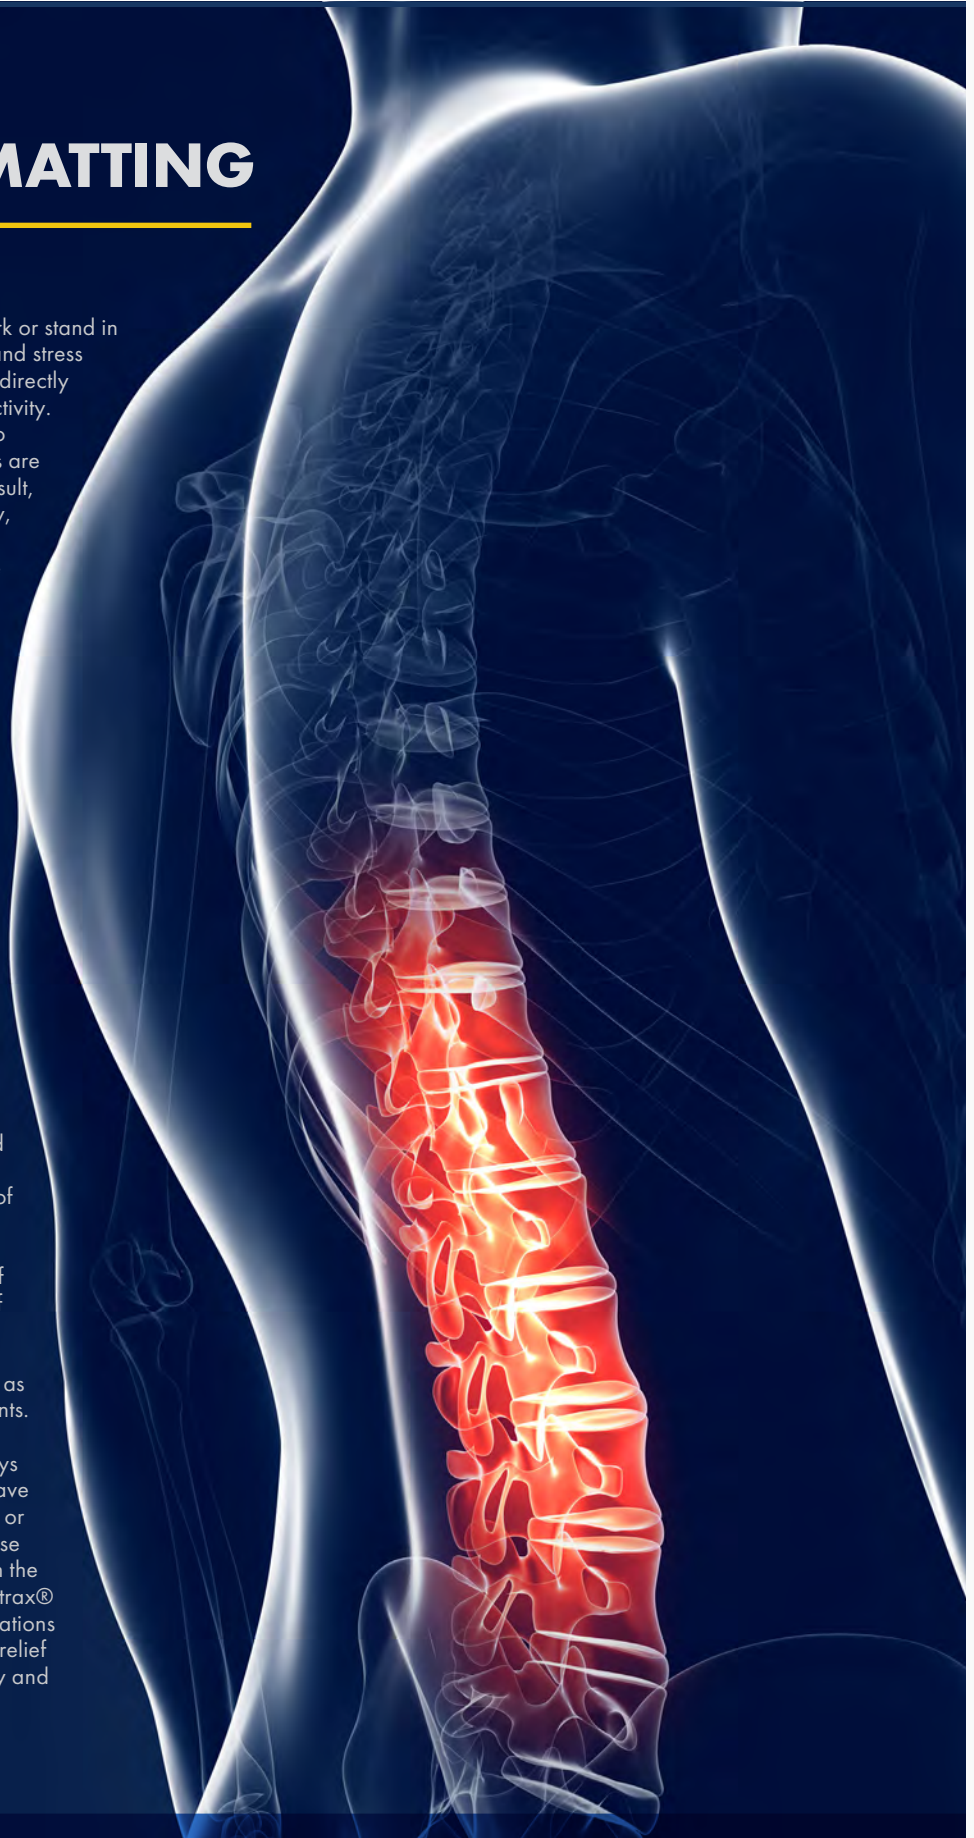



# DIAMOND PLATE ANTI-FATIGUE SERIES

The Notrax® Diamond Plate series is high performance anti-fatigue matting, representing the ultimate in comfort and durability for today's industrial environments. The signature Diamond Plate top surfaces are available in general purpose Vinyl or Nitrile rubber for added spark resistance in fabricating environments. Diamond Plate top surfaces are bonded to a PVC or NIRU® nitrile rubber sponge base for the ultimate in anti-fatigue and rebound. Both are designed and manufactured with the right amount of compression deflection to meet ergonomic needs. Multiple thicknesses are available to satisfy any workers standing preferences.

The Diamond Plate series features Notrax® exclusive RedStop® non-slip backing, and UniFusion™ bonding process. RedStop® non-slip backing, certified by the NFSI (National Floor Safety Institute), eliminates the slipping and sliding of Notrax® floor mats on smooth floor surfaces such as vinyl composite tile, painted or epoxy coated concrete, carpet, and ceramic tile. Notrax® UniFusion™ bonding process provides a lifetime warranty against mat delamination.



## SELECT THE RIGHT MAT FOR YOU

### THICKNESS

9/16" Thick  
3/4" Thick  
1" Thick

Vinyl Top PVC Sponge Base <small>(DIAMOND-TUFF™ SERIES)</small>	Vinyl Top Niru Rubber Base <small>(ERGO TRAX™ SERIES)</small>	Vinyl Top PVC Sponge Base <small>(CUSHION TRAX™ SERIES)</small>	Rubber Top PVC Sponge Base <small>(DURA TRAX™ SERIES)</small>
509 (pg 72)	485 (pg 6)	479 (pg 8)	490 (pg 10)
		975 (pg 8)	976 (pg 10)
510 (pg 72)	985 (pg 6)	979 (pg 8)	990 (pg 10)

### FEATURES

RedStop®



UniFusion®



Welding



Anti-Fatigue



Anti-Slip



Cut Lengths



Insulation



		479, 975, 979	490, 976, 990
	485, 985	479, 975, 979	490, 976, 990
			490, 976, 990
509, 510	485, 985	479, 975, 979	490, 976, 990
509, 510	485, 985	479, 975, 979	490, 976, 990
509, 510	485, 985	479, 975, 979	490, 976, 990
509, 510	485, 985	479, 975, 979	490, 976, 990







# ANTI-FATIGUE - Dry (Laminates)

**485 - ERGO TRAX™**  
**985 - ERGO TRAX™ GRANDE™**

**NEW!**

- The vinyl diamond plate top surface is combined with a dense closed cell rubber foam base
- UniFusion™ bond guaranteed for the life of the mat
- Beveled edges on all 4 sides
- Certified by the NFSI (National Floor Safety Institute)




Stock Sizes	2'x3', 3'x5', 3'x12'
Roll Sizes	2'x75', 3'x75', 4'x75'
Cut Lengths	2', 3', and 4' widths (up to 75' long)
Color	 Black  Black/Yellow

**⚠ WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov). See pg 77-78

## Applications:


- Multi-shift operations in dry work areas.
- Any work station where worker is standing for prolonged periods of time.

## Thickness:

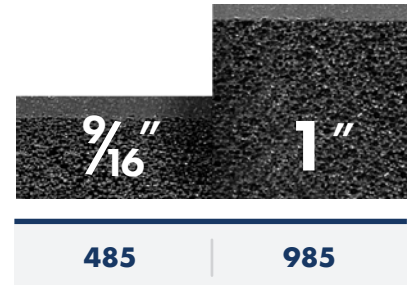

## Performance:

	Good	Better	Best	Superior
Wear Resistance			<b>485</b>	<b>985</b>
Anti-fatigue Performance			<b>485</b>	<b>985</b>
Slip Resistance			<b>485</b>	<b>985</b>

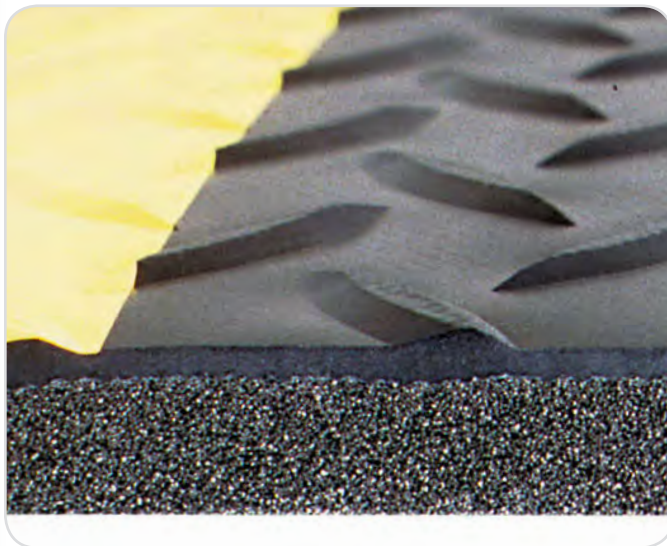



# ANTI-FATIGUE - Dry (Laminates)








# ANTI-FATIGUE - Dry (Laminates)

- 479 - CUSHION TRAX®**
- 975 - CUSHION TRAX® ULTRA™**
- 979 - SADDLE TRAX™ GRANDE™**

- The 100% recycled vinyl diamond plate top surface is combined with a dense closed cell PVC foam base
- UniFusion™ bond guaranteed for the life of the mat
- RedStop™ non-slip backing to reduce mat slippage
- Beveled edges on all 4 sides
- Certified by the NFSI (National Floor Safety Institute)
- See Splicing Kit on pg 74

Uni  
FUSION™



Stock Sizes	2'x3', 3'x5', 3'x12'
Roll Sizes	2'x75', 3'x75', 4'x75', 5'x75'
Cut Lengths	2', 3', 4' and 5' widths (up to 75' long) *479 available in up to 150' long
Color	 Black  Black/Yellow  Grey

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov). See pg 77-78




## Performance:

	Good	Better	Best	Superior
Wear Resistance			479	975, 979
Anti-fatigue Performance			479	975, 979
Slip Resistance			479	975, 979

## Applications:

- Multi-shift operations in dry work areas.
- Any work station where worker is standing for prolonged periods of time.

## Thickness:

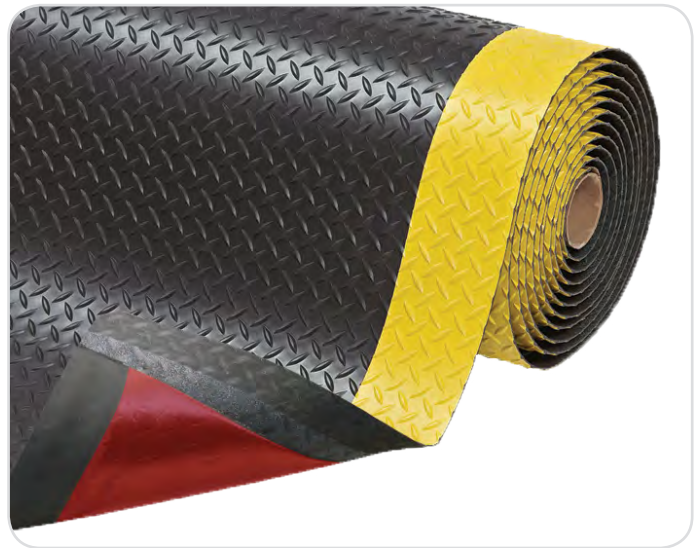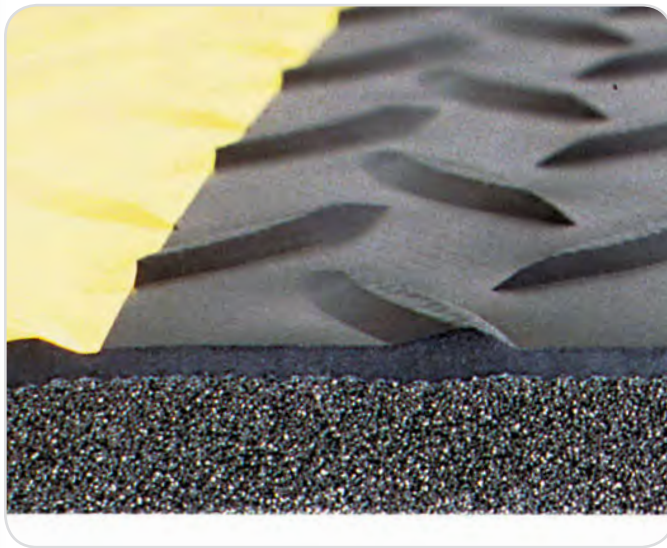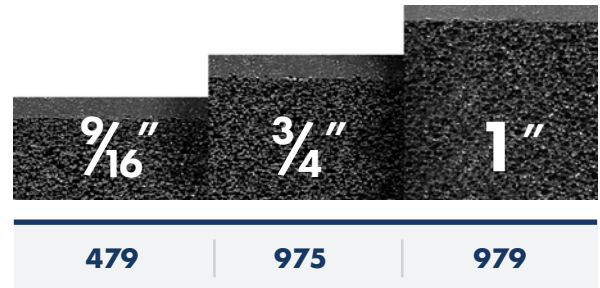



# ANTI-FATIGUE - Dry (Laminates)

**DURA TRAX™ SERIES**



**PEBBLE TRAX™ SERIES**





# ANTI-FATIGUE - Dry (Laminates)

## DURA TRAX™ SERIES

- 490 - DURA TRAX™**
- 976 - DURA TRAX™ ULTRA™**
- 990 - DURA TRAX™ GRANDE™**

**NEW!**  
3/4"

- The nitrile rubber diamond plate top surface is combined with a dense closed cell PVC foam base
- UniFusion™ bond guaranteed for the life of the mat
- RedStop™ non-slip backing to reduce mat slippage
- Withstands exposure to sparks
- Beveled edges on all 4 sides
- Certified by the NFSI (National Floor Safety Institute)

Uni  
FUSION™



Stock Sizes	2'x3', 3'x5', 3'x12'
Roll Sizes	2'x75', 3'x75', 4'x75'
Thickness	9/16" (490), 3/4" (976), 1" (990)
Cut Lengths	2', 3', and 4' widths (up to 75' long)
Colors	 Black  Black/Yellow



**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78



**Applications:**

- Welding applications.
- Workstations where comfort and slip resistance are needed.
- Any work station where worker is standing for prolonged periods of time.

**Performance:**

	Good	Better	Best	Superior
Wear Resistance			490	976,990
Anti-fatigue Performance			490	976,990
Slip Resistance			490	976,990


## PEBBLE TRAX™ SERIES


- 480 - PEBBLE TRAX™**
- 980 - PEBBLE TRAX™ GRANDE™**

- The pebble embossed rubber top surface is combined with a dense closed cell PVC foam base
- UniFusion™ bond guaranteed for the life of the mat
- RedStop™ non-slip backing to reduce mat slippage
- Spark resistant
- Beveled edges on all 4 sides
- Certified by the NFSI (National Floor Safety Institute)

Uni  
FUSION™



Stock Sizes	2'x3', 3'x5', 3'x12'
Roll Sizes	2'x75', 3'x75', 4'x75'
Thickness	1/2" (480), 1" (980)
Cut Lengths	2', 3', and 4' widths (up to 75' long)
Colors	 Black

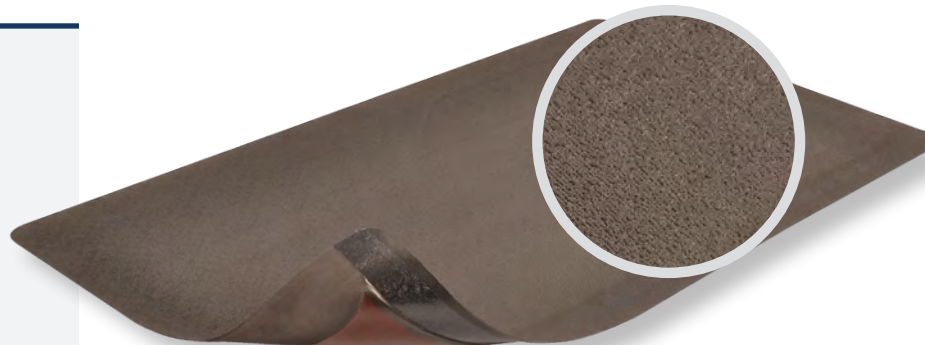

**Applications:**

- Fabricating applications.
- Work stations that are subjected to extreme traffic.

**Performance:**

	Good	Better	Best	Superior
Wear Resistance			480	980
Anti-fatigue Performance			480	980
Slip Resistance			480	980



# ANTI-FATIGUE - Dry (Laminates)






# ANTI-FATIGUE - Dry (Laminates)




## BUBBLE TRAX™ SERIES

- 482** - BUBBLE TRAX™
- 782** - BUBBLE TRAX™ ULTRA™
- 982** - BUBBLE TRAX™ GRANDE™

**NEW!**  
3/4"

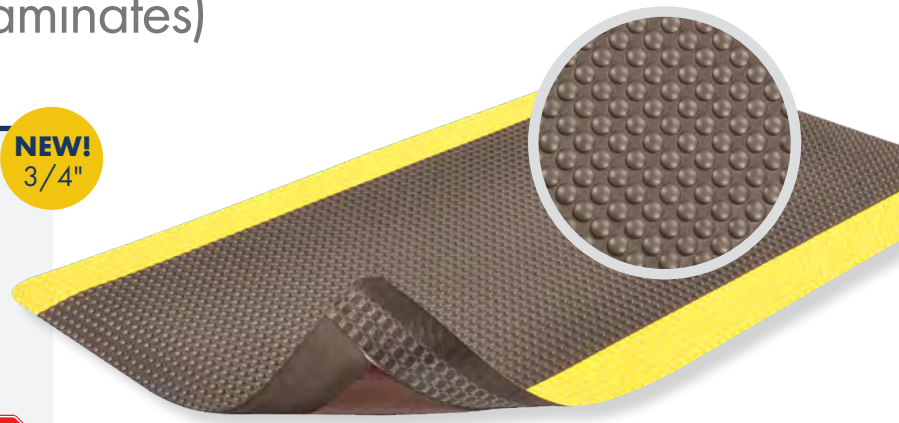- Heavy-duty vinyl, bubble top surface combined with a dense closed cell PVC foam base provides added cushioning comfort
- UniFusion™ bond guaranteed for the life of the mat
- RedStop™ non-slip backing to reduce mat slippage
- Beveled edges on all 4 sides



Stock Sizes	2'x3', 3'x5'
Roll Sizes	2'x75', 3'x75', 4'x75', 5'x75'
Thickness	1/2" (482), 3/4" (782), 1" (982)
Cut Lengths	2', 3', 4' and 5' widths (up to 75' long)
Colors	 Black  Black/Yellow  Grey

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

### Applications:


- Extremely well suited for multi-shift operations.
- Dry work areas where the worker is standing for prolonged periods of time; workstations, assembly lines.
- General lab use.


Performance:	Good	Better	Best	Superior
Wear Resistance			482	782,982
Anti-fatigue Performance			482	782,982
Slip Resistance			482	782,982

## ERGO MAT™ SERIES

- 474** - ERGO MAT™
- 974** - ERGO MAT™ GRANDE™

- Heavy-duty vinyl, corrugated ribbed top surface combined with a dense closed cell PVC foam base
- Corrugated ribbed texture runs length of the mat. Provides added traction and is easy to sweep clean.
- UniFusion™ bond guaranteed for the life of the mat
- RedStop™ non-slip backing to reduce mat slippage
- Beveled edges on all 4 sides

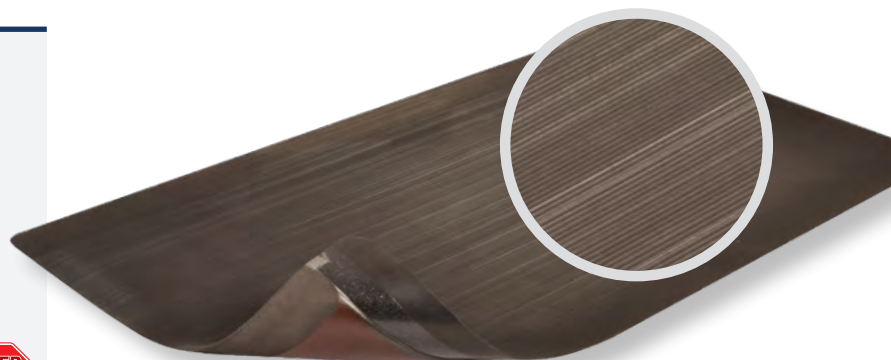

Stock Sizes	2'x3', 3'x5', 3'x12'
Roll Sizes	2'x75', 3'x75', 4'x75'
Thickness	1/2" (474), 1" (974)
Cut Lengths	2', 3', and 4' widths (up to 75' long)
Colors	 Black

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

### Applications:

- Multi-shift environments.
- Work stations that are subjected to extreme traffic.

Performance:	Good	Better	Best	Superior
Wear Resistance			474	974
Anti-fatigue Performance			474	974
Slip Resistance			474	974





# ANTI-FATIGUE - Dry (Laminates)

## SOF-TYLE™ SERIES






# ANTI-FATIGUE - Dry (Laminates)

## SOF-TYLE™ SERIES

### 470 - MARBLE SOF-TYLE™

### 970 - MARBLE SOF-TYLE™ GRANDE™

- Heavy-duty vinyl, marble top surface combined with a dense closed cell PVC foam base provides added cushioning comfort
- UniFusion™ bond guaranteed for the life of the mat
- RedStop™ non-slip backing to reduce mat slippage
- Beveled edges on all 4 sides
- Certified by the NFSI (National Floor Safety Institute)

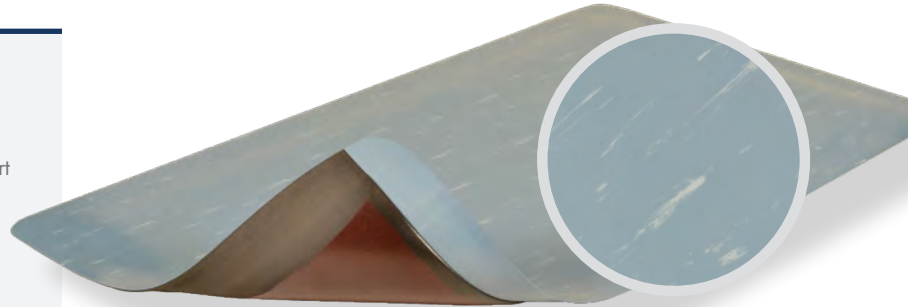

Stock Sizes	2'x3', 3'x5', 3'x12'
Roll Sizes	2'x75', 3'x75', 4'x75'
Thickness	1/2" (470), 1" (970)
Cut Lengths	2', 3' and 4' widths (up to 75' long)
Colors	 Black  Grey  Blue  Walnut

### Applications:

- General lab/testing areas
- Check-out counters
- Order fulfillment lines
- Pharmacies

### Performance:



	Good	Better	Best	Superior
Wear Resistance			470	970
Anti-fatigue Performance			470	970
Slip Resistance			470	970

### 477 - WOODGRAIN SOF-TYLE™

### 977 - WOODGRAIN SOF-TYLE™ GRANDE™

- Heavy-duty vinyl, faux woodgrain top surface combined with a dense closed cell PVC foam base provides added cushioning comfort
- UniFusion™ bond guaranteed for the life of the mat
- RedStop™ non-slip backing to reduce mat slippage
- Beveled edges on all 4 sides
- Certified by the NFSI (National Floor Safety Institute)



Stock Sizes	2'x3', 3'x5'
Roll Sizes	3'x75'
Thickness	1/2" (477), 1" (977)
Cut Lengths	3' width (up to 75' long)
Colors	 Cherry  Oak

### Applications:

- Check-out counters
- Reception areas
- Office Buildings
- Retail / Hotels




### Performance:

	Good	Better	Best	Superior
Wear Resistance			477	977
Anti-fatigue Performance			477	977
Slip Resistance			477	977

# ANTI-FATIGUE - Dry/Wet (Rubber Foam)



**Rubber foam matting available in a variety of models in stock, roll, cut length, spliced and custom configurations**

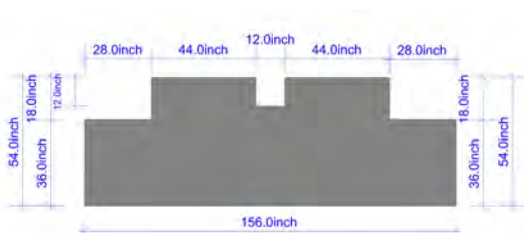

- T17 Superfoam can be made in a number of custom configurations to meet your specific work cell needs




# SUPERFOAM® - Anti-Fatigue Matting




## T17P - SUPERFOAM® PERF T17 - SUPERFOAM®

- Anti-fatigue mat design especially for safety and ergonomic comfort
- Closed cell nitrile foam, does not absorb liquids, and is highly resistant to chemicals, greases, and oils.
- Durable and abrasion resistant
- 45°, four-sided beveled edge
- Silicone free compound

T17P SUPERFOAM® PERF

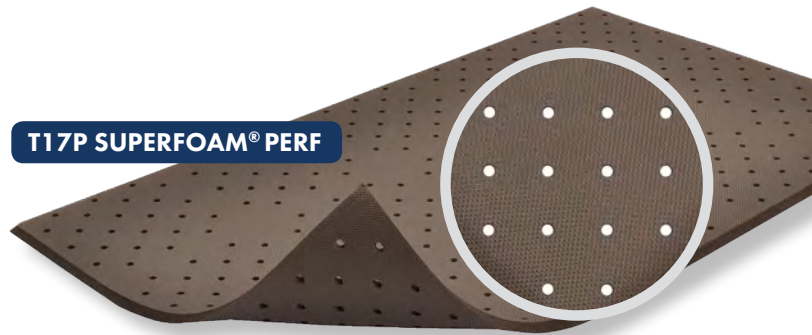

T17 SUPERFOAM®

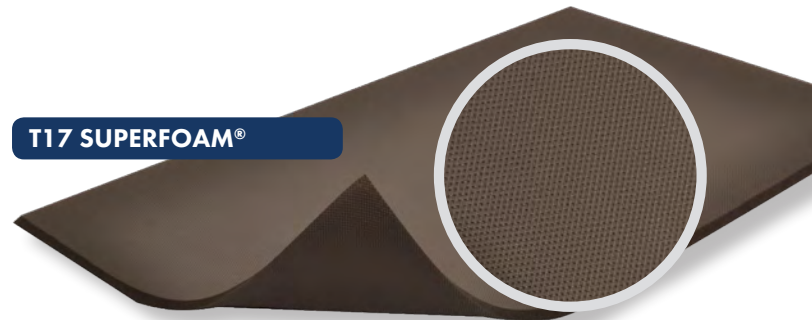


### Applications:

- Assembly Lines
- Laboratories
- Workstations
- Wet Environments
- CNCs
- Elevated Platforms

### Performance:

	Good	Better	Best	Superior
Wear Resistance	████████████████████			████████
Anti-fatigue Performance	████████████████████			
Slip Resistance	████████████████████			████████


Stock Sizes	3'x2', 3'x3', 3'x4', 3'x5', 3'x6', 3'x8'
Roll Sizes	3'x 75', 4'x75'
Thickness	5/8"
Cut Lengths	3' and 4' widths (up to 75' long)
Colors	 Black

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

## **ANTI-FATIGUE** - Dry/Wet (Rubber & Polyurethane Foam)








### 425 - SUPERFOAM® REVIVE RS

- Durable rubberized sponge mat designed for extreme ergonomic comfort
- Closed cell foam blend does not absorb liquids
- Highly resistant to greases, oils, and animal & vegetable fats

Stock Sizes	20"x24", 24"x40", 24"x72", 36"x40", 36"x60"
Thickness	3/4"
Colors	 Black

**NEW!**

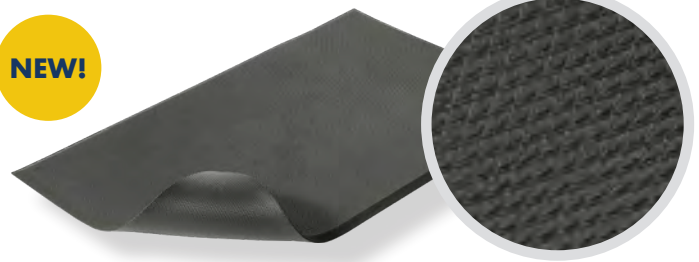


**Applications:** Reception counters, cashiers stations, assembly lines, laboratories, cooking lines, & bar areas.


Performance:	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				

### 440 - SUPERFOAM® COMFORT

- Extra soft material for greater comfort and exceptional memory
- Made from a unique nitrile rubber foam blend that resists chemicals, greases, oils, and animal & vegetable fats
- High density material incorporates millions of tiny closed cells that won't absorb liquids
- Aggressive texture on both top and bottom for added traction while keeping mat in place

Stock Sizes	3'x2', 3'x3', 3'x5', 3'x8', 4'x6'
Roll Sizes	2'x75', 3'x75', 4'x75'
Thickness	3/4"
Cut Lengths	2', 3', and 4' widths (up to 75' long)
Colors	 Black

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov). See pg 77-78

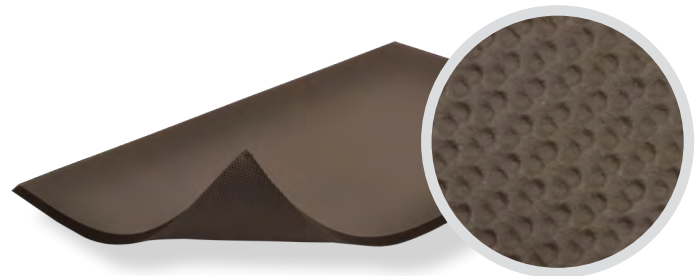


**Applications:** Areas where occasional overspray and dripping occur such as part wash stations, dishwashing stations, cooking lines, service counters and food prep stations.

Performance:	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				

### 454 - ERGO COMFORT

- Extremely comfortable and durable, made from high quality polyurethane
- A durable, thick outer skin provides protection against wear
- Stain and chemical resistant surface is easy to clean
- Beveled on all 4 sides

Stock Sizes	2'x3', 3'x5'
Thickness	5/8"
Colors	 Black



**Applications:** Reception counters, cashiers stations, assembly lines, laboratories, cooking lines, & bar areas.

Performance:	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				

## ANTI-FATIGUE - Dry (Foam)





# ANTI-FATIGUE - Dry (Foam)

## DYNA-SHIELD® SERIES

- 419 - DIAMOND SOF-TRED™**
- 417 - BUBBLE SOF-TRED™**
- 406 - RAZORBACK™**
- 413 - BLADE RUNNER™**










- PVC foam provides added cushioning comfort
- Exclusive Dyna-Shield® top surface manufactured directly into the mat for long lasting wear
- Beveled edges on all 4 sides
- Superior tear resistance and tensile strength

Stock Sizes	2'x3', 2'x6', 3'x4', 3'x5', 3'x6', 3'x12'
Roll Sizes	2'x60', 3'x60', 4'x60'
Thickness	1/2"
Cut Lengths	2', 3', and 4' widths (up to 60' long)
Colors	 Black  Black/Yellow

### Applications:


Workstations where longer lasting fatigue protection is required.

### Performance:

	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				




### 419 - DIAMOND SOF-TRED™

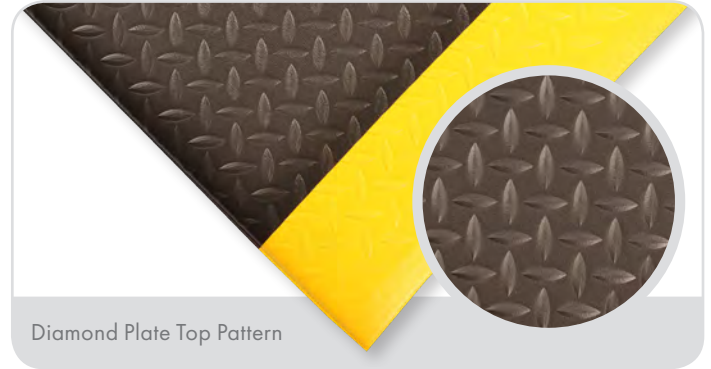


Diamond Plate Top Pattern

### 417 - BUBBLE SOF-TRED™

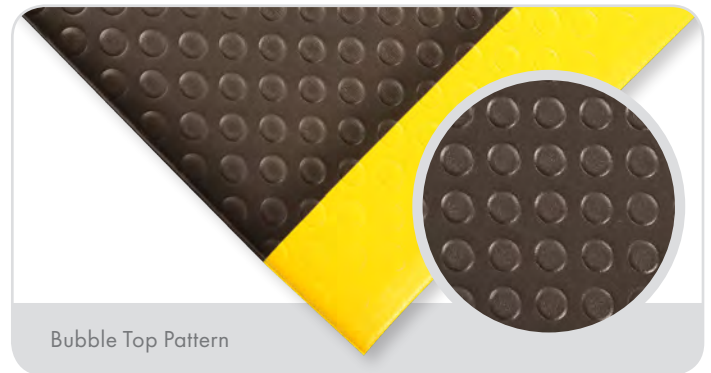


Bubble Top Pattern

### 406 - RAZORBACK™

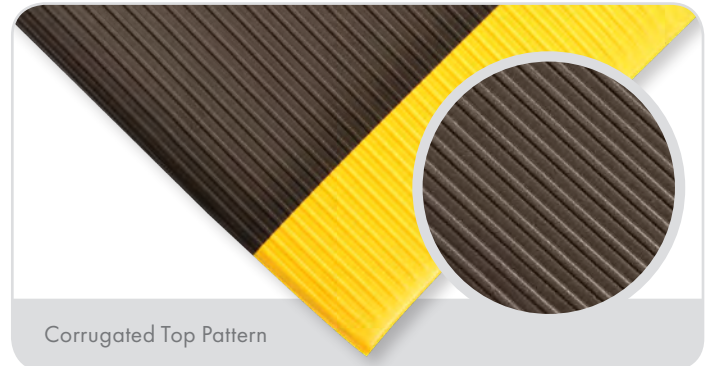

Corrugated Top Pattern

### 413 - BLADE RUNNER™

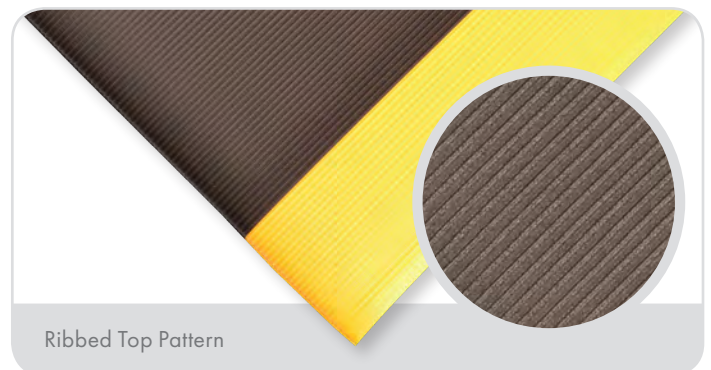


Ribbed Top Pattern



# ANTI-FATIGUE - Dry (PVC Foam)






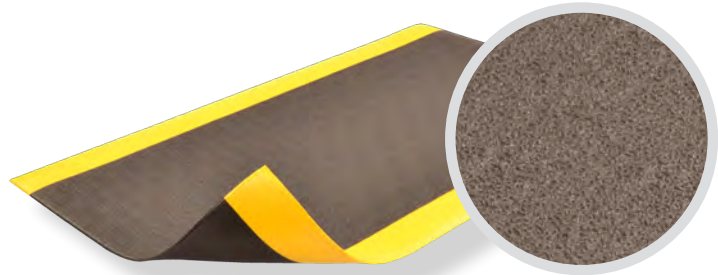


Anti-Fatigue   Cut Lengths   Insulation

### 415 - PEBBLE STEP SOF-TRED™ w/DYNA-SHIELD®

- PVC foam provides added cushioning comfort
- Exclusive Dyna-Shield® pebble top surface provides long lasting wear
- Beveled edges on all 4 sides
- Superior tear resistance and tensile strength

Stock Sizes	2'x3', 2'x6', 3'x4', 3'x5', 3'x6', 3'x12'
Roll Sizes	2'x60', 3'x60', 4'x60'
Thickness	3/8" and 5/8"
Cut Lengths	2', 3', and 4' widths (up to 60' long)
Colors	 Black  Black/Yellow




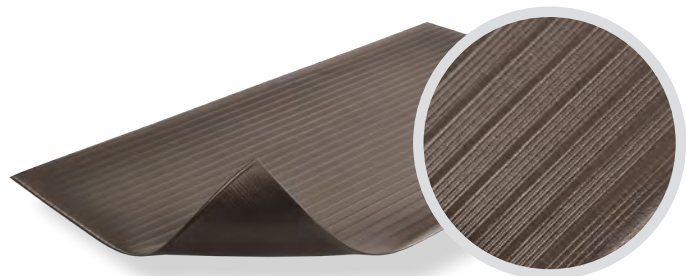
**Applications:** Work stations where the need for longer lasting fatigue protection is required.

Performance:	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				

### 410 - AIRUG®

- Basic anti-fatigue protection provided
- PVC closed cell foam relieves leg and back discomfort; provides a barrier to cold floors
- Beveled edges on all 4 sides

Stock Sizes	2'x3', 3'x5', 3'x12'
Roll Sizes	2'x60', 3'x 60', 4'x60', 6'x60' (3/8") 2'x30', 3'x 30', 4'x30', 6'x30' (5/8")
Thickness	3/8" and 5/8"
Cut Lengths	2', 3', and 4' widths (up to 60' long) (3/8") 2', 3', and 4' widths (up to 30' long) (5/8")
Colors	 Black  Black/Yellow  Grey



**Applications:** Work stations where anti-fatigue matting is needed at a low cost.

Performance:	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				

### 411 - SOF-TRED™

- Basic anti-fatigue protection provided
- PVC closed cell foam relieves leg and back discomfort; provides a barrier to cold floors
- Beveled edges on all 4 sides

Stock Sizes	2'x3', 3'x5', 3'x12'
Roll Sizes	2'x60', 3'x 60', 4'x60', 6'x60'
Thickness	3/8" and 9/16"
Cut Lengths	2', 3', and 4' widths (up to 60' long)
Colors	 Black  Black/Yellow



**Applications:** Work stations where anti-fatigue matting is needed at a low cost.

Performance:	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				

## MODULAR WORKSTATION SERIES

Notrax<sup>®</sup> mats are created using the highest quality materials in its signature Cushion-Ease<sup>®</sup>, SkyMaster<sup>™</sup>, and De-Flex<sup>™</sup> series of rubber modular matting. Each series is made to accommodate a variety of work environments and complete with the versatility to solve challenges presented. Whether it is a unique interlocking system, a variety of edging solutions or specific rubber compound needed these series of mats help create individual work stations, long aisle runs, and unique custom configurations.

Each modular matting series is engineered to rigorous safety standards to provide safe walking surfaces with seamless interlocking systems, beveled edges, and rubber substrates with high coefficient of friction. These features provide assurance that employees are safe. Additionally, these mats are ergonomically designed to provide the necessary amount of anti-fatigue to keep workforces productive. Drainage and oil resistant options are made available for harsher conditions or where containment levels are lower. Flame Retardant rubber compounded mats give piece of mind that no fire hazard exists.

Any workspace is transformed into a more comfortable, safe space with Notrax<sup>®</sup> modular workstation matting.



## Engineered Modular Rubber Matting Solutions

- An interlocking ergonomic matting system for individual work stations, long runs, unique configurations or wall to wall floors
- Add Safety and Ergonomics to any work space in a versatile matting system
- Easy to work with high quality engineered 3'x3' molded mats and 3' molded ramps
- Cut lines are engineered into the underside of the mat every 12" for easy on-site customization
- Available in natural rubber compound for general purposes


## High-Quality Rubber Compounding

Notrax<sup>®</sup> branded rubber modular mats are made from mixed synthetic rubbers pressed into Notrax<sup>®</sup>'s signature molds. Our rubber is high quality. Our recipes call for specific measured level of hardness to provide a comfortable, yet solid working surface. With over 6 different compounds, we bring to market a rubber to fit the demands of many different work environments. We take quality seriously. No clay fillers or smells of petroleum.



## Guide for Ordering Custom Matting Sizes

- Custom designs for any specific work station are possible.
- To order, simply provide a sketch that illustrates the shape, dimensions, and where the ramp edges are required.
- You will receive our CAD drawing for approval.
- Oversized mats are made in sections that interlock on site, to facilitate shipping and handling.

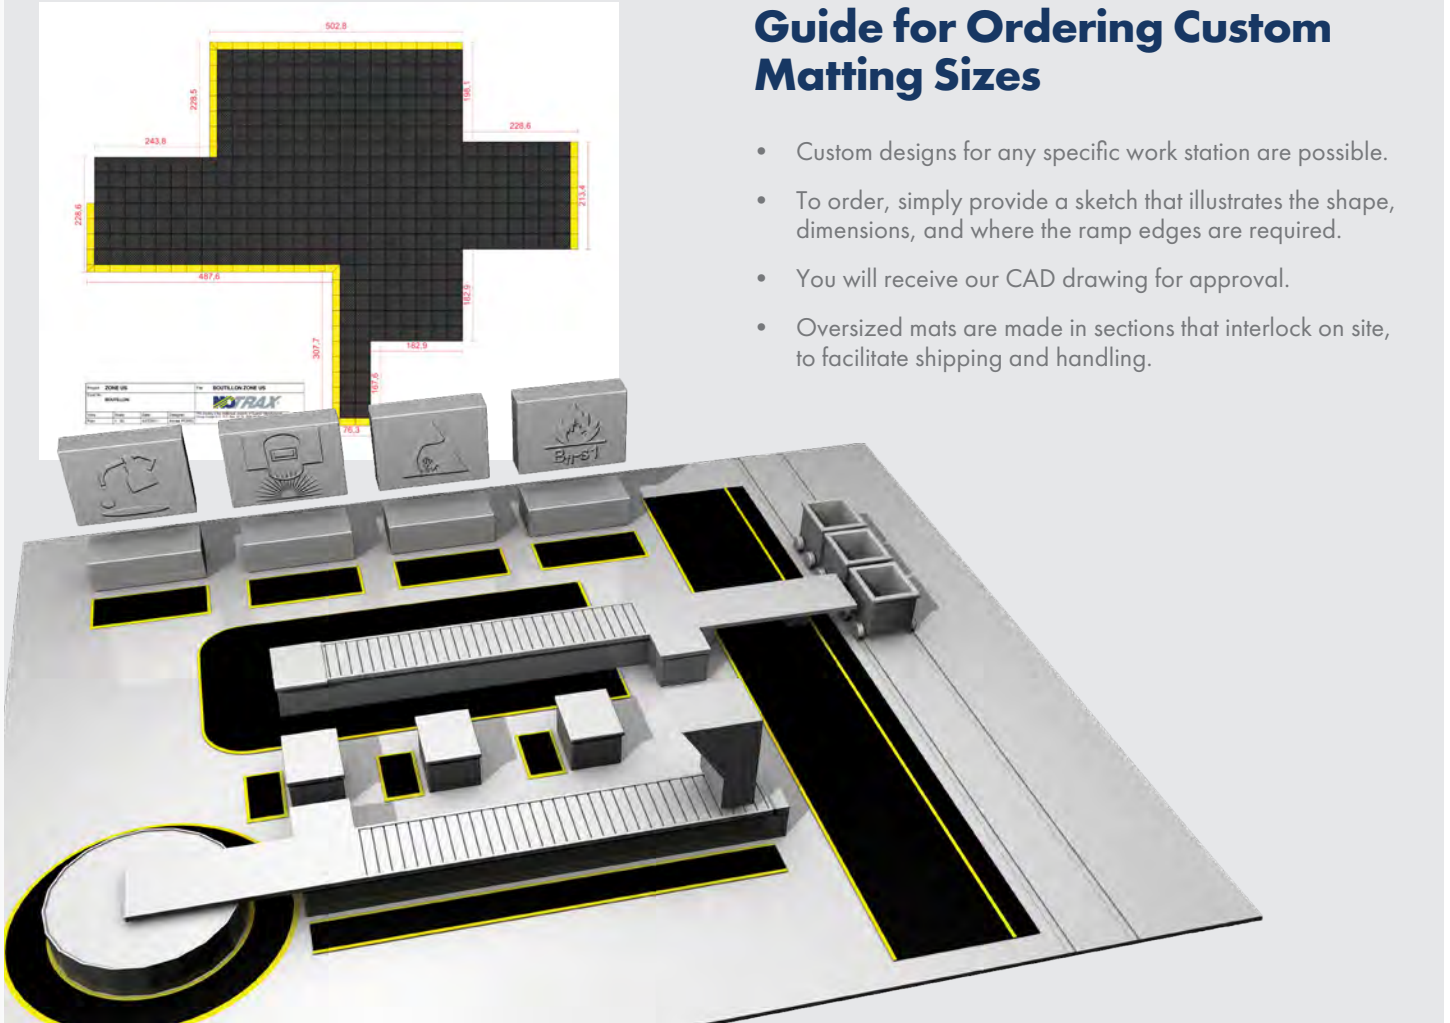

## SELECT THE RIGHT MAT FOR YOU

FEATURES	CUSHION-EASE® SERIES 3'x3'	CUSHION-EASE® SERIES 3'x5'	DE-FLEX™ SERIES 18"x18"	SKYMASTER™ SERIES 3'x3'
	Natural Rubber	550 (pg 28), 556 (pg 26), 557 (pg 26)	550 (pg 28)	570 (pg 30)
100% Nitrile Rubber	650 (pg 28), 650FR (pg 28), 656 (pg 26), 656FR (pg 26)	650 (pg 28)	572 (pg 30)	462 (pg 32)
100% Nitrile GSII™ (Grit)	850 (pg 28), 850FR (pg 28), 856 (pg 26), 856FR (pg 26)	850 (pg 28)		
Nitrile / Fire Retardant	656FR (pg 26), 856FR (pg 26)			465 (pg 32)
GSII™ (Grit) Fire Retardant	850FR (pg 28), 856FR (pg 28)			
ESD Dissipative	558 (pg 26)		573 (pg 30)	463 (pg 32)



# **ANTI-FATIGUE** - Dry (Rubber) **CUSHION-EASE**<sup>®</sup> SERIES







### 556 CUSHION-EASE® SOLID

- Resilient compound and unique design to provide exceptional fatigue relief
- Easy-to-clean solid top and anti-slip surface



Anti-Slip  
Pebble Top Surface


Stock Sizes	3'x3'
Thickness	3/4"



**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

### 557 CUSHION-EASE® ERGO

- Resilient rubber compound
- Bubble design for ergonomic comfort
- Can be mixed and matched with any of the Cushion-Ease® family




Bubble Top  
Surface

Stock Sizes	3'x3'
Thickness	3/4"

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

### 558 CUSHION-EASE® ESD SOLID

- Resilient rubber compound that is easy to clean
- Electrostatic dissipative
- Can be mixed and matched with any of the Cushion-Ease® family



Anti-Slip  
Pebble Top Surface

Stock Sizes	3'x3'
Thickness	3/4"



**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

**NEW!**

### 656/656FR


#### NIRU® CUSHION-EASE® SOLID

- 100% Nitrile rubber compound provides the highest level of resistance to chemicals, oils and greases
- 656FR Flame retardant option



Anti-Slip  
Solid Top Surface

Stock Sizes	3'x3'
Thickness	3/4"



**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

### 856/856FR


#### NIRU® CUSHION-EASE® GSII™ SOLID

- GSII™ Grit technology provides durability and performance in the harshest environments
- 100% Nitrile rubber provides high levels of resistance to chemicals, oils and greases
- 856FR Flame retardant option



Anti-Slip Grit  
Pebble Top Surface

Stock Sizes	3'x3'
Thickness	3/4"




**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78



### Performance:

	Good	Better	Best	Superior
Wear Resistance		556, 557, 558		
Anti-fatigue Performance		656, 656FR, 856, 856FR		
Slip Resistance		556, 557, 558		656, 656FR, 856, 856FR

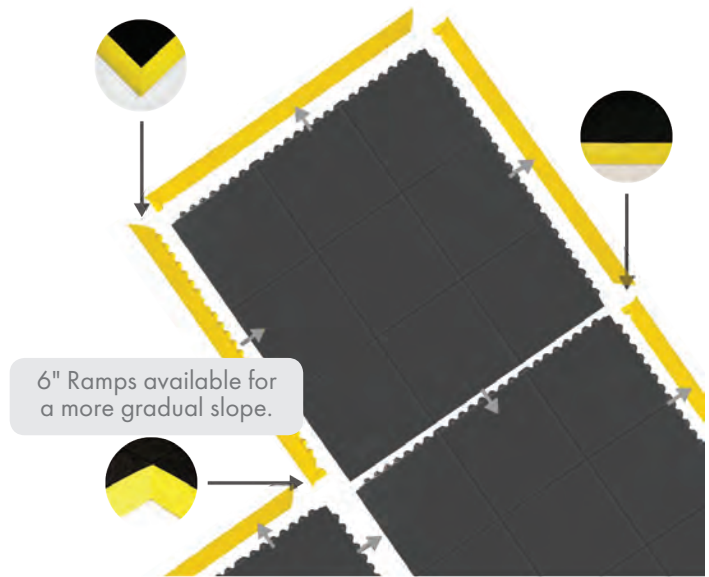

### M.D. Ramps

M.D. Ramps can be cut to a specific length other than the standard sizes easily.



**551 - M.D. RAMP SYSTEM™** 2" wide and 3' and 5' lengths

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

**552 - M.D.-X RAMP SYSTEM™** 6" wide and 3' lengths **NEW!**

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78



**ANTI-FATIGUE** - Wet (Rubber)

**CUSHION-EASE**<sup>®</sup> SERIES







### 550 - CUSHION-EASE®

- Made from a heavy-duty rubber compound
- Multi-nib design offers exceptional fatigue relief and aeration
- Large hole drainage system keeps moisture and debris away
- Easy to snap together modular matting system
- Optional nitrile rubber ramps available for trip-resistant platform (551 M.D. Ramp System®)
- Can be mixed/matched with any of the Cushion-Ease® family mats

Stock Sizes	3'x3', 3'x5'
Thickness	3/4"

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

### 650 - NIRU® CUSHION-EASE® 650FR - NIRU® CUSHION-EASE FIRE RETARDANT®

- 100% Nitrile rubber compound for resistance to commonly found chemicals, cutting fluids, oils, greases, and animal fats
- Multi-nib design offers exceptional fatigue relief and aeration
- Large hole drainage system keeps moisture and debris away
- Easy to snap together modular matting system
- Optional nitrile rubber ramps available for trip-resistant platform (551 M.D. Ramp System)
- Can be mixed/matched with any of the Cushion-Ease® family mats
- 650SFR flame retardant version

Stock Sizes	3'x3', 3'x5'
Thickness	3/4"



**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

### 850 - NIRU® CUSHION-EASE® GSII™ 850FR - NIRU® CUSHION-EASE® GSII™ FIRE RETARDANT®

- 100% Nitrile rubber compound for resistance to commonly found chemicals, cutting fluids, oils, greases, and animal fats
- Multi-nib design offers exceptional fatigue relief and aeration
- Large hole drainage system keeps moisture and debris away
- Easy to snap together modular matting system
- Optional nitrile rubber ramps available for trip-resistant platform (551 M.D. Ramp System)
- Can be mixed/matched with any of the Cushion-Ease® family mats
- 850SFR flame retardant version
- GSII™ technology offers the ultimate in durability and performance in the harshest environments
- Silicon Carbide grit surface provides long lasting traction

Stock Sizes	3'x3', 3'x5'
Thickness	3/4"



**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78



### Applications:

Wet environments where comfort and durability are critical. The GSII or Niru versions are available for environments where industrial chemicals, oils, greases, and animal fats are often found. Where custom configurations are a consideration.

### Performance:

	Good	Better	Best	Superior
Wear Resistance	550, 650, 650FR, 850, 850FR			
Anti-fatigue Performance	550, 650, 650FR, 850, 850FR			
Slip Resistance	550, 650, 650FR, 850, 850FR			



### M.D. Ramps

M.D. Ramps can be cut to a specific length other than the standard sizes easily.



### 551 - M.D. RAMP SYSTEM™ 2" wide and 3' and 5' lengths

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

### 552 - M.D.-X RAMP SYSTEM™ 6" wide and 3' lengths **NEW!**

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78



# ANTI-FATIGUE - Dry (Rubber)

## DE-FLEX<sup>®</sup> SERIES







Anti-Fatigue



Heavy Traffic



Anti-Slip



Floor Protection



Insulation



Modular System

**NEW!**

### 570 - DE-FLEX™

- Natural rubber compound
- General purpose applications



Anti-Slip  
Diamond Top Surface

Stock Sizes	18"x18"
Thickness	3/4"

**570 DE-FLEX™**

### 572 - DE-FLEX™ NIRU®

- Nitrile rubber compound
- Resistant to most industrial oils



Anti-Slip  
Diamond Top Surface

Stock Sizes	18"x18"
Thickness	3/4"



Oil/Grease  
Resistant

**572 DE-FLEX™ NIRU®**

**NEW!**

### 573 - DE-FLEX™ ESD

- Natural rubber compound
- ESD Static Dissipative, measured resistance  $10^6 - 10^9 \Omega$
- Optional grounding cord available



Anti-Slip  
Diamond Top Surface

Stock Sizes	18"x18"
Thickness	3/4"



Non-Conductive


**NEW!**

### Applications:


Heavy duty industrial areas where custom configurations are needed for coverage.

### Performance:

	Good	Better	Best	Superior
Wear Resistance			<b>570,572,573</b>	
Anti-fatigue Performance			<b>570,572,573</b>	
Slip Resistance			<b>570,572,573</b>	

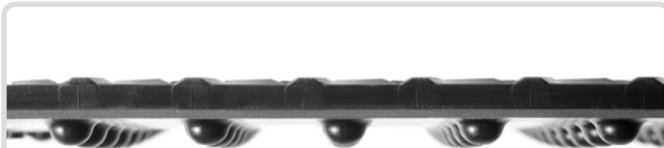

**DE-FLEX™ - Profile View**

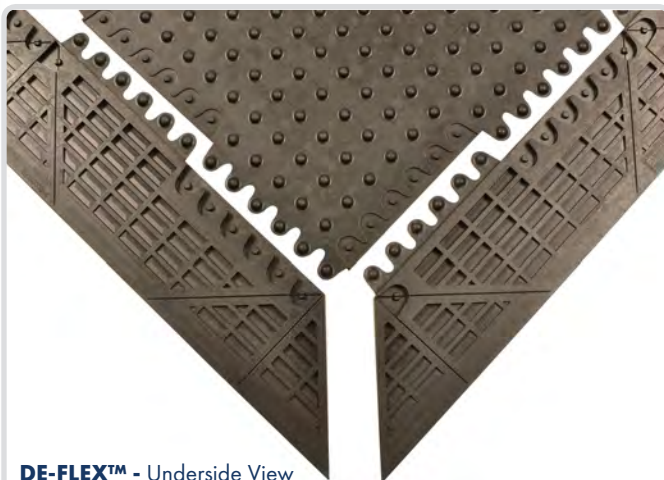

**DE-FLEX™ - Underside View**

### DE-FLEX™ Ramps

De-Flex™ Ramps can be cut to a specific length other than the standard sizes. Simple assembly with no male or female specific ramps.




Yellow



Black

### 571 - DE-FLEX™ RAMPS 36" straight available

**NEW!**

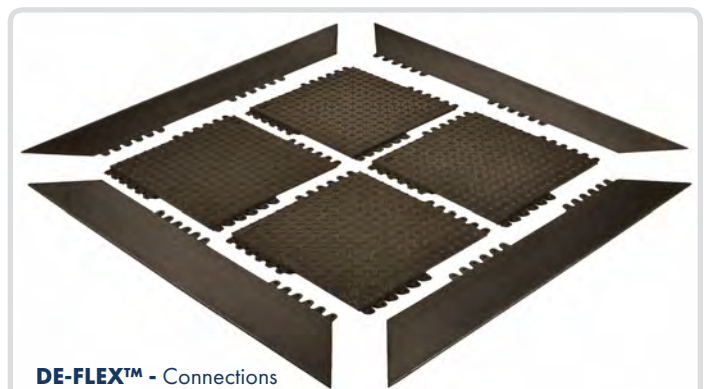

**DE-FLEX™ - Connections**

# **ANTI-FATIGUE** - Dry (Rubber)

## **SKYMASTER™ HD SERIES**







Anti-Fatigue



Anti-Slip



Cut Lengths



Floor Protection



Heavy Traffic



Insulation



Modular System

### 460 - SKYMASTER™ HD

**NEW!**

- Made of 100% heavy duty natural rubber compound

Stock Sizes	3'x3'
Thickness	5/8"

**Application:** Dry industrial environments.

### 462 - SKYMASTER™ HD NIRU®

**NEW!**

- Made of 100% nitrile rubber
- Resistant to industrial oils

Stock Sizes	3'x3'
Thickness	5/8"



Oil/Grease

**Application:** Dry industrial environments with exposure to oil.

### 463 - SKYMASTER™ HD ESD

**NEW!**

- Made of 100% heavy duty natural rubber compound
- ESD Dissipative, measured resistance  $10^6 - 10^9 \Omega$
- Grounding cord available, not required

Stock Sizes	3'x3'
Thickness	5/8"



Anti-Static

**Application:** Use where Electro Static Discharge (ESD) could be present.

### 465 - SKYMASTER™ HD NIRU® FR

**NEW!**

- Made from 100% nitrile rubber compound
- Resistant to most industrial oils
- Fire Retardant

Stock Sizes	3'x3'
Thickness	5/8"



Fire Resistant



Welding



Oil/Grease Resistant

**Application:** Welding applications.




#### Standard

- 90 degree angle

#### Performance:

	Good	Better	Best	Superior
Wear Resistance	██████████			██████
Anti-fatigue Performance	██████████			██████
Slip Resistance	██████████			██████

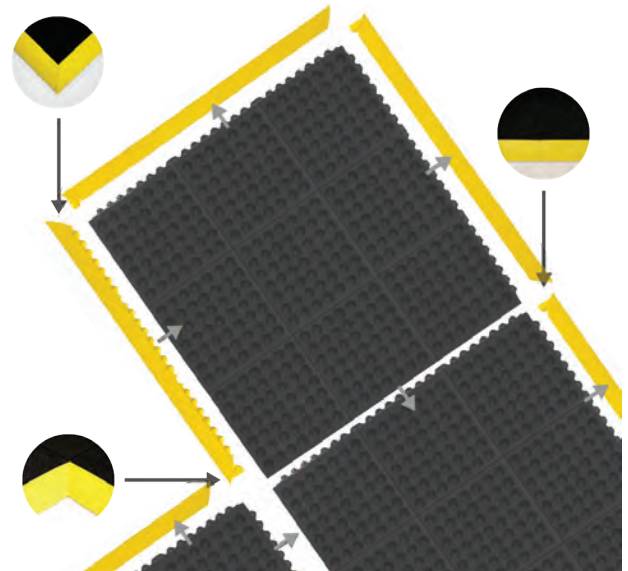

### 469 - SAFETY LINE

4" wide and 36" long

**NEW!**

### 461 - SKYMASTER™ HD RAMPS

2" wide and 36" long

**NEW!**




Yellow




Black



## SKYMASTER™ - Curves

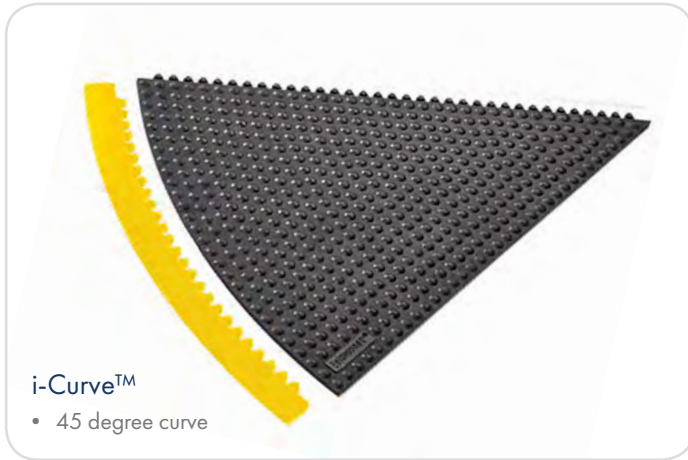

**i-Curve™**  
• 45 degree curve

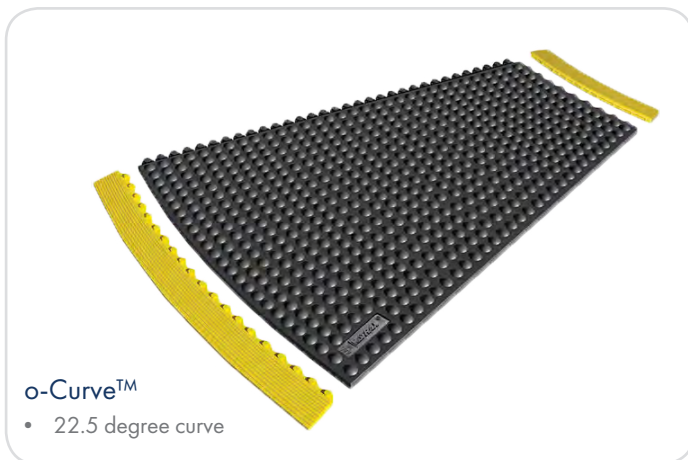

**o-Curve™**  
• 22.5 degree curve

Performance:	Good	Better	Best	Superior
Wear Resistance	██████████			██████
Anti-fatigue Performance	██████████			██████
Slip Resistance	██████████			██████



### 430 - SKYMASTER™ HD i-CURVE™ 446 - SKYMASTER™ HD o-CURVE™

**NEW!**

- Made of 100% heavy duty natural rubber compound

Stock Sizes	3'x3'
Thickness	5/8"

**⚠ WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

**Application:** Dry industrial environments.

### 432 - SKYMASTER™ HD i-CURVE™ NIRU® 442 - SKYMASTER™ HD o-CURVE™ NIRU®

**NEW!**

- Made of 100% nitrile rubber
- Resistant to industrial oils

Stock Sizes	3'x3'
Thickness	5/8"



**⚠ WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

**Application:** Dry industrial environments with exposure to oil.

### 433 - SKYMASTER™ HD i-CURVE™ ESD 443 - SKYMASTER™ HD o-CURVE™ ESD

**NEW!**

- Made of 100% heavy duty natural rubber compound
- ESD Dissipative, measured resistance 10<sup>6</sup> - 10<sup>9</sup> Ω

Stock Sizes	3'x3'
Thickness	5/8"



**⚠ WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78


**Application:** Use where Electro Static Discharge (ESD) could be present.

### 435 - SKYMASTER™ HD i-CURVE™ NIRU® FR 445 - SKYMASTER™ HD o-CURVE™ NIRU® FR

**NEW!**

- Made from 100% nitrile rubber compound
- Resistant to most industrial oils
- Fire Retardant

Stock Sizes	3'x3'
Thickness	5/8"



**⚠ WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

**Application:** Welding applications.

### 431 - i-CURVE™ Ramp 2" wide, 45° curve

**NEW!**

**⚠ WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

### 481 - o-CURVE™ Ramp 2" wide, 22.5° curve

**NEW!**

**⚠ WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78







# WORKSTATIONS - Solid (Rubber)

## 455 - SKYSTEP™ 457 - SKYSTEP™ ESD

**NEW!**


- Rubber molded, air-pocket underside anti-fatigue mat
- Beveled edges on all four sides
- Designed to suction to the ground to prevent shifting while trapping air in its chambers
- (455) For general purpose applications
- (457) ESD Static Dissipative, measured resistance  $10^5 - 10^7 \Omega$

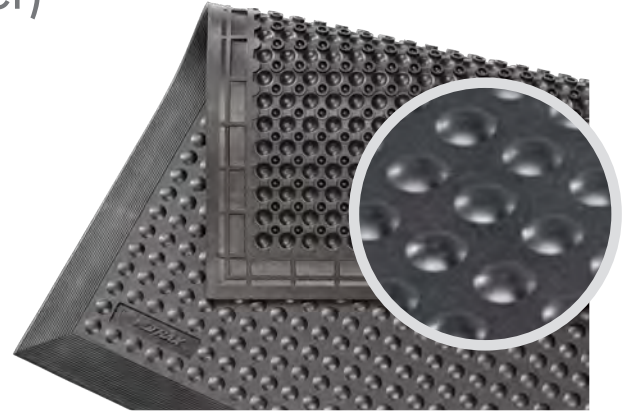

Stock Sizes	2'x3', 3'x4', 3'x5'
Thickness	5/8"
Colors	 Black


**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

**Applications:** Dry industrial stand-alone workstations where electrostatic discharge may be present.

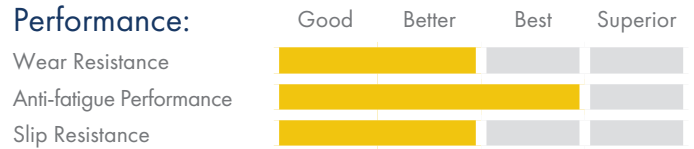

## 447 - COMFORT-EZE™

- Rubber molded, anti-fatigue mat
- Beveled edges on all four sides
- Bubbles are molded on an offset on the top and bottom of the mat to maximize flex and enhance the ergonomic benefit


Stock Sizes	24"x36", 30"x60", 30"x10'*
	*Consists of multiple mats bonded together
Thickness	3/8"
Colors	 Black

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78



**Applications:** Dry applications where there is a good deal of pivoting required.

- Packaging stations
- Shipping areas
- Quality inspection areas
- Light to medium duty dry areas

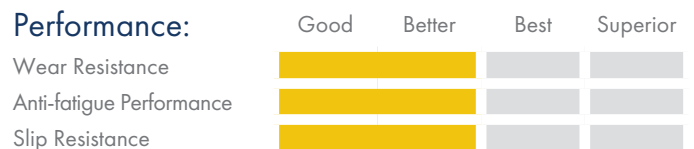



Anti-Fatigue



Anti-Slip




Drainage





Oil/Grease Resistant
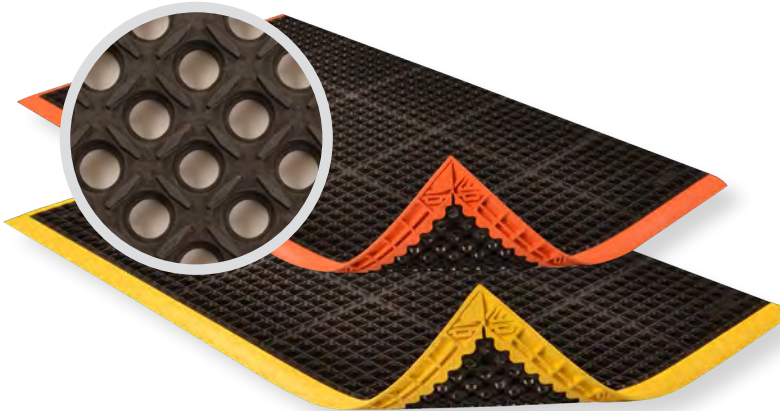
# SAFETY/ANTI-FATIGUE - Wet (Rubber)



## 549 - SAFETY STANCE®

- Resilient natural rubber compound withstands industrial cutting oils and chemicals
- Large hole configuration facilitates drainage and resists clogging while mini-diamond studs on top surface minimize slippage
- Nitrile beveled borders are affixed to the mat and are available on 3 or 4 sides. Prevents swelling/curling

Stock Sizes (3-sided borders)	26"x40", 38"x40", 38"x64", 38"x124"
Stock Sizes (4-sided borders)	28"x40", 40"x40", 40"x64", 40"x124"
Thickness	7/8"
Colors	 Black/Orange  Black/Yellow

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78



Anti-Fatigue



Anti-Slip



Drainage



Oil/Grease Resistant

### Applications:


All heavy industrial environments and work cells that require worker protection from fatigue, spillage of liquids, heavy cart traffic.

### Performance:

	Good	Better	Best	Superior
Wear Resistance	██████████			██████
Anti-fatigue Performance	██████████			██████
Slip Resistance	██████████			██████

## 543 - CUSHION-TRED™

- Made from a heavy-duty resilient rubber compound
- Flexible cushioning design provides maximum comfort
- Large hole configuration facilitates drainage and resists clogging
- Square edges on all 4 sides

Stock Sizes	2'x3', 3'x3', 3'x5'
Thickness	7/8"
Colors	 Black

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

### Performance:

	Good	Better	Best	Superior
Wear Resistance	██████████			██████
Anti-fatigue Performance	██████████			██████
Slip Resistance	██████████			██████

### Applications:

Any heavy industrial environment or work cell that needs to offer worker protection from fatigue and spillage of liquids. Food prep or bar areas where workers stand for long periods of time.










# SAFETY/ANTI-FATIGUE - Wet (Rubber)

## 562 - SANITOP®

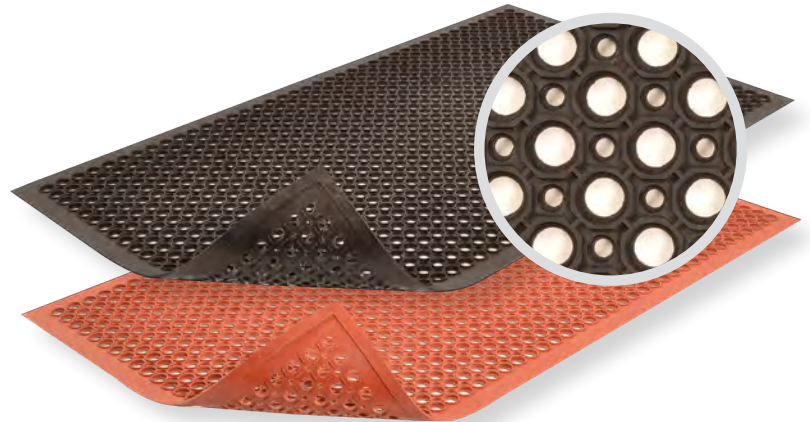- Durable rubber compound
- Molded alternating large/small hole drainage system keeps moisture and debris away from work area
- Raised pattern surrounds large holes to channel drainage and provide worker traction
- Beveled ramps on all 4 sides
- Available in 2 versions:
  - Black grease resistant mat
  - Red grease-proof nitrile mat



Stock Sizes	3'x5', 3'x10'*, 3'x20'* *Consists of multiple mats bonded together
Thickness	1/2"
Colors	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  Black         </div> <div style="text-align: center;">  Red         </div> </div>

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov). See pg 77-78

**Applications:** Wet environments that require basic fatigue relief.



### Performance:

	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				




## 504 - BEVELED DRAIN STEP™

- Economic general purpose black rubber compound
- Large hole drainage design keeps liquids and debris away from worker platform
- Beveled edges on all 4 sides

Stock Sizes	3'x5'
Thickness	1/2"
Colors	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  Black         </div> <div style="text-align: center;">  Red         </div> </div>

### Performance:

	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				

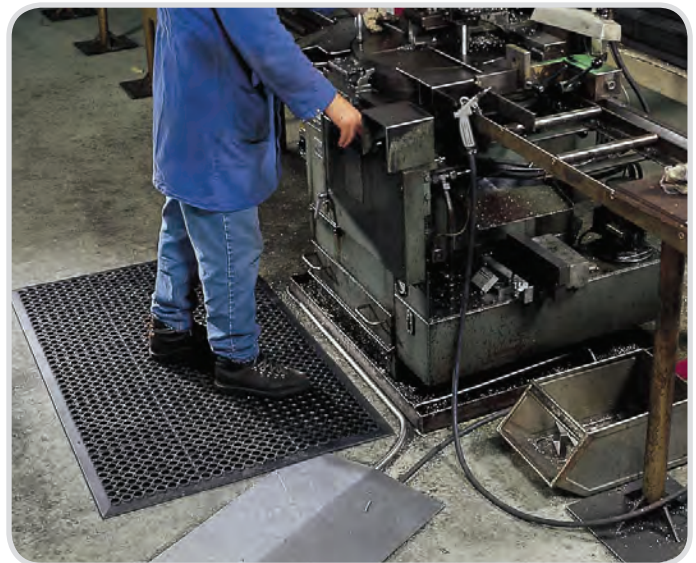

**Applications:** Wet environments that require basic fatigue relief.



# MODULAR WORKSTATIONS & TILES - Dry/Wet







Anti-Fatigue

Anti-Slip

Cleaning

Custom

Drainage

Oil/Grease Resistant

### 620 - DIAMOND FLEX-LOK™

### 621 - DIAMOND FLEX-LOK™ SOLID

- PVC modular interlocking tile with raised diamond top surface
- Black tiles & ramps made from 100% recycled PVC
- Ergonomic, multi-tiered design
- Unique post-in-hole connection system
- Beveled ramps and corners
- 620 - Drainage holes
- 621 - solid top

Sizes	12"x12" Tiles, 6"x12" Ramps, 6"x6" Corners		
Assembled Stock Sizes	30"x36", 30"x48", 30"x60", 30"x72", 30"x96", 42"x72", 42"x96", 42"x120"		
Thickness	1"		
Colors	<b>Assembled</b>  Black/Yellow	<b>Tiles</b>  Black	<b>Ramps/Corners</b>   Black Yellow

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

### 520 - CUSHION-LOK™

### 522 - CUSHION-LOK™ w/ GRIP-STEP®

- PVC based workstation mat made from 100% recycled materials (black only)
- 520 - Drainage top
- 522 - Gritted drainage top
- Porthole drainage system
- Beveled ramps and corners available
- Tiles use dovetail connection system

Sizes	12"x12" Tiles, 6"x12" Ramps, 6"x6" Corners		
Assembled Stock Sizes	30"x36", 30"x48", 30"x60", 30"x72", 30"x96", 42"x72", 42"x96", 42"x120"		
Thickness	7/8"		
Colors	<b>Assembled</b>  Black/Yellow	<b>Tiles</b>  Black	<b>Ramps/Corners</b>   Black Yellow

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

### 523 - MODULAR LOK-TYLE

- Light-weight PVC, modular, drainage tiles
- Beveled ramps and corners available
- 100% recycled PVC (Black only)
- NSF tested and certified (as shelf liners)



Sizes	12"x12" Tile, 2"x12" Ramp, 2"x2" Corners			
Thickness	1/2"			
Colors	 Black	 Green	 Blue	 Yellow

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78




620

621

#### Applications:

Where anti-fatigue, drainage, and slip resistance are all a priority. Where custom configurations are a consideration.

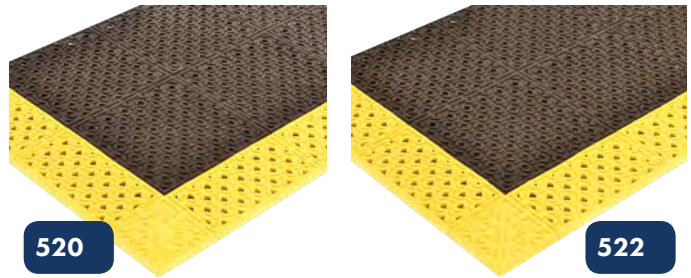

520

522

#### Applications:

Wet environments where drainage and slip resistance are a priority. Where custom configurations are a consideration.



#### Applications:

- Locker rooms
- Shower areas
- Spa Areas
- Restaurants
- Shelving
- Bar areas



# INDUSTRIAL RUNNERS - Wet











### 531 - SAFETY GRID™


- Resilient vinyl construction
- Saw-tooth texture for added traction

Roll Sizes	2'x40', 3'x40', 4'x40'
Thickness	1/2"
Cut Lengths	2', 3', and 4' widths (up to 40' long)
Colors	   
	Black    Black/Yellow    Grey    Blue

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

### 420 - CUSHION-DEK™

- Tough PVC compound with raised pyramid design to enhance traction
- Drainage system for use in wet areas


Stock Sizes	2'x3', 2'x6', 3'x4', 3'x6', 3'x10', 4'x6', 4'x8'
Roll Sizes	2'x30', 3'x30', 4'x30'
Thickness	7/16"
Cut Lengths	2', 3' and 4' widths (up to 30' long)
Colors	
	Black

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

### 755 - NIRU® VERSA RUNNER®

- 100% Nitrile rubber compound
- Slotted perforations for drainage
- Ribbed underside channels liquid away from the mat
- MicroStop™ anti-microbial rubber compound





Stock Sizes	2'x3', 3'x4'
Roll Sizes	2'x60', 3'x60', 4'x60'
Thickness	3/8"
Cut Lengths	2', 3' and 4' widths (up to 60' long)
Colors	
	Black

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

### T23 - MULTI-MAT II®

**NEW!**

- Non-skid surface for added traction
- Black natural rubber & red Nitrile available
- Reversible for extended life
- Low profile for easy cart access

Stock Sizes	2'x8', 3'x2', 3'x4', 3'x8', 4'x8'
Roll Sizes	2'x30', 2'x60', 3'x32', 3'x64', 4'x30', 4'x64'
Thickness	3/8"
Colors	 
	Black    Red

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

**531 SAFETY GRID™**

**Applications:**  
Elevated runs, locker rooms, shower areas.

**420 CUSHION-DEK™**

**Applications:**  
Harsh environments that require a surface with traction and anti-fatigue properties.

**755 NIRU® VERSA RUNNER®**

**Applications:**  
Wet or dry environments that require high traction and drainage capability in a continuous mat. Low profile allows for use in applications with high cart traffic.

**T23 MULTI-MAT II®**

**Applications:**  
Longer runs or workstation environments, drainage, some exposure to grease, oil and water, anti-slip surface, low profile for cart traffic.



Anti-Slip



Cold Resistant



Cut Lengths



Floor Protection



Insulation


# INDUSTRIAL RUNNERS - Dry

**NEW!**

## 765 - DEEP FREEZE MAT™



- Raised knob solid top surface that enhances traction
- Tested to withstand temperatures to -40 Fahrenheit
- MicroStop™ anti-microbial rubber compound
- Low profile for easy cart traffic

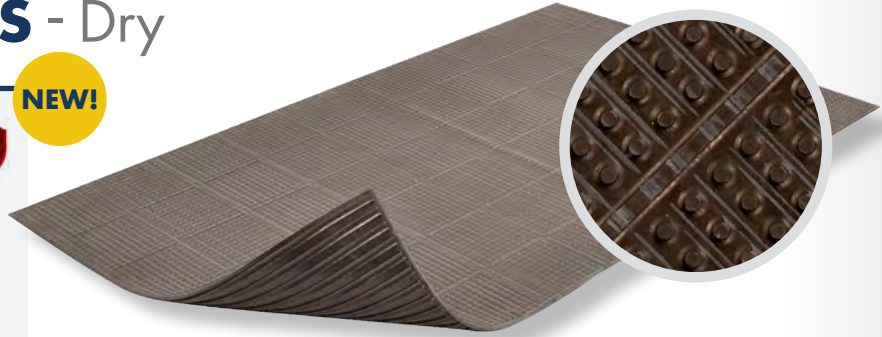

Stock Sizes	2'x5', 2'x8', 3'x5', 3'x8', 4'x5', 4'x8'
Thickness	3/8"
Cut Lengths	2', 3', and 4' widths (up to 60')
Colors	Black

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

**Applications:** Meat lockers, walk-in freezers, specialty freezers.

### Performance:



Anti-Fatigue



Custom



Insulation




Welding

## 758 - NIRU® KNOB-TOP RUNNER™



- 100% Nitrile rubber compound
- Solid-top slip resistant surface
- Ribbed underside channels liquid away from the mat
- MicroStop™ anti-microbial rubber compound

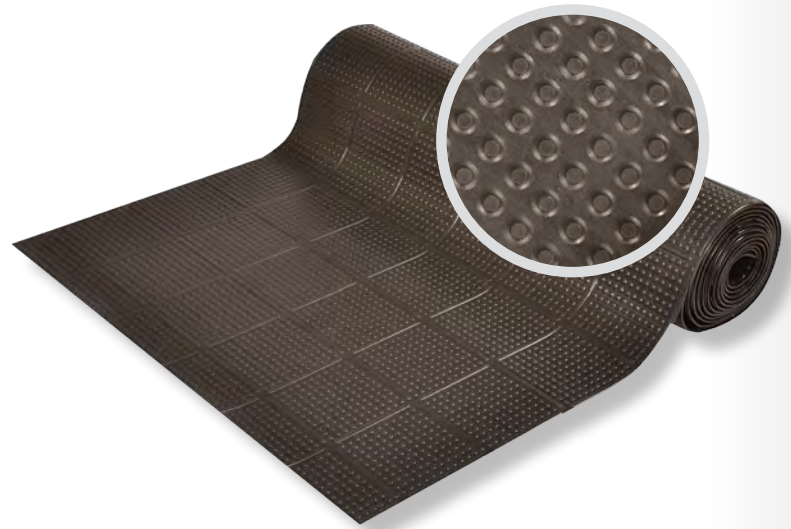

Stock Sizes	2'x3', 3'x4'
Roll Sizes	2'x60', 3'x60', 4'x60'
Thickness	1/4"
Cut Lengths	2', 3', and 4' widths (up to 60')
Colors	Black

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

### Applications:

Wet or dry environments that require high traction and drainage capability in a continuous mat.

### Performance:







Anti-Slip



Cut Lengths



Floor Protection




Insulation

# INDUSTRIAL RUNNERS - Dry

## 730 - V-GROOVE CORRUGATED RUNNER™ - VINYL 750 - V-GROOVE CORRUGATED RUNNER™ - RUBBER


- Corrugated rib-tooth design improves traction
- Insulates floor and creates a silencing effect
- Low profile allows for easy on/off cart traffic
- Made from 100% recycled materials

Roll Sizes (730)	2'x105', 3'x105', 4'x105'
Roll Sizes (750)	2'x75', 3'x75', 4'x75', 6'x75', 2'x150', 3'x150', 4'x150'
Thickness	1/8"
Cut Lengths (730)	2', 3', and 4' widths (up to 105' long)
Cut Lengths (750)	2', 3', 4', and 6' widths (up to 150' long)
Colors	 Black

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

## 735 - ROUND RIB RUNNER

- 100% recycled vinyl materials
- Wide-spaced rounded rib design
- Low profile allows for easy on/off cart traffic

Roll Sizes	2'x105', 3'x105', 4'x105'
Thickness	1/8"
Cut Lengths	2', 3', and 4' widths (up to 105' long)
Colors	 Black  Grey


**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

## 737 - DIAMOND PLATE RUNNER

- 100% recycled vinyl materials
- Diamond-plate embossed top surface
- Low profile allows for easy on/off cart traffic

Roll Sizes	2'x75', 3'x75', 4'x75', 5'x75'
Thickness	5/32"
Cut Lengths	2', 3', 4', and 5' widths (up to 75' long)
Colors	 Black  Grey  Black/Yellow

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

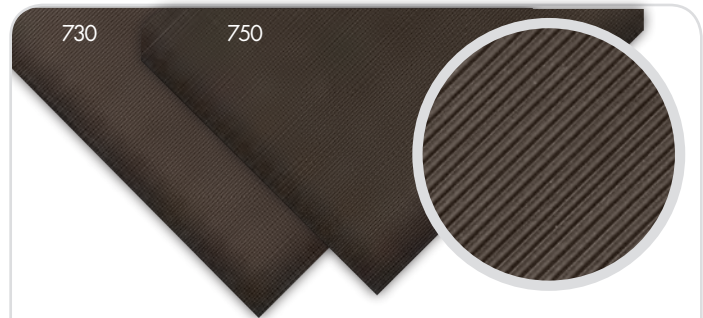


### Applications:

Where safety and slip protection is needed; aisle ways, warehouses, vending areas, liner for maintenance and tool carts.

### Performance:

	Good	Better	Best	Superior
Wear Resistance	<b>730,750</b>			
Anti-fatigue Performance	<b>730,750</b>			
Slip Resistance	<b>730,750</b>			

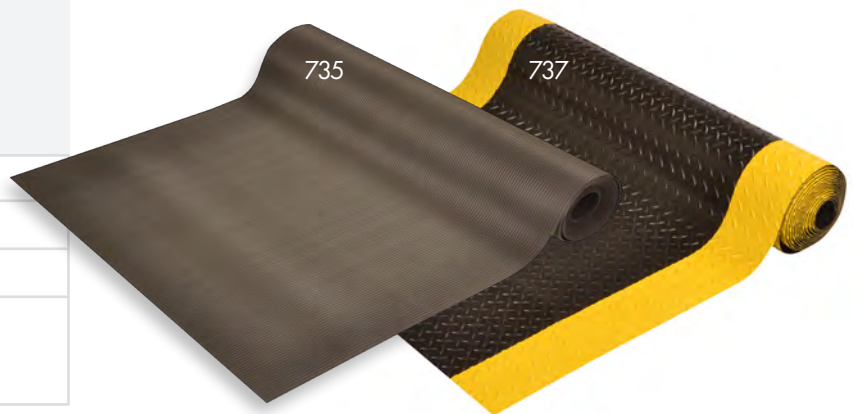

### Application:

Aisle ways, warehouses, vending areas, easy on/off cart traffic.

### Performance:

	Good	Better	Best	Superior
Wear Resistance	<b>735,737</b>			
Anti-fatigue Performance	<b>735,737</b>			
Slip Resistance	<b>735,737</b>			

# ELECTROSTATIC DISCHARGE (ESD) MATTING










# ESD SAFETY/ANTI-STATIC - Dry

## 825 - CUSHION-STAT™ w/DYNASHIELD®


- Static dissipative PVC sponge
- Absorbs static electricity keeping sensitive electronic circuitry safe
- Dyna-Shield® increases strength and provides long lasting wear
- Beveled on all 4 sides
- RG  $10^6 - 10^9 \Omega$ ; RP  $10^6 - 10^9 \Omega$
- Grounding cord available, not required



Stock Sizes	2'x3', 3'x5', 3'x10'
Roll Sizes	3'x60', 4'x60'
Thickness	3/8"
Cut Lengths	3' and 4' widths (up to 60' long)
Colors	 Black  Grey  Black/Yellow

**Applications:** Assembly or testing areas for circuitry: computers, chips, electronics of all kinds.

Performance:	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				





## 827 - ANTI-STAT P.O.P.™

**NEW!**

Vinyl work surface that dissipates static from conductive items placed on it. Protects table and keeps sensitive components safe from damaging static shocks. Smooth top surface that is abrasion resistant and easy to wipe clean.

- Single layer vinyl work surface that dissipates static to keep sensitive components safe
- Smooth top surface
- ESD Static Dissipative
- Meets EOS/ESD-S4, measured resistance for work surfaces RG  $10^7 \Omega$  10 and RP  $10^8 \Omega$
- Electrostatic charge (walking test), meets ISO6356 and EN1815
- Grounding cord available, not required

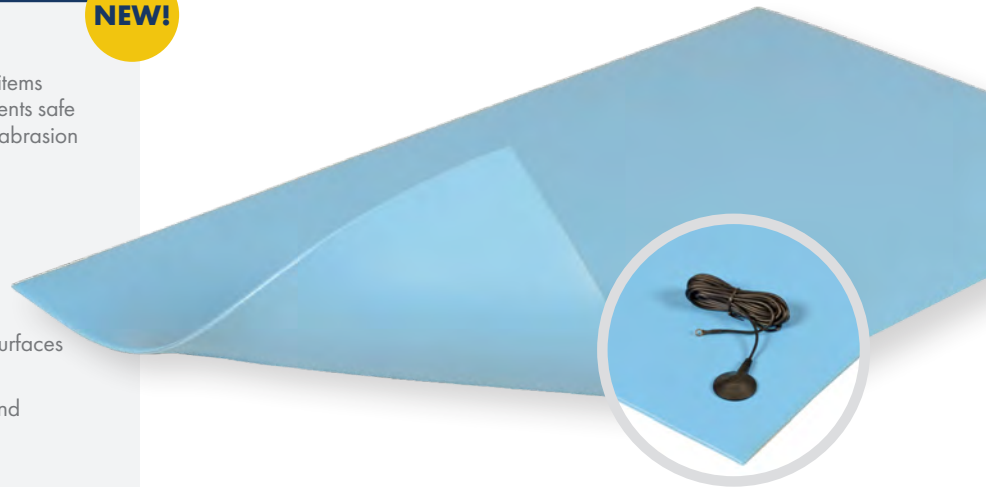

Roll Sizes	30"x40', 3'x40', 3'x60'
Thickness	1/4"
Cut Lengths	2', 30" and 3' widths (up to 60' long)
Colors	 Blue

**Applications:** Tabletop work surfaces.

Performance:	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				

# ESD SAFETY/ANTI-STATIC - Dry

## 558 - CUSHION-EASE® ESD SOLID

**NEW!**

- ESD static dissipative
- Anti-slip pebble surface
- High quality ESD rubber compound mat
- Modular mat with available ramps
- (see pg25)
- RG  $10^6 - 10^9 \Omega$ ; RP  $10^6 - 10^9 \Omega$
- Grounding cord available, not required

Stock Sizes	3'x3'
Thickness	3/4"
Colors	Black

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

## 558 - CUSHION EASE® ESD SOLID



**Applications:**  
Automated manufacturing lines.

## 573 - DE-FLEX™ ESD

**NEW!**

- ESD static dissipative
- Diamond plate surface
- High quality ESD rubber compound mat
- Modular mat with available ramps
- (see pg29)
- RG  $10^6 - 10^9 \Omega$ ; RP  $10^6 - 10^9 \Omega$
- Grounding cord available, not required

Stock Sizes	18"x18"
Thickness	3/4"
Colors	Black

## 573 - DE-FLEX™ ESD



**Applications:**  
Assembly, test equipment, and inspection stations.

## 463 - SKYMASTER™ HD ESD

**NEW!**

- ESD static dissipative
- Bubble design with suction cup backing
- High quality ESD rubber compound mat
- Modular mat with available ramps (see pg31)
- RG  $10^6 - 10^9 \Omega$ ; RP  $10^6 - 10^9 \Omega$

Stock Sizes	3'x3'
Thickness	5/8"
Colors	Black

## 463 - SKYMASTER™ HD ESD




**Applications:**  
Electronic manufacturing and laboratories.

## 457 - SKYSTEP™ ESD

- ESD static dissipative
- Bubble design with suction cup backing
- High quality ESD rubber compound mat
- Beveled edges on all 4 sides
- RG  $10^5 - 10^7 \Omega$ ; RP  $10^5 - 10^7 \Omega$
- Grounding cord available, not required

Stock Sizes	2'x3', 3'x4', 3'x5'
Thickness	5/8"
Colors	Black

## 457 - SKYSTEP™ ESD

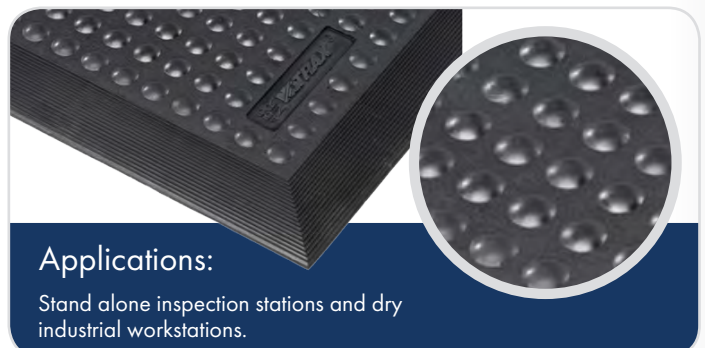

**Applications:**  
Stand alone inspection stations and dry industrial workstations.

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78




# ESD SAFETY/ANTI-STATIC - Dry

## 826 - DIAMOND STAT™ 927 - DIAMOND STAT™ GRANDE™

**NEW!**

- Electrically conductive PVC diamond plate top surface is combined with a dense closed cell PVC foam base
- UniFusion™ bond guaranteed for the life of the mat
- RedStop™ non-slip backing to reduce mat slippage
- Beveled edges on all 4 sides
- Certified by the NFSI (National Floor Safety Institute)
- RG 10<sup>4</sup> - 10<sup>6</sup> Ω; RP 10<sup>4</sup> - 10<sup>6</sup> Ω
- Grounding cord included, required



Stock Sizes	2'x3', 3'x5', 3'x12'
Roll Sizes	2'x75', 3'x75', 4'x75'
Thickness	9/16" (826), 1" (927)
Cut Lengths	2', 3' and 4' widths (up to 75' long)
Colors	 Black

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78


**Applications:** Assembly or testing areas for circuitry: computers, chips, electronics of all kinds.


Performance:	Good	Better	Best	Superior
Wear Resistance			<b>826</b>	<b>927</b>
Anti-fatigue Performance			<b>826</b>	<b>927</b>
Slip Resistance			<b>826</b>	<b>927</b>

## 926 - SMOOTH STAT™

**NEW!**

- Electrically conductive PVC smooth top surface is combined with a dense closed cell PVC foam base
- UniFusion™ bond guaranteed for the life of the mat
- RedStop™ non-slip backing to reduce mat slippage
- Beveled edges on all 4 sides
- Certified by the NFSI (National Floor Safety Institute)
- RG 10<sup>4</sup> - 10<sup>6</sup> Ω; RP 10<sup>4</sup> - 10<sup>6</sup> Ω
- Grounding cord included, required

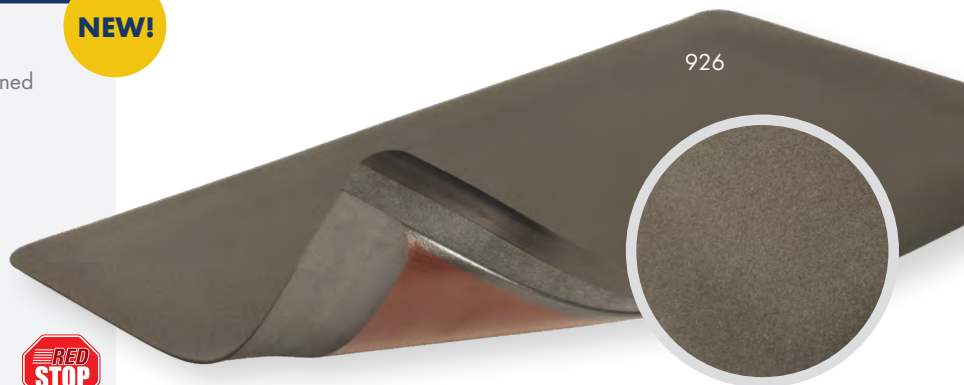

Stock Sizes	2'x3', 3'x5'
Roll Sizes	3'x75'
Thickness	9/16"
Cut Lengths	3' wide (up to 75' long)
Colors	 Black

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

**Applications:** Assembly or testing areas for circuitry: computers, chips, electronics of all kinds.

Performance:	Good	Better	Best	Superior
Wear Resistance			<b>926</b>	
Anti-fatigue Performance			<b>926</b>	
Slip Resistance			<b>926</b>	

# SPECIALTY/SANITATION - Dry




**Applications:**  
Laboratories, operating rooms, hazmat and radiology.

## 448 - AUTOCLAVEABLE BUBBLE MAT

- Rubber Anti-fatigue mat with offset bubble design
- Anti-microbial formula resists most Gram positive and Gram negative bacteria
- Durable rubber top surface easy to wipe clean using most hospital grade cleaners and autoclaves
- Beveled on all 4 sides

Stock Sizes	2'x3'	
Thickness	3/8"	
Colors		
	Grey	




**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov). See pg 77-78




**Applications:** Life sciences, electronics manufacturing, clean room entrance.

## 080 - CLEAN-STEP TACKY MAT

- Traps and keeps out impurities, dust, and particulates
- Adhesive surface grabs and holds soil matter with no transfer
- Peel away sheets for fresh, clean surface

Stock Sizes	18"x36", 18"x45", 24"x36", 26"x45"		
Full Case	4 Mats/120 Sheets (30 sheets per mat)		
Colors			
	Blue	Grey	White

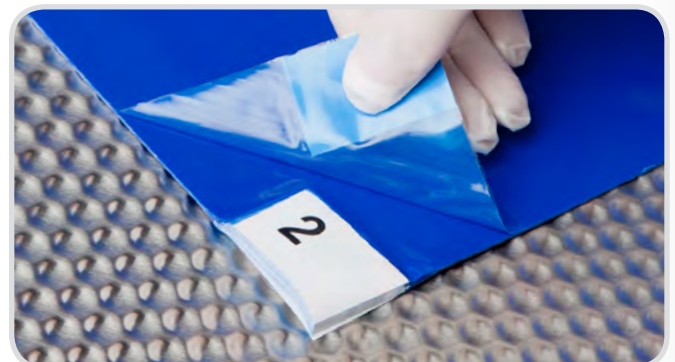





Cleaning





Food Processing

# SPECIALTY/SANITATION - Wet/Dry

## 346 - SANI-TRAX®

- Tough rubber compound resists most chemicals and variations in temperature
- Thick containment border allows mat to hold a full gallon of disinfectant solution
- Thousands of flexible rubber fingers provide scrubbing action
- Suction cups on underside help to minimize mat movement
- Containment wall height: 3/4"

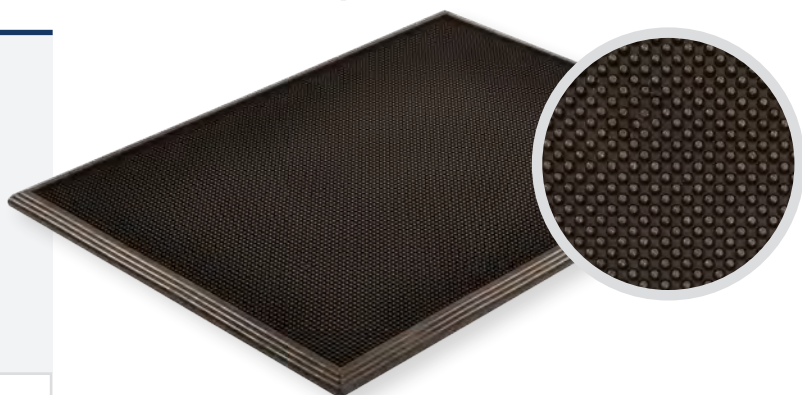

Stock Sizes	24"x32"
Thickness	3/4"
Colors	 Black



**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

### Applications:

Entrances to any room where spread of contamination needs to be limited: food processing, agriculture.

## 351 - SANI-TRAX® PLUS

- Tough rubber compound resists most chemicals and variations in temperature
- Thick containment border allows mat to hold 5 gallons of disinfectant solution
- Thousands of flexible rubber fingers provide scrubbing action
- Suction cups on underside help to minimize mat movement
- Containment wall height: 2 1/2"

Stock Sizes	32"x39"
Thickness	2 1/2"
Colors	 Black  Black/Yellow

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78



### Applications:

Food processing, agriculture



# HIGH-VOLTAGE SWITCHBOARD MATTING







Anti-Slip



Cut Lengths



Floor Protection





Non-Conductive

# HIGH-VOLTAGE SWITCHBOARD MATTING

## 830 - SWITCHBOARD MATTING 831 - DIAMOND SWITCHBOARD MATTING

- Insulated matting engineered to protect workers from electric shock
- Electrically Insulative Type 2 PVC compound
- Class 2 Di-electric Strength: 30,000 volts
- Proof test of 20,000 volts
- Recommended maximum use voltage: 17,000
- Each square foot of this matting is tested in conformance with ANSI/ASTM D-178 specifications
- ASTM D-178 printed on underside of mat


Roll Sizes	2'x75', 3'x75', 4'x75'
Thickness	1/4"
Cut Lengths	2', 3', and 4' widths (up to 75' long)
Colors	 Black  Black/Yellow* <small>*only in 3' widths</small>

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

### 830 - Switchboard Matting



### 831 - Diamond Switchboard Matting

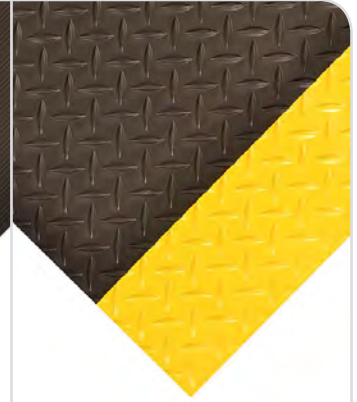

#### Applications:

Transformers, switchgear, distribution boards and generators.

#### Performance:

	Good	Better	Best	Superior
Wear Resistance			<b>830, 831</b>	
Anti-fatigue Performance				
Slip Resistance			<b>830, 831</b>	

## 835, 836 - MILITARY SWITCHBOARD MATS


- Each square foot of this matting is tested in conformance with MIL-DTL-15562G specifications:
  - Class 2 Di-electric Strength: 30,000 volts
  - Proof test of 20,000 volts
  - Recommended maximum use voltage: 3,000
- Roll Size = 3'x75'
- Custom sizes available in 3' width (up to 75')
- Fire retardant



Fire Retardant

#### Applications:

These mats are designed for use as flooring, or around electrical apparatus and circuits in the commercial marine industry as well as the military and avionics.

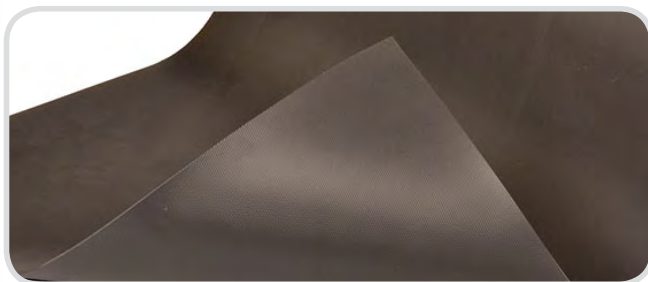


### 835 - TYPE 2

- Electrically Insulative Type 2 PVC compound
- Smooth surface - Easy to sweep or mop clean
- Thickness 1/8"


Colors  Black  Blue

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

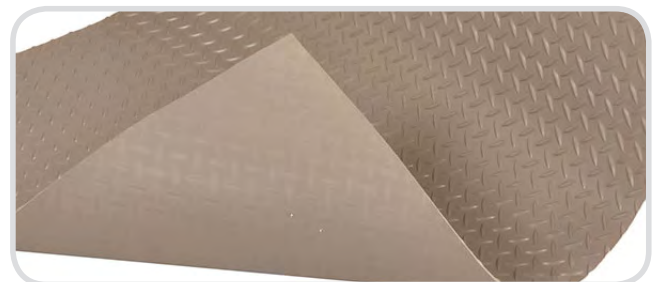

### 836 - TYPE 3

- Electrically Insulative Type 3 PVC compound
- Diamond-plate surface - Added traction
- Thickness 3/16"
- Slip resistant


Colors  Grey



Anti-Slip

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

# INDUSTRIAL SPECIALTIES

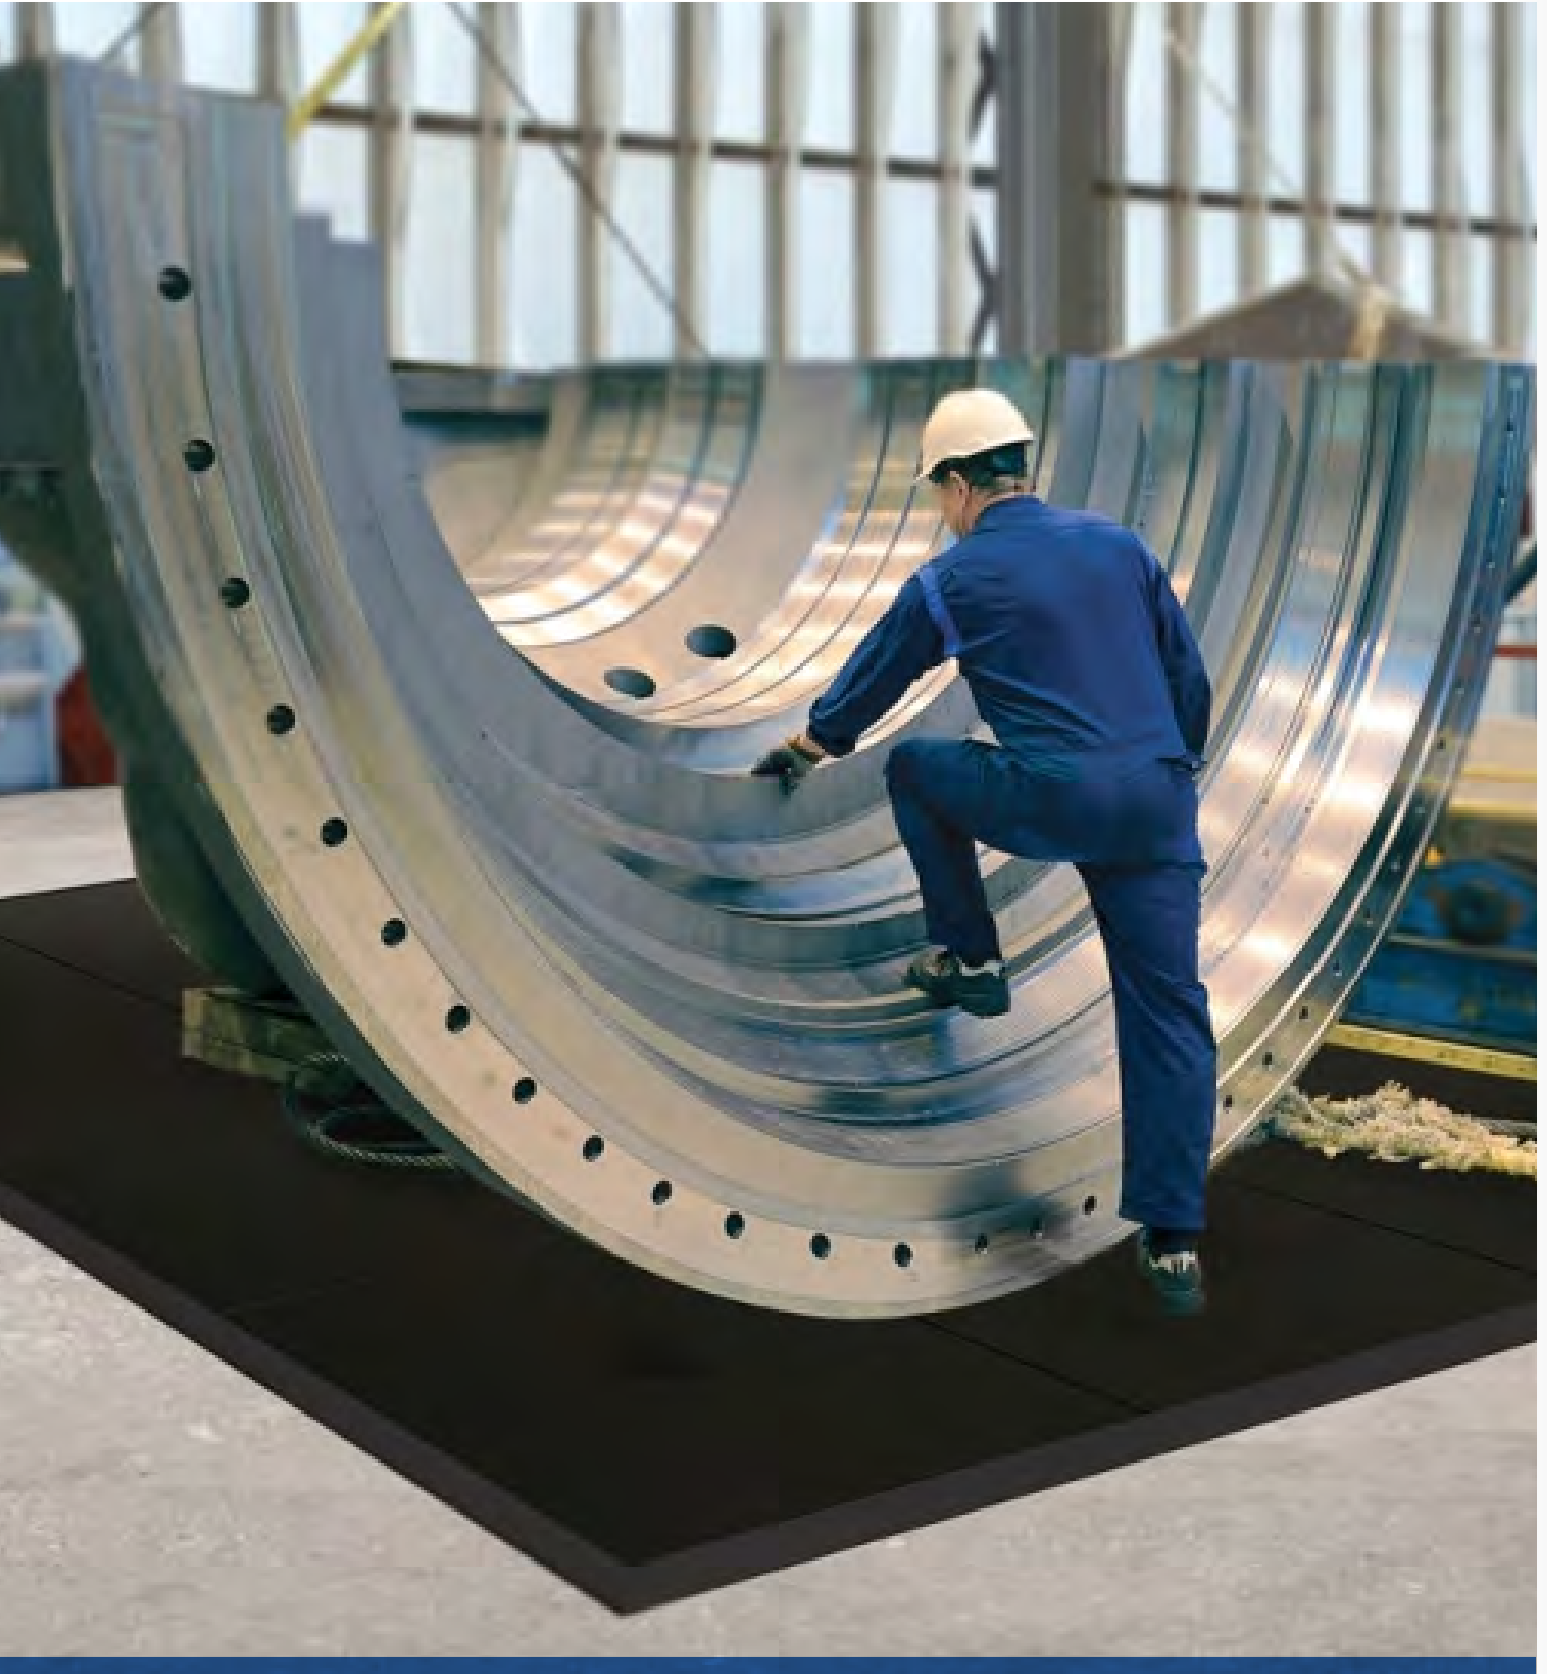






# INDUSTRIAL SPECIALTIES

## 040 - SLABMAT



- Tough natural rubber compound
- Modular interlocking, designed for use with heavy industrial equipment
- Shock absorbing, impact protection
- Compression test at 20% up to 24,000 lb/sf

Stock Sizes	3'x3'
Thickness	1/2"
Colors	 Black

**⚠ WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov). See pg 77-78

**Applications:** Areas where heavy industrial equipment is stored. It is also suitable for gyms, weight rooms, skating rinks, golf courses, trailers and stables.

### Performance:

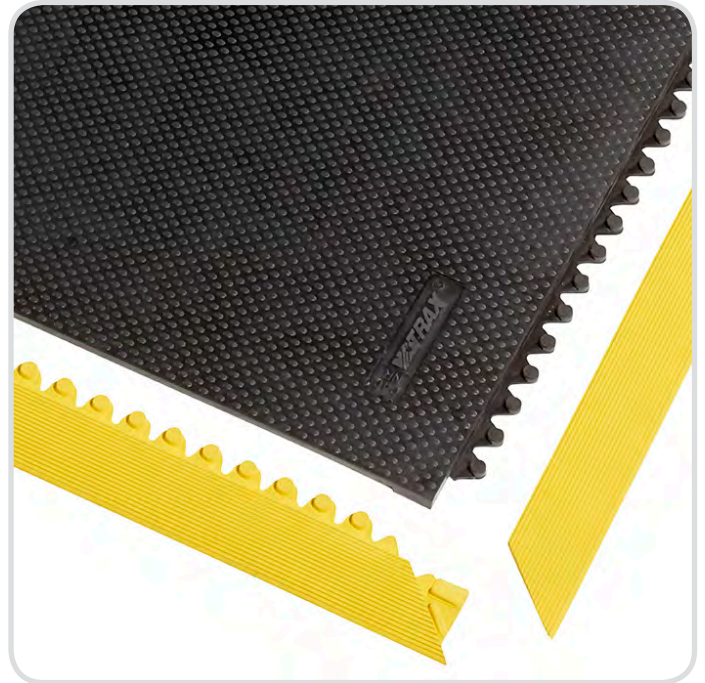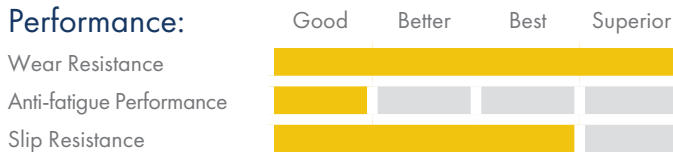

## Slabmat Safety Ramps




### 041 - SLABMAT SAFETY RAMPS 2" wide and 36" length


**⚠ WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov). See pg 77-78

## 045 - WEIGHT ROOM MAT

- Heavy-duty natural rubber mat designed to handle heavy equipment
- Designed to take impact of free weights while protecting the floor
- Extra tough in order not to buckle or curl under the extreme weight
- Textured top surface provides traction

Stock Sizes	4'x6'
Thickness	1/2", 3/4"
Colors	 Black

**Applications:** In areas where impact from heavy equipment often occurs and floor protection is needed.

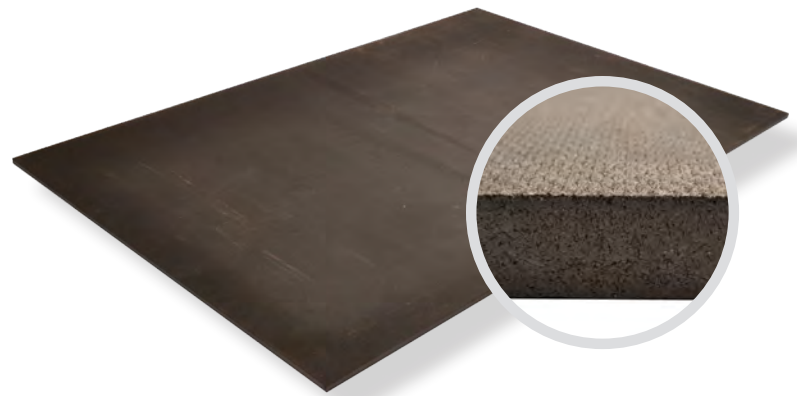

### Performance:





# INDUSTRIAL SPECIALTIES







Anti-Fatigue

# INDUSTRIAL SPECIALTIES

## 950 - KNEE RX™ 951 - KNEE RX™ HD

- Designed for comfort and durability in extreme kneeling applications
- For use on gravel, asphalt, concrete, dirty/oily surfaces, tile & wood flooring, metal grating, grass
- Durable laminated heavy-duty rubber bottom surface for additional comfort and long-lasting wear in rough environments (951)
- Nitrile/PVC foam blend for the highest degree of resistance to oils and greases
- Self-extinguishing, non-conductive, silicone free material
- Built-in handle easy to carry or hang up



950  
KNEE RX™

951  
KNEE RX™ HD

Stock Sizes	12"x22", 12"x14" (950 only)
Thickness	1"
Colors	 Black

**Applications:** Tool carts, maintenance carts, individual workstations, landscaping, utilities, construction.

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78



Outdoor Use




Anti-Slip



Cut Lengths

## 680 - SAFETY TRAX™

- Slip resistant tape is affixed to surfaces to increase friction providing a safer pathway
- Top surface is embedded with silicon carbide particles
- Pressure adhesive backing allows for easy "peel and stick" installation


Roll Sizes	2"x60', 4"x60', 6"x60'
Colors	 Black

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78



**Applications:** Inclines and ramped walkways.

## ENTRANCE MATS

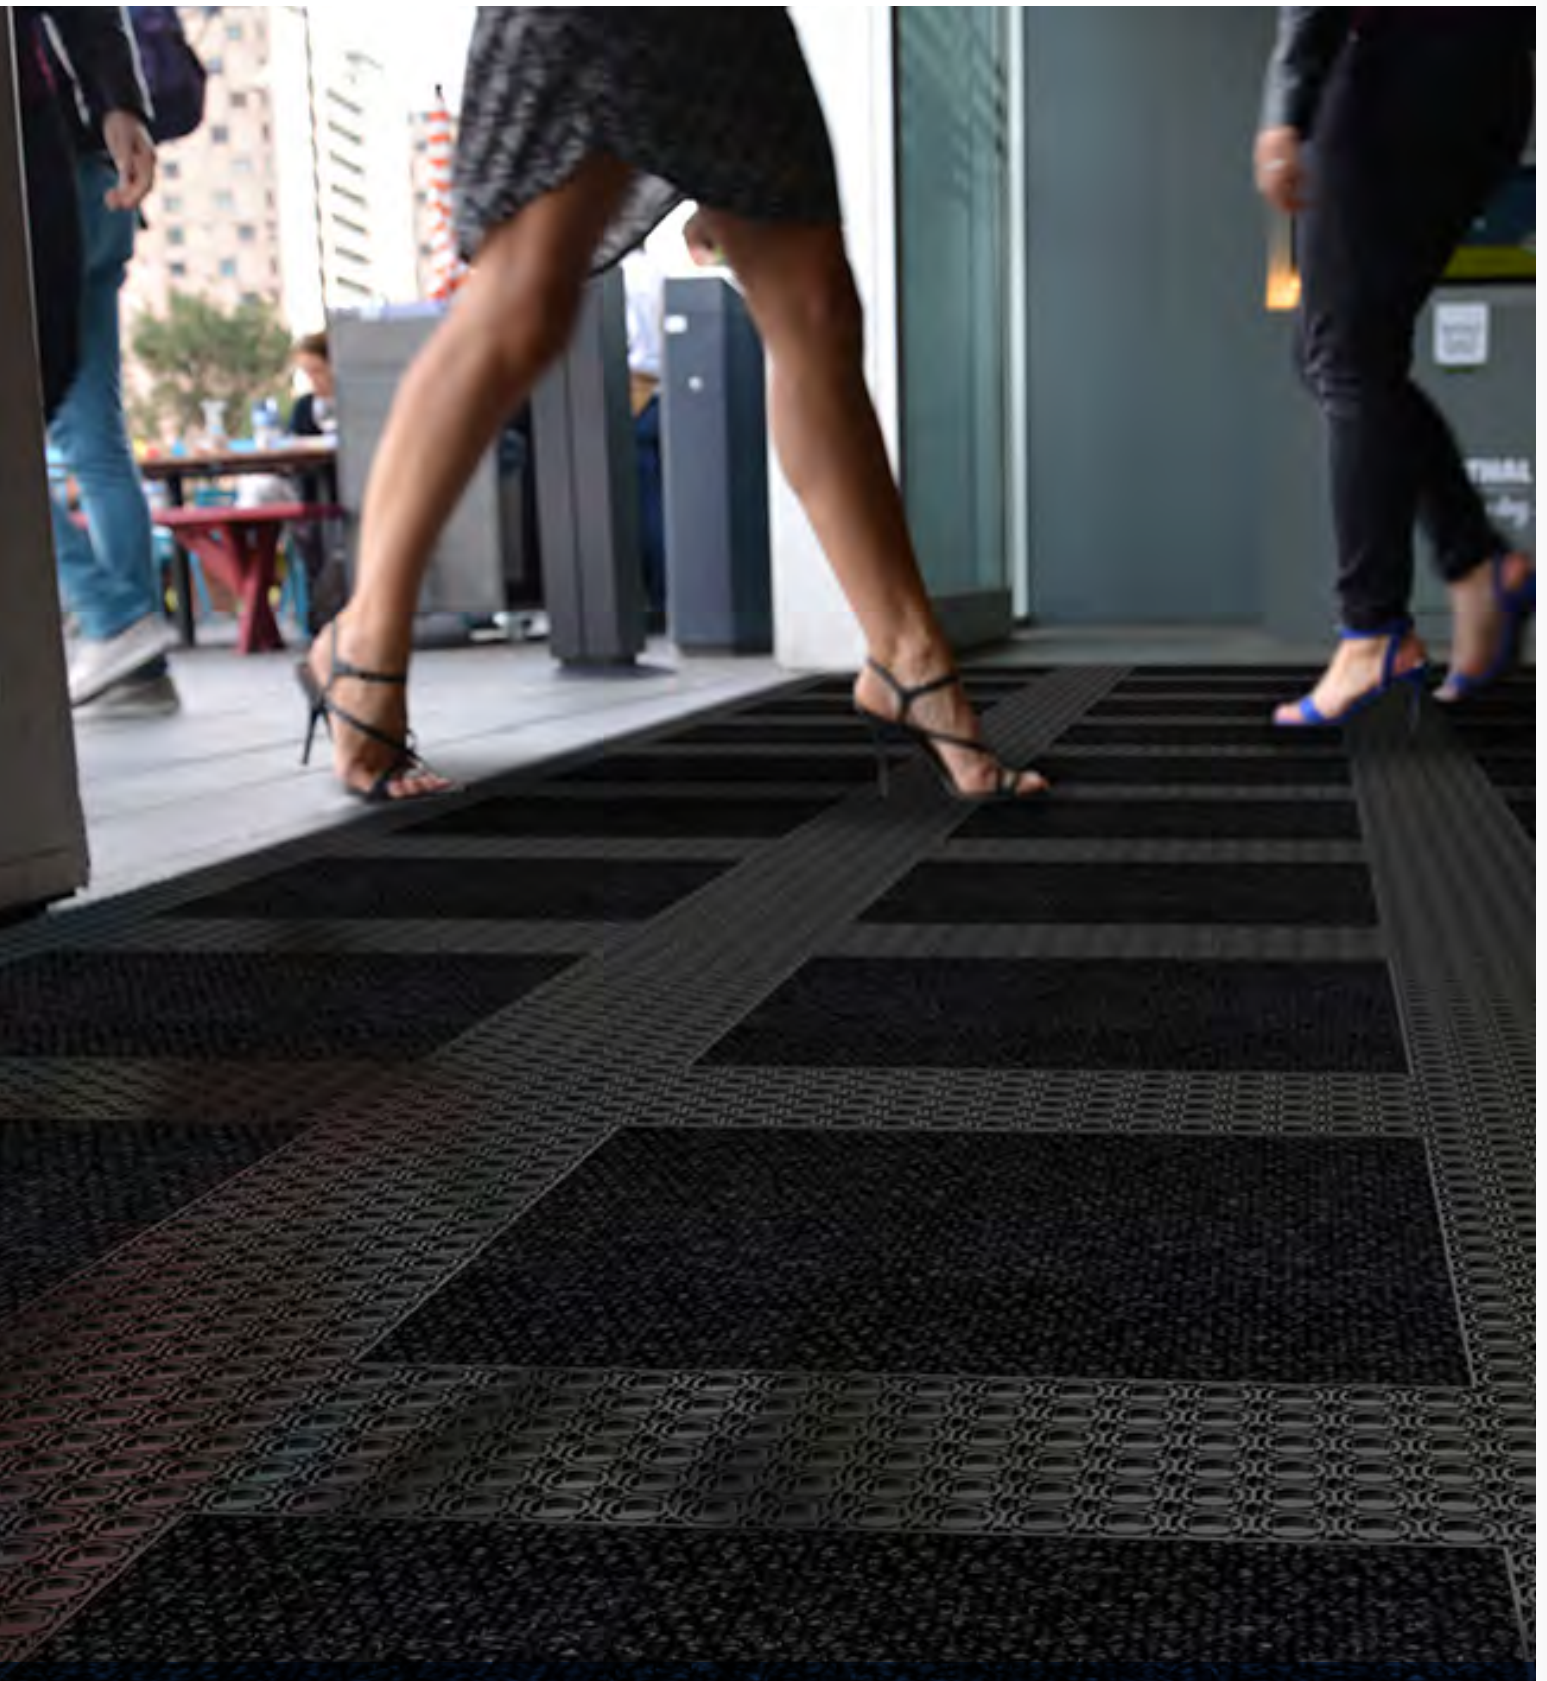





# ENTRANCE MATS - Foyer

- 592** - MASTERFLEX™ DRAINAGE
- 593** - MASTERFLEX™ DRAINAGE w/CARPET
- 692** - MASTERFLEX™ HEEL-PROOF
- 693** - MASTERFLEX™ HEEL-PROOF w/CARPET

- Natural rubber compound
- Octagonal ring design with open construction
- Suitable for use in extreme weather

Stock Sizes	20"x20"
Thickness	1/2"
Colors	 Black





Performance:	Good	Better	Best	Superior
Water Retention				593,693
Crush Resistance				592,593,692,693
Soil Resistance			592,593,692,693	

**Applications:** Outdoor/indoor high traffic areas.

## 597 - MASTERFLEX™ SAFETY RAMPS

- 100% nitrile rubber
- Beveled edges prevent tripping
- Allows for inside and outside corners

Colors	 Black
--------	--

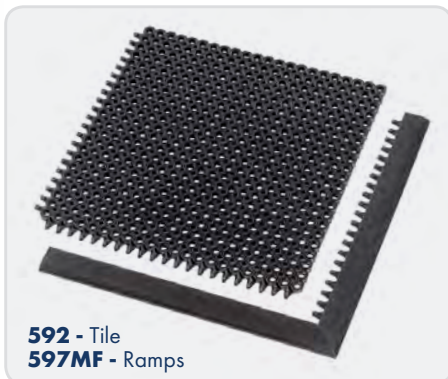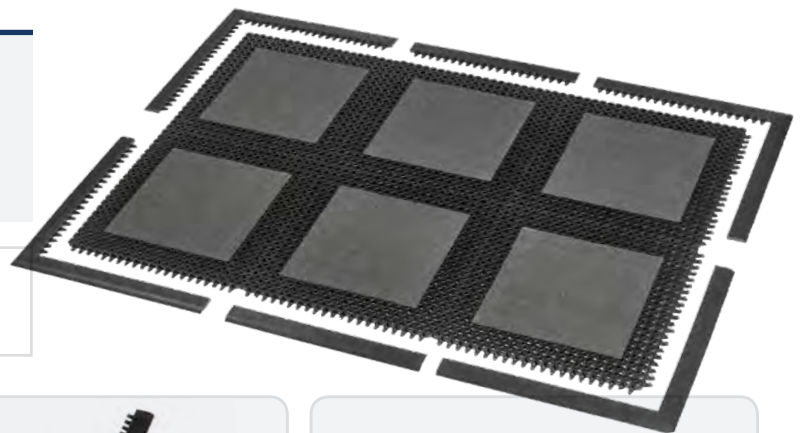



Cut Lengths



Outdoor Use







Heavy Traffic

# ENTRANCE MATS - Foyer




## 370 - MASTER TRAX™ 371 - MASTER TRAX™ LITE

- Crafted specifically for oversized entrances & foyers where one piece of matting is required versus multiple individual mats
- 54 ounces (370) and 37 ounces (371) per square yard of berber needle punch
- Heat-sealed edges, vinyl borders, and squared edges available
- Rubber backing is textured to help minimize mat movement
- UV stable, stain resistant, durable and highly resilient, tightly woven carpet

Custom Sizes	Available up to 13' wide and 75' long.
Thickness	7/16" (370), 3/8" (371)
Colors	   
	 
	*contact us for additional colors

**Applications:** Heavy traffic entrances: Retail, shopping malls, schools, hospitals, airports, office buildings, floor applications and recessed trays.

Performance:	Good	Better	Best	Superior
Water Retention			371	370
Crush Resistance			371	370
Soil Resistance			371	370

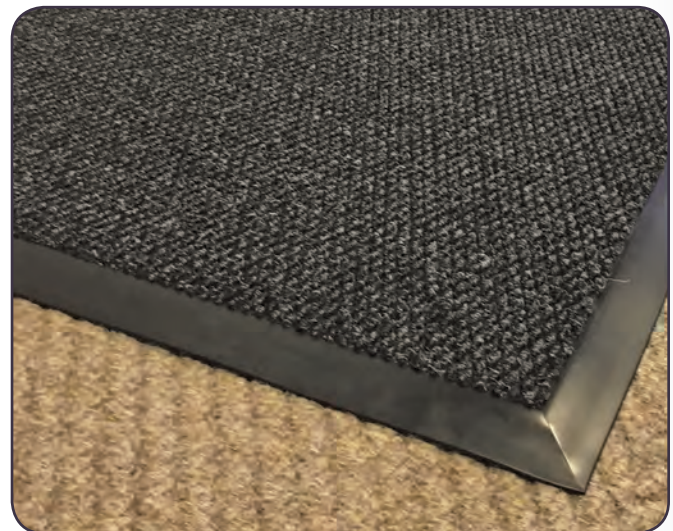





Cleaning



Cold Resistant



Outdoor Use

# ENTRANCE MATS - Outdoor

## 340 - SOIL GUARD™ 350 - SLIP GUARD™ w/GRIT STEP®

- Heavy-duty, durable rubber compound
- Low profile for door clearance/cart traffic
- High-low design scrapes debris from shoe traffic
- 350 has grit surface for added traction
- Easy to clean – simply hose off
- 340 is recommended product as a part of the GreenTRAX™ program for "Green Cleaning" environments




Stock Sizes	3'x5' (340 & 350) 4'x6' (340 w/Parquet pattern)
Thickness	1/4"
Colors	 Black

**⚠ WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

**Applications:** Outdoor high traffic areas.

### Performance:

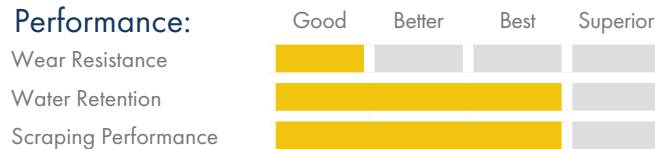

Cleaning




Cold Resistant




Outdoor Use

## 345 - RUBBER BRUSH™

- Tough natural rubber remains flexible while withstanding extreme cold
- Thousands of flexible rubber fingers sweep shoes clean
- Suction cups on underside help to minimize mat movement
- Molded beveled edging on all 4 sides creates a retention dam to trap moisture and hides debris
- Recommended product as a part of the GreenTRAX™ program for "Green Cleaning" environments
- Heavier duty/better than competition

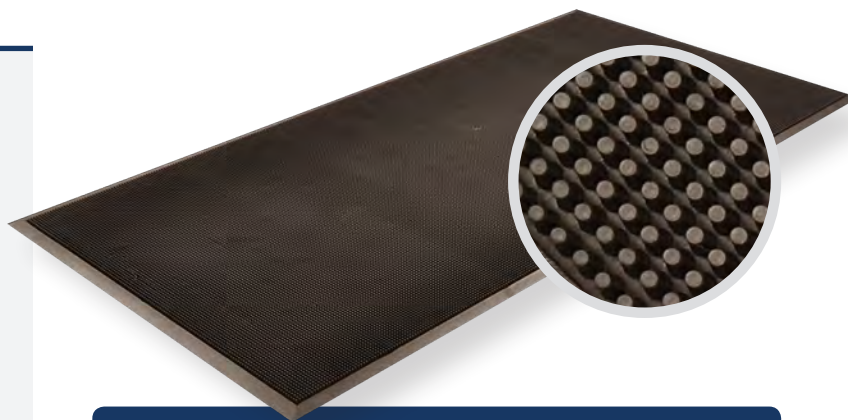


Stock Sizes	16"x24", 24"x32", 28"x46", 32"x39", 36"x60", 36"x 72"
Thickness	5/8"
Colors	 Black

**⚠ WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

### Applications:

Outdoor high traffic areas: Schools, municipal buildings, plant entrances, and office buildings.

### Performance:

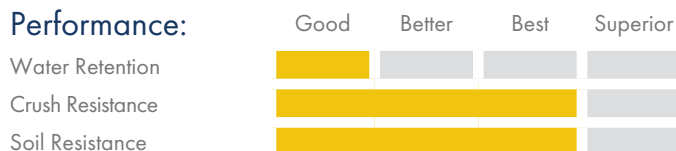



# ENTRANCE MATS - Outdoor

- 265 - WAYFARER™**
- 266 - WAYFARER™ CUSTOM HD UNBACKED**
- 267 - WAYFARER™ CUSTOM HD**

- A vinyl-looped construction traps dirt and moisture while scraping debris
- Color-coordinated thin vinyl backing resists mat movement (265)
- Open unbacked design allows moisture and dirt to pass through the mat (266)
- Thick vinyl backing to resist mat movement (267)
- Factory compressed border on stock sizes (265, 266)
- Recommended and approved product as a part of the GreenTRAX™ program for "Green Cleaning" environments



Stock Sizes	3'x5', 4'x6'
Roll Sizes	3'x60', 4'x60'
Thickness	3/8" (265), 1/2" (266), 5/8" (267)
Cut Lengths	3' and 4' widths (up to 60' long)
Colors	     Leaf Green    Brown    Grey    Black    Navy

\* 267 only available in black.

### Applications:

- (265) Outdoor entrances, plant doorways, water fountain areas.
- (266) Outdoor entrances, pool areas, recessed wells in foyers.
- (267) Outdoor entrances, plant doorways, drinking fountains, and pool areas.

### Performance:



**265 - WAYFARER™**



**266 - WAYFARER™ CUSTOM HD UNBACKED**







# ENTRANCE MATS - Outdoor

## 599 - OCT-O-FLEX™

- Resilient natural rubber compound
- A smooth top surface, heavyweight construction
- Molded beveled edging on all 4 sides
- Raised knob underside provides aeration, reduces mat movement
- Recommended product as a part of the GreenTRAX™ program for "Green Cleaning" environments
- For custom options see product 592 on page 56

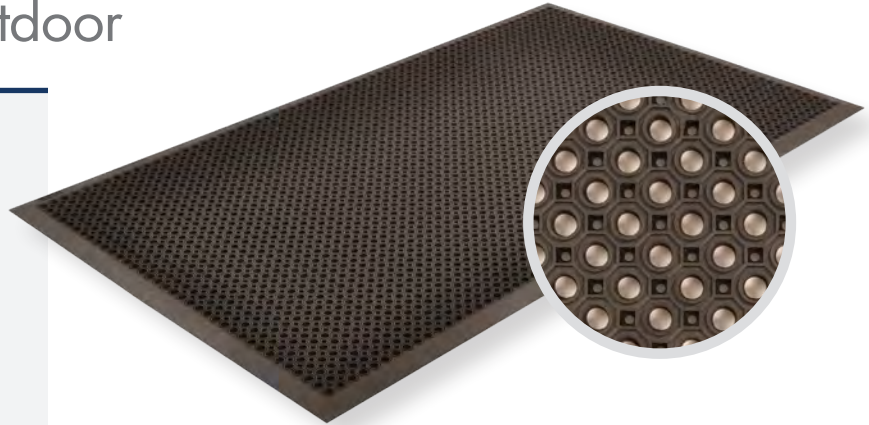

Stock Sizes	2'x3', 3'x5', 4'x6'
Thickness	1/2"
Colors	 Black

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

### Applications:

Outside high traffic areas; schools, retail stores, hospitals, nursing homes, areas with carts and/or wheelchair traffic.

### Performance:

	Good	Better	Best	Superior
Wear Resistance				
Crush Resistance				
Scraping Performance				




## 352 - BOOT SCRAPER™

**NEW!**

- Resilient natural rubber compound
- Removes dirt and muck from the bottom and sides of your shoes and boots
- Flexible rubber fingertips on the sidewalls help to quickly remove dirt and debris before it can be tracked inside your facility
- Designed to be bolted down in a permanent position
- Easy to clean and maintain
- Stop dirt, sand, grass, snow, salt and mud at the door



Stock Sizes	12"x15"
Thickness	2"
Colors	 Black

### Applications:

Outdoor entrances, wet or dry areas, portable or can be bolted down.

### Performance:

	Good	Better	Best	Superior
Water Retention				
Crush Resistance				
Scraping Performance				



Cut Lengths



Outdoor Use



Medium Traffic




Heavy Traffic

# ENTRANCE MATS - Vinyl-Backed

## 231 - PRELUDE™

- A coarse loop-twisted non-absorbent ribbon fiber to scrape heavy debris from foot traffic
- Vinyl backing ensures minimal buckling and mat movement
- Can be used as a stand-alone mat, or as the first section (Scraping) of the "Stages" entrance matting system

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4'x8'
Roll Sizes	3'x60', 4'x60', 6'x60'
Thickness	3/8"
Cut Lengths	3', 4', and 6' widths (up to 60' long)
Colors	   Black    Brown    Grey

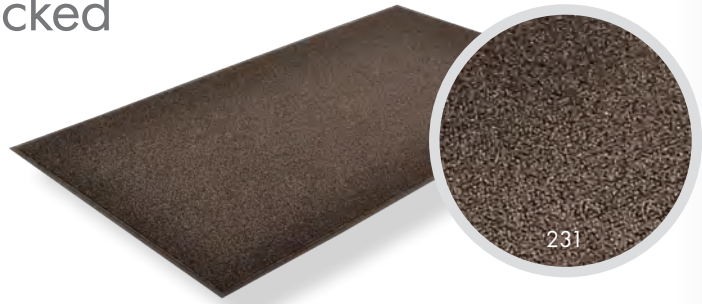

**Applications:** Outdoor - Main entranceways, all heavy traffic areas.

<b>Performance:</b>	Good	Better	Best	Superior
Crush Resistance	██████████			██████████
Soil Resistance	██████████			██████████
Function & Appearance	██████████			

## 146 - ENCORE™

- A combination of Prelude™ scraping and looped pile Decalon®
- Vinyl backing ensures minimal buckling and mat movement
- Can be used as a stand-alone mat, or as the second section (Scraping & Drying) of the "Stages" entrance matting system

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4'x8'
Roll Sizes	3'x60', 4'x60', 6'x60'
Thickness	3/8"
Cut Lengths	3', 4', and 6' widths (up to 60' long)
Colors	   Black    Brown    Grey




**Applications:** Inside foyer area - Main entranceways, all heavy traffic areas.

<b>Performance:</b>	Good	Better	Best	Superior
Crush Resistance	██████████			██████████
Soil Resistance	██████████			██████████
Function & Appearance	██████████			

## 141 - OVATION™

- Tufted Decalon® looped pile construction for drying and cleaning
- Vinyl backing ensures minimal buckling and mat movement
- Can be used as a stand-alone mat, or as the third section (Drying) of the "Stages" entrance matting system

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4'x8'
Roll Sizes	3'x 60', 4'x60', 6'x60'
Thickness	3/8"
Cut Lengths	3', 4', and 6' widths (up to 60' long)
Colors	     Burgundy    Brown    Grey    Black    Blue

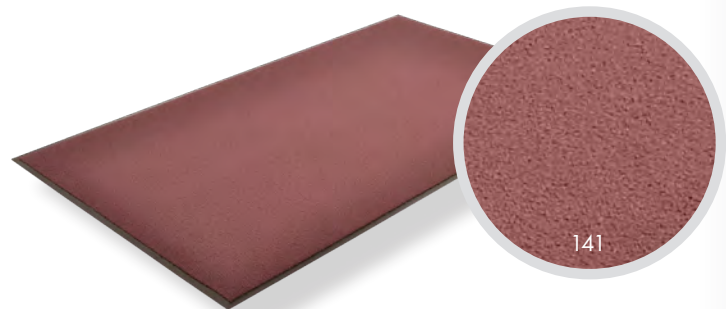

**Applications:** Main entranceways, all heavy traffic areas.

<b>Performance:</b>	Good	Better	Best	Superior
Water Retention	██████████			██████████
Crush Resistance	██████████			██████████
Soil Resistance	██████████			██████████
Function & Appearance	██████████			

• Recommended and approved product as a part of the GreenTRAX™ program for "Green Cleaning" environments. (231, 146, 141)




# ENTRANCE MATS - Vinyl-Backed

## 117 - HERITAGE RIB®

- A heavier-weight double rib high / low design that performs the scraping function of the mat
- 22 ounces of needle-punched yarn per square yard
- Vinyl backing ensures minimal buckling and mat movement
- Recommended and approved product as a part of the GreenTRAX™ program for "Green Cleaning" environments

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4'x8'
Roll Sizes	3'x60', 4'x60', 6'x60'
Thickness	3/8"
Cut Lengths	3', 4', and 6' widths (up to 60' long)
Colors	     Red/Black Charcoal Brown Grey Green

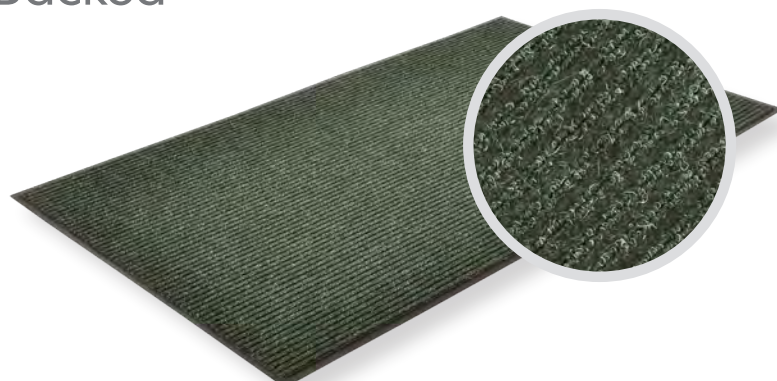

**Applications:** Entranceways; Lobbies; all medium traffic areas.


### Performance:

	Good	Better	Best	Superior
Water Retention	██████████		██████████	██████████
Crush Resistance	██████████			██████████
Soil Resistance	██████████		██████████	██████████
Function & Appearance	██████████			██████████

## 118 - ARROW TRAX™

- High/low herringbone carpet scrapes and channels moisture and debris away from shoes
- A full 40 ounces of needle-punched yarn per square yard provides the highest degree of crush resistance and absorption
- Vinyl backing ensures minimal buckling and mat movement
- Recommended and approved product as a part of the GreenTRAX™ program for "Green Cleaning" environments

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4'x8'
Roll Sizes	3'x60', 4'x60', 6'x60'
Thickness	3/8"
Cut Lengths	3', 4', and 6' widths (up to 60' long)
Colors	   Charcoal Brown Grey

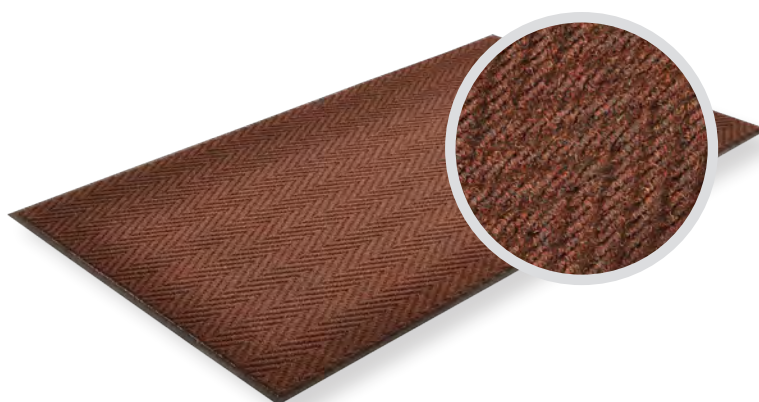



**Applications:** Indoor - Main entranceways; heavy traffic areas.

### Performance:

	Good	Better	Best	Superior
Water Retention	██████████			██████████
Crush Resistance	██████████			
Soil Resistance	██████████			██████████
Function & Appearance	██████████			

## 131 - DANTE™

- Densely tufted cut-pile Decalon® construction
- Vinyl backing ensures minimal buckling and mat movement

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4'x8'
Roll Sizes	3'x60', 4'x60', 6'x60'
Thickness	3/8"
Cut Lengths	3', 4', and 6' widths (up to 60' long)
Colors	  Charcoal Brown



# ENTRANCE MATS - Vinyl-Backed

## 136 - POLYNIB™


- Tightly nibbed loop that entraps debris and hides it for an always elegant appearance
- 24 ounces of needle-punched yarn per square yard
- Low profile performs in narrow clearance doorways
- Vinyl backing ensures minimal buckling and mat movement

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4'x8'
Roll Sizes	3'x60', 4'x60', 6'x60'
Thickness	1/4"
Cut Lengths	3', 4', and 6' widths (up to 60' long)
Colors	   Brown    Grey    Charcoal

## 145 - PREFERENCE™


- A combination of Prelude™ scraping and looped pile Decalon® drying yarns in a mini-checked pattern
- 26 ounces of needle-punched yarn per square yard
- Vinyl backing ensures minimal buckling and mat movement
- Dual-fiber, mini-checked pattern effectively traps debris and moisture while retaining its contemporary appearance

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4'x8'
Roll Sizes	3'x60', 4'x60', 6'x60'
Thickness	3/8"
Cut Lengths	3', 4', and 6' widths (up to 60' long)
Colors	   Hunter Green    Brown    Charcoal

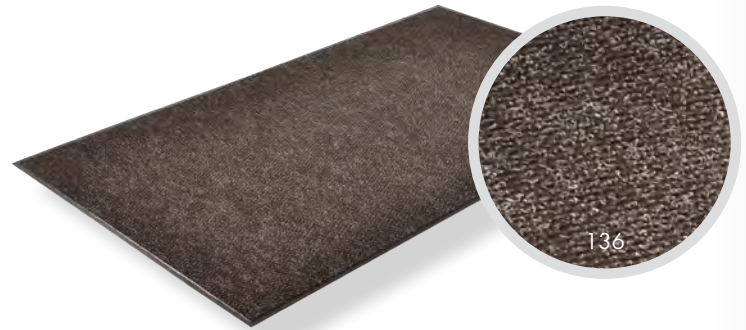

**Applications:** Indoor – Entranceways, lobbies, all medium traffic areas.

Performance:	Good	Better	Best	Superior
Water Retention	██████████		██████████	██████████
Crush Resistance	██████████			██████████
Soil Resistance	██████████		██████████	██████████
Function & Appearance	██████████			██████████

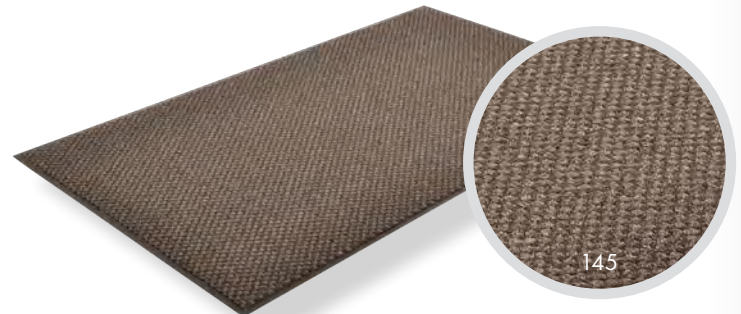

**Applications:** Inside foyer area - Main entranceways, all heavy traffic areas.

Performance:	Good	Better	Best	Superior
Water Retention	██████████			██████████
Crush Resistance	██████████			
Soil Resistance	██████████		██████████	██████████
Function & Appearance	██████████			██████████








# ENTRANCE MATS - Vinyl-Backed

## 138 - UPTOWN™


- The high-low looped pile design for drying and retaining moisture and debris, while offering an upscale, elegant look
- A dense 36 ounces of tufted Decalon® yarn per square yard for the ultimate in moisture absorption and crush resistance
- Vinyl backing ensures minimal buckling and mat movement

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4'x8'
Roll Sizes	3'x60', 4'x60', 6'x60'
Thickness	3/8"
Cut Lengths	3', 4', and 6' widths (up to 60' long)
Colors	   Brown Navy Charcoal

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78



## 132 - ESTES®

- Fashionable high-low looped pile Decalon® captures debris and dries foot traffic while maintaining its attractive appearance
- 25 ounces of tufted yarn per square yard
- Vinyl backing ensures minimal buckling and mat movement

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4'x8'
Roll Sizes	3'x60', 4'x60', 6'x60'
Thickness	3/8"
Cut Lengths	3', 4', and 6' widths (up to 60' long)
Colors	      Burgundy Brown Navy Charcoal Red/Black Hunter Green

## 137 - OPERA™

- Dense combination of scraping and absorbent yarns ensure maximum performance
- Vinyl backing ensures minimal buckling and mat movement
- Low profile for use in narrow clearance doorways

Stock Sizes	3'x12', 4'x12', 6'x12'
Thickness	3/8"
Colors	  Charcoal Grey

• Recommended and approved product as a part of the GreenTRAX™ program for "Green Cleaning" environments. (138, 132, 137)



**Applications:** All large, upscale entrances: offices, hotels, professional buildings.

<b>Performance:</b>	Good	Better	Best	Superior
Water Retention	████████████████████			
Crush Resistance	████████████████████			████████████████████
Soil Resistance	████████████████████			████████████████████
Function & Appearance	████████████████████			



**Applications:** Indoor - Main entranceways; any and all heavy traffic areas.

<b>Performance:</b>	Good	Better	Best	Superior
Water Retention	████████████████████			████████████████████
Crush Resistance	████████████████████			████████████████████
Soil Resistance	████████████████████			████████████████████
Function & Appearance	████████████████████			



**Applications:** All large, upscale entrances: offices, hotels, professional buildings.

<b>Performance:</b>	Good	Better	Best	Superior
Water Retention	████████████████████			████████████████████
Crush Resistance	████████████████████			████████████████████
Soil Resistance	████████████████████			
Function & Appearance	████████████████████			

# ENTRANCE MATS - Logo Mats




## 193 - SUPERIOR IMPACT™ LOGO MAT

- Dye-injection process for long lasting, vibrant color
- Color palette of 22 base colors
- Vinyl backing ensure minimal buckling and mat movement
- 24 ounces of cut-pile nylon yarn per square yard provides increased moisture retention

Stock Sizes	2'x3', 3'x4', 3'x5', 4'x6', 4'x8', 5'x8', 3'x10', 4'x10', 4'x12'			
Thickness	3/8"			
Colors				
	Silver	Yellow	Blue	Tan
	Grey	Gold	Green	Rust
	Dark Grey	Orange	Dark Green	Blue Grey
	Light Blue	Red	Black	Olive Green
	Dark Blue	Brown	Teal	Beige
Wine	Purple			

**Applications:** Prominent entrances of light to heavy traffic where a long-lasting image is critical: Retail, restaurants, hotels, corporate offices, schools.

<b>Performance:</b>	Good	Better	Best	Superior
Water Retention				
Crush Resistance				
Soil Resistance				
Function & Appearance				

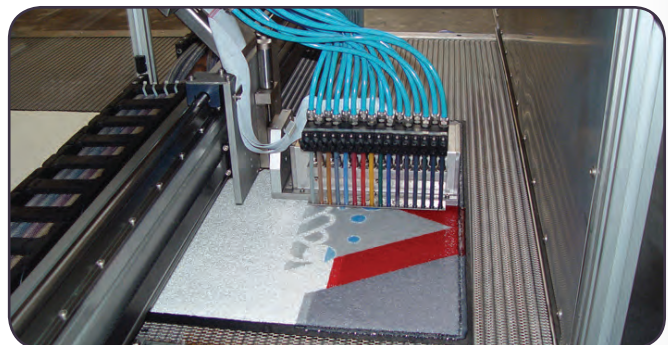





Custom




Heavy Traffic

# ENTRANCE MATS - Logo Mats

## 373 - MASTER GUARD™ LOGO MAT

- Designed for use in large format/high traffic entrances
- 54 ounces of needle punch yarn per square yard
- Water jet cut textile logo inlay
- 100% solution dyed UV stabilized polypropylene fibers
- Berber design carpet surface
- Heavy-duty vinyl edging reduces trip hazards and keeps mat flat and in position

Cut Sizes	Available up to 13' wide and 75' long.			
Thickness	1/2"			
Colors				
	Charcoal	Autumn	Sky Blue	Teak
	Bright Red	Pink	Black Shadow	Coir
	Prism	Taupe	Orange	Sterling
	Beige	Loden	Walnut	Steel Blue
	Yellow	Kelly Green	Hunter Green	Burgundy
	Cardinal Red	Royal Blue	Purple	Turquoise
	Azure Blue	Garnet	Zinc	Sand
	Crimson	Gold	Rosewood	Verde Green
	Midnight Blue	Solid Black	White	Chocolate

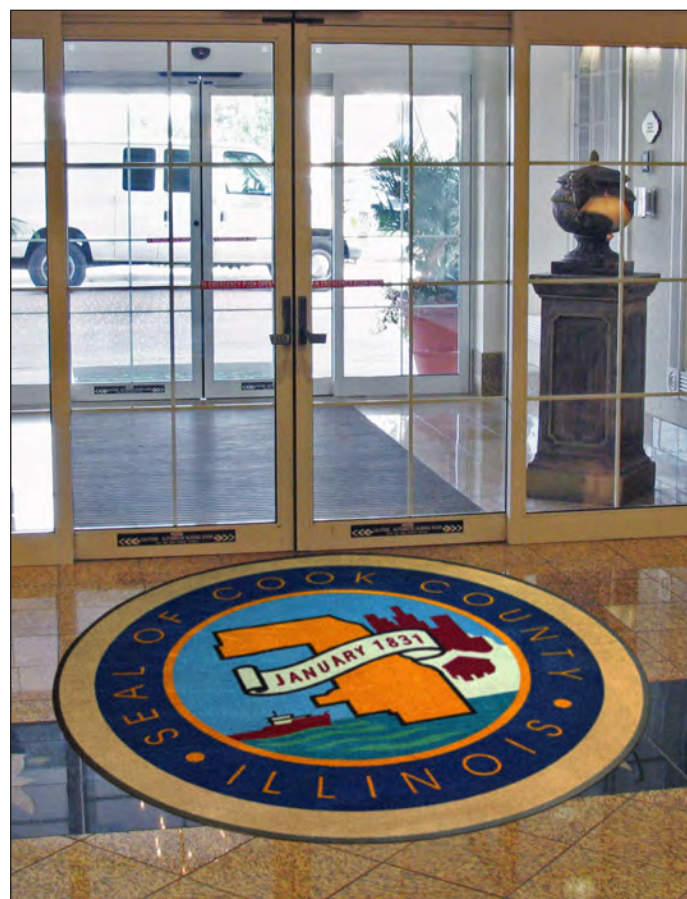

**Applications:** Heavy traffic entrances: Retail, restaurants, hotels, corporate offices, schools, and outdoor with no direct exposure to elements.

<b>Performance:</b>	Good	Better	Best	Superior
Water Retention				
Crush Resistance				
Soil Resistance				
Function & Appearance				



# ENTRANCE MATS - Rubber-Backed







Cut Lengths



Heavy Traffic

# ENTRANCE MATS - Rubber-Backed




## 150 - AQUA TRAP®

## 161 - BARRIER RIB™

- Molded pattern facilitates scraping and drying
- Raised rubber border retains moisture and debris
- Carpet-to-edge (CTE) construction to blend with its surroundings
- Anti-Microbial carpet treatment stops bacteria and germs
- 20 ounces of tufted yarn per square yard
- Rubber underside cleat design resists mat slippage
- Recommended product as a part of the GreenTRAX™ program for "Green Cleaning" environments



150 AQUA TRAP®

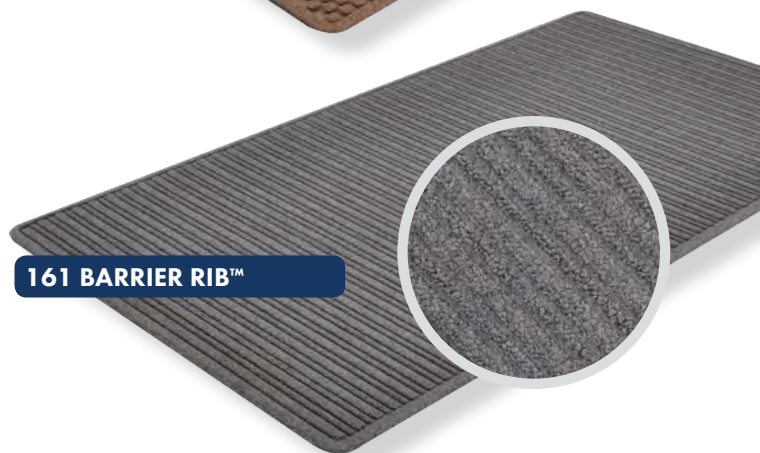








161 BARRIER RIB™

**Applications:** Indoor - Main entranceways; any and all heavy traffic areas where sensitive health issues may be a concern such as; hospitals, health care facilities, schools, and daycare.

### Performance

Good Better Best Superior

Water Retention	██████████			██████████
Crush Resistance	██████████			██████████
Soil Resistance	██████████			
Function & Appearance	██████████			

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x10', 4'x6', 4'x10'						
Thickness	3/8"						
Cut Lengths	3' and 4' widths (5'3" up to 60' long)						
Colors							
	Charcoal	Brown	Grey	Burgundy	Red/Black	Hunter Green	Slate Blue

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78



Medium  
Traffic



Floor  
Protection

# ENTRANCE MATS - Rubber-Backed

## 165 - GUZZLER™ CTE

**NEW!**

- High/low waffle pattern facilitates scraping and keeps moisture and debris away from foot traffic
- Raised rubber carpet-to-edge (CTE) border on all 4 sides traps moisture and debris for easy removal
- Molded rubber cleats on the bottom of the mat grip underlying surfaces and minimize mat movement
- 26 ounces of tufted yarn per square yard
- Low profile for use in narrow clearance doorways



Stock Sizes	2'x3', 3'x5', 3'x10', 4'x6', 4'x10'
Thickness	3/8"
Colors	 Charcoal

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

### Applications:

Office buildings, healthcare facilities, commercial buildings, restaurants, and hotels.

### Performance:

	Good	Better	Best	Superior
Water Retention	████████████████████			████████████████
Crush Resistance	████████████████		████████████████	████████████████
Soil Resistance	████████████████		████████████████	████████████████
Function & Appearance	████████████████		████████████████	████████████████

## 169 - OPUŠ™ CTE

**NEW!**

- High/low diamond pattern facilitates scraping and keeps moisture and debris away from foot traffic
- Raised rubber carpet-to-edge (CTE) border on all 4 sides traps moisture and debris for easy removal
- Molded rubber cleats on the bottom of the mat grip underlying surfaces and minimize mat movement
- 26 ounces of tufted yarn per square yard
- Low profile for use in narrow clearance doorways



Stock Sizes	2'x3', 3'x4', 3'x5', 3'x10', 4'x6', 4'x10'
Thickness	3/8"
Colors	 Charcoal

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78

### Applications:

Office buildings, healthcare facilities, commercial buildings, restaurants, and hotels.

### Performance:

	Good	Better	Best	Superior
Water Retention	████████████████████			████████████████
Crush Resistance	████████████████		████████████████	████████████████
Soil Resistance	████████████████		████████████████	████████████████
Function & Appearance	████████████████		████████████████	████████████████





Medium Traffic



Heavy Traffic

# ENTRANCE MATS - Rubber-Backed



## 166 - GUZZLER™

## 167 - PORTRAIT™

## 168 - OPUS™


- High/low pattern facilitates scraping and keeps moisture and debris away from foot traffic
- Raised rubber border on all 4 sides traps moisture and debris for easy removal
- Molded rubber cleats on the bottom of the mat grip underlying surfaces and minimize mat movement
- 26 ounces of tufted yarn per square yard
- Low profile for use in narrow clearance doorways
- Recommended products as a part of the GreenTRAX™ program for "Green Cleaning" environments

**Applications:** The non-directional pattern design is perfect for entranceways, lobbies, and other indoor medium to high traffic areas.

### Performance:

	Good	Better	Best	Superior
Water Retention	██████████			████
Crush Resistance	██████████		████	████
Soil Resistance	██████████		████	████
Function & Appearance	██████████		████	████

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x10', 4'x6', 4'x10'					
Thickness	3/8"					
Colors (166)						
Colors (167)						
Colors (168)						

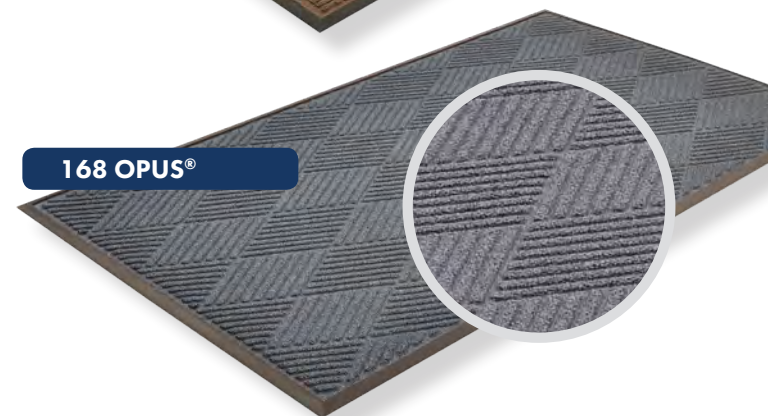

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov). See pg 77-78



Light Traffic



Medium Traffic



Cut Lengths

# VALUE LINE - Carpet Mats



## 105, 109, 130 - INDOOR ENTRANCE MATS

- Vinyl backing ensures minimal buckling and mat movement
- Roll Sizes: 3'x60', 4'x60', 6'x60'
- Stock sizes: 2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4x8'
- Cut Lengths available in 3', 4', and 6' widths (up to 60' long)





### 105 - CHEVRON

- Scrapes debris from shoes regardless of traffic flow
- Thickness 5/16"
- 24 oz. of needle-punched yarn per sq. yard

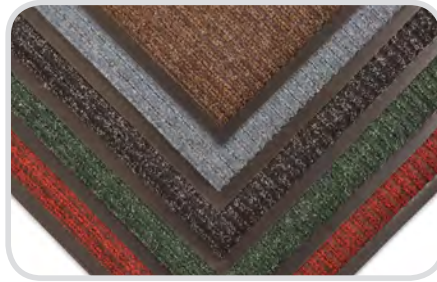


### 109 - BRUSH-STEP®

- A lighter-weight double rib high/low design
- Thickness 3/8"
- 18 oz. of needle-punched yarn per sq. yard

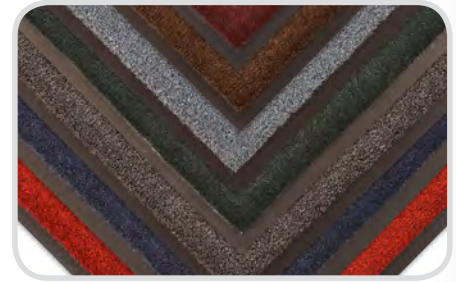

### 130 - SABRE™

- Dries shoes and retains debris
- Thickness 5/16"
- 19 oz. of tufted cut-pile Decalon® per sq. yard



## Applications:

Indoor – Entrances, Lobbies, all light to medium traffic areas.

## Performance:

	Good	Better	Best	Superior
Water Retention	████	████	████	████
Crush Resistance	████	████	████	████
Soil Resistance	████	████	████	████
Function & Appearance	████████	████████	████████	████████

## 151 - DIAMOND CTE 152 - WAFFLE CTE

- High/low pattern facilitates scraping and keeps moisture and debris away from foot traffic
- Raised rubber carpet-to-edge (CTE), bordered on all 4 sides to trap moisture and debris
- Crumb rubber backing
- 26 ounces of tufted yarn per square yard

Stock Sizes	2'x3', 3'x5', 4'x6'
Thickness	3/8"
Colors	Brown          Blue          Charcoal

### 151 - DIAMOND CTE

### 152 - WAFFLE CTE



## Applications:

Indoor – Entrances, Lobbies, all light to medium traffic areas.



**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78



# VALUE LINE - Sponge & Laminate Mats

## 408 - ACHILLES 409 - TEXTURED CUSHION SOF-TRED™ 508 - DIAMOND CUSHION™

- Basic anti-fatigue protection provided
- PVC closed cell foam relieves leg and back discomfort; provides a barrier to cold floors
- All four sides are beveled to minimize trip hazards

Roll Sizes	(3/8" thick) 2'x60', 3'x60', 4'x60' (5/8" thick) 2'x30', 3'x30', 4'x30' (1/2" thick) 2'x60', 3'x60', 4'x60'
Thickness	3/8", 5/8" (408, 409), 1/2" (508)
Colors	 Black  Black/Yellow






**Applications:** Areas requiring basic fatigue relief.

<b>Performance:</b>	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				

## 509 - DIAMOND-TUFF™ 510 - DIAMOND-TUFF™ MAX

- Diamond pattern vinyl laminate top surface for added traction
- PVC closed cell foam relieves leg and back discomfort
- Beveled on all 4 sides

Stock Sizes	2'x3', 3'x5', 3'x12'
Roll Sizes	2'x75', 3'x75', 4'x75', 5'x75'
Thickness	9/16" (509), 1" (510)
Colors	 Black  Black/Yellow

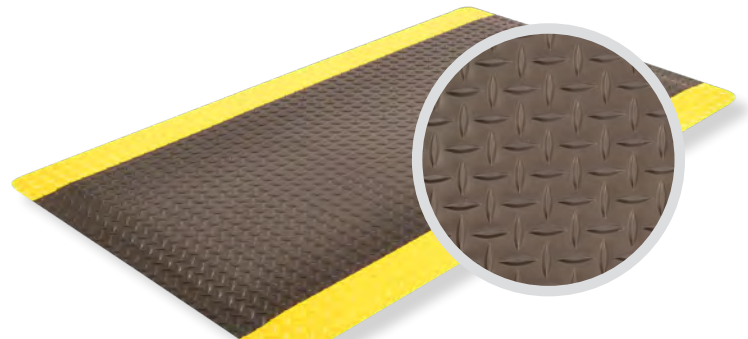




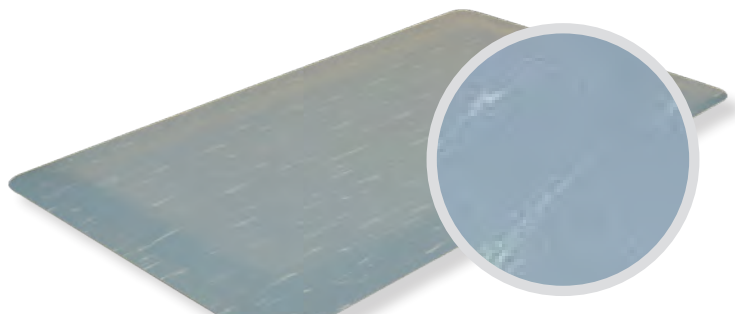
**Applications:** Areas that require added anti-fatigue relief, sure footing, and durability.

<b>Performance:</b>	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				

## 511 - MARBLE TUFF™ 512 - MARBLE TUFF™ MAX

- Durable smooth vinyl top surface easy to sweep or mop clean
- Dense closed cell foam base provides ergonomic support
- Beveled on all 4 sides

Stock Sizes	2'x3', 3'x5', 3'x12'
Roll Sizes	2'x75', 3'x75', 4'x75'
Thickness	1/2" (511), 1" (512)
Colors	 Black  Blue  Grey



**Applications:** Areas that require added anti-fatigue relief and durability in an attractive style.

<b>Performance:</b>	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov. See pg 77-78



Anti-Fatigue



Anti-Slip



Cleaning



Drainage




Food Service



Modular

# VALUE LINE - Rubber Mats

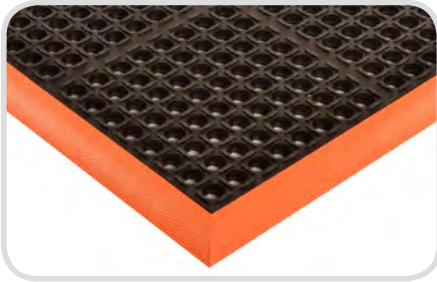

## 514 - SURE STEP

- General purpose drainage mat
- Edges are permanently attached
- Beveled edges

Colors  Black/ Orange  Black/Yellow


Stock Size	28"x40", 38"x64" (Bevel, 3 sides) 40"x52", 40"x64", 40"x124" (Bevel, 4 sides)
Thickness	3/4"

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov). See pg 77-78



## 619 - DRAIN LITE

- General purpose drainage mat
- Beveled edge on all 4 sides


Colors  Black

Stock Size	3'x5', 3'x10', 3'x15', 3'x20'
Thickness	1/2"




## 501 - CUSHION CONNECT™

- Large hole drainage design
- Modular design and configurations

Colors  Black

Roll Size	3'x3'
Thickness	1/2"

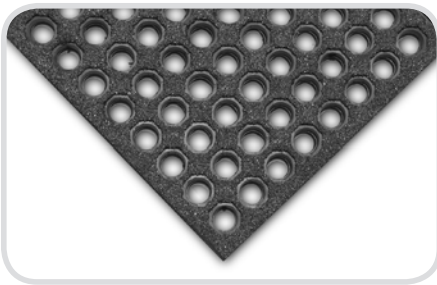


## 505 - GRIT-STEP™

- Large hole drainage design
- Silicon Carbide grit surface
- Modular design & customizable

Colors  Black

Roll Size	3'x3'
Thickness	3/4"

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov). See pg 77-78

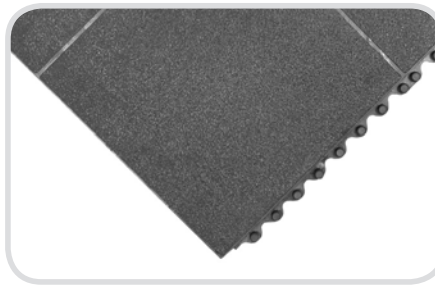

## 616 - CO-NEX

- Solid pebbled top surface
- General purpose rubber compound
- Modular design and configurations

Colors  Black

Roll Size	3'x3'
Thickness	1/2"

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov). See pg 77-78



## 581 - CO-NEX RAMPS

- General purpose rubber compound
- Connects with the 616 CO-NEX
- Available in male and female
- Size: 2"x3'
- Thickness: 1/2"

Colors  Yellow



# ACCESSORIES



## Applications:

For on-site cut carpet matting that requires a finished look and a beveled edge to reduce trip hazards.

### 083 - STANDARD BEVELED NOSING

- Nosing lip is adhered underneath mat and produces the 1" "factory-look" beveled border
- #083K Nosing Kit – includes 25 feet of Nosing, 4 ounce can of adhesive and application roller

Colors



Black

Roll Size	1"x150"
Thickness	1/8"



## Applications:

For on-site cut carpet matting that requires a finished look and a beveled edge to reduce trip hazards.

### 084 - HEAVY DUTY BEVELED NOSING

- Nosing lip is adhered underneath mat and produces a 1 1/2" beveled border
- #039K Nosing Kit – includes 25 feet of Nosing, 4 ounce can of adhesive and application roller

Colors



Black

Roll Size	1 1/2"x100"
Thickness	1/4"



## Applications:

To keep vinyl-backed floor mats from moving when placed on looped pile carpeting.

### 085 - VELCRO® CARPET ANCHOR

- Individual easy-peel self-adhesive strips of Velcro® adhere to vinyl backing of mat
- Anchors vinyl backed mats to looped pile carpet floors
- Most effective solution to anchor mats to carpet

Colors



Black

Roll Size	75'
Custom Size	Custom Lengths Available




## Applications:

Wherever the splicing together of Notrax® laminated floor mats is needed to create a larger work surface.

### 082 - SPLICING KIT

- For on-site splicing of blunt-cut laminate mats
- Contents: 5"x15' roll of vinyl patch material, small bottle of adhesive
- Tacks matting together quickly and easily on site

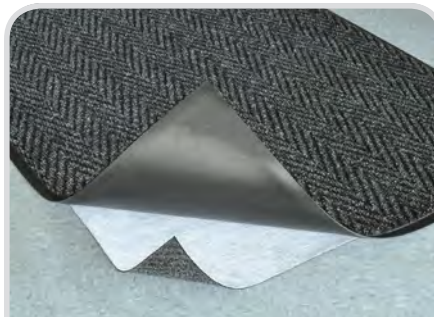

## Applications:

To keep vinyl-backed floor mats from moving when placed on either smooth surface floors or carpeting.

### 090 - MAT HOLD

- Rubberized mesh pad gently adheres to floor and underside of vinyl backed carpet mat
- Does not leave behind any residue and will not stain carpeting or floors
- Cut lengths: 2' wide up to 100' long, 3' wide up to 50' long



### 086 - ADHESIVE

- Adhesive for Notrax vinyl and rubber mats.
- Available in 4 oz can for vinyl and 8oz bottle for rubber

**LEGEND:**

(1) Recommended	(2) Suitable for Use
(3) Useable, not-recommended	(4) Not Recommended

Use of product in environments specified as "USEABLE, NOT RECOMMENDED" or "NOT RECOMMENDED" may lead to product failure and will void warranty. These ratings are intended to be used as a guide only. For decisive results, please call for a free product sample for on-site testing in actual conditions. Actual results may vary depending on concentration of chemicals.

Chemical	Form	Chemical Family	Product Numbers															
			485/985	558	457	351	340/350		755	431/481		T17	782/982	413	420			
			827	550	447	040/041	345		758	562RD		425	826/927	415	730			
			480/980	570	549	592/593	599		951	T23RD		440	470/970	410	735			
			490	573	543	692/693	352		656/856	597		370	509/510	411	737			
			976/990	460	562BL	501/505	165		551	448		371	511/512	825	539			
			474/974	463	504	616	169		552	950		477/977	926	408	830/831			
			150/161	430/446	T23BL	045	166	151/152	650/850	462	469	479	419	409	835/836			
			556	433/443	750	545	167	514	572	465	432/442	975/979	417	508	620/621			
			557	455	346	765	168	619	571	461	435/445	482	406	531	520/522	523	454	
2-Propanol (isopropal alcohol)	Liquid	Alcohol	1	1	1	1	1	1	2	2	2	2	2	2	2	2	2	4
Acetaldehyde (50%)	Liquid	Aldehyde	2	2	2	2	2	2	4	4	4	3	3	3	3	3	3	4
Acetic Acid (50%)	Liquid	Acid (weak, organic)	2	2	2	2	2	2	3	3	3	2	2	2	2	2	2	4
Acetic Acid	Liquid	Glacial	3	3	3	3	3	3	3	3	3	4	4	4	4	4	4	3
Acetic Anhydride	Liquid	Acid (weak)	3	3	3	3	3	3	2	2	2	4	4	4	4	4	4	4
Acetone	Liquid	Ketone	3	3	3	3	3	3	4	4	4	3	3	3	3	3	3	4
Ammonium Hydroxide (30%)	Liquid	Base (weak)	4	4	4	4	4	4	4	4	4	1	1	1	1	1	1	4
Amyl Acetate	Liquid	Carboxylic Acid (Aliphatic)	4	4	4	4	4	4	4	4	4	3	3	3	3	3	3	4
Aniline	Liquid	Base (aromatic, weak)	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
ASTM #1	Liquid	Paraffin Oil	4	4	4	4	4	4	1	1	1	n/a	n/a	n/a	n/a	n/a	n/a	1
Beef Fat	Solid/Liquid		4	4	4	4	4	4	1	1	1	2	2	2	2	2	2	2
Benzene	Liquid	Aromatic HC	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
Benzoic Acid	Liquid	Carboxylic Acid (Aromatic)	4	4	4	4	4	4	4	4	4	1	1	1	1	1	1	4
Benzyl Alcohol	Liquid	Alcohol	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
Boric Acid	Liquid	Acid (weak)	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Brake Fluid	Liquid	Ether/Glycol	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
Bromine	Liquid/Gas	Halogen	4	4	4	4	4	4	4	4	4	2	2	2	2	2	2	4
Butane	Liquid	Aliphatic HC	4	4	4	4	4	4	1	1	1	3	3	3	3	3	3	3
Butter	Solid/Liquid		4	4	4	4	4	4	2	2	2	1	1	1	1	1	1	2
Butyl Acetate	Liquid	Carboxylic Acid (Aliphatic)	4	4	4	4	4	4	4	4	4	3	3	3	3	3	3	4
Butyl Alcohol (butanol)	Liquid	Alcohol	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	3
Calcium Chloride	Solid	Inorganic Salt	1	1	1	1	1	1	1	1	1	2	2	2	2	2	2	1
Calcium Hydroxide	Solid	Metal Hydroxide	1	1	1	1	1	1	1	1	1	2	2	2	2	2	2	2
Carbolic Acid (liquid phenol)	Liquid	Acid (organic)	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
Carbon Monoxide	Gas	Inorganic Carbon Compound	3	3	3	3	3	3	2	2	2	1	1	1	1	1	1	1
Carbon Tetrachloride	Liquid	Halogenated Organic Liquid	4	4	4	4	4	4	3	3	3	4	4	4	4	4	4	4
Chicken Fat	Solid/Liquid		4	4	4	4	4	4	2	2	2	2	2	2	2	2	2	2
Chloroacetone	Liquid	Ketone	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
Chloroform	Liquid	Aliphatic HC	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
Chromic Acid (50%)	Liquid	Acid (weak)	4	4	4	4	4	4	4	4	4	3	3	3	3	3	3	4
Citric Acid (10%)	Liquid	Acid (weak, organic)	1	1	1	1	1	1	1	1	1	2	2	2	2	2	2	1
Corn Oil	Liquid	Fatty Acid	4	4	4	4	4	4	2	2	2	1	1	1	1	1	1	1
Cottonseed Oil	Liquid	Aliphatic HC	4	4	4	4	4	4	3	3	3	1	1	1	1	1	1	1
Cyclohexane	Liquid	Aliphatic HC	4	4	4	4	4	4	1	1	1	4	4	4	4	4	4	2
Cyclohexanol	Liquid	Alcohol (cyclic)	4	4	4	4	4	4	3	3	3	1	1	1	1	1	1	n/a
Cyclohexanone	Liquid	Ketone	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
Dibutyl Phthalate	Liquid	Ester	4	4	4	4	4	4	4	4	4	3	3	3	3	3	3	4
Diesel fuel	Liquid	Petroleum HC	4	4	4	4	4	4	1	1	1	3	3	3	3	3	3	n/a
Diesel Oil	Liquid	Petroleum HC	4	4	4	4	4	4	1	1	1	3	3	3	3	3	3	3
Diocetyl Phthalate (DOP)	Liquid	Ester	4	4	4	4	4	4	3	3	3	4	4	4	4	4	4	4
Ethane	Liquid	Aliphatic HC	4	4	4	4	4	4	1	1	1	1	1	1	1	1	1	2
Ethyl Acetate	Liquid	Ester	2	2	2	2	2	2	4	4	4	3	3	3	3	3	3	4
Ethyl Alcohol (ethanol)	Liquid	Alcohol	1	1	1	1	1	1	1	1	1	3	3	3	3	3	3	4
Ethyl Ether	Liquid	Ether	4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	3
Ethylene Glycol (antifreeze)	Liquid	Alcohol	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	4
Formaldehyde (37%)	Liquid	Aldehyde	3	3	3	3	3	3	2	2	2	1	1	1	1	1	1	3
Formic Acid	Liquid	Acid (weak, organic)	2	2	2	2	2	2	2	2	2	1	1	1	1	1	1	4
Fresh Water	Liquid		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Fuel Oil	Liquid	Aliphatic HC	4	4	4	4	4	4	1	1	1	2	2	2	2	2	2	3
Gasoline	Liquid	Aliphatic HC	4	4	4	4	4	4	1	1	1	3	3	3	3	3	3	2
Gear Oil (85w-140)	Liquid	Paraffin Oil	4	4	4	4	4	4	1	1	1	2	2	2	2	2	2	n/a
Glucose	Liquid	Sugar	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Glycerin	Liquid	Alcohol	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2
Heptane	Liquid	Aliphatic HC	4	4	4	4	4	4	1	1	1	2	2	2	2	2	2	2
Hexane	Liquid	Aliphatic HC	4	4	4	4	4	4	1	1	1	3	3	3	3	3	3	2
Hydraulic Fluid	Liquid	Aliphatic HC	4	4	4	4	4	4	1	1	1	2	2	2	2	2	2	4
Hydrazine	Liquid	Base (weak)	4	4	4	4	4	4	2	2	2	1	1	1	1	1	1	4
Hydrochloric Acid (30%)	Liquid	Acid (strong)	2	2	2	2	2	2	4	4	4	2	2	2	2	2	2	4
Hydrofluoric Acid (30%)	Liquid	Acid (weak)	4	4	4	4	4	4	4	4	4	3	3	3	3	3	3	4



# CHEMICAL CHART

## LEGEND:

Recommended	Suitable for Use
Useable, not-recommended	Not Recommended

Use of product in environments specified as "USEABLE, NOT RECOMMENDED" or "NOT RECOMMENDED" may lead to product failure and will void warranty. These ratings are intended to be used as a guide only. For decisive results, please call for a free product sample for on-site testing in actual conditions. Actual results may vary depending on concentration of chemicals.

Chemical	Form	Chemical Family	Product Numbers																	
			485/985	558	457	351	340/350		755	431/481		T17	782/982	413	420					
			827	550	447	040/041	345			758	562RD		425	826/927	415	730				
			480/980	570	549	592/593	599			951	T23RD		440	470/970	410	735				
			490	573	543	692/693	352			656/856	597		370	509/510	411	737				
			976/990	460	562BL	501/505	165			551	448		371	511/512	825	539				
			474/974	463	504	616	169			552	950		477/977	926	408	830/831				
			150/161	430/446	T23BL	045	166			151/152	650/850		462	479	419	409	835/836			
			556	433/443	750	545	167			514	572		465	432/442	975/979	417	508	620/621		
			557	455	346	765	168			619	571		461	435/445	482	406	531	520/522	523	454
Hydrogen Peroxide	Liquid		3	3	3	3	3	3	3	3	3	3	3	1	1	1	1	1	1	2
Iodine	Liquid	Inorganic Halogenated Comp	4	4	4	4	4	4	3	3	3	3	1	1	1	1	1	1	1	4
IRM 902	Liquid	Napathenic Oil	4	4	4	4	4	4	2	2	2	n/a	n/a	n/a	n/a	n/a	n/a	n/a	2	
IRM 903	Liquid	Napathenic Oil	4	4	4	4	4	4	2	2	2	n/a	n/a	n/a	n/a	n/a	n/a	n/a	2	
Jet Fuel	Liquid	Aromatic HC	4	4	4	4	4	4	1	1	1	3	3	3	3	3	3	3	3	
Kerosene	Liquid	Aliphatic HC	4	4	4	4	4	4	1	1	1	3	3	3	3	3	3	3	2	
Lacquers	Liquid	Aromatic HC (with alcohol)	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	
Linoleic Acid	Liquid	Fatty Acid	4	4	4	4	4	4	2	2	2	---	---	---	---	---	---	n/a		
Linseed Oil	Liquid	Fatty Acid	4	4	4	4	4	4	1	1	1	2	2	2	2	2	2	2	1	
Methane	Liquid	Aliphatic HC	4	4	4	4	4	4	1	1	1	2	2	2	2	2	2	2	3	
Methyl Alcohol (methanol)	Liquid	Alcohol	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	4	
Methyl Ethyl Ketone (MEK)	Liquid	Ketone	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	
Methyl Formate	Liquid	Alcohol	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	4	
Methyl Isobutyl Ketone (MIBK)	Liquid	Ketone	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	
Methyl Methacrylate	Liquid	Ester	4	4	4	4	4	4	4	4	4	1	1	1	1	1	1	1	4	
Methylene Chloride	Liquid	Aliphatic HC (halogenated)	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	
Mineral Oil	Liquid	Petroleum HC	4	4	4	4	4	4	1	1	1	3	3	3	3	3	3	3	1	
Mineral Spirits	Liquid	Aliphatic HC	4	4	4	4	4	4	2	2	2	3	3	3	3	3	3	3	2	
Motor Oil 10w-30 (natural)	Liquid	Paraffin Oil	4	4	4	4	4	4	1	1	1	2	2	2	2	2	2	2		
Motor Oil 10w-30 (synthetic)	Liquid	Paraffin Oil	4	4	4	4	4	4	1	1	1	2	2	2	2	2	2	2		
Napathenic	Liquid	Aromatic HC	4	4	4	4	4	4	1	1	1	---	---	---	---	---	---	3		
Naptha	Liquid	Aromatic HC	4	4	4	4	4	4	1	1	1	2	2	2	2	2	2	3		
Nitric Acid (20%)	Liquid	Acid (strong)	4	4	4	4	4	4	4	4	4	2	2	2	2	2	2	4		
Nitric Acid (Concentrated)	Liquid		4	4	4	4	4	4	4	4	4	2	2	2	2	2	2	4		
Nitrobenzene	Liquid	Aromatic HC	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4		
Octane	Liquid	Aliphatic HC	4	4	4	4	4	4	1	1	1	2	2	2	2	2	2	4		
Oleic Acid	Liquid	Acid	4	4	4	4	4	4	2	2	2	3	3	3	3	3	3	2		
Oxalic Acid	Liquid	Acid (weak)	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3		
Peanut Oil	Liquid	Fatty Acid	4	4	4	4	4	4	2	2	2	1	1	1	1	1	1	2		
Pentane	Liquid	Aliphatic HC	4	4	4	4	4	4	1	1	1	2	2	2	2	2	2	4		
Perchloroethylene	Liquid	Aliphatic HC (chlorinated)	4	4	4	4	4	4	2	2	2	3	3	3	3	3	3	4		
Petroleum	Liquid	Aliphatic HC	4	4	4	4	4	4	1	1	1	2	2	2	2	2	2	2		
Phosphoric Acid	Liquid	Acid (weak)	2	2	2	2	2	2	3	3	3	1	1	1	1	1	1	4		
Pine Oil (100%)	Liquid	Turpene/Alcohol/Ether	4	4	4	4	4	4	3	4	4	4	4	4	4	4	4	2		
Pine Oil (20%=Pine-Sol)	Liquid		3	3	3	3	3	3	2	2	2	3	3	3	3	3	3	1		
Potassium Hydroxide (50%)	Liquid	Base (strong)	2	2	2	2	2	2	2	2	2	2	1	1	1	1	1	3		
Power Steering Fluid	Liquid	Napathenic Oil	4	4	4	4	4	4	1	2	2	2	2	2	2	2	2	n/a		
Propane	Liquid	Aliphatic HC	4	4	4	4	4	4	1	1	1	1	1	1	1	1	1	2		
Propyl Alcohol (propanol)	Liquid	Alcohol	1	1	1	1	1	1	1	1	1	2	2	2	2	2	2	4		
Propylene Dichloride	Liquid	Aliphatic HC	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4		
Salt Water	Liquid		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		
Silicates	Solid	Alkali Metals	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		
Silver Nitrate	Solid	Inorganic Salt	1	1	1	1	1	1	2	2	2	1	1	1	1	1	1	1		
Sodium Bicarbonate	Solid	Inorganic Salt	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		
Sodium Hydroxide	Liquid	Base (strong)	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3		
Sodium Hydroxide (0.34%)	Liquid		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		
Sodium Hypochlorite (bleach)	Liquid	Base	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	4		
Stearic Acid	Liquid	Fatty Acid	3	3	3	3	3	3	1	1	1	2	2	2	2	2	2	1		
Styrene	Liquid	Aromatic HC	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	3		
Sulfuric Acid (<10%)	Liquid	Acid (strong)	2	2	2	2	2	2	2	2	2	1	1	1	1	1	1	4		
Sulfuric Acid (10-75%)	Liquid		3	3	3	3	3	3	4	4	4	1	1	1	1	1	1	4		
Sulfuric Acid (Concentrated)	Liquid		4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	2		
Tetrahydrofuran (THF)	Liquid	Ether	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	3		
Toluene (methyl benzene)	Liquid	Aromatic HC	4	4	4	4	4	4	3	3	3	4	4	4	4	4	4	4		
Transmission Fluid	Liquid	Napathenic or Paraffin Oil	4	4	4	4	4	4	1	1	1	2	2	2	2	2	2	1		
Trinitrobenzene	Liquid	Aromatic HC	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	n/a		
Turpentine	Liquid	Aliphatic HC	4	4	4	4	4	4	1	1	1	4	4	4	4	4	4	4		
Vegetable Oil	Liquid	Aliphatic HC	4	4	4	4	4	4	1	2	2	1	1	1	1	1	1	1		
Vinegar (5% Acetic Acid)	Liquid	Acid (weak, organic)	3	3	3	3	4	3	1	1	1	1	1	1	1	1	1	3		
Xylene	Liquid	Aromatic HC	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4		

## PROPOSITION 65:

Proposition 65 requires the State of California to maintain and update a list of chemicals that can cause cancer, birth defects or other reproductive harm. Businesses with 10 or more employees that expose individuals to listed chemicals through their products or operations must provide these warnings. Below is a list of part number, names, page number the product appears on within this catalog, and full form warnings for products Notrax sells that contain chemicals listed within Prop 65. On the corresponding page there is the short form warning with reference back to this page for the full warning and more information. Please read this carefully. For more information visit [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

485/985 ERGO TRAX™ (pg6)	<b>⚠️WARNING:</b> This product can expose you to chemicals including, di (2-ethylhexyl) phthalate or diisononyl phthalate, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .
479/975 CUSHION TRAX® (pg8)	<b>⚠️WARNING:</b> This product can expose you to chemicals including, di (2-ethylhexyl) phthalate or diisononyl phthalate, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .
979 SADDLE TRAX™ (pg8)	<b>⚠️WARNING:</b> This product can expose you to chemicals including, di (2-ethylhexyl) phthalate or diisononyl phthalate, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .
490/976/990 DURA TRAX™ (pg10)	<b>⚠️WARNING:</b> This product can expose you to chemicals including, di (2-ethylhexyl) phthalate or diisononyl phthalate, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .
482/782/982 BUBBLE TRAX™ (pg12)	<b>⚠️WARNING:</b> This product can expose you to chemicals including, di (2-ethylhexyl) phthalate or diisononyl phthalate, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .
474/974 ERGO MAT™ (pg12)	<b>⚠️WARNING:</b> This product can expose you to chemicals including, di (2-ethylhexyl) phthalate or diisononyl phthalate, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .
T17/T17P SUPERFOAM® (pg16)	<b>⚠️WARNING:</b> This product can expose you to chemicals including, di (2-ethylhexyl) phthalate or diisononyl phthalate, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .
440 SUPERFOAM® COMFORT (pg18)	<b>⚠️WARNING:</b> This product can expose you to the chemical, di (2-ethylhexyl) phthalate, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .
551/556/558/656/656FR CUSHION-EASE® (pg26)	<b>⚠️WARNING:</b> This product can expose you to chemicals including, 2 Mercaptobenzothiazole and diisodecyl phthalate, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .
557/552 CUSHION-EASE® (pg26)	<b>⚠️WARNING:</b> This product can expose you to chemicals including, di (2-ethylhexyl) phthalate, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .
856/856FR CUSHION-EASE® (pg26)	<b>⚠️WARNING:</b> This product can expose you to chemicals including, 2 Mercaptobenzothiazole, diisodecyl phthalate and beryllium, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .
550/551 CUSHION-EASE® (pg28)	<b>⚠️WARNING:</b> This product can expose you to chemicals including, 2 Mercaptobenzothiazole, diisodecyl phthalate and di (2-ethylhexyl) phthalate, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .
650/650FR CUSHION-EASE® (pg28)	<b>⚠️WARNING:</b> This product can expose you to chemicals including, 2 Mercaptobenzothiazole and diisodecyl phthalate, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .
850/850FR CUSHION-EASE® (pg28)	<b>⚠️WARNING:</b> This product can expose you to chemicals including, 2 Mercaptobenzothiazole, diisodecyl phthalate and beryllium, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .
430/446/432/442/433 443/435/445 SKYMASTER™ (pg33)	<b>⚠️WARNING:</b> This product can expose you to the chemical, di (2-ethylhexyl) phthalate, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .
455/457/447 SKYSTEP™ (pg34)	<b>⚠️WARNING:</b> This product can expose you to the chemical, di (2-ethylhexyl) phthalate, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .
549 SAFETY STANCE® (pg35)	<b>⚠️WARNING:</b> This product can expose you to chemicals including, 2 Mercaptobenzothiazole, diisodecyl phthalate and di (2-ethylhexyl) phthalate, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .
543 CUSHION-TRED™ (pg35)	<b>⚠️WARNING:</b> This product can expose you to chemicals including, 2 Mercaptobenzothiazole, diisodecyl phthalate and di (2-ethylhexyl) phthalate, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .
562 SANITOP® (pg36)	<b>⚠️WARNING:</b> This product can expose you to chemicals including, 2 Mercaptobenzothiazole, diisodecyl phthalate and di (2-ethylhexyl) phthalate, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .
620/621 DIAMOND FLEX-LOK™ (pg37)	<b>⚠️WARNING:</b> This product can expose you to chemicals including, di (2-ethylhexyl) phthalate or diisononyl phthalate, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .
520 CUSHION-LOK™ (pg37)	<b>⚠️WARNING:</b> This product can expose you to chemicals including, di (2-ethylhexyl) phthalate or diisononyl phthalate, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .
522 CUSHION-LOK™ W/GRIP-STEP® (pg37)	<b>⚠️WARNING:</b> This product can expose you to chemicals including, di (2-ethylhexyl) phthalate or diisononyl phthalate, and beryllium, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .
523 MODULAR LOK-TYLE (pg37)	<b>⚠️WARNING:</b> This product can expose you to chemicals including, di (2-ethylhexyl) phthalate or diisononyl phthalate, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .
531 SAFETY GRID™ (pg40)	<b>⚠️WARNING:</b> This product can expose you to chemicals including, di (2-ethylhexyl) phthalate or diisononyl phthalate, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .
420 CUSHION-DEK™ (pg40)	<b>⚠️WARNING:</b> This product can expose you to chemicals including, di (2-ethylhexyl) phthalate or diisononyl phthalate, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .
T23 MULTI-MAT II® (pg40)	<b>⚠️WARNING:</b> This product can expose you to chemicals including, di (2-ethylhexyl) phthalate or diisononyl phthalate, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .
755 NIRU® VERSA RUNNER® (pg40)	<b>⚠️WARNING:</b> This product can expose you to chemicals including, 2 Mercaptobenzothiazole and diisodecyl phthalate, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .
765 DEEP FREEZE MAT® (pg41)	<b>⚠️WARNING:</b> This product can expose you to chemicals including, 2 Mercaptobenzothiazole and diisodecyl phthalate, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .
758 NIRU® KNOB-TOP RUNNER™ (pg41)	<b>⚠️WARNING:</b> This product can expose you to chemicals including, 2 Mercaptobenzothiazole and diisodecyl phthalate, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .
730 V-GROOVE CORR. RUNNER® VINYL (pg42)	<b>⚠️WARNING:</b> This product can expose you to chemicals including, di (2-ethylhexyl) phthalate or diisononyl phthalate, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .













**NOTRAX®**

5655 West 73rd St.  
Bedford Park, IL 60638

**PHONE:** (800) 621-2802

**FAX:** (800) 322-7105

**EMAIL:** [customerservice@notrax.com](mailto:customerservice@notrax.com)

[www.notrax.com](http://www.notrax.com)

Ver: 8/18  
MKTS004800

A PRODUCT OF:



**JUSTRITE®**

Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at [Justrite.com](http://Justrite.com), [Checkers-safety.com](http://Checkers-safety.com), and [Notrax.com](http://Notrax.com).