


ORING S-14
(ハイト)

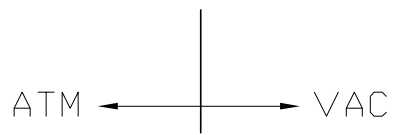

NOTES:

1. ROTARY SPEED: Max10000RPM
2. VAPOR PRESSURE: 10E-8 Torr
3. VACUUM LEAK CHECK TO LESS THAN 10^{-12} Pa.M³/sec HELUUM
4. TEMPERATURE: 0-80°C
5. GASES SEALED: INERT GASES

UNRELEASED
PENDING CUSTOMER APPROVAL
Approved _____ Date _____

TOLERANCES UNLESS STATED			
PROCESSING SIZE	LATHE		PRESS
	GENERAL	HOLE	GENERAL
<6mm	± 0.1	± 0.15	± 0.5
6 - 30 mm	± 0.2	± 0.2	± 0.7
31 - 120 mm	± 0.3	± 0.25	± 1.0
121 - 315 mm	± 0.5	± 0.4	± 1.5
316 - 1000 mm	± 0.8	± 0.6	± 2.0
1001 - 2000 mm	± 1.2		

NUB	DATE	CONTENT	NAME	PREPARED
				CHECKED DATE
				ENGINEER DATE
				MFC, ENG DATE

6.3 / 1.6 / 1.6 / graze

MATL HOUSING SUS304
SHAFT SUS630

PROJECTION

FEEDTHROUGH		Model	SSB006NN
P/N	SCALE	REV	
	1/1	Z	