



Quality





Model shown: RH-72



King Kutter's Rotary Harrows have been designed with sleeve mounted, drive-in, spot welded spikes, to increase strength, performance, and durability. They're easy to use, and no tractor PTO is required. The unique turning action allows the harrow to level soil by redistributing it inward. They are ideal for use in orchards and vineyards to control weeds without the use of chemicals, to prepare seedbeds for planting, and to groom riding arenas.

**Choose from three sizes:**

60" – 84" Rotary Harrows – Cat. I, 3-pt. quick hitch compatible, heavy duty bolt on hub with sealed bearings, sleeve mounted, drive-in, spot welded spikes, channel iron harrow frame.  
(Models: RH-60, RH-72, & RH-84)

 **QuickHitch**  
Compatible



Prepare Soil for Planting



Bolt On Hub with Sealed Bearings



Sleeve Mounted Spikes






Model shown: AR-72

King Kutter's Arena Renovator is the only fully adjustable Arena Renovator on the market today that does not require tools for adjustment. Through the use of a patent-pending system of adjustable links and pins, the King Kutter Arena Renovator is easily adjustable to fit your specific application. Fifteen high vibration tines and adjustable smoother bar and crumbling basket make this the tool you need for preparing your riding arena.

**Model type:**

Arena Renovator – Cat. I & II, 3-pt. hitch, fully adjustable without the use of tools, adjustable smoother bar, adjustable crumbling basket, 15 high vibration tines.  
(Model: AR-72)

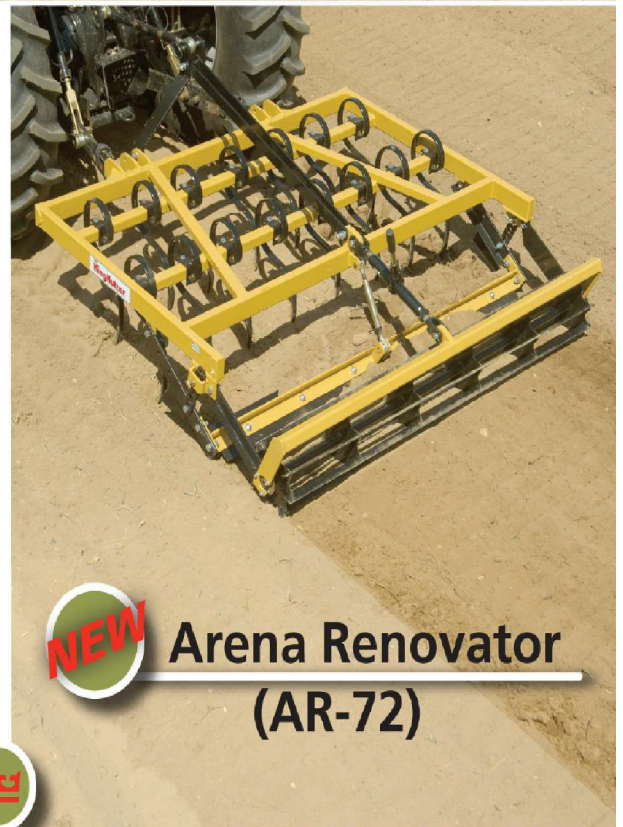

**NEW** Arena Renovator  
(AR-72)

Quick Hitch  
Compatible 




Easy Adjust Crumbling Basket



High Vibration Tines



Adjustable Smoother Bar



## Arena Renovator & Rotary Harrow Specifications

### **Model**

HP Range

Approx. Weight

### **Performance**

Working Width

Tine Type

Tine Material

No. of Tines

Tine Points

Smoother Bar

Crumbling Basket

Smoother Bar Adjustment

Crumbling Basket Adjustment

Tools Needed for Adjustment

### **Construction**

Hitch

Frame

AR-72

55 - 80

752 lbs.

72"

Danish Tine

Spring Steel

15

Rev. heat treated

Reversible, Replaceable

Flat Bar, Spiral Configuration

Adjustable Link

Adjustable Link & Pins

None

Cat. I & II Straddle

Square & Rectangle Tube

### **Model**

HP Requirements

Approx. Weight

### **Performance**

Working Width

Working Depth\*

### **Construction**

Hitch

Quick Hitch Compatible

Frame

Harrow Frame

Harrow Rotation

Spike Mount

RH-60 / RH-72 / RH-84

15 - 40

323 lbs. / 355 lbs. / 401 lbs.

60" / 72" / 84"

4"

Cat. I

Yes

Industrial Tube

Channel Iron

Sealed bearing hub

Sleeve mounted, drive in

*\*Working depth can vary with soil type and conditions.*

*\*Weights are for products only. Does not include packaging material.*

*\*Specifications also available at [www.kingkutter.com](http://www.kingkutter.com).*

King Kutter Inc.

PO Box 1200

Winfield, AL 35594

205.487.3202

[www.kingkutter.com](http://www.kingkutter.com)

**KingKutter**  
INCORPORATED

Quality Rotary Mowers & Farm Equipment

King Kutter, Inc. reserves the right to change model numbers, optional equipment and product specifications without notice.

Printed in U. S. A. 8/10