

# LELY THATCHER



- High work outputs
- Simple to set and operate
- Low H.P. tractor requirements
- No expensive mechanical wearing parts
- Inexpensive to purchase and very cost effective to operate

[www.lelyusa.com](http://www.lelyusa.com)



*partners in turfcare*

# LELY THATCHERS— Turf maintenance made easy!




The LELY Thatcher is ideal for turf maintenance and golf courses in particular. Spring tines vibrate their way through the grass removing moss and dead material thereby allowing air, nutrients and water through to the roots. This process also greatly assists with drainage issues.

The Thatcher consists of a lightweight frame with four rows of tines staggered to allow trash through but provide a close working space of 1.5". The 7mm tines are shot peened for long life and work effectively up to 7 mph.

## Unique Tine Structure

With the 7mm tine, the Lely thatchers provide outstanding performance. The spring tines are rugged for long life and work effectively at speeds up to 7mph. All tines can be adjusted without the use of tools to nine different positions, providing the tips of the tines with the correct spring pressure to achieve the desired amount of trash or weed removal. The tines are designed to be very flexible with the forward movement causing the tines to vibrate at high speeds over the ground.

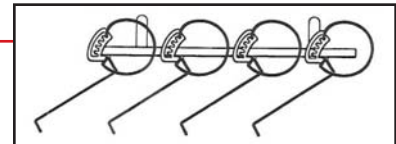

## Four Models Available

Four sizes of Lely thatchers are available **225, 300, 450, and 600** models (7.5', 10', 15', 20') The 450 and 600 models (15' and 20') consist of two frames which carry the tines and fold up vertically to a narrow transport width of 7.5'. Manual folding is standard on the 450 model (15') while hydraulic fold is standard on the 600 model (20') The 225 and 300 models (7.5' and 10') consist of a single rigid frame.



## Optional Accessories

Options available for the thatchers include hydraulic fold assist (450 model) as well as guide wheels providing additional support for increased control of material removal.



[www.lelyusa.com](http://www.lelyusa.com)

## Technical Specifications

	<b>225</b>	<b>300</b>	<b>450</b>	<b>600</b>
Working Width	7.5'	10'	15'	20'
Transport Width apx.	7.5'	10'	7'	7'
Transport Position	Rigid	Rigid	Man.	Hyd.
No. of Tines	57	77	114	154
Tine Adjustment	9	9	9	9
Linkage	Cat. II	Cat. II	Cat. II	Cat. II
Min. Power Required	20HP	20HP	25HP	25HP
Shipping Weight/lbs.	235	350	410	660



**Lely, USA Inc.**  
P.O. Box 437  
Pella, Iowa 50219  
1-888-245-4684 (U.S.A. only)  
Fax: 1-800-752-8249

## DEALER NETWORK

Lely USA, Inc. has a dealer network to serve you. To find the dealer nearest you, please go to our website:

[www.lelyusa.com](http://www.lelyusa.com) Click the LOCATOR tab.