


**SUPER STARCO
PLASTIC
ELEVATOR BUCKET**

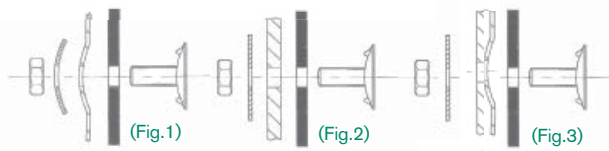

TECHNICAL SPECIFICATION - SUPER STARCO PLASTIC ELEVATOR BUCKET

Type	A	B	H1	H2	T	kg HDP	kg PU	kg Nylon	Capacity (W-L)	Capacity (X-Y)	Holes	D	E	I	Max. buckets per meter
Dimensions	mm	mm	mm	mm	mm	kgs.	kgs.	kgs.	Ltr.	Ltr.	No.	mm	mm	mm	Pos.
SPS80-80HDP-MD**	90	85	63	43	4,0	0,08	0,13	0,11	0,18	0,24	2	9,0	43	18	15
SPS100-90HDP-MD**	110	100	67	44	5,0	0,11	0,18	0,15	0,29	0,38	2	9,0	50	20	14
SPS120-100HDP-MD**	129	110	80	55	5,0	0,15	0,24	0,20	0,46	0,59	2	9,0	67	25	12
SPS130-120HDP-MD**	135	120	85	57	5,0	0,18	0,29	0,24	0,52	0,70	2	9,0	70	25	11
SPS140-120HDP-MD*	145	120	90	62	5,0	0,19	0,30	0,25	0,61	0,80	2	8,5	70	25	10,8
SPS130-130HDP-MD**	146	130	90	60	5,0	0,21	0,34	0,28	0,65	0,87	2	9,0	70	25	10,8
SPS160-140HDP-MD**	172	152	113	78	6,0	0,34	0,54	0,45	1,22	1,58	2	9,0	100	30	8,6
SPS180-140HDP-MD**	187	150	112	77	6,0	0,30	0,48	0,40	1,35	1,77	2	9,0	100	30	8,6
SPS200-150HDP-MD(*)	205	150	112	75	6,0	0,35	0,56	0,47	1,39	1,82	2	9,0	100	32	8,6
SPS300-150HDP-MD**	305	152	115	80	7,0	0,65	1,04	0,87	2,24	2,89	4	9,0	102	32	8,5
SPS200-160HDP-MD*	210	152	115	79	7,0	0,39	0,62	0,52	1,61	2,09	2	9,0	100	32	8,5
SPS240-165HDP-MD**	250	170	132	93	7,0	0,54	0,86	0,72	2,34	3,15	2	11,0	120	35	7,4
SPS280-165HDP(*)	293	170	132	95	7,0	0,67	1,07	0,89	3,00	3,75	3	11,0	80	36	7,4
SPS230-170HDP-MD**	240	175	138	93	7,0	0,61	0,97	0,81	2,40	3,06	2	11,0	120	36	7
SPS280-170HDP-MD**	282	175	138	97	7,0	0,67	1,07	0,89	2,96	3,76	3	11,0	80	37	7
SPS280-180HDP(*)	290	185	140	97	7,0	0,84	1,34	1,12	3,30	4,20	3	11,0	80	36	7
SPS300-180HDP(*)	316	185	140	97	8,0	0,85	1,36	1,13	3,60	4,60	3	11,0	100	36	7
SPS330-180HDP(*) (#)	347	185	140	97	8,0	0,90	1,44	1,20	4,00	5,00	3	11,0	110/120	38	7
SPS350-180HDP(*)	367	186	140	97	9,0	1,12	1,79	1,49	4,10	5,25	3	11,0	120	38	7
SPS300-215HDP-MD**	318	220	168	117	9,0	1,28	1,56	1,40	5,20	6,60	3	11,0	100	50	5,88
SPS330-215HDP(*)	343	220	168	117	9,0	1,30	2,08	1,73	5,73	7,10	3	11,0	120	50	5,88
SPS350-215HDP-MD** (#)	368	220	168	117	9,0	1,45	1,82	1,64	6,12	7,75	3/4	11,0	120/90	50	5,88
SPS370-215HDP(*)	390	220	168	117	9,0	1,45	2,32	1,93	6,42	8,15	4	11,0	90	50	5,88
SPS400-215HDP-MD**	420	220	168	117	9,0	1,54	2,03	1,83	7,00	8,80	4	11,0	100	50	5,88
SPS450-215HDP(*)	470	220	165	115	9,0	1,56	2,50	2,08	7,70	9,70	5	11,0	90	50	5,88
SPS500-215HDP(*)	525	220	168	117	9,0	1,84	2,95	2,46	9,00	11,25	5	11,0	100	50	5,88

- Type Super Starco-MD* elevator bucket has recessed holes on the back of the bucket and a recess on the inside of the bucket and needs to be fitted on the elevator belt by using a DIN15237 elevator bolt in combination with a concave/domed washer (Fig.1).
- Type Super Starco-MD** elevator bucket has recessed holes on the back of the bucket and no recess on the inside of the bucket and needs to be fitted on the elevator belt by using a DIN15237 elevator bolt in combination with flat washer according to DIN9021. Norway elevator bolt (metric) type STM can't be used with these buckets (Fig.3).
- Type Super Starco-(*) elevator bucket has flat holes on the back of the bucket and no recess on the inside of the bucket and needs to be fitted on the elevator belt by using a DIN15237 elevator bolt or Norway elevator bolt (metric) type STM in combination with a flat washer according to DIN9021 (Fig.2).
- (#) = slotted holes.
- Available in polyethylene (max. temp +80° C.), Polyurethane (max. temp +80° C.) and nylon (max. temp +110° C.).
- FDA 1935/2004

