

Product Catalogue

ANNIVERSARY
25th
1999 - 2024
AUSTRALIA



PRIDE[®]
MOBILITY
LIVE YOUR BEST[®]



THANK YOU

To all Providers, Clinicians, and most importantly the people using our products every day!

Leading the Way with Innovation & Quality

Pride® Mobility Products is the world's leading innovator and manufacturer of personal mobility products. As Pride® Mobility celebrates its 25th year in Australia, our commitment to innovation and market-leading products—along with our reputation as the friendliest company in the industry—has never been stronger.

Pride® Mobility Products Australia offers a wide range of mobility products, including travel scooters, everyday scooters, power wheelchairs, and power lift recliners, catering to the diverse needs of our clientele.

Quantum Rehab® became part of the Pride® Mobility family in 2002 and is a top leader in complex power wheelchairs in Australia. Our products are expertly built in Australia by highly trained technicians. We are dedicated to being the premier global innovator of consumer-inspired complex rehab mobility technologies that not only deliver medical comfort, but also the features contributing to overall well-being.

For over two decades, the Pride® family of brands has been serving Australia, consistently creating products inspired by user needs, integrating the industry's most innovative features, unique designs, and performance-driven details. Our mission is to empower everyone to "Live Your Best!"



TRAVEL MOBILITY SCOOTERS



Go Go® e

QUEST



Perfect for those with an active lifestyle. The compact design simply folds down in just three steps, allowing for convenient storage in a cupboard or vehicle boot. The Quest includes a lithium ion battery, which is ideal for air travel.

 Range per Charge: <19.3 km

 Weight Capacity: 113.3 kg

 Turning Radius: 82 cm

GOGO®e

NEW



The GoGo®e mobility scooter offers simple and easy travel. It features intuitive steering, a front basket for convenience, and a comfy seat for a smooth ride. Ideal for urban areas, this scooter is a budget-friendly option for navigating paved paths and sidewalks.

 Range per Charge: <14.4 km

 Weight Capacity: 120 kg

 Turning Radius: 125 cm

GOOGO[®] ULTRAX



Travel with ease on the Go-Go[®] Ultra X, a compact scooter that disassembles into five lightweight pieces. Its foldable swivel seat provides comfort, and the front basket keeps your items close.

Available in 3 or 4-wheel configurations.

 Range per Charge: <11.5 km

 Weight Capacity: 118 kg

 Turning Radius: 100.3 cm



Go Go[®] Ultra X

GOOGO[®] ELITE TRAVELLER[®] 2

NEW



The Go Go[®] Elite Traveller 2 has the tightest turning radius among 4-wheel scooters. Pride's iTurn Technology, combines the stability of a 4-wheel scooter with the agility of a 3-wheel model. This makes it easy to navigate through tight spaces with confidence.

 Range per Charge: <16.7 km


 Weight Capacity: 136 kg

 Turning Radius: 94 cm

GOOGO[®] LX WITH CTS SUSPENSION



The Go Go[®] LX with CTS suspension offers a smooth ride with its advanced suspension system and sleek design. It features easy disassembly, a wraparound delta tiller with a charging port, an LED headlight, and a front basket, it's ideal for those who like to venture out.

 Range per Charge: <16.9 km

 Weight Capacity: 136 kg

 Turning Radius: 116.2 cm

GO GO[®] ENDURANCE Li



The Go Go[®] Endurance Li scooter is a portable and lightweight travel solution. It disassembles into 5 pieces for easy transport and storage. With its Lithium ion battery, you can travel up to 23km on a single charge, giving you the freedom to explore more places.



 Range per Charge: <23.1 km

 Weight Capacity: 147 kg

 Turning Radius: 122.5 cm



Go Go[®] Endurance Li



Zero Turn 8

ZERO TURN 8



Featuring Prides *iTurn Technology*[®], the Zero Turn 8 is a 4-wheel scooter with an extremely tight turning radius and features Comfort-Trac Suspension (CTS) to ensure a smooth road ahead. This scooter will have you navigating tight corners and small spaces effortlessly.



 Range per Charge: <16 km

 Weight Capacity: 136 kg

 Turning Radius: 97.2 cm

END-TO-END | Travel Scooter Specifications



	QUEST®	GO GOe®	GO GO® ULTRA X	GO GO® ELITE TRAVELLER 2	GO GO® LX W/ CTS SUSPENSION	GO GO ENDURANCE LI®	ZERO TURN 8
RANGE PER CHARGE (MAX) ^{2, 8}	Up to 19.3 km	Up to 14.4 km	3W: Up to 11 km 4W: Up to 11.5 km	Up to 16.7 km	Up to 16.9 km	Up to 23 km	Up to 16 km
MAXIMUM WEIGHT CAPACITY	113.3 kg	120 kg	118 kg	136 kg	136 kg	147 kg	136 kg
TURNING RADIUS ³	82 cm	125 cm	3W: 83.8 cm 4W: 100.3 cm	94 cm	116.2 cm	122.5 cm	97.2 cm
MAXIMUM SLOPE DEGREE	6°	6°	6°	6°	6°	6°	6°
MAXIMUM SPEED ²	Up to 6 km/h	Up to 6.4 km/h	Up to 6.4 km/h	Up to 6.8 km/h	Up to 7 km/h	Up to 6.7 km/h	Up to 6.4 km/h
LENGTH & WIDTH ^{3, 10}	L: 92.7 cm W: 49.5 cm	L: 100 cm W: 49 cm	3W: L: 94 cm 3W W: 49.5 cm 4W: L: 100.3 cm 4W W: 49.5 cm	L: 103.6 cm W: 49.4 cm	L: 104 cm W: 52.1 cm	L: 107 cm W: 52 cm	L: 116 cm W: 50.8 cm
SEAT TYPE WIDTH & DEPTH (STANDARD)	Compact, foldable, molded plastic seat ⁵ W: 41 cm (16") D: 33 cm (13")	Compact, foldable seat ⁵ W: 41.9 cm (16.5") D: 33 cm (13")	Compact, foldable seat ⁵ W: 43 cm (17") D: 43 cm (17")	Compact, foldable seat ⁵ W: 43 cm (17") D: 43 cm (17")	Compact, foldable seat ⁵ W: 43 cm (17") D: 43 cm (17")	Compact, foldable seat ⁵ W: 43 cm (17") D: 43 cm (17") or W: 50.8 cm (20") D: 45.7 cm (18")	Compact, foldable seat ⁵ W: 43 cm (17") D: 43 cm (17")
SEAT-TO-DECK HEIGHT RANGE ³	31 cm fixed	41.9 cm - 45.7 cm	40 cm - 43.8 cm	41.6 cm - 45.3 cm	41.3 cm - 43.8 cm	41.2 cm x 45 cm	40.6 cm - 45.6 cm
SEAT-TO-GROUND HEIGHT RANGE ³	51 cm fixed	54.6 cm - 59.7 cm	55 cm - 60 cm	46.3 cm - 51.4 cm	52.7 cm - 56.5 cm	53.9 cm x 59 cm	53.3 cm - 60 cm
GROUND CLEARANCE ^{3, 11}	5.8 cm at frame	5 cm at transaxle	6.3 cm at midframe 3.8 cm at motor	3.4 cm at transaxle	6.4 cm at frame 3.8 cm at motor	3.6 cm at motor	8.9 cm at frame 3.3 cm at motor
OVERALL WEIGHT (NOT INC. BATTERY) ^{3, 12}	23.5 kg	32.5 kg	3W: 34.5 kg 4W: 36.3 kg	37.6 kg	39.4 kg	42.4 kg	53.9 kg
WEIGHT OF HEAVIEST PIECE ³	23.5 kg (does not disassemble)	31 kg (does not disassemble)	3W: 13.4 kg 4W: 15.4 kg (front sections)	15.8 kg (front section)	16.6 kg (front section)	18.48 kg (front section)	21.8 kg (rear section)
SUSPENSION	N/A	N/A	N/A	N/A	CTS Front & Rear	CTS Front & Rear	CTS Front & Rear
3W/4W OPTION	4W	4W	3W & 4W	4W	4W	4W	4W
FRONT TYRES	1.5" x 7" solid	2" x 7.2" solid	3W: 2" x 8" solid 4W: 2" x 7" solid	2" x 7" solid	2" x 7" solid	2" x 8" solid	2" x 7" solid
REAR TYRES	1.9" x 7.8" solid	2" x 8" solid	2.5" x 8" solid	2.5" x 8" solid	2.5" x 8" solid	2.5" x 8" solid	2.5" x 9" solid
BATTERY REQUIREMENTS ⁶	11.5 AH (Lithium Ion)	(2) 12AH	(2) 12AH	(2) 18AH	(2) 18AH	16AH (Lithium Ion)	(2) 22AH
BATTERY CHARGER	Off-Board 2.5A (Lithium Ion)	Off-Board, 2A	Off-Board, 2A	Off-Board, 2A	Off-Board, 2A	Off-board, 3.5A (Lithium Ion)	Off-Board, 3.5A
BATTERY WEIGHT ⁹	2.3 kg	2.5 kg	4 kg ⁴	6 kg	6 kg ⁷	5.4 kg	6 kg ⁷
COLOUR OPTIONS	White	Matte Black	Red	Red, Black	Red, Blue ¹	Garnet Red, Euro Grey ¹	Fire Opal, Pearl White, Sapphire Blue

¹ All shroud panels included. ² Varies with user weight, terrain type, battery amp- hour (AH), battery charge, battery condition and tyre condition. This specification can be subject to a variance of (+ or -) 10%. ³ Due to manufacturing tolerances and continual product improvement, this specification can be subject to variance of + or - 3%. ⁴ 12 AH battery pack weighs 8.8 kg (19.5 lbs.). ⁵ Durable solid plastic. ⁶ Deep cycle (AGM or gel cell type recommended) excluding Lithium-ion models. ⁷ 18 AH battery pack weighs 13.4 kg (29.5 lbs.). ⁸ Tested in accordance with ANSI/RENSA, WC Vol 2, Section 4 and ISO 7176-4 standards. Results derived from theoretical calculations based on battery specifications and drive system performance. Test conducted at maximum weight capacity. Due to manufacturing tolerances and continual product improvement, length, width, turning radius and ground clearance can be subject to variance of + or - 3%. ⁹ Battery weight may vary based on manufacturer. ¹⁰ Width of base (not including seat). ¹¹ Does not account for anti-tip clearance. ¹² Includes standard seat weight. ¹⁴ Range tested with 31-36 AH Batteries. Standard larger battery size would increase range. **NOTE** The information contained herein is correct at the time of publication; due to Pride's commitment to constant improvement and development, we reserve the right to alter specifications without prior notice. Theoretical range is calculated under test conditions in accordance with European standards. Actual range in normal use will depend on many factors, including the condition of the vehicle and its batteries, the weight of the driver, correct tyre pressures, ambient temperature, and the gradient and surface of the road or pavement.



EVERYDAY MOBILITY SCOOTERS



BAJA BANDIT


NEW



The first member of the Baja™ Mobility family. The Revo Bandit is bold, adventurous and innovative. With bumpers and a high ground clearance the Baja® Bandit tackles obstacles with ease and it's long-lasting lithium ion battery lets you explore for longer.

 Range per Charge: <23.3 km

 Weight Capacity: 181.4 kg

 Turning Radius: 132 cm

ZERO TURN 10



A sleek, high-tech scooter that merges powerful performance with excellent maneuverability. With iTurn Technology® and dual motors, it turns on its own axis, making it easy to navigate tight spaces. Comfort-Trac Suspension ensures a smooth ride both indoors and outdoors.

 Range per Charge: <28.8 km

 Weight Capacity: 170 kg

 Turning Radius: 109 cm

PATHRIDER® ES 10



With great outdoor stability, ease of use and maximum value, The Pathrider® ES 10 features thumb control throttle levers, a bright headlight and adjustable tiller. It also disassembles quickly offering hassle free transport.

 Range per Charge: <17.9 km

 Weight Capacity: 158.7 kg

 Turning Radius: 132 cm

PATHRIDER® 10



The sleek and sporty Pathrider® 10 offers comfort and performance for your active lifestyle. Enjoy simple disassembly with one hand, a bright LED headlight and swivel seat to help you get through your daily activities.

 Range per Charge: <25 km

 Weight Capacity: 158.7 kg

 Turning Radius: 137 cm

PATHRIDER® 10 DELUXE



The Pathrider® 10 Deluxe offers superior comfort and stability for those seeking a safe and enjoyable ride. With features including Pride's CTS suspension, a fully adjustable high back seat and LED lighting package.

 Range per Charge: <25 km

 Weight Capacity: 158.7 kg

 Turning Radius: 133.3 cm

VICTORY® 10 LX WITH CTS SUSPENSION



Rough roads smooth out in front of you with the Victory® 10 LX, featuring Pride's front and rear Comfort-Trac suspension (CTS). Along with an LED lighting package and a deluxe high-back seat, which ensures a comfortable ride every time.

 Range per Charge: <26 km

 Weight Capacity: 181.4 kg

 Turning Radius: 152 cm

MAXIMA



Heavy duty and robust, the ALL NEW Maxima scooter maximises your potential! Experience the comfort of a new high-back, depth adjustable recline seat that swivels for easier access, side bumpers, and a USB charger standard. Available in 3 or 4-wheel configuration.



 Range per Charge: <31.4 km

 Weight Capacity: 226.7 kg

 Turning Radius: 134.6 cm

PATHRIDER[®] — ENDURANCE —

NEW



The Pathrider[®] Endurance is designed for thrilling adventures. Its pneumatic tyres can handle any terrain, from paved roads to rugged trails. Packed with premium features, this scooter is built to turn the impossible into possible, inviting you to explore new horizons & enjoy every ride.

 Range per Charge: <54.7 km

 Weight Capacity: 158.8 kg

 Turning Radius: 176 cm



PATHRIDER[®] — ENDURANCE —

Built to handle adventures



Dual rear view mirrors

Pillow top, high-back seat with lumbar support

Angle adjustable tiller with a USB charging point

Large, tiller-mounted front basket

Enhanced LED lighting for optimal visibility

Durable plastic shrouds for navigating through brush, weather and transport

Dual Lithium batteries

Front and rear CTS suspension

Pneumatic tyres mounted on split rims for off-road thrills



NEW



The Celebrity MFP offers versatility and adaptability, featuring a water-resistant digital display and a supplemental hand brake. With its long battery range and full LED lighting package, this scooter is perfect for travel, whether you're at the park or exploring the city.



Range per Charge: <43.5 km

Weight Capacity: 159 kg

Turning Radius: 158 cm

PATHRIDER® 130 XL



The Pathrider® 130 XL incorporates a blend of power, style and performance to handle rugged outdoor terrain. The powerful drivetrain, 24 Volt, 4-pole motor for increased power, front & rear suspension and high back reclining seat will accelerate your active lifestyle.



Range per Charge: <25 km

Weight Capacity: 158.7 kg

Turning Radius: 170 cm



Celebrity MFP

PATHRIDER® 140 XL



Discover the perfect blend of power and precision with the Pathrider® 140 XL. Equipped with luxurious features, such as front and rear suspension, a high-back pillow-top seat, and an LED lighting package, it offers the perfect outdoor mobility solution.



Range per Charge: <35 km

Weight Capacity: 181.4 kg

Turning Radius: 208 cm



Outback

OUTBACK®

Rugged and built to last, the Outback® is your perfect adventure companion! Equipped with front and rear suspension, LED lighting, a user-friendly console and dual hydraulic brakes, the Outback® is designed for embracing the great outdoors!



 Range per Charge: <35 km

 Weight Capacity: 158.7 kg

 Turning Radius: 243 cm

SPORT RIDER

The Sport Rider is an extraordinary three-wheel motorcycle inspired outdoor scooter. This scooter boasts impressive features including a full digital display for speed and distance tracking, a robust suspension system, an adjustable high-back seat, and a powerful lighting kit.



 Range per Charge: <35 km

 Weight Capacity: 181.4 kg

 Turning Radius: 158 cm

END-TO-END | Scooter Specifications



	BAJA™ BANDIT	ZERO TURN 10	PATHRIDER® ES10	PATHRIDER® 10	PATHRIDER® 10 DX	VICTORY® 10 LX W/ CTS SUSPENSION	MAXIMA	PATHRIDER® ENDURANCE	CELEBRITY MFP
RANGE PER CHARGE (MAX) ^{2, 8}	Up to 23.3 km	Up to 28.8 km	Up to 17.9 km	Up to 25 km ¹⁴	Up to 25 km with 40AH ¹⁴	Up to 26 km	3W: Up to 31.4 km 4W: Up to 31.4 km	Up to 54.7 km	Up to 43.5 km
MAXIMUM WEIGHT CAPACITY	181 kg	170 kg	158.7 kg	158.7 kg	158.7 kg	181.4 kg	226.8 kg	158.8 kg	159 kg
TURNING RADIUS ³	134.7 cm	109 cm	132 cm	137 cm	133.3 cm	152 cm	3W: 124.5 cm 4W: 134.6 cm	176 cm	158 cm
MAXIMUM SLOPE DEGREE	6°	6°	10°	6°	6°	6°	3W: 6° 4W: 7.5°	10°	10°
MAXIMUM SPEED ²	Up to 10 km/h	Up to 10 km/h	Up to 8.85 km/h	Up to 8.4km/h	Up to 8.85 km/h	Up to 9 km/h	Up to 9.3 km/h	Up to 9.7 km/h	Up to 10 km/h
LENGTH & WIDTH ^{3, 10}	L: 126 cm W: 56 cm	L: 122 cm W: 61.6 cm	L: 115.6 cm W: 57.1 cm	L: 115 cm W: 56.5 cm	L: 119.4 cm W: 56.2 cm	L: 119.4 cm W: 56.5 cm	3W L: 120.7 cm 3W W: 68.6 cm 4W L: 120.7 cm 4W W: 68.6 cm	L: 146 cm W: 75.3 cm	L: 145 cm W: 70.7 cm
SEAT TYPE WIDTH & DEPTH (STANDARD)	Compact, foldable seat ⁵ W: 46.5 cm (18.3") D: 44 cm (17.3")	Deluxe, pillow-top, high-back seat W: 49.5 cm (19.5") D: 44.5 cm (17.5")	Compact, foldable seat ⁵ W: 46 cm (18") D: 43 cm (17")	Compact, foldable seat ⁵ W: 46 cm (18") D: 43 cm (17")	Pillow-top, high-back seat W: 44.2 cm (17.5") D: 43 cm (17")	Pillow-top, high-back seat W: 46 cm (18") D: 46 cm (18")	High-back seat W: 55.9 cm (22") D: 50.8 cm (20")	High-back seat W: 55.9 cm (53") D: 50.8 cm (45.7")	Deluxe, pillow-top, high-back seat W: 49.5 cm (19.5") D: 44.5 cm (17.5")
SEAT-TO-DECK HEIGHT RANGE ³	47.5 cm suspension seat post	47.5 cm - 52.5 cm	37 cm - 42 cm	37 cm - 42 cm	43.8 cm - 47.6 cm	46 cm - 49 cm	44 cm x 60 cm	45.5 cm x 53 cm	45.2 cm - 49.9 cm
SEAT-TO-GROUND HEIGHT RANGE ³	66 cm suspension seat post	58.4 cm - 63.5 cm	51.4 cm - 55.2 cm	52 cm - 55.8 cm	60 cm - 63.8 cm	60 cm - 64.8 cm	56.6 cm - 72.6 cm	55.6 cm - 63 cm	66.7 cm - 70.5 cm
GROUND CLEARANCE ^{3, 11}	4 cm at motor skid plate	5 cm at motor	8.8 cm at frame	7.6 cm at frame	8.25 cm at frame	5.6 cm at motor	5.7 cm at motor	9.6 cm at transaxle	8.8 cm at motor
OVERALL WEIGHT (NOT INC. BATTERY) ^{3, 12}	72.3 kg	82 kg	59.4 kg	62.4 kg	84.8 kg	81.2 kg	3W: 86.4 kg 4W: 92 kg	100 kg	104.3 kg
WEIGHT OF HEAVIEST PIECE ³	31.8 kg (front section)	34 kg (rear section)	25.8 kg (front section)	27.7 kg (rear section)	29.5 kg (front section)	35.2 kg (rear section)	3W: 61.7 kg 4W: 67.3 kg (does not disassemble)	34 kg (rear section)	94 kg (does not disassemble)
SUSPENSION	Front, Rear & Seat Post	Front & Rear	N/A	N/A	Front & Rear	Front & Rear	N/A	Front & Rear	Front & Rear
3W/4W OPTION	4W	4W	4W	4W	4W	4W	3W & 4W	4W	4W
FRONT TYRES	2.5" x 9" solid	9" x 2.75" solid	3.6" x 10.4" solid	3.6" x 10.4" solid	3.6" x 10.4" solid	3.5" x 10" pneumatic	3.6" x 10" solid	3.5" x 13" pneumatic	4" x 13" pneumatic
REAR TYRES	2.5" x 9" solid	10.75" x 6" solid	3.6" x 10.75" solid	3.6" x 10.75" solid	3.6" x 10.75" solid	3.5" x 10" pneumatic	3.6" x 10.75" solid	3.5" x 13" pneumatic	4" 13" pneumatic
BATTERY REQUIREMENTS ⁶	20AH, 36V (Lithium Ion)	(2) 40AH	(2) 31AH	(2) 31AH or (2) 40AH	(2) 31AH or (2) 40AH	(2) 40AH	(2) 50AH	(2) 50AH (Lithium Ion)	(2) 70AH
BATTERY CHARGER	Off-Board, 4A (Lithium Ion)	Off-Board, 3.5A	Off-Board, 3A	Off-Board, 3A (32AH) Off-Board, 5A (40AH)	Off-Board, 3A (32AH) Off-Board, 5A (40AH)	Off-Board, 5A	Off-board, 5A	Off-Board, 8A (Lithium Ion)	Off-Board, 8A
BATTERY WEIGHT ⁹	9.5 kg	14 kg	10.5 kg	10.5 kg or 14 kg	10.5 kg or 14 kg	14 kg	16.6 kg	10.8 kg	22 kg ⁵
COLOUR OPTIONS	Sage, Tan	Candy Apple Red, Black	Red	Viper Blue	Viper Blue	Candy Apple Red	Garnet Red, Ocean Blue	Black, Orange	Red, Blue

¹ All shroud panels included. ² Varies with user weight, terrain type, battery amp- hour (AH), battery charge, battery condition and tyre condition. This specification can be subject to a variance of (+ or -) 10%. ³ Due to manufacturing tolerances and continual product improvement, this specification can be subject to variance of + or - 3%. ⁴ 12 AH battery pack weighs 8.8 kg (19.5 lbs.). ⁵ Durable solid plastic. ⁶ Deep cycle (AGM or gel cell type recommended) excluding Lithium-ion models. ⁷ 18 AH battery pack weighs 13.4 kg (29.5 lbs.). ⁸ Tested in accordance with ANSI/RENSA, WC Vol 2, Section 4 and ISO 7176-4 standards. Results derived from theoretical calculations based on battery specifications and drive system performance. Test conducted at maximum weight capacity. Due to manufacturing tolerances and continual product improvement, length, width, turning radius and ground clearance can be subject to variance of + or - 3%. ⁹ Battery weight may vary based on manufacturer. ¹⁰ Width of base (not including seat). ¹¹ Does not account for anti-tip clearance. ¹² Includes standard seat weight. ¹⁴ Range tested with 31-36 AH Batteries. Standard larger battery size would increase range. **NOTE** The information contained herein is correct at the time of publication; due to Pride's commitment to constant improvement and development, we reserve the right to alter specifications without prior notice. Theoretical range is calculated under test conditions in accordance with European standards. Actual range in normal use will depend on many factors, including the condition of the vehicle and its batteries, the weight of the driver, correct tyre pressures, ambient temperature, and the gradient and surface of the road or pavement.






	PATHRIDER® 130 XL	PATHRIDER® 140 XL	OUTBACK®	SPORT RIDER
RANGE PER CHARGE (MAX) ^{2, 8}	Up to 25 km ¹⁴	Up to 35 km ¹⁴	Up to 35 km	Up to 35 km
MAXIMUM WEIGHT CAPACITY	158.7 kg	181.4 kg	158.7 kg	181.4 kg
TURNING RADIUS ³	170 cm	210 cm right 208 cm left	243 cm	158 cm
MAXIMUM SLOPE DEGREE	10°	10°	10°	10° at 91 kg 6° at 136 kg 0° at 181 kg
MAXIMUM SPEED ²	Up to 10 km/h	Up to 10 km/h	Up to 10 km/h	Up to 10 km/h
LENGTH & WIDTH ^{3, 10}	L: 136 cm W: 63.6 cm	L: 142.8 cm W: 69.2 cm	L: 156 cm W: 83 cm	L: 165 cm W: 78 cm
SEAT TYPE WIDTH & DEPTH (STANDARD)	Deluxe, pillow-top, high-back seat W: 49.5 cm (19.5") D: 44.5 cm (17.5")	Deluxe, pillow-top, high-back seat W: 49.5 cm (19.5") D: 44.5 cm (17.5")	Deluxe, pillow-top, high-back seat W: 49.5 cm (19.5") D: 44.5 cm (17.5")	Captains high-back, adjustable seat W: 51 cm (20") D: 56 cm (22")
SEAT-TO-DECK HEIGHT RANGE ³	47 cm suspension seat post	55.3 cm - 57 cm	50 cm - 53 cm	48 cm fixed
SEAT-TO-GROUND HEIGHT RANGE ³	56.7 cm suspension seat post	66.7 cm - 70.5 cm	76 cm - 80 cm	68 cm fixed
GROUND CLEARANCE ^{3, 11}	9 cm at transaxle	13.3 cm at midframe	14 cm at midframe	12.7 cm at shroud
OVERALL WEIGHT (NOT INC. BATTERY) ^{3, 12}	99.8 kg	117.7 kg	124 kg	115 kg
WEIGHT OF HEAVIEST PIECE ³	34 kg (rear section)	93 kg (does not disassemble)	99 kg (does not disassemble)	92.3 kg (does not disassemble)
SUSPENSION	Front & Rear	Front & Rear	Front & Rear	Front & Rear
3W/4W OPTION	4W	4W	4W	3W
FRONT TYRES	4" x 13" pneumatic	4" x 13" pneumatic	14.5" x 6" pneumatic	2.75" x 19" ¹⁶ pneumatic
REAR TYRES	4" x 13" pneumatic	4" x 13" pneumatic	14.5" x 6" pneumatic	2.75" x 19" ¹⁶ pneumatic
BATTERY REQUIREMENTS ⁶	(2) 55AH	(2) 70AH	(2) 100AH	(2) 70AH
BATTERY CHARGER	Off-Board, 8A	Off-Board, 8A	Off-Board, 8A	Off-Board, 8A
BATTERY WEIGHT ⁹	16.8 kg	23.45 kg	27.9 kg	23.7 kg
COLOUR OPTIONS	Candy Apple Red, Mercury Silver	Candy Apple Red, Yellow, Silver	Stone Grey	Black

***Refer to previous pages for footnotes

DOWNLOAD OUR PQ365 APP FOR EVERYTHING PRIDE AND QUANTUM

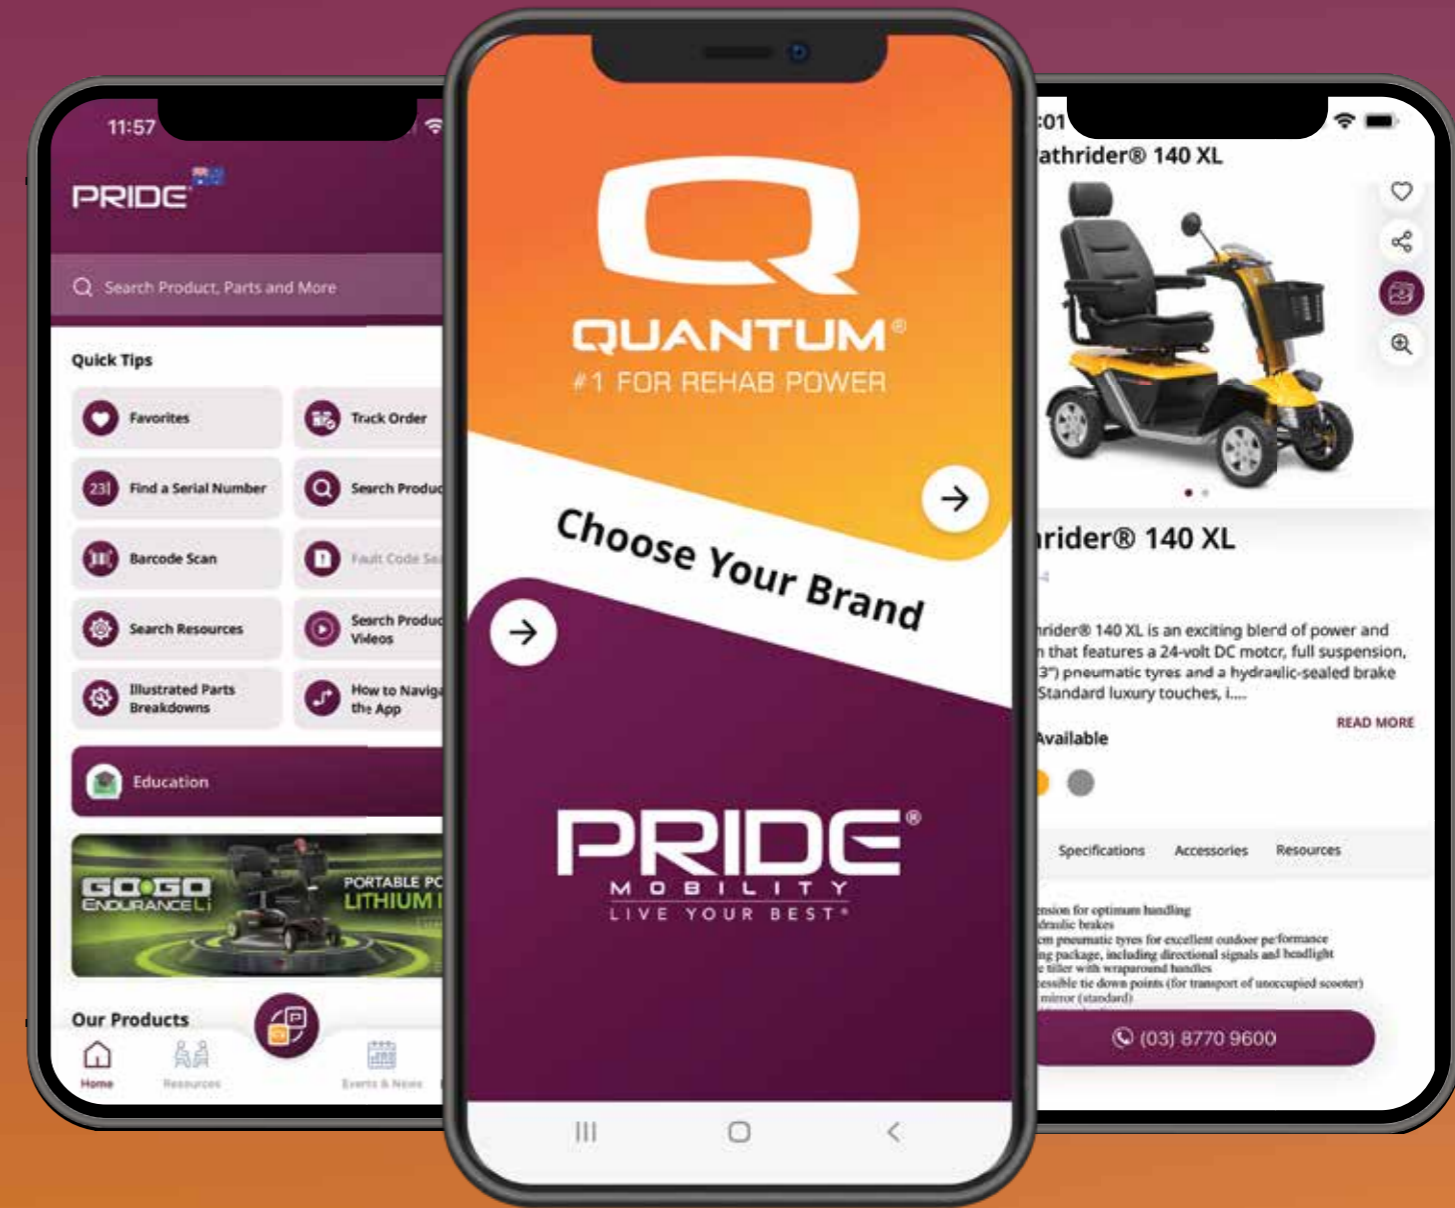

Jazzy®

POWER CHAIRS



Jazzy Passport

Jazzy® PASSPORT



Embrace the ease of lightweight travel with the Jazzy® Passport! The compact design effortlessly folds in a few simple steps, making it a breeze to transport. With convenient storage capabilities, the Jazzy® Passport ensures hassle-free traveling.

 Range per Charge: <15.4 km

 Weight Capacity: 113.3 kg

 Turning Radius: 61.5 cm

GOCHAIR®



The Go Chair® NG is #1 for portability! With Pride's feather-touch disassembly, and a tight turning radius, the Go Chair® NG is ideal for indoor use and smooth surfaces, allowing you to enjoy greater independence.

 Range per Charge: <14 km

 Weight Capacity: 136 kg

 Turning Radius: 64.5 cm



Go Chair

Jazzy[®] EVO 613Li

NEW



The Jazzy[®] EVO 613 provides the freedom to navigate small spaces and tight corners indoors with a narrow base width of only 56cm. The Jazzy[®] EVO 613Li uses a lithium ion battery that provides longer life and more convenient charging.


 Range per Charge: <27.5 km

 Weight Capacity: 136 kg

 Turning Radius: 55.8 cm

Jazzy[®] SELECT 6



 Experience the sporty and sophisticated design of the Jazzy[®] Select 6 power wheelchair. It provides powerful performance and stability with its superior suspension system. Featuring an adjustable high-back seat with manual recline.

 Range per Charge: <24.1 km

 Weight Capacity: 136 kg

 Turning Radius: 55.5 cm

Jazzy[®] EVO 614HD

NEW



The Jazzy[®] EVO 614HD provides the freedom to navigate small spaces indoors along with the ability to handle terrain, so thresholds, transitions, and grassy fields feel smoother than ever before.

 Range per Charge: <21 km

 Weight Capacity: 204 kg

 Turning Radius: 55.9 cm

Jazzy air₂



Take your life to new heights with the Jazzy Air[®] 2! With a simple switch, this power wheelchair elevates 30.4 cm in just 11 seconds. Allowing you to safely drive at speeds of up to 6.4 km/h while elevated, enabling face-to-face social interactions.

 Range per Charge: <27 km

 Weight Capacity: 136 kg

 Turning Radius: 61.5 cm




Jazzy Air 2



Jazzy Air 2

Jazzy[®] 623 2.0

*Leg rests shown on chair are an optional accessory, they do not come standard 

The Jazzy[®] 623 2.0 is engineered to meet the performance needs of the most active user. Equipped with an adjustable high-back seat and adjustable armrests, as well as powerful motors, this power wheelchair ensures exceptional performance.



 Range per Charge: <24.9 km

 Weight Capacity: 136 kg

 Turning Radius: 50.8 cm

Jazzy[®]

ELITE HD



Experience the ultimate heavy-duty electric wheelchair with the Jazzy[®] Elite HD. This power wheelchair excels on various terrains, providing superior performance and control with its dual-motor, front-wheel drive technology, that offers a tight turning radius.

 Range per Charge: <15.7 km

 Weight Capacity: 204.1 kg

 Turning Radius: 61.9 cm

Jazzy[®]

1450



With a robust and heavy-duty design, the Jazzy[®] 1450 ensures powerful performance with front-wheel drive and powerful motors. This bariatric chair offers a 24" - 32" seat size, allowing you to live life on your terms.

 Range per Charge: <25.2 km

 Weight Capacity: 273.1 kg

 Turning Radius: 67.3 cm

Stealth Products[®]

CUSHIONS

Stealth Products[®] Cushions feature patented Coolcore[®] technology, a chemical free, four-way stretch material that offers moisture wicking, moisture transportation, and moisture evaporation properties. Our cushions also use a colour guide that identifies the suggested function family by a unique patch.

FEATURES

- Chemical free
- Regulates temperature
- Manages and distributes your body heat

[CUSHIONS.STEALTHPRODUCTS.COM/](https://cushions.stealthproducts.com/)

Learn about our Stealth Products range of cushions featuring our exclusive Coolcore[®] Technology.



Scan here to access the
Stealth Cushions Catalogue



GENERAL USE

SKIN PROTECTION

POSITIONING

ADJUSTABLE SKIN PROTECTION

ADJUSTABLE SKIN PROTECTION & POSITIONING

SKIN PROTECTION AND POSITIONING



END-TO-END | Powerchair Specifications




	JAZZY® PASSPORT	GO CHAIR® NG	JAZZY® SELECT 6	JAZZY® EVO 613 LI	JAZZY® EVO 614 HD	JAZZY® AIR 2	JAZZY® 623 2.0	JAZZY® ELITE HD	JAZZY® 1450
RANGE PER CHARGE (MAX) ^{9,5}	Up to 15.4 km	Up to 14km	Up to 24.1 km	Up to 27.5 km	Up to 21 km	Up to 27 km	Up to 24.9 km	Up to 15.7 km	Up to 25.2 km
MAXIMUM WEIGHT CAPACITY	113.3 kg	136 kg	136 kg	136 kg	204 kg	136 kg	136 kg	204.1 kg ⁶	273.1 kg
TURNING RADIUS ¹	61.5 cm	64.5 cm	55.5 cm	55.8 cm	55.9 cm	61.5 cm	50.8 cm	61.9 cm	67.3 cm
MAXIMUM SLOPE DEGREE	6°	6°	6°	6°	6°	6°	6°	6°	6°
MAXIMUM SPEED ³	Up to 5.7 km/h	Up to 5.9 km/h	Up to 6.4 km/h	Up to 7.8 km/h	Up to 7.8 km/h	Up to 6.4 km/h	Up to 9.6 km/h	Up to 6.4 km/h	Up to 7.2 km/h
LENGTH & WIDTH ¹	L: 101.6 cm W: 59.6 cm	L: 83.8 cm W: 57 cm	L: 90 cm W: 59.6 cm	L: 104 cm W: 55.8 cm	L: 101.6 cm W: 64.5 cm	L: 106 cm W: 61.5 cm	L: 90 cm W: 60.9 cm	L: 90 cm W: 61.5 cm	L: 97 cm W: 74.2 cm
WEIGHT OF HEAVIEST PIECE ⁴	24.4 kg	16.3 kg	44.1 kg	42.6 kg	65 kg	91.6 kg ⁸	62.3 kg	44.9 kg	88.4 kg
GROUND CLEARANCE ¹	7.6 cm at motor	4.5 cm at frame	4.4 cm at motor mount	7.6 cm at motors	7.6 cm at mid-frame	3.6 cm at motor mount	7.6 cm at frame	7.6 cm at footboard mount 3.8 cm at anti-tip wheel	7.6 cm at footboard mount 3.8 cm at anti-tip wheel
SEAT SIZE WIDTH & DEPTH (STANDARD)	W: 43 cm x D: 43 cm (17"x 17")	W: 45.7 cm x D: 43.1 cm (18"x 17")	W: 45.7 cm x D: 45.7 cm (18"x 18" - 20")	W: 45.7 cm x D: 45.7 cm (18"x 18" - 20")	W: 50.8 cm x D: 50.8 cm (20"x 20" - 22") W: 55.8 cm x D: 55.8 cm (22"x 20" - 22")	W: 40.6 cm x D: 45.7 cm (16"x 18" - 20") W: 45.7 cm x D: 45.7 cm (18"x 18" - 20") W: 50.8 cm x D: 45.7 cm (20"x 18" - 20")	W: 45.7 cm x D: 45.7 cm (18"x 18" - 20") W: 50.8 cm x D: 45.7 cm (20"x 18" - 20")	W: 45.7 cm x D: 45.7 cm (18"x 18" - 20") W: 50.8 cm x D: 50.8 cm (20"x 20" - 22") W: 55.8 cm x D: 50.8 cm (22"x 20" - 22")	W: 60.9 cm x D: 81.2 cm (24" to 32")
18' X 18" STANDARD SEAT WEIGHT	N/A (seat is integrated with the base) (sling)	13.6 kg	19.9 kg (comfort, high-back)	22.7 kg	23.5 kg (high-back)	23 kg (high-back)	19.9 kg (high-back)	23.5 kg (high-back)	25.8 kg (high-back)
HIGH-BACK SEAT-TO-FLOOR RANGE	N/A	N/A	53.9 cm - 59 cm	50.2 cm - 54 cm	55.8 cm - 60.9 cm	53.9 cm - 84 cm	52 cm - 59.6 cm	50.8 cm - 55.8 cm	52 cm - 57 cm
SPECIALITY SEATING OPTIONS	N/A	N/A	N/A	N/A	N/A	N/A	Synergy® Seating ^A Tru-Balance ^B	N/A	Synergy® Seating ^A
STANDARD ELECTRONICS	50A, PG VSI	40A, PG GC3	40A, PG GC3	40A, PG GC3	60A, Dynamic Linx	40A, VR2	90A, PG VR2	60A, Dynamic Linx	90A, PG VR2
SPECIALTY CONTROLS	N/A	N/A	N/A	N/A	N/A	N/A	Yes	N/A	Yes
DRIVE TRAIN	2x 180W brushed motors, rear drive	Two-motor, rear-wheel drive	Two-motor, in-line, mid-wheel drive	Two motor, in-line, mid-wheel drive	Two-motor, in-line HD, mid-wheel drive	Two-motor, in-line, mid-wheel drive	Two-motor, in-line, mid-wheel drive ⁶	Two-motor, front-wheel drive	Two-motor, front-wheel drive
BRAKING SYSTEM	Regenerative & electro-mechanical	Regenerative & electro-mechanical	Regenerative & electro-mechanical	Regenerative & electro-mechanical	Regenerative & electro-mechanical	Regenerative & electro-mechanical	Regenerative & electro-mechanical	Regenerative & electro-mechanical	Regenerative & electro-mechanical
SUSPENSION TYPE	Limited	Limited	Active-Trac® (ATX)	Active-Trac® (ATX)	Active-Trac® (ATX)	Active-Trac® with Mid-Wheel ⁶ technology	Active-Trac® (ATX)	Limited	Limited
FRONT WHEELS	8" solid castors	6" solid castors	6" solid castors	5" solid	6" castors	6" solid castors	6" solid castors	3" solid anti-tips	4" solid anti-tips
DRIVE WHEELS	12" pneumatic	9" solid	10" solid	13" solid	13.75" solid	10" solid	14" pneumatic	14" solid	14" solid
REAR WHEELS	N/A	3" solid anti-tips	6" solid castors	5" castors	6" castors	6" solid castors	8" solid castors	6" solid castors	9" castors
BATTERY REQUIREMENTS	(1) 18AH, 24V (Lithium Ion)	(2) 18AH, 12V	(2) 35AH, 12V	(1) 32.4AH, 25.6V (Lithium Ion)	(2) 55AH, 12V	(2) 40AH, 12V	(2) 55AH, 12V	(2) 55AH, 12V	(2) 70AH, 12V
BATTERY CHARGER	Off-board, 2A (Lithium Ion)	Off-board, 2A	Off-board, 3.5A	Off-board, 3.5A (Lithium Ion)	Off-board, 5A	Off-board, 5A	Off-board, 8A	Off-board, 5A	Off-board, 8A
BATTERY WEIGHT ⁷	3.9 kg	14 kg battery box	10.5 kg each	8.4 kg	16.8 kg each	14 kg each	16.8 kg each	16.8 kg each	23.4 kg each
COLOUR OPTIONS	Pewter	Ruby Red, Pearl White	Ruby Red	Black, Robins Egg Blue, Cardinal Red	Black, Robins Egg Blue, Cardinal Red	Black Oynx, Pearl White, Pink Topaz, Garnet Red	Candy Apple Red	Jazzy Red, Jazzy Blue	Candy Apple Red, Viper Blue

¹ Due to manufacturing tolerances and continual product improvement, this specification can be subject to a variance of + or - 3%. Dimensions listed are for power base only. Overall measurements will vary based on seating and accessory selections. ² Without front riggings. ³ Varies with user weight, terrain, battery condition and tire pressure. ⁴ Does not include seat or battery weights. ⁵ Tested in accordance with ANSI/RESNA, WC Vol. 2, Section 4 and ISO 7176-4 standards. Results derived from theoretical calculations based on battery specifications and drive system performance. Testing conducted at maximum weight capacities. This specification can be subject to a variance of +10%, -5%. ⁶ Maximum weight capacity is reduced to 400 lbs. (181 kg) on 46 cm (18") deep seat configurations. ⁷ Battery weight may vary based on manufacturer. ⁸ Seat weight included (because tools are required to remove the seat). Battery weight not included. ⁹ Varies with user weight, terrain, battery type, battery condition and tire pressure. ^A International configuration shown **SEATING: A** For Synergy® Seating Contact your nearest Pride® stocklist for more information ^B Quantum® dealers only **NOTE** The information contained herein is correct at the time of publication; due to Pride's commitment to constant improvement and development, we reserve the right to alter specifications without prior notice. Theoretical range is calculated under test conditions in accordance with European standards. Actual range in normal use will depend on many factors, including the condition of the vehicle and its batteries, the weight of the driver, correct tyre pressures, ambient temperature, and the gradient and surface of the road or pavement.



PRIDE RAMPERS


SINGLE FOLD

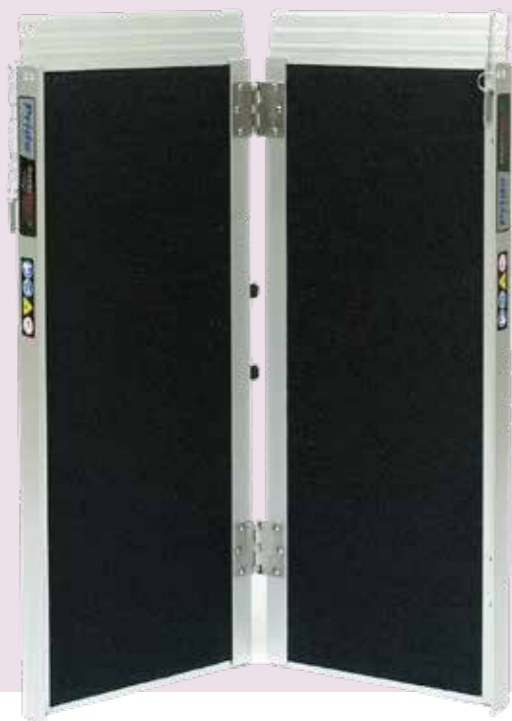

Single Fold Ramps offer a reliable solution for transitioning curbs, thresholds, and other obstacles. They are 75 cm wide and are available in several different lengths. These high-traction ramps are portable and lightweight, making them ideal for home and travel.

 Weight Capacity: 272 kg

RUBBER THRESHOLD

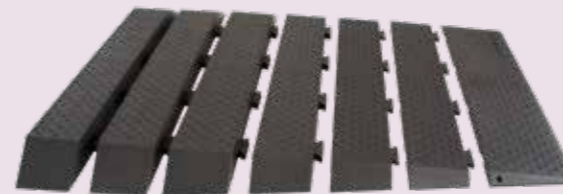


Rubber Threshold Ramps provide a safe, durable means of navigating uneven household surfaces, including small steps and doorways. A hidden dovetail locking system allows for easy installation and incremental ramp height adjustment of up to 10.16cm (4"). A modular design, slip-resistant and maintenance free material makes our Rubber Threshold Ramps a practical and affordable home accessibility solution.

 Weight Capacity: 385 kg

ACCESSORIES



Sun Canopy & Flag

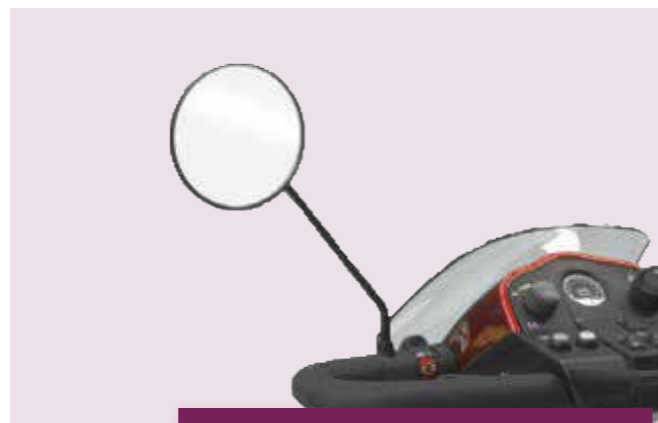

Rear View Mirror



Rear Pride Scooter Bag



Saddle Pride Bag



Walking Frame Holder



Oxygen Tank Holder



Rear Pod



XLR USB Charger



Mobile Phone Holder



Foldable Cup Holder



Tel: (03) 8770 9600

Visit pridemobility.com.au for further details



NOTE: All specifications subject to change without notice. The information contained herein is correct at the time of publication; we reserve the right to alter specifications without prior notice.

VIC Head Office: 20-24 Apollo Dr. Hallam, VIC 3803

NSW Distribution Centre: 19 Newton Rd. Wetherill Park, NSW 2164

QLD Distribution Centre: 66-68 Quilton Place. Crestmead, QLD 4132

WA Distribution Centre: 30 Division St. Welshpool, WA 6106

NZ Distribution Centre: 391 Neilson St. Penrose, Auckland NZ 1061