



Quad-Lock Building Systems  
 19402 - 56 Ave  
 Surrey, BC V3S 6K4 Canada  
 Phone: (604) 590-3111  
 www.quaddeck.com

## Fact Sheet on R-Values of Quad-Deck Floors & Roofs

This is Expanded Polystyrene (EPS) board insulation.

### Insulation Product Rating

At the concrete joists Quad-Deck panels provide R-7.8 h·ft<sup>2</sup>·°F/BTU [ R<sub>SI</sub> 1.381 m<sup>2</sup>·°K/W ] @ 75° F mean temperature and the following calculated values between the joists:

	<b>Floor or Ceiling R-values</b> h·ft <sup>2</sup> ·°F/BTU	<b>R<sub>SI</sub></b> m <sup>2</sup> ·°K/W
<b>Quad-Deck Panel Thickness</b>	@ 75° F	@ 24° C
7"	<b>18</b>	3.17
8"	<b>22</b>	3.91
9"	<b>26</b>	4.64
10"	<b>30.5</b>	5.26
11"	<b>34.5</b>	6.08
12"	<b>38.5</b>	6.79
12 ½"	<b>40.5</b>	7.14

### **READ THIS BEFORE YOU BUY**


#### **What You Should Know About R-values**

The charts show the R-value of this insulation. R means resistance to heat flow. The higher the R-value, the greater the insulating power. Compare insulation R-values before you buy. There are other factors to consider. The amount of insulation you need depends mainly on the climate you live in. Also, your fuel savings from insulation will depend upon the climate, the type and size of your house, the amount of insulation already in your house, your fuel use patterns and family size, proper installation of your insulation, and how tightly your house is sealed against air leaks. If you buy too much insulation, it will cost you more than what you'll save on fuel. To get the marked R-value, it is essential that this insulation be installed properly. If you do it yourself, get instructions and follow them carefully.

## Assembly Insulation Values (Energy Modeling or Total UA Alternative)

The insulation values in the following table were calculated for **completed Floor or Roof Assemblies, including the thermal bridging effect of the concrete joists**, with Quad-Deck EPS panels (1.25 PCF avg. density) on the underside, 3" concrete slab thickness, and they contain R-1.43 for: inside air film (horiz. avg.), ½" gypsum wallboard, and outside air film.

Quad-Deck Panel Thickness	R-values		U-factors		Rsi	
	@ 75° F when cooling	@ 40° F when heating in colder climates	@ 75° F when cooling	@ 24° C when cooling	@ 4° C when heating in colder climates	
7"	16.2	17.4	0.062	2.85	3.07	
8"	18.3	20	0.055	3.22	3.53	
9"	20	21.9	0.050	3.53	3.85	
10"	21.6	23.4	0.046	3.8	4.12	
11"	23	25.2	0.043	4.06	4.43	
12"	24.4	26.5	0.041	4.29	4.66	
12 ½"	24.7	27.1	0.040	4.36	4.77	

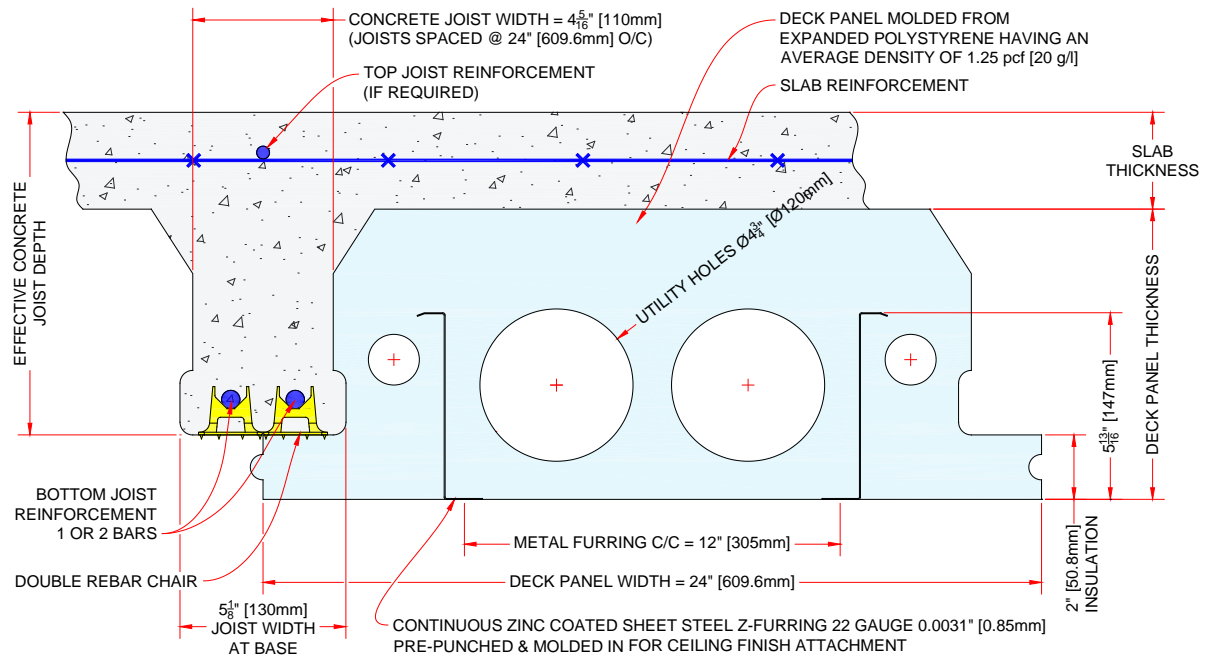

### Additional Insulation when needed

