


KB2 - Wall Mounting Cable Poster Kit - Application Instructions

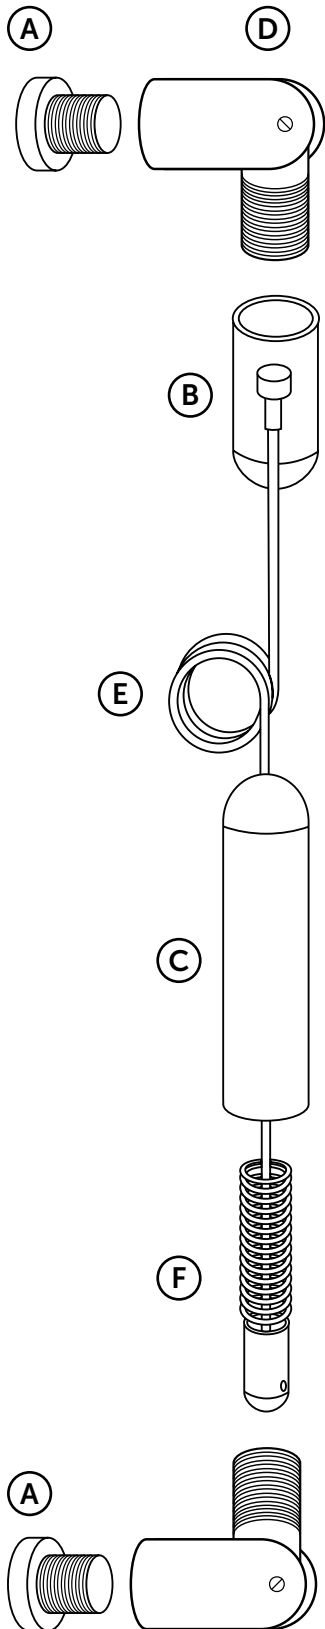

How to apply

1. Mark-out the lower fixing position on the wall first; followed by the upper fixing position (using a plumb bob).
2. Drill the holes and insert rawl plugs (if necessary).
3. Separate the fixing plates (A) from the ceiling fixing (B) and the floor fixing (C) and fix them into their respective holes with screws.
4. Screw a wall-mount fixing (D) to both the upper and lower fixing plates.
5. Screw the ceiling fixing to the upper wall-mount fixing and allow the cable (E) to hang down and unwind.
6. Using the Allen key provided, undo the brass fitting (F) around the cable (inside the cable tensioner) and slide it up the cable whilst ensuring that the cable is pulled tight. Retighten the fitting so that it sits flush with the top edge of the lower wall-mount fixing (whilst it is pointed upwards at 90°).
7. Cut the excess cable off leaving approximately 5mm remaining.
8. Screw the outer body of the cable tensioner onto the bottom wall-mount fixing (you should feel mild resistance just before the outer body is fully screwed down).

NOTE: You should be able to pull the cable out of the tensioner slightly (under tension). If the cable will not move, the tension needs to be reduced, by moving the brass fitting down the remaining cable.

Remember: the cable system is only as strong as the wall it is fixed to.