



BETTER VALUE.
SMARTER CHOICE.

PRODUCT CATALOG



PREMIUM TECHNOLOGY, EVERYDAY AFFORDABILITY

www.atgtire.com | 800-343-3276 | #atgtire   



VISION

To be a global market leader in Agricultural, Forestry, Construction and Material Handling tire segments.

MISSION

Our purpose is to deliver Superior Value to the users of our products through lowest total cost of ownership. We will effectively achieve this through a focus on innovation, technology and cost efficient manufacturing and distribution practices.

CONTENTS

LOAD INDEX.....	4
SPEED CATEGORY.....	4
LOAD RANGE.....	5
DESIGNATIONS.....	5
TIRE COMPARISONS.....	5
ABBREVIATIONS AND DEFINITIONS.....	5
ABOUT ALLIANCE TIRE GROUP.....	6
HISTORY OF ATG.....	7
TIRE SIZE INDEX.....	10

AGRICUTURAL

350 ROW CROP - NARROW RADIAL R-1.....	26
354 AGRIFLEX STEEL BELTED.....	27
363 AGRIFLEX IF STEEL BELTED.....	27
360 SUPER POWER DRIVE RADIAL R-1+.....	28
387 FARM RADIAL.....	28
365 AGRISTAR RADIAL R-1W.....	29
375 AGRISTAR STEEL BELTED RADIAL R-1W.....	29
370 WIDE DEEP TREAD RADIAL "SEVENTY" R-1W.....	30
372 AGRIFLEX IF/VF CFO STEEL BELTED.....	31
376 MULTISTAR STEEL BELTED R-1.....	31
378 AGRISTAR XL R-1W.....	32
356 POWER DRIVE RADIAL R-1.....	32
385 AGRISTAR RADIAL R-1W.....	33
842 846 FARMPRO 85 RADIAL R-1W.....	34
845 ALLIANCE FARMPRO 70 RADIAL R-1W.....	36
768 IRRIGATION.....	37
349 YIELD MASTER R-1.....	37
347 HI TRACTION BIAS R1.....	37
324 BIAS R-1.....	38
304 BIAS R-1.....	39
357 BIAS R-1.....	40
358 BIAS R-1.....	40
316 MULTIPURPOSE R-3.....	40
329 MULTIPURPOSE R3.....	40
330 MULTIPURPOSE R-3.....	41
313 F-2M 4 RIB.....	41
303 F-2 3 RIB.....	41
571 AGRICULTURAL IMPLEMENT RADIAL.....	42
222 AGRICULTURAL IMPLEMENT I-1.....	42
351 AGRICULTURAL IMPLEMENT I-1.....	42
319 AGRICULTURAL IMPLEMENT.....	42
320 AGRICULTURE IMPLEMENT VALUE PLUS I-1.....	43
239 MULTIPURPOSE.....	43
327 FARMPRO IMPLEMENT I-1.....	44
542 AGRICULTURE RIB IMPLEMENT I-1.....	44
543 ALLIANCE HIGH SPEED RIB IMPLEMENT FI.....	45

FLOTATION

885 STEEL BELTED FLOTATION RADIAL IMPLEMENT.....	48
388 STEEL BELTED FLOTATION RADIAL.....	48
882 STEEL BELTED AGRI-TRANSPORT FLOTATION RADIAL.....	48
390 STEEL BELTED AGRI-TRANSPORT FLOTATION RADIAL.....	49
393 STEEL BELTED FLOTATION RADIAL.....	49
381 STEEL BELTED FLOTATION RADIAL.....	50
382 ALL-STEEL HIGH SPEED FLOTATION RADIAL MPT.....	50
380 STEEL BELTED FLOTATION RADIAL.....	51
328 FLOTATION IMPLEMENT I-3.....	52
328 FLOTATION IMPLEMENT I-3 - CONTINUED.....	53
328 FLOTATION IMPLEMENT VALUE PLUS I-3.....	53
332 TRENCHER.....	53
331 FLOTATION IMPLEMENT I-3 / HF-3.....	54

FORESTRY

328 FORESTRY FLOTATION I-3 STEEL BELTED.....	58
343 FORESTAR FLOTATION LS-2 STEEL BELTED.....	58
342 FORESTAR FLOTATION LS-2 STEEL BELTED.....	58
333 AGRO-FOREST STEEL BELTED.....	59
331 FORESTRY FLOTATION I-3 / HF-3 STEEL BELTED.....	59
346 FORESTAR FLOTATION STEEL BELTED LS-2.....	59
344 FORESTAR FLOTATION LS-2 STEEL BELTED.....	60
345 FORESTAR STEEL BELTED LS-2.....	60
356 SEVERE DUTY SERVICE STEEL BELTED BIAS R-1.....	61
370 AGRO-FOREST STEEL BELTED.....	61

INDUSTRIAL

550 MULTI-USE STEEL BELTED RADIAL.....	64
580 INDUSTRIAL R-4 STEEL BELTED.....	65
606 RADIAL STEEL BELTED BACKHOE/LOADER DOZER.....	65
624 INDUSTRIAL RADIAL.....	65
570 INDUSTRIAL RADIAL R-4.....	66
323 AGRO-INDUSTRIAL MPT.....	66
903 SKID STEER.....	66
906 SKID STEER.....	67
310 EARTHMOVER SPECIAL E-3/L-3.....	67
322 TURF.....	67
228 MEDIUM BIAS CROSS LUG.....	67
601 MUD & SNOW.....	68
608 INDUSTRIAL RADIAL BACKHOE.....	68
210 SUPER TRANSPORT LUG.....	68
839 EXCAVATOR.....	68
533 INDUSTRIAL REAR BACKHOE R-4.....	69
321 FRONT WHEEL ASSIST BACKHOE R-4.....	69
690 OTR ALL-STEEL E-3/L-3.....	69
317 FRONT WHEEL ASSIST BACKHOE R-4.....	70
318 SUPER GRIP E-3/L-3.....	70
308 SPECIAL WIDE BASE E-2/L-2/G-2.....	71
302 SUPER TRACTION L-2/G-2.....	71
307 LOADER GRADER L-2/G-2.....	71
306 SUPER TRACTION E-2/L-2/G-2.....	71
600 LOADER DOZER.....	72
326 WIDE GRIP "70 SERIES" L2.....	72
309 CONTAINER TRANSPORT.....	72
630 MOBILE CRANE ALL STEEL.....	72
224 CONSTRUCTION MACHINERY.....	72
225 WIDE BASE MPT L-2.....	73
325 TOUGH TRAC.....	73
655 MUD & SNOW G-2.....	73
312 TRENCHER.....	73
221 ALL PURPOSE TRENCHER & MANLIFT.....	74

REFERENCE TABLES

SPEED CATEGORY

SPEED SYMBOL	SPEED (MPH)	SPEED (KM/H)
A1	3	5
A2	5	10
A3	10	15
A4	12	20
A5	15	25
A6	20	30
A7	22	35
A8	25	40

SPEED SYMBOL	SPEED (MPH)	SPEED (KM/H)
B	30	50
C	35	60
D	40	65
E	43	70
F	50	80
G	55	90
J	62	100
K	68	110

LOAD INDEX

LOAD INDEX	LBS.	KG.
70	740	335
71	760	345
72	785	355
73	805	365
74	825	375
75	855	387
76	880	400
77	910	412
78	935	425
79	965	437
80	990	450
81	1020	462
82	1050	475
83	1070	487
84	1100	500
85	1140	515
86	1170	530
87	1200	545
88	1230	560
89	1280	580
90	1320	600
91	1360	615
92	1390	630
93	1430	650
94	1480	670
95	1520	690
96	1570	710
97	1610	730
98	1650	750
99	1710	775
100	1760	800
101	1820	825
102	1870	850
103	1930	875
104	1980	900
105	2040	925
106	2090	950
107	2150	975
108	2200	1000
109	2270	1030
110	2340	1060

LOAD INDEX	LBS.	KG.
111	2400	1090
112	2470	1120
113	2540	1150
114	2600	1180
115	2680	1215
116	2760	1250
117	2830	1285
118	2910	1320
119	3000	1360
120	3080	1400
121	3200	1450
122	3300	1500
123	3420	1550
124	3520	1600
125	3640	1650
126	3740	1700
127	3860	1750
128	3960	1800
129	4080	1850
130	4180	1900
131	4300	1950
132	4400	2000
133	4540	2060
134	4680	2120
135	4800	2180
136	4940	2240
137	5080	2300
138	5200	2360
139	5360	2430
140	5520	2500
141	5680	2575
142	5840	2650
143	6000	2725
144	6150	2800
145	6400	2900
146	6600	3000
147	6800	3075
148	6950	3150
149	7150	3250
150	7400	3350
151	7600	3450

LOAD INDEX	LBS.	KG.
152	7850	3550
153	8050	3650
154	8250	3750
155	8550	3875
156	8800	4000
157	9100	4125
158	9350	4250
159	9650	4375
160	9900	4500
161	10200	4625
162	10500	4750
163	10700	4875
164	11000	5000
165	11400	5150
166	11700	5300
167	12000	5450
168	12300	5600
169	12800	5800
170	13200	6000
171	13600	6150
172	13900	6300
173	14300	6500
174	14800	6700
175	15200	6900
176	15700	7100
177	16100	7300
178	16500	7500
179	17100	7750
180	17600	8000
181	18200	8250
182	18700	8500
183	19300	8750
184	19800	9000
185	20400	9250
186	20900	9500
187	21500	9750
188	22000	10000
189	22700	10300
190	23400	10600
191	24000	10900
192	24700	11200

LOAD INDEX	LBS.	KG.
193	25400	11500
194	26000	11800
195	26800	12450
196	27600	12500
197	28300	12850
198	29100	13200
199	30000	13600
200	30900	14000
201	32000	14500
202	33100	15000
203	34200	15500
204	35300	16000
205	36400	16500
206	37500	17000
207	38600	17500
208	39700	18000
209	40800	18500
210	41900	19000
211	43000	19500
212	44100	20000
213	45400	20600
214	46700	21200
215	48100	21800
216	49400	22400
217	50700	23000
218	52000	23600
219	53600	24300
220	55100	25000
221	56800	25750
222	58400	26500
223	60000	27250
224	61500	28000
225	64000	29000
226	66000	30000
227	68000	30750
228	69500	31500
229	71500	32500
230	74000	33500
231	76000	34500
232	78500	35500
233	80500	36500

LOAD RANGE DESIGNATIONS

Load Range	Ply Rating	Load Range	Ply Rating
A	2	G	14
B	4	H	16
C	6	J	18
D	8	L	20
E	10	M	22
F	12	N	24

TIRE COMPARISONS

SIZE (MM)	SIZE (IN)
215	8.5
230	9.5
250 / 260	10.0
265	10.5
280 / 290	11.2
320	12.4
340	13.6
355 / 360	14.0
380 / 385	14.9
400 / 405	16.0
420	16.9
445	17.5
460 / 480	18.4
500	19.5
520 / 540	20.8
600	23.1
620 / 650	24.5
710	28.0
800	30.5
900	35.5
1050	43.0
1250	50.0

ABBREVIATIONS AND DEFINITIONS

TIRE TREAD CODE DEFINITIONS	
F	Front Steer
I	Implement
R	Rear Tractor
HF	High Flotation
C	Compactor
E	Earthmover
G	Grader
L	Loader and Dozer
IND	Industrial

MAXIMUM		
TRA Code	Speed	Distance (One way)
C	6mph (10km/h)	No limit
E	40mph (65km/h)	2.5 mi (4 km)
G	25mph (40km/h)	No limit
L	6mph (10km/h)	250 ft (76m)

OTHER DESIGNATIONS AND DEFINITIONS	
NHS	Not for highway service
SL	Service limited to Agricultural use
FI	Implement tire, towed highway service
ST	Special tires for trailers in highway service
ML	Mining and logging intermittent highway service
IF	20% higher load at the same inflation
VF	40% higher load at the same inflation

TREAD DEPTH CLASSIFICATIONS	
TRA Code	Depth
2/3 - Regular Tread	100%
4 - Deep Tread	150%
5 - Extra Deep Tread	250%
6 - Extra Deep Tread	280-300%

TIRE TYPE NOMENCLATURE	
F-1	Agricultural Single Rib Tread
F-2	Agricultural Multiple-Rib Tread
F-3	Industrial Multiple-Rib Tread
I-1	Rib Tread
I-2	Moderate Tread
I-3	Traction Tread
R-1	Drive Wheel, Regular Tread
R-1W	Drive Wheel, Wet Traction Tread
R-2	Drive Wheel, Cane & Rice, Deep
R-3	Drive Wheel, Shallow Tread
R-4	Drive Wheel, Industrial Tractor Tread
HF-1	Shallow Tread
HF-2	Regular Lug Tread
HF-3	Deep Lug Tread
HF-4	Extra Deep Tread
E-2	Traction Regular Tread
E-3	Rock Regular Tread
E-4	Rock Deep Tread
E-7	Flotation Tread
L-2	Traction Regular Tread
L-3	Rock Regular Tread
L-4	Rock Deep Tread
L-5	Rock Extra Deep Tread
L-6	Rock Extra Deep Tread
L-4S	Smooth Deep Tread
L-5S	Smooth Extra Deep Tread
L-6S	Smooth Extra Deep Tread
G-2	Traction Regular Tread
G-3	Rock Regular Tread
C-1	Smooth Tread

RCI Index	Rolling Circ (in.)	Rev/ Mile
0	20	3219
1	21	3065
2	22	2900
3	23	2751
4	24	2617
5	26	2476
6	27	2349
7	28	2335
8	30	2118
9	31	2012
10	33	1905
11	35	1808
12	37	1721
13	39	1634
14	41	1547

RCI Index	Rolling Circ (in.)	Rev/ Mile
15	43	1470
16	45	1393
17	48	1325
18	51	1252
19	53	1192
20	56	1129
21	59	1073
22	62	1019
23	66	967
24	69	917
25	73	870
26	77	825
27	81	783
28	85	743
29	90	706

RCI Index	Rolling Circ (in.)	Rev/ Mile
30	95	669
31	100	636
32	105	603
33	111	573
34	117	543
35	123	516
36	130	489
37	136	464
38	144	440
39	152	418
40	160	397
41	168	376
42	177	357
43	187	339
44	197	322

RCI Index	Rolling Circ (in.)	Rev/ Mile
45	207	305
46	219	290
47	230	275
48	243	261
49	256	248
50	269	235
51	284	223
52	299	212
53	315	201
54	332	191
55	350	181
56	369	172
57	389	163



BETTER VALUE.
SMARTER CHOICE.

ABOUT ALLIANCE TIRE GROUP


Alliance Tire Group (ATG), is one of the fastest-growing manufacturers of off-highway tires in the world. With its Alliance, Galaxy and Primex brands, ATG specializes in developing products for the agriculture, forestry, construction, industrial and off-the-road (OTR) markets worldwide. With more than 2,600 SKUs, the company has one of the largest and most diverse product line-ups in the business.

As a major global supplier for some of the world's most trusted equipment manufacturers—including CNH, John Deere, AGCO, Caterpillar and Bobcat—ATG has earned positions on more than 350 OE fitments. From high-performance tires for the fastest and heaviest farm machinery to rugged skid steer and backhoe tires, ATG has purpose-built a tire for any job around the farm.

The ATG global R&D team spans three continents and maintains constant contact with customers in the field. World class engineers collaborate closely with farmers and equipment companies every day, developing and refining new tires to push the envelope and deliver outstanding performance in any condition. Alliance remains at the cutting edge of tire technology, from IF/VF tires to fast flotation and high-performance tread patterns.

Backed by warehouses coast to coast and a nationwide network of distributors and dealers, Alliance delivers dependable farm, forestry and OTR tires that are engineered to keep you ahead.

HISTORY OF ATG


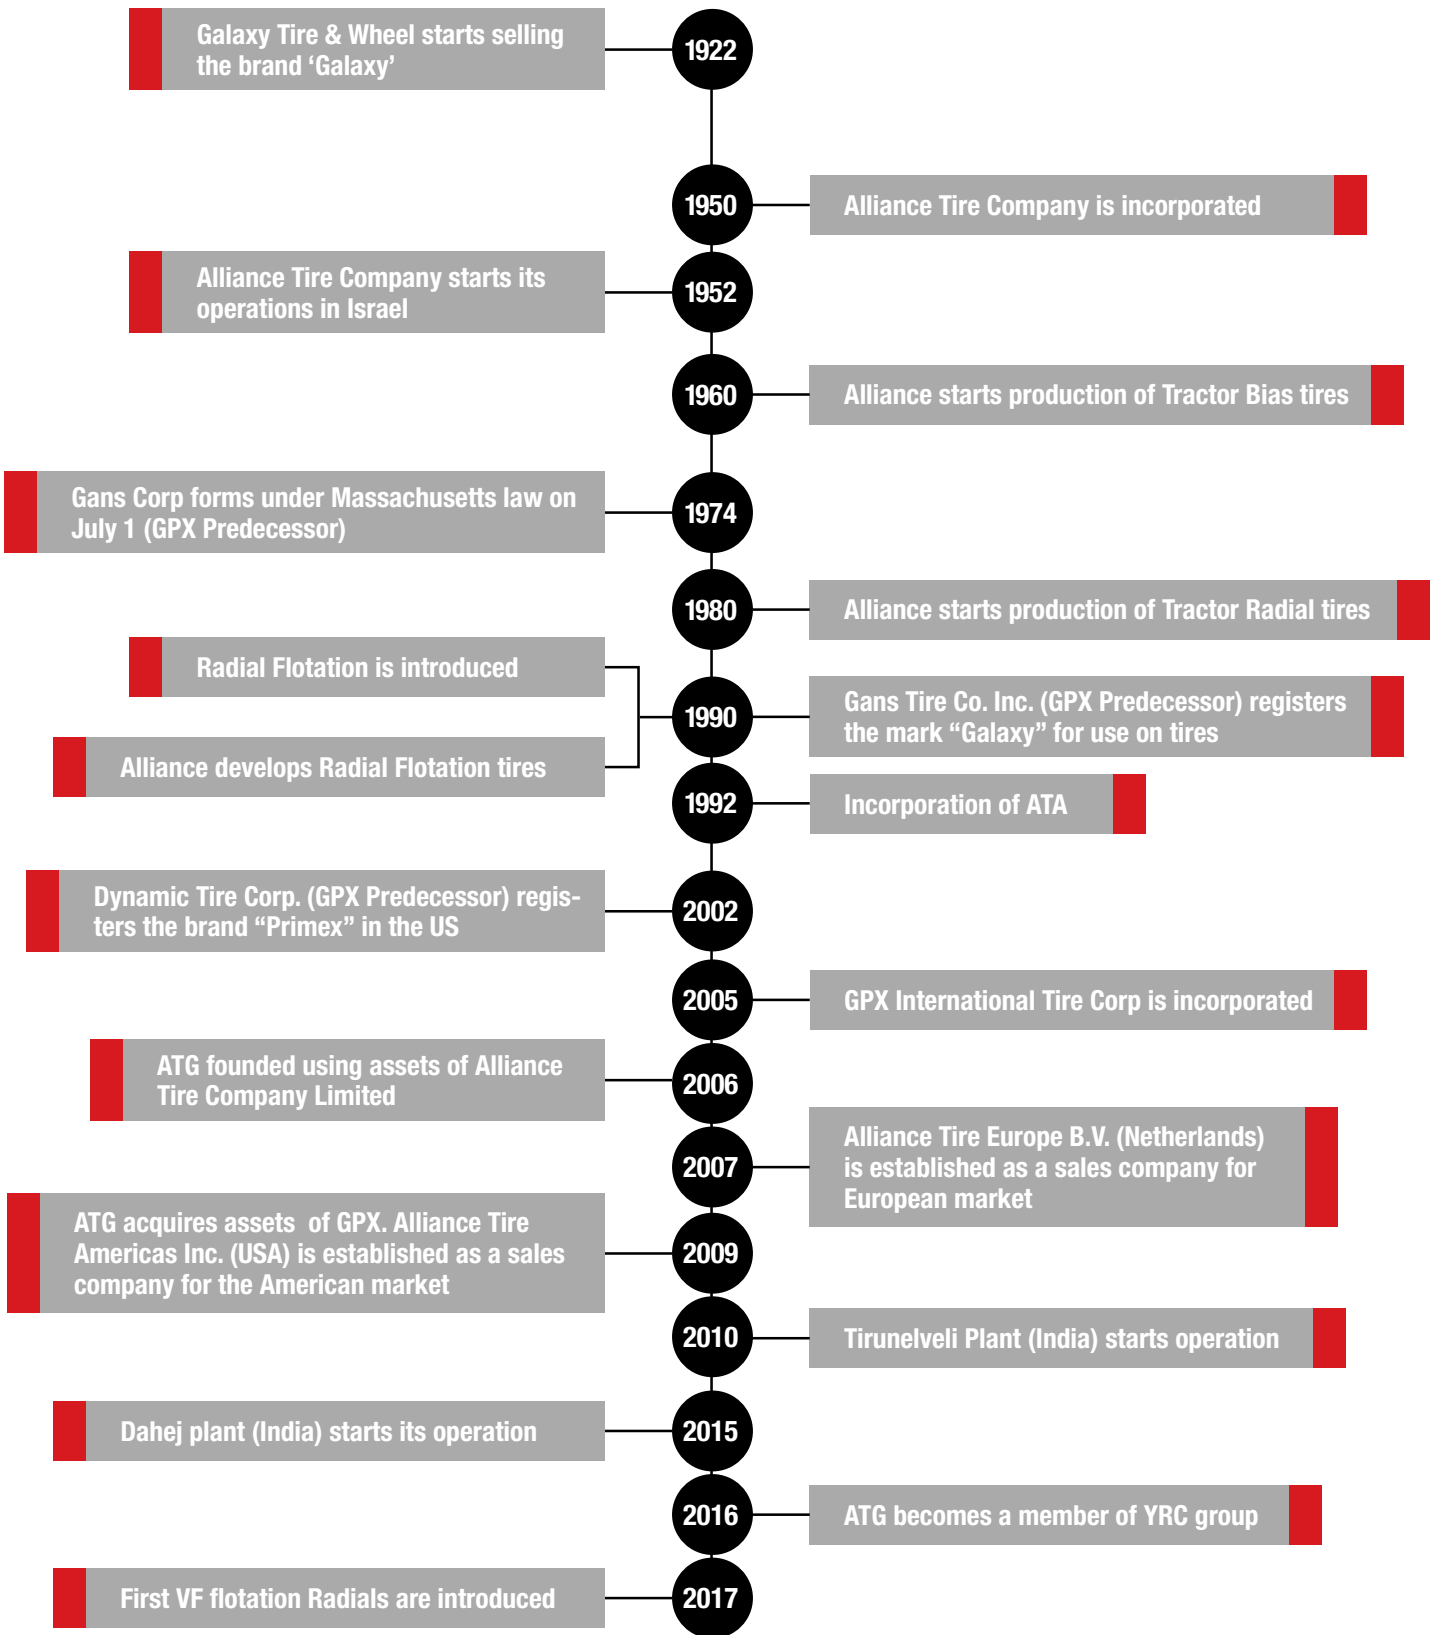




Agriflex technology is an innovation that helps in increasing productivity and efficiency by reducing soil compaction, fuel consumption and total cost of ownership (TCO) as compared to standard radial farm tires.

At Alliance, we have managed the daunting task of incorporating steel belts in the tread area of our entire IF/VF range for added durability when working in the field or running on the road.

Getting a steel belted tire to flex under heavy loads and high speeds is no small task, and getting the tire to flex in the sidewall instead of by the bead near the rim takes huge investments and a lot of engineering at our R&D centers which use the latest technologies to come up with solutions. Indeed, a technological feat that isn't easy for our competitors to master.

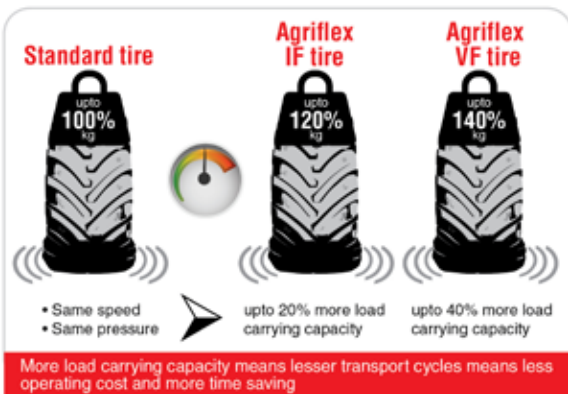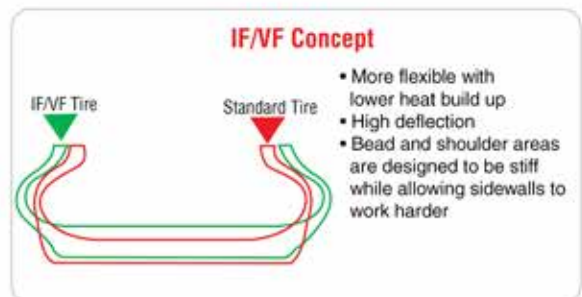

THE LARGEST SELECTION OF IF AND VF TIRES IN THE INDUSTRY AND THE WORLD'S ONLY VF FLOTATION LINE

Agriflex tires are designed to operate
with up to 40% less pressure




Over 95% of Agriflex tires have
Stubble Guard compounds



All Agriflex tires rated at 40mph



Industry's only steel belted IF/VF tire

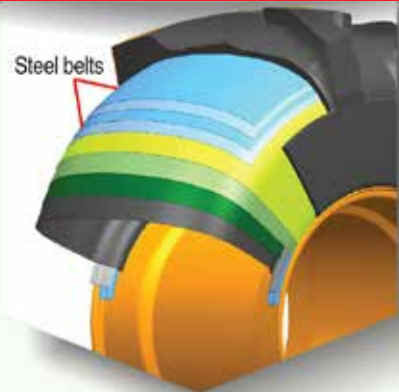

TIRE SIZE INDEX

WHEEL DIAMETER	STANDARD SIZE	AGRIFLEX IF/VF	RADIAL					BIAS					
12	26X1200_12							312 pg. 50					
	9.5L_14							542 pg. 44					
14	11L_14SL							542 pg. 44					
	5.00_15			303 pg. 41									
15	6.5/80_15							324 pg. 38					
	6.70_15SL							542 pg. 44					
	7.60_15SL							542 pg. 44					
	9.5L_15							343 pg. 58					
	9.5L_15FI							543 pg. 45					
	11L_15	381 pg. 50						222 pg. 42	313 pg. 41				
	11L_15FI							319 pg. 42	543 pg. 45				
	11L_15SL							542 pg. 44					
	12.5L_15FI							543 pg. 45					
	12.5L_15SL							542 pg. 44					
	31X1550_15							221 pg. 51	312 pg. 50				
	33X1550_15							221 pg. 51					
15.3	10.0/75_15.3							317 pg. 70	320 VP pg. 43	323 pg. 66			
	11.5/80_15.3							317 pg. 70	320 VP pg. 43	323 pg. 66			
	12.5/80_15.3							320 VP pg. 43					
15.5	400/60_15.5							320 VP pg. 43	327 pg. 44	328 pg. 52-53	328 VP pg. 53		
	500/60_15.5							328 pg. 52-53					
16	5.50_16							303 pg. 41					
	6.00_16							303 pg. 41					
	6.50_16							302 pg. 71	324 pg. 38				
	7_16							TD45 pg. 38-39					
	7.50_16							303 pg. 41	323 pg. 66	324 pg. 38	542 pg. 44		
	8_16							TD45 pg. 38-39					
	8.25_16							324 pg. 38					

Wheel Diameter	Standard Size	Agriflex IF/VF		Radial					Bias				
16	9.00_16							303 pg. 41	542 pg. 44				
	9.5_16							TD45 pg. 38-39					
	10.00_16							303 pg. 41	313 pg. 41				
	10.5/65_16							320 VP pg. 43					
	11.00_16							303 pg. 41	313 pg. 41				
	11.00_16SL							542 pg. 44					
	12.4_16							316 pg. 40					
	13.0/55_16							320 VP pg. 43					
	13.0/75_16												
	14.0/65_16							327 pg. 44					
	200/70_16			370 pg. 61									
	240/70_16			370 pg. 61									
	250/75_16			550 pg. 64									
	250/80_16			550 pg. 64									
	260/70_16			370 pg. 61									
	280/70_16			370 pg. 61									
	320/65_16			370 pg. 61									
340/55_16							327 pg. 44						

16.1	13.5_16.1							329 pg. 40					
	14.5/75_16.1SL							239 pg. 43					
	14L_16.1							313 pg. 41					
	16.5L_16.1							802					
	16.5L_16.1SL							222 pg. 42					
	19L_16.1							542 pg. 44					
	21.5L_16.1							542 pg. 44					
	33X16LL_16.1							322 pg. 67					

16.5	10_16.5 (265/70_16.5)			550 pg. 64				903 pg. 66	906 pg. 67				
	12_16.5 (305/70_16.5)			550 pg. 64				903 pg. 66	906 pg. 67				
	340/60_16.5			381 pg. 50									

Wheel Diameter	Standard Size	Agriflex IF/VF	Radial					Bias					
16.5	380/55_16.5			381 pg. 50									

17	15.0/55_17							319	320 VP pg. 43	327 pg. 44	222 pg. 42		
	19.0/45_17							222 pg. 42	320 VP pg. 43	327 pg. 44			
	425/55_17			221 pg. 51									
	440/50_17			221 pg. 51									
	450/55_17							221 pg. 51					
	500/50_17			328 pg. 52-53	381 pg. 50			320 VP pg. 43	327 pg. 44				
	500/55_17							328 pg. 52-53					

17.5	14_17.5ML							239 pg. 43					
	400/55_17.5							328 pg. 52-53					

18	7.00_18							324 pg. 38					
	7.50_18							303 pg. 41					
	10.5_18 (280/80_18)			580 pg. 65				325 pg. 73					
	10.5_18MPT							317 pg. 70					
	10.5/80_18							317 pg. 70	320 VP pg. 43	321 pg. 69			
	12.0_18							317 pg. 70					
	12.0/75_18							317 pg. 70					
	12.5_18 (340/80_18)			550 pg. 64									
	12.5_18MPT							317 pg. 70					
	12.5/80_18 (335/80_18)			606 pg. 65	608 pg. 68	550 pg. 64		317 pg. 70	320 VP pg. 43	321 pg. 69			
	13.0/65_18												
	15.0/70_18												
	15.5/55_18 (385/55_18)			601 pg. 68									
	16/70_18 (405/70_18)			606 pg. 65	608 pg. 68			606 pg. 65	608 pg. 68				
	280/70_18			370 pg. 61									
	300/75_18												
	320/80_18							327 pg. 44					
	340/65_18			571 pg. 42									
	365/70_18			550 pg. 64	606 pg. 65	608 pg. 68							
	400/70_18			550 pg. 64									

Wheel Diameter	Standard Size	Agriflex IF/VF	Radial					Bias					
19	4.00_19							303 pg. 41					
	6.00_19							303 pg. 41					

19.5	18_19.5 (445/70_19.5)			624 pg. 65					224 pg. 72				
-------------	--------------------------	--	--	---------------	--	--	--	--	---------------	--	--	--	--

20	7.50_20								303 pg. 41				
	9.00_20								324 pg. 38				
	9.00_20ML								225 pg. 73				
	9.5_20								324 pg. 38				
	1000_20								839 pg. 68				
	10.00_20ML								225 pg. 73				
	10.5_20 (280/80_20)			580 pg. 65									
	10.5_20MPT								317 pg. 70				
	11.00_20								210 pg. 68				
	11.2_20 (280/85_20)			385 pg. 33									
	12.00_20								210 pg. 68	228 pg. 67			
	12.4_20 (320/85_20)			385 pg. 33	842 pg. 34								
	12.5_20 (335/80_20)			606 pg. 65									
	12.5_20MPT								225 pg. 73	317 pg. 70			
	12.5/80_20 (340/80_20)			580 pg. 65	550 pg. 64				325 pg. 73				
	14.00_20								228 pg. 67				
	14.5_20 (365/80_20)			606 pg. 65	608 pg. 68	580 pg. 65							
	14.5_20MPT								317 pg. 70				
	14.9L_20 (375/75_20)			387 pg. 28									
	16.0/70_20								320 VP pg. 43	327 pg. 44			
16.0/70_20 (405/70_20)			570 pg. 66	550 pg. 64	606 pg. 65	608 pg. 68		323 pg. 66	570 pg. 66	326 pg. 72	317 pg. 70		
20.00_20								222 pg. 42					
21.0/80_20								222 pg. 42					
38X18.00_20								331 pg. 54					
41X14.00_20								322 pg. 67					
42X25.00_20								328 pg. 52-53	331 pg. 54				
44X18.00_20								322 pg. 67					

Wheel Diameter	Standard Size	Agriflex IF/VF		Radial					Bias					
20	48X25.00_20								328 pg. 52-53	331 pg. 54				
	48X31.00_20								328 pg. 52-53	331 pg. 54				
	260/70_20			370 pg. 61										
	280/70_20			370 pg. 61										
	300/70_20			370 pg. 61	845 pg. 36									
	320/70_20			370 pg. 61	845 pg. 36									
	340/65_20			370 pg. 61										
	360/70_20			370 pg. 61	550 pg. 64									
	360/80_20			550 pg. 64										
	380/70_20								370 pg. 61					
	420/65_20			365 pg. 29										
	420/75_20			580 pg. 65										
	455/70_20			608 pg. 68										
	500/45_20									331 pg. 54				
	500/50_20									331 pg. 54				
	500/55_20									327 pg. 44				

22	9.5_22								324 pg. 38					
-----------	--------	--	--	--	--	--	--	--	---------------	--	--	--	--	--

22.5	18_22.5 (445/70_22.5)			624 pg. 65										
	385/65_22.5			882 pg. 48										
	400/55_22.5			382 pg. 50					328 pg. 52-53	328 VP pg. 53				
	400/60_22.5								328 pg. 52-53					
	445/65_22.5													
	500/45_22.5			390 pg. 49					328 pg. 52-53	328 VP pg. 53				
	500/60_22.5			388 pg. 48	390 pg. 49				328 pg. 52-53	328 VP pg. 53	331 pg. 54			
	550/45_22.5			380 pg. 51					328 pg. 52-53	328 VP pg. 53	331 pg. 54			
	550/60_22.5								222 pg. 42	328 pg. 52-53	331 pg. 54			
	560/45_22.5			380 pg. 51	381 pg. 50	390 pg. 49	882 pg. 48	885 pg. 48						
	560/60_22.5			380 pg. 51	390 pg. 49	885 pg. 48			327 pg. 44					
	580/65_22.5			380 pg. 51	390 pg. 49	885 pg. 48								
	600/40_22.5								331 pg. 54	344 pg. 60				

Wheel Diameter	Standard Size	Agriflex IF/VF		Radial					Bias					
22.5	600/45_22.5			331 pg. 54										
	600/50_22.5			380 pg. 51	382 pg. 50	388 pg. 48	390 pg. 49	885 pg. 48	328 pg. 52-53	331 pg. 54	343 pg. 58	344 pg. 60		
	600/55_22.5			380 pg. 51					222 pg. 42	328 pg. 52-53	331 pg. 54			
	620/40_22.5			380 pg. 51	381 pg. 50									
	620/50_22.5			381 pg. 50										
	650/50_22.5			380 pg. 51	885 pg. 48									
	700/40_22.5								328 pg. 52-53	331 pg. 54				
	700/50_22.5								328 pg. 52-53	331 pg. 54				
	710/40_22.5			381 pg. 50					343 pg. 58	344 pg. 60				
	710/45_22.5			885 pg. 48	388 pg. 48									
	750/45_22.5			380 pg. 51										
	800/35_22.5													

24	8.3_24								324 pg. 38					
	9.5_24 (230/95_24)			350 pg. 26					324 pg. 38					
	11.2_24 (280/85_24)			846 pg. 34					324 pg. 38	356 pg. 32	768 pg. 37			
	11.25_24								351 pg. 42					
	12.00_24ML								210 pg. 68					
	12.4_24 (320/85_24)			385 pg. 33	842 pg. 34				324 pg. 38	356 pg. 32	333 pg. 59			
	13.00_24								306 pg. 71	307 pg. 71				
	13.6_24 (340/85_24)			385 pg. 33	842 pg. 34				324 pg. 38	356 pg. 32				
	14.00_24			655 pg. 73					306 pg. 71	307 pg. 71				
	14.9_24								324 pg. 38	329 pg. 40	356 pg. 32	358 pg. 40	533 pg. 69	768 pg. 37
	14.9_24 (380/85_24)			385 pg. 33	842 pg. 34	550 pg. 64			333 pg. 59	325 pg. 73				
	15.5/80_24								324 pg. 38	533 pg. 69				
	16.00_24								306 pg. 71	310 pg. 67				
	16/70_24 (405/70_24)								326 pg. 72					
	16.5/85_24								358 pg. 40					
	16.9_24 (420/85_24)			385 pg. 33	842 pg. 34				324 pg. 38	329 pg. 40	533 pg. 69			
	17.5L_24 (460/70_24)			570 pg. 66	550 pg. 64	580 pg. 65			533 pg. 69	570 pg. 66				
	18.4_24								533 pg. 69					

Wheel Diameter	Standard Size	Agriflex IF/VF		Radial				Bias					
24	19.5L_24 (500/70_24)			570 pg. 66				533 pg. 69	550 pg. 64	580 pg. 65			
	20_24EM (22/70_24)							326 pg. 72					
	21L_24 (540/70_24)							533 pg. 69					
	250/85_24			846 pg. 34									
	300/80_24			550 pg. 64									
	320/70_24			370 pg. 61	845 pg. 36								
	340/80_24			550 pg. 64									
	360/70_24			370 pg. 61	845 pg. 36								
	360/80_24			550 pg. 64									
	380/70_24							370 pg. 61	845 pg. 36				
	405/70_24			580 pg. 65	606 pg. 65			323 pg. 66					
	420/65_24			550 pg. 64									
	420/70_24			370 pg. 61	845 pg. 36			370 pg. 61					
	440/65_24			365 pg. 29									
	440/80_24			550 pg. 64	580 pg. 65			325 pg. 73					
	455/70_24			606 pg. 65									
	445/70_24MPT			570 pg. 66									
	460/65_24			550 pg. 64									
	480/65_24			360 pg. 28	550 pg. 64			360 pg. 28					
	480/70_24			370 pg. 61									
495/70_24MPT			570 pg. 66										
500/85_24							570 pg. 66						
540/65_24			365 pg. 29	550 pg. 64									

24.5	650/45_24.5			342 pg. 58				343 pg. 58					
	710/40_24.5			342 pg. 58				343 pg. 58					

25	15.5_25			600 pg. 72	655 pg. 73			302 pg. 71	307 pg. 71	308 pg. 71			
	16.00_25 (445/95_25)			630 pg. 72				309 pg. 72	310 pg. 67				
	17.5_25			600 pg. 72	655 pg. 73	690 pg. 69		306 pg. 71	307 pg. 71	308 pg. 71	318 pg. 70		
	18.00_25							318 pg. 70					
	20.5_25			655 pg. 73				307 pg. 71	308 pg. 71	318 pg. 70			

Wheel Diameter	Standard Size	Agriflex IF/VF		Radial					Bias					
25	23.5_25								318 pg. 70					
	26.5_25								318 pg. 70					
	29.5_25								318 pg. 70					
	54X37.00_25								344 pg. 60					
	66X43.00_25								331 pg. 54					
	1000/50_25				375 pg. 29									

26	14.9_26													
	16.9_26				356 pg. 32									
	18.4_26				356 pg. 32				324 pg. 38	329 pg. 40	345 pg. 29	356 pg. 32	533 pg. 69	
	18.4_26 (480/80_26)				580 pg. 65	550 pg. 64								
	23.1_26 (620/75_26)				390 pg. 49	360 pg. 28	375 pg. 29		329 pg. 40	330 pg. 41	345 pg. 29	347 pg. 37	349 pg. 37	
	28L_26 (750/65_26)				390 pg. 49	360 pg. 28			329 pg. 40	330 pg. 41	345 pg. 29	349 pg. 37		
	620/70_26	372 pg. 31			370 pg. 61									
	710/65_26				390 pg. 49									
	750/50_26				376 pg. 31									

26.5	500/60_26.5								331 pg. 54					
	600/50_26.5													
	600/55_26.5				342 pg. 58	380 pg. 51	388 pg. 48	390 pg. 49	885 pg. 48	328 pg. 52-53	331 pg. 54	343 pg. 58	344 pg. 60	
	620/55_26.5				381 pg. 50									
	650/55_26.5	389			380 pg. 51	390 pg. 49	885 pg. 48							
	650/60_26.5				380 pg. 51									
	650/65_26.5				380 pg. 51	388 pg. 48	885 pg. 48		343 pg. 58	344 pg. 60				
	700/40_26.5								331 pg. 54					
	700/50_26.5								328 pg. 52-53	331 pg. 54	344 pg. 60			
	710/45_26.5				342 pg. 58				343 pg. 58	344 pg. 60				
	710/50_26.5				380 pg. 51	381 pg. 50	390 pg. 49	885 pg. 48						
	710/60_26.5								344 pg. 60					
	750/45_26.5				380 pg. 51	885 pg. 48								
	750/55_26.5				344 pg. 60	388 pg. 48			343 pg. 58	344 pg. 60				
	800/40_26.5				344 pg. 60				343 pg. 58	344 pg. 60				

Wheel Diameter	Standard Size	Agriflex IF/VF		Radial				Bias					
26.5	800/45_26.5			381 pg. 50	390 pg. 49			328 pg. 52-53	331 pg. 54				
	850/45_26.5							343 pg. 58					
	870/45_26.5							344 pg. 60					

28	8.3_28							324 pg. 38					
	9.5_28 (230/95_28)			350 pg. 26									
	11.2_28 (280/85_28)			846 pg. 34				324 pg. 38					
	11.25_28							351 pg. 42					
	12.4_28 (320/85_28)			842 pg. 34				324 pg. 38					
	13.6_28 (340/85_28)			842 pg. 34				324 pg. 38	329 pg. 40	356 pg. 32			
	14.9_28 (380/85_28)			385 pg. 33	842 pg. 34			302 pg. 71	324 pg. 38	356 pg. 32	333 pg. 59		
	16.5/85_28							324 pg. 38					
	16.9_28 (420/85_28)	372 pg. 31		385 pg. 33	842 pg. 34			333 pg. 59	302 pg. 71	324 pg. 38	356 pg. 32	533 pg. 69	
	18.4_28							304 pg. 39	533 pg. 69				
	19.5L_28 (480/70_28)			370 pg. 61									
	250/85_28			846 pg. 34									
	320/70_28			845 pg. 36									
	360/70_28			370 pg. 61	845 pg. 36								
	380/70_28			370 pg. 61	845 pg. 36			370 pg. 61					
	400/80_28			550 pg. 64									
	420/70_28			370 pg. 61	845 pg. 36			370 pg. 61					
	440/80_28			550 pg. 64	580 pg. 65								
	480/65_28			365 pg. 29	550 pg. 64			360 pg. 28					
	480/70_28			845 pg. 36				370 pg. 61					
	500/70_28							580 pg. 65					
	540/65_28			365 pg. 29	550 pg. 64			360 pg. 28					
	600/60_28	372 pg. 31		342 pg. 58									
600/65_28	365 pg. 29	372 pg. 31	360 pg. 28				360 pg. 28						
600/70_28	372 pg. 31		370 pg. 61	845 pg. 36									

30	14.9_30 (380/85_30)			842 pg. 34				324 pg. 38	356 pg. 32				
	16.9_30 (420/85_30)			385 pg. 33	842 pg. 34			324 pg. 38	345 pg. 29	356 pg. 32	533 pg. 69	333 pg. 59	

Wheel Diameter	Standard Size	Agriflex IF/VF		Radial				Bias					
30	18.4_30 (460/85_30)			842 pg. 34				324 pg. 38	345 pg. 29	356 pg. 32	333 pg. 59		
	19.5L_30 (480/70_30)			845 pg. 36	370 pg. 61								
	19.5_30 (500/85_30)							570 pg. 66					
	23.1_30							347 pg. 37					
	420/70_30			845 pg. 36									
	420/90_30			842 pg. 34									
	440/80_30			550 pg. 64									
	480/80_30			550 pg. 64									
	520/70_30							845 pg. 36					
	540/65_30			365 pg. 29	550 pg. 64			360 pg. 28					
	540/70_30							360 pg. 28					
	600/60_30	372 pg. 31											
	600/65_30			365 pg. 29									
	600/70_30	372 pg. 31		370 pg. 61	550 pg. 64								
	620/70_30			570 pg. 66									
	620/75_30			378 pg. 32									
	650/75_30	372 pg. 31											
	710/55_30			378 pg. 32									
710/60_30			378 pg. 32										

30.5	600/60_30.5			390 pg. 49				331 pg. 54					
	650/60_30.5							328 pg. 52-53					
	650/65_30.5			380 pg. 51									
	700/50_30.5							331 pg. 54					
	710/50_30.5			331 pg. 54	390 pg. 49								
	750/60_30.5			380 pg. 51	390 pg. 49	885 pg. 48		328 pg. 52-53					
	800/45_30.5							328 pg. 52-53	331 pg. 54				
	850/50_30.5			390 pg. 49				328 pg. 52-53					

32	8.3_32			350 pg. 26									
	9.5_32 (230/95_32)			350 pg. 26				324 pg. 38					
	11.2_32 (270/95_32)			350 pg. 26									

Wheel Diameter	Standard Size	Agriflex IF/VF		Radial				Bias						
32	12.4_32 (320/85_32)			842 pg. 34										
	12.4_32								324 pg. 38					
	24.5_32 (650/75_32)			330 pg. 41	360 pg. 28	375 pg. 29			345 pg. 29	347 pg. 37				
	30.5L_32 (800/65_32)	372 pg. 31	375 pg. 29	360 pg. 28	390 pg. 49	380 pg. 51			345 pg. 29	349 pg. 37				
	35.5L_32 (900/60_32)	372 pg. 31		376 pg. 31	393 pg. 49				345 pg. 29					
	680/85_32			376 pg. 31										
	800/70_32	372 pg. 31		375 pg. 29										
	900/75_32			375 pg. 29										
	1050/50_32			375 pg. 29	376 pg. 31									

34	14.9_34 (380/85_34)			385 pg. 33	842 pg. 34									
	16.9_34 (420/85_34)			385 pg. 33	842 pg. 34				324 pg. 38	356 pg. 32	333 pg. 59			
	18.4_34 (460/85_34)	354 pg. 27		385 pg. 33	842 pg. 34	550 pg. 64			324 pg. 38	345 pg. 29	333 pg. 59			
	23.1_34								347 pg. 37					
	320/85_34													
	440/80_34			550 pg. 64										
	480/70_34			370 pg. 61	845 pg. 36				370 pg. 61					
	520/70_34			845 pg. 36	370 pg. 61									
	600/65_34	372 pg. 31		342 pg. 58	365 pg. 29	388 pg. 48			346 pg. 59					
	600/70_34			378 pg. 32										
	620/75_34			375 pg. 29										
	650/60_34			388 pg. 48										
	700/55_34								346 pg. 59					
	700/70_34								346 pg. 59					
	710/55_34			388 pg. 48										
	710/60_34			378 pg. 32										
	710/75_34			375 pg. 29										
	800/50_34			388 pg. 48										
	850/45_34			388 pg. 48										

36	8.3_36			350 pg. 26										
	9.5_36 (230/95_36)			350 pg. 26					324 pg. 38					

Wheel Diameter	Standard Size	Agriflex IF/VF		Radial				Bias					
36	11.2_36 (270/95_36)			350 pg. 26									
	12.4_36 (320/85_36)			842 pg. 34					324 pg. 38				
	13.6_36 (340/85_36)			842 pg. 34					304 pg. 39				

38	11.2_38 (270/95_38)			350 pg. 26					768 pg. 37				
	12.4_38 (320/85_38)			842 pg. 34					304 pg. 39				
	13.6_38 (340/85_38)			842 pg. 34	356 pg. 32				304 pg. 39	357 pg. 40			
	14.9_38 (380/80_38)	354 pg. 27		842 pg. 34	385 pg. 33				304 pg. 39				
	15.5_38 (400/75_38)			356 pg. 32					324 pg. 38				
	16.9_38 (420/85_38)			385 pg. 33	842 pg. 34				324 pg. 38	347 pg. 37	356 pg. 32	333 pg. 59	
	18.4_38 (460/85_38)			385 pg. 33	842 pg. 34				324 pg. 38	347 pg. 37	356 pg. 32	357 pg. 40	333 pg. 59
	20.8_38 (520/85_38)	372 pg. 31		385 pg. 33	842 pg. 34	550 pg. 64			347 pg. 37	333 pg. 59			
	380/95_38	354 pg. 27											
	480/70_38			370 pg. 61	845 pg. 36				370 pg. 61				
	480/80_38			550 pg. 64									
	520/70_38			370 pg. 61									
	520/70_38								370 pg. 61	845 pg. 36			
	540/65_38			360 pg. 28	365 pg. 29				360 pg. 28				
	580/70_38								370 pg. 61				
	580/70_38			370 pg. 61									
	600/65_38								360 pg. 28				
	600/65_38			365 pg. 29	550 pg. 64								
	650/65_38			342 pg. 58	360 pg. 28	365 pg. 29	550 pg. 64						
	650/75_38			378 pg. 32									
	650/85_38			385 pg. 33	550 pg. 64								
	710/60_38	372 pg. 31											
	710/70_38			360 pg. 28	365 pg. 29	845 pg. 36							
	710/85_38	372 pg. 31											
	800/70_38	372 pg. 31		370 pg. 61									
	900/55_38			378 pg. 32									
	900/60_38	372 pg. 31											

Wheel Diameter	Standard Size	Agriflex IF/VF		Radial				Bias					
40	9.5_40 (230/95_40)			350 pg. 26									
	9.5_42 (230/95_42)			350 pg. 26									
42	11.2_42 (270/95_42)			350 pg. 26									
	18.4_42 (480/80_42)			842 pg. 34	356 pg. 32								
	20.8_42 (520/85_42)	372 pg. 31		385 pg. 33	842 pg. 34								
	320/80_42			842 pg. 34									
	320/90_42			842 pg. 34									
	580/70_42			370 pg. 61									
	580/85_42	372 pg. 31											
	620/70_42			360 pg. 28									
	620/80_42			550 pg. 64									
	650/65_42			360 pg. 28	365 pg. 29	550 pg. 64							
	710/60_42	372 pg. 31											
	710/70_42	372 pg. 31		365 pg. 29	550 pg. 64	845 pg. 36							
	710/75_42	372 pg. 31		378 pg. 32									
	900/50_42			378 pg. 32									
	900/60_42			378 pg. 32									
44	8.3_44			350 pg. 26									
	9.5_44 (230/95_44)			350 pg. 26									
	11.2_44 (270/95_44)			350 pg. 26									
46	11.2_46 (270/95_46)			350 pg. 26									
	12.4_46 (320/90_46)	354 pg. 27		842 pg. 34				350 pg. 26					
	14.9_46 (380/90_46)	354 pg. 27	363 pg. 27	842 pg. 34	350 pg. 26								
	16.9_46 (420/80_46)			385 pg. 33									
	18.4_46 (480/80_46)			385 pg. 33	842 pg. 34	356 pg. 32							
	20.8_46 (520/85_46)	354 pg. 27		375 pg. 29	842 pg. 34								
	320/105_46	354 pg. 27											
	340/85_46			350 pg. 26									

Wheel Diameter	Standard Size	Agriflex IF/VF	Radial						Bias					
46	380/105_46			350 pg. 26										
	620/70_46			376 pg. 31										
48	9.5_48 (230/95_48)	363 pg. 27		350 pg. 26										
	11.2_48 (270/95_48)	363 pg. 27		350 pg. 26										
	13.6_48 (340/85_48)	354 pg. 27		350 pg. 26										
50	12.4_50 (320/90_50)	354 pg. 27							350 pg. 26					
	14.9_50 (380/90_50)	354 pg. 27		350 pg. 26										
	18.4_50 (480/80_50)	354 pg. 27	363 pg. 27	385 pg. 33										
	320/105_50	354 pg. 27												
	380/105_50	354 pg. 27		350 pg. 26										
	480/95_50	354 pg. 27												
52	12.4_52 (300/95_52)								350 pg. 26					
54	11.2_54 (270/95_54)	363 pg. 27		350 pg. 26										
	12.4_54 (320/90_54)	354 pg. 27							350 pg. 26					
	14.9_54 (380/90_54)	354 pg. 27		350 pg. 26										
	230/115_54	354 pg. 27												
	320/105_54	354 pg. 27												





ALLIANCE AGRICULTURAL TIRES KEEP FARMERS ROLLING ALL YEAR LONG

Alliance agricultural tires offer our customers a full line of options for every challenge on the farm. From high-speed flotation tires, to increased flexion (IF/VF), to value-priced tractor tires, we offer one of the world's most comprehensive lineups of tires designed specifically to minimize soil compaction. Our wide range of choices for high-speed rated tires keep farmers moving efficiently across the field and over the road. All engineered and built with the dedication to quality that has made Alliance a trusted brand among farmers around the world.



AGRICULTURAL

RADIAL AG

350 ROW CROP - NARROW RADIAL R-1

OEM FITMENT

The Alliance 350 is the market-leading high-clearance tire designed for all types of cultivation, harvesting, and spraying jobs. The strong casing and rigid belts coupled with radial construction provide unbeatable performance. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
35000802AL	9.5R24	230/95R24	107A8/104B	**	TL	44	W8	74	41.2	9	120	18.9	1980	52	30
35000971AL	9.5R28	230/95R28	109A8/106B	**	TL	44	W8	80	45.1	9	130	20.7	2090	52	30
35050008AL-IN	8.3R32		116D		TL	41	W7	77	46.9	8.3	140.8	21.8	2760	52	40
35052001AL-IN	9.5R32	230/95R32	131A8/128D	4*	TL	43	W8	94	49	9.5	147.4	22.8	3960	52	40
35050001AL-IN	11.2R32	270/95R32	135A8/132D	4*	TL	35	W10	112	51.2	11.2	153.3	23.7	4400	52	40
35012850AL	8.3R36		118A8/118D	4*	TL	41	W7	80	50.8	8.3	153.8	23.9	2910	52	40
35050007AL-IN	9.5R36	230/95R36	133A8/130D		TL	43	W8	109	53	9.5	159.1	24.6	4180	52	40
35050002AL-IN	11.2R36	270/95R36	139A8/136D	4*	TL	40	W10	126	55.5	11.2	170.4	25.7	4940	52	40
35050003AL-IN	11.2R38	270/95R38	140A8/137D	4*	TL	43	W10	132	57.3	11.2	172.8	26.8	5080	52	40
35013260AL	9.5R40	230/95R40	132A8/132D	4*	TL	44	W8	117	57.5	9.5	173.9	27	4400	52	40
35013806AL	11.2R42	270/95R42	139A8/139D	4*	TL	46	W10	141	61.6	11.2	185.2	28.7	5360	52	40
35050108AL-IN	9.5R42	230/95R42	133D		TL	43	W7	120	59.3	9	178.6	28	4540	59	40
35017003AL	8.3R44		126A8/126D	4*	TL	41	W7	96	58.9	8.3	178.9	27.9	3740	52	40
35050010AL-IN	9.5R44	230/95R44	137A8/134D	4*	TL	47	W8	125	61	9.5	184.9	28.7	4680	52	40
35025009AL-IN	11.2R44	270/95R44	145A8/142D		TL	49	W10	156	63.2	11.2	190.8	29.6	5840	58	40
35055252AL-IN	11.2R46	270/95R46	144A8/141D	4*	TL	45	W10	155	65.6	11.2	197	30.5	5680	52	40
35050020AL-IN	12.4R46	320/90R546	151A8/148D	4*	TL	47	W11	183	67.1	12.4	208.4	31.4	6800	52	40
35047530AL	340/85R46		161A2/150D		TL	56	W12	274	68.7	13.4	214.1	32.2	7400	52	40
35047520AL	14.9R46	380/90R46	145A8/142D	3*	TL	51	W13A	260	71.8	14.9	214.7	33.1	5360	30	30
35047528AL	14.9R46	380/90R46	152A8/149D		TL	51	W13A	274	71.8	14.9	214.7	33.1	7150	32	40
35075100AL	14.9R46	380/90R46	162A8/159D		TL	51	W13A	314	71.8	14.9	214.7	33.1	9650	58	40
35047977AL	14.9R46	380/90R46	172A8/172D		TL	51	W13A	339	71.8	14.9	214.7	33.1	13900	84	40
35047536AL	380/105R46		158D		TL	51	W13A	370	76.8	15.5	232.9	35.4	9350	44	40
35050030AL-IN	9.5R48	230/95R48	136D	4*	TL	44	W8	137	65	9.5	197.2	30.7	4940	52	40
35050031AL-IN	11.2R48	270/95R48	145A8/142D	4*	TL	49	W9	160	67.3	11.2	208.2	31.6	5840	52	40
35067000AL	13.6R48		148A8/148D	4*	TL	50	W12	216	71.1	13.6	213.9	33.1	6950	52	40
35050032AL-IN	13.6R48		154A8/151D		TL	49	W12	225	71.1	13.6	213.9	33.1	7600	51	40
35067249AL	13.6R48		167A2/156D		TL	50	W12	244	71.1	13.6	219.2	33.6	8800	70	40
35075050AL	12.4R50	320/90R50	150A8/150D		TL	52	W10A	209	73.5	12.8	216.6	33.1	7400	52	40
35075250AL	14.9R50	380/90R50	154A8/151D		TL	59	W12A	288	76.8	15.1	233.8	35.9	7600	52	40
35075255AL	14.9R50	380/90R50	161A8/158D		TL	59	W12A	291	76.8	15.1	233.8	36	9350	52	40
35075180AL	380/105R50		179A2/168D		TL	59	W12A	399	80.7	15.9	244.6	37.6	12300	64	40
35067073AL	12.4R52	300/95R52	159A2/148D	4*	TL	48	W10	201	74.4	12.2	226.2	35.2	6950	52	40
35067085AL	12.4R52	300/95R52	167A2/156D		TL	48	W10	204	74.4	12.2	226.2	35.2	8800	70	40
35075011AL	11.2R54	270/95R54	157A2/146D		TL	46	W10A	189	74.2	10.8	229.4	34.6	6600	52	40
35075080AL	11.2R54	270/95R54	167A2/156D		TL	46	W10A	222	74.8	11.2	229.4	35.6	8800	87	40
35075124AL	12.4R54	320/90R54	162A2/151D		TL	52	W10A	213	76.7	12.6	233.3	36.4	7600	52	40
35075600AL	14.9R54	380/90R54	152A8/152D		TL	59	W12A	321	80.9	15.3	247.5	38.1	7850	35	40
35047682AL	14.9R54	380/90R54	174A8/171D		TL	59	W12A	357	80.9	15.3	247.5	38.1	13600	52	40

354 AGRIFLEX STEEL BELTED

OEM FITMENT

The Alliance 354 has state-of-the-art materials and the steel-belted construction allow VF (Very High Flexion) and IF (Increased Flexion) radial tractor tires to deliver outstanding performance in any conditions. VF tires carry 40% more load on the same inflation pressure as conventional radials, or require 40% less inflation pressure for the same load, to reduce soil compaction. IF tires carry 20% more load on the same inflation pressure as conventional radials, or require 20% less inflation pressure for the same load. (TUBELESS - STEEL BELTED - STUBBLE GUARD)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
35400108AL	IF 420/85R34		154D		TL	63	W14L	282	62	16.4	181.9	27.9	8250	35	40
35400001AL	IF 380/80R38		149D		TL	61	DW13	260	62.8	15.7	183.8	28.7	7150	35	40
35400002AL	VF 380/80R38		154D		TL	59	DW13	276	62.6	15	185.4	28.5	8260	35	40
35400003AL	IF 380/95R38		154D		TL	61	DW13	283	66.4	15.4	195.2	30.2	8250	35	40
35400046AL	IF 320/90R46		155D		TL	48	W11	238	68.7	13	208	32	8550	52	40
35400052AL	IF 320/105R46		166D		TL	48	W11	301	72.4	13.6	216.7	33.7	11700	70	40
35400053AL	VF 320/105R46		172D		TL	59	DW11	288	72.4	12.8	219.8	33.5	13880	70	40
35400010AL	IF 380/90R46		168D		TL	61	W13	330	73	15.4	217.2	33.9	12300	64	40
35400016AL	VF 380/90R46		173D		TL	61	DW13	341	73	15.4	220.3	33.9	14320	64	40
35400030AL	IF 520/85R46		165D		TL	67	DW18	495	80.8	20.9	236.7	36.1	11400	23	40
35400033AL	VF 520/85R46		170D		TL	67	DW18	510	80.8	20.9	236.7	36.1	13220	23	40
35400049AL	IF 340/85R48	13.6R48	159D		TL	56	DW12	357	71.2	13.3	215.7	33.5	9650	58	40
35400032AL	IF 320/90R50		161D		TL	56	DW11	262	72.7	12.6	222.2	34.3	10200	64	40
35400133AL	VF 320/90R50		166D		TL	56	W11	262	72.8	12.6	221.3	34	11700	64	40
35400048AL	IF 320/105R50		152D		TL	59	DW11	313	76.3	12.7	228.2	35.8	7850	35	40
35400022AL	IF 380/90R50		170D		TL	61	DW13	348	77	15.2	229.2	35.7	13200	64	40
35400008AL	IF 380/105R50		177D		TL	60	DW13	385	80.8	15.7	222.7	37.3	16100	70	40
35400020AL	IF 480/80R50		166D		TL	66	DW16	468	80.7	18.9	242.2	37.2	11700	35	40
35400019AL	VF 480/80R50		171D		TL	66	DW16	472	80.7	18.9	240.7	36.9	13600	35	40
35400021AL	VF 480/80R50		179D		TL	66	DW16	467	86.1	19.1	257.9	38.7	17100	52	40
35400025AL	IF 480/95R50		165D		TL	66	W16	498	86.1	18.9	256.6	38.9	11400	23	40
35400027AL	VF 480/95R50		176D		TL	66	DW16	494	86.1	19.1	257.9	38.7	15640	35	40
35400005AL	IF 230/115R54		145D		TL	58	W8	232	76.7	10.1	233.9	36.3	6400	46	40
35400034AL	IF 320/90R54		162D		TL	36	DW11	282	76.8	12.7	234.3	36.6	10500	64	40
35400024AL	IF 380/90R54		171D		TL	59	DW13	374	80.9	15	245.3	37.8	13600	64	40
35400055AL	IF 320/105R54		167D		TL	59	DW11	332	80.3	13	245.3	37.8	12000	64	40

363 AGRIFLEX IF STEEL BELTED

OEM FITMENT

The Alliance 363 is rated for speeds up to 40 mph over the road, and is designed for sprayers that need to perform both on the fields and on the road. State-of-the-art materials and the steel-belted construction allow IF (Increased Flexion) radial tractor tires to deliver outstanding performance in any conditions. IF tires carry 20% more load on the same inflation pressure as conventional radials, or require 20% less inflation pressure for the same load, to reduce soil compaction. (TUBELESS - STEEL BELTED - STUBBLE GUARD)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
36300020AL	IF 320/90R46		155D		TL	47	DW11	243	68.8	12.1	209.6	32.3	8550	52	40
36300032AL	IF 380/90R46		168D		TL	49	W13	340	72.5	15.3	220.8	33.6	12300	64	40
36300036AL	VF 380/90R46		173D		TI	49	DW13	346	72.5	15.3	218.4	33.4	14300	64	40
36300011AL	VF 230/95R48		146D		TL	42	DW9	154	65.4	9.1	199.1	30.9	6600	52	40
36300014AL	VF 270/95R48		155D		TL	44	DW10	207	68.2	10.8	209.8	32.1	8540	58	40
36300100AL	IF 480/80R50		166D		TL	52	DW16B	422	80.2	18.9	242.2	37	11700	35	40
36300017AL	VF270/95R54		156D		TL	44	DW10	227	76.6	11.3	226.1	35.2	8800	52	40

AGRICULTURAL

RADIAL AG

360 SUPER POWER DRIVE RADIAL R-1+ OEM FITMENT

The Alliance 360 is designed for great traction and flotation on harvesting equipment. The broad tread face and multi-angle tread bar provides a large footprint for maximum flotation and minimal compaction and rutting. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
36086018AL	480/65R24		136A8/133D		TL	58	W15	202	48.6	18.9	143	21.9	6950	46	25
36050185AL-IN	620/75R26	23.1R26	167A8		TL	59	DW20B	348	62.6	24.6	184.4	28.2	12000	46	25
36017501AL	750/65R26	28LR26	158A8/155B		TL	71	DW25A	498	63.9	29.6	188.1	28.7	9350	17	25
36017702AL	750/65R26	28LR26	166A8/163B		TL	71	DW25A	514	63.9	29.6	188.1	28.7	11700	35	25
36017698AL	750/65R26	28LR26	173A8/170B		TL	71	DW25A	530	63.9	29.6	188.1	28.7	14300	44	25
36018031AL	600/65R28		157A8/154D		TL	59	DW18L	323	58.3	23.3	172.8	25.8	9100	35	25
36020105AL	650/75R32	24.5R32	159A8/156B	**	TL	63	DW21A	435	70.9	24.5	207.2	31.5	9650	23	25
36020025AL-IN	650/75R32	24.5R32	172A8		TL	63	DW21A	465	70.9	24.6	207.2	31.5	13900	46	25
36020948AL	650/75R32	24.5R32	172D		TL	63	DW21A	493	70.9	24.6	212.7	31.5	13880	46	40
36035001AL-IN	800/65R32		181A8/178B		TL	63	DH27	727	72.8	31.5	215.9	32.5	18200	52	25
36032007AL	30.5LR32		167A8/164B	**	TL	62	DW27A	560	71.7	30.5	209.4	31.9	12000	23	25
36033010AL	30.5LR32		173A8/170B		TL	62	DW27	583	71.7	30.5	209.4	31.9	14300	35	25
36033008AL	30.5LR32		178A8/175B		TL	62	DH27	574	71.7	30.5	209.4	31.9	16500	45	25
36083111AL	800/65R32		169A8/166D		TL	63	DW27	600	72.8	31.5	215.9	32.5	12800	23	25
36033435AL	800/65R32		176A8/173D		TL	63	DW27B	643	72.8	31.5	215.9	32.5	15700	48	25
36033444AL	800/65R32		178A8/175D		TL	63	DH27	632	72.8	31.5	215.9	32.5	16500	45	25
36084855AL	540/65R38		150A8/147D		TL	63	W16L	336	65.9	21.7	196.3	30.2	7400	25	25
36080045AL	710/70R38		181A8/178D		TL	69	DW25B	638	76.7	28.2	225.9	34.5	18200	54	25
36050028AL-IN	650/65R38		171D		TL	60	DW20A	463	72.2	25.4	213.5	32.7	13600	51	40
36061582AL	620/70R42		166A8/163B		TL	66	DW20A	527	76.4	25.6	226.5	34.8	11700	28	25
36061747AL	620/70R42		173A8/170B		TL	66	DW20A	605	76.4	25.6	226.5	34.8	14300	39	25
36016205AL	480/65-24		140A8		TL	58	W15	229	49.2	18.5	147.2	22.9	5510	35	25
36018125AL	480/65-28		142A8		TL	58	W15	272	52.6	18.9	155.5	23.8	6950	46	25
36018124AL	540/65-28			16	TL	63	W16L	330	57	20.5	170.5	26.3	8480	48	25
36018062AL	600/65-28		154A8		TL	59	W18L	367	58.3	23.3	172.8	25.8	6950	46	25
36019040AL	540/65-30		150A8		TL	63	W16L	359	58.5	22	171.2	26.1	6950	46	25
36035012AL	540/70-30		152A8		TL	63	W16L	361	59.1	20.5	177.6	27.3	7820	35	25
36035045AL	540/65-38		153A8		TL	63	W16L	445	66.9	20.4	201.8	31.2	8040	35	25
36051010AL	600/65-38		159A8		TL	60	W18L	450	69.3	21.9	209.4	32.2	9640	35	25
36021056AL	650/65R42		165A8		TL	64	DW20A	631	76.4	25.6	226.5	34.8	6950	46	25

387 FARM RADIAL

The Alliance 387 Farm Radial is a tire specially developed for environmentally friendly machines designed to minimize damage to soil, grass and plants during operation. This Pattern is suitable for grassland and other sensitive terrain application on utility tractors and small implements used in golf courses, parks and vineyards.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
38701000AL-IN	14.9LR20	375/75R20	119A8/116B		TT	45	W13	115	42.3	14.9	124.3	18.9	3000	23	30

365 AGRISTAR RADIAL R-1W

OEM FITMENT

The Alliance 365 Agristar is a high-volume tire designed for high-horsepower tractors as well as flotation tires for high-clearance sprayers. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
36500022AL-IN	420/65R20		135D		TL	45	W13	138	41.5	16.5	122.4	20.2	4800	35	40
36516559AL-IN	440/65R24		138A8/135D		TL	52	W14L	168	46.9	17.6	140	21.5	4300	35	25
36516565AL-IN	480/65R24		140D		TL	55	W15L	215	48.7	19	144.5	21.9	5520	29	40
36517950AL-IN	540/65R24		140D		TL	61	W16L	234	51.7	21.3	152.4	23.3	5520	23	40
36517951AL-IN	540/65R24		146D		TL	61	W16L	249	51.7	21.3	152.4	23.3	6600	35	40
36517712AL-IN	480/65R28		145A8/142D		TL	57	W14L	216	52.6	18.8	155.9	23.9	5360	23	25
36588012AL-IN	540/65R28		152A8/149D		TL	60	W16L	270	55.9	20.9	164.7	25.2	6400	23	25
36518668AL-IN	600/65R28		157A8/154D		TL	69	W18L	318	58.4	23.4	171.3	26.1	9900	35	25
36518652AL	VF 600/65R28 NRO		163D		TL	69	DW20	344	58.9	24.2	172.9	25.5	10700	29	40
36518400AL-IN	540/65R30		153A8/150D		TL	63	W16L	267	58.3	21.7	171.9	26.3	8050	35	25
36550120AL	600/65R30		149D		TL	69	DW20	311	60.7	24	179.3	27.4	7160	23	40
36550122AL	600/65R30		158D		TL	69	DW20	322	60.7	24	179.3	27.4	9360	36	40
36518802AL-IN	540/65R34		155A8/152D		TL	61	W16L	305	61.8	21	183.5	28.2	8550	35	25
36550168AL-IN	600/65R34		160A8/157D		TL	69	W18L	364	64.9	23.7	190.8	29.1	8550	35	25
36518808AL-IN	540/65R38		153D		TL	69	W16L	330	65.6	21.3	196.4	30.3	8040	35	40
36550246AL-IN	600/65R38		162A8/159D		TL	69	W18L	397	68.8	23.4	203.5	31.3	10500	35	25
36581508AL-IN	650/65R38		171D		TL	73	DW20B	452	71.9	25.9	215.9	32.5	13550	52	40
36580338AL	710/70R38		168A8/166D		TL	76	DW25B	586	76.9	28.6	226.2	34.5	11700	43	25
36580475AL	710/70R38		174A8/171D		TL	76	DW25B	615	76.9	28.6	226.2	34.5	14800	43	25
36581510AL-IN	650/65R42		173A8/170D		TL	73	DW20A	553	76.6	25.9	226.7	34.7	14300	46	25
36580810AL	710/70R42		173A8/173B		TL	76	DW23B	662	80.9	29.1	243.2	36.9	14320	35	25
36580455AL	710/70R42		180A8/177D		TL	76	DW23B	734	80.9	29.1	243.2	36.9	17600	46	25

375 AGRISTAR STEEL BELTED RADIAL R-1W

OEM FITMENT

The Alliance 375 Agristar is specially designed to withstand aggressive stubble and heavy loads in harvesting applications. Steel belts and special stubble-resistant rubber compounds ensure a long tire life. (TUBELESS - STEEL BELTED - STUBBLE GUARD)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
37551004AL	1000/50R25		172A8/166D		TL	66	36.00	847	65	41.7	190.7	29.1	11700	35	40
37530112AL	620/75R26	23.1R26	166A8/166B		TL	73	DW20B	514	62.8	24.6	186.5	28.6	11700	44	30
37522500AL	650/75R32	24.5R32	172A8/172B		TL	73	DW21B	496	71.9	26.4	213.2	32.7	13900	46	30
37533605AL	VF 800/65R32		181D		TL	76	DW27B	734	72.8	31.7	214	31.8	18170	29	40
37535001AL	800/70R32		175A8/175B		TL	77	DW27A	844	76.2	30.7	224.6	34.5	15200	46	30
37552000AL	900/75R32		190A8		TL	83	DW30B	1,054	84.8	37	251.7	37.9	23350	46	25
37551431AL	1050/50R32		180A8		TL	81	DW36A	1,064	75	40.6	223.1	34.3	17600	32	25
37530450AL	620/75R34		170A8/170B		TL	67	DW20A	531	71.7	24	214.1	33	13200	46	30
37531150AL	710/75R34		178A8/178B		TL	73	DW23A	701	76.6	28.3	226.4	34.6	16500	46	30
37555015AL	520/85R46	20.8R46	158A8/155B		TL	76	W16L	533	80.7	19.8	240	36.4	9350	23	25
37555033AL	520/85R46	20.8R46	173A8/170B		TL	76	W16L	545	80.7	19.8	240	36.4	14300	46	25

AGRICULTURAL

RADIAL AG

370 WIDE DEEP TREAD RADIAL “SEVENTY” R-1W

OEM FITMENT

The Alliance 370 is a wide-base radial tractor tire designed for high-horsepower tractors used in heavy-duty field and hauling jobs. Designed to perform at higher load capacities without increasing air pressure, the tire offers maximum compaction protection. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
37001600AL-IN	200/70R16		94A8/94B		TL	36	W6	32	27	7.8	80.6	12.4	1480	35	30
37001677AL-IN	240/70R16		104A8/101B		TL	38	W8	40	29.1	9.6	86.5	13.3	1980	35	25
37001666AL-IN	260/70R16		109A8/106B		TL	39	W9	48	30.7	10.2	90.5	13.8	2270	35	25
37001591AL-IN	280/70R16		112A8/109B		TL	42	W9	55	31.7	10.9	94.2	14.5	2470	35	25
37001780AL-IN	320/65R16		107A8/104B		TL	41	W10	70	32.8	12.8	96.7	14.8	2150	23	30
37001243AL-IN	280/70R18		114A8/111B		TL	42	W9	59	33.9	10.9	100.2	15.4	2600	35	25
37002333AL-IN	340/65R20		124A8/122B		TL	42	W11	82	37.6	13.6	111	17	3520	35	25
37002000AL-IN	260/70R20		113A8/110B		TL	39	W9	57	34.6	10.2	102.8	15.8	2540	23	25
37002033AL-IN	280/70R20		116A8/113B		TL	42	W10	65	35.9	10.9	106.5	16.3	2760	23	25
37002360AL-IN	300/70R20		120A8/117B		TL	43	W9	75	37.6	11.5	111.5	17.1	3080	35	25
37002525AL-IN	320/70R20		123A8/120B		TL	42	W10	82	38.8	12.8	114.5	17.5	3420	25	25
37002350AL-IN	360/70R20		129A8/126B		TL	60	W11	110	41	14.2	120.7	18.4	3740	35	30
37002410AL-IN	380/70R20		122A8/122B		TL	54	W12	131	42.6	15	125	19.1	3300	23	30
37001960AL-IN	320/70R24		116A8/113B		TL	51	W10	108	43.2	12.6	128.3	19.7	2760	23	25
37042001AL-IN	360/70R24		122A8/119B		TL	53	W11	131	45.4	14.2	134.1	20.6	3300	23	25
37042005AL	380/70R24		125A8/122B		TL	55	W12	150	46.5	15	137.4	21	3640	23	25
37044008AL	420/70R24		130A8/127B		TL	57	W13	175	48.7	16.5	143	21.8	4180	23	25
37044020AL	480/70R24		138A8/135B		TL	59	W15	213	52	18.9	152.5	23.2	5200	23	25
37011010AL	620/70R26		153A8/153B		TL	60	W20B	319	59.1	24.6	174.8	26	8050	23	30
37044806AL	360/70R28		125A8/122B		TL	51	W11	149	49.4	14.1	146.9	22.6	3640	23	25
37045004AL	380/70R28		127A8/124B		TL	55	W12	172	50.5	15	149.9	23	3860	23	25
37046000AL	420/70R28		133A8/130B		TL	57	W13	190	52.7	16.5	155.9	23.9	4540	23	25
37048003AL	480/70R28	19.5LR28	140A8/137B		TL	58	W15L	232	56	18.9	164.9	25.2	5520	23	25
37008115AL	480/70R28	19.5LR28	151A8/145E		TL	58	W15L	239	56	18.9	164.9	25.2	7600	36	25
37010150AL	600/70R28		161A8/158B		TL	66	W18L	364	61.5	23.3	183.9	27.9	10200	41	25
37010200AL	480/70R30	19.5LR30	150A8/144E		TL	58	W15L	249	58	18.9	170.7	26.1	7400	46	25
37010210AL	480/70R30	19.5LR30	155A8/149E		TL	58	W15L	256	58	18.9	170.7	26.1	8550	46	25
37010220AL	480/70R30	19.5LR30	160A8/154E		TL	58	W15L	274	58	18.9	170.7	26.1	9100	58	25
37010411AL	600/70R30		152A8/152B		TL	73	DW20B	362	62.8	24.7	183.3	27.9	7850	23	30
37051004AL	480/70R34		143A8/140B		TL	59	W15L	261	62	18.9	184	28.2	6000	23	25
37051060AL	480/70R34		155A8/152B		TL	59	W15L	270	62	18.9	184	28.2	8550	38	25
37052000AL	520/70R34		148A8/145B		TL	69	W16L	315	64.3	20.3	190	29.1	6950	25	25
37052775AL	520/70R34		168A8/165B		TL	69	W16L	354	64.3	20.3	190	29.1	12300	64	25
37054003AL	480/70R38		145A8/142B		TL	66	W15L	282	66	18.9	196.5	30.2	6390	23	25
37055000AL	520/70R38		150A8/147B		TL	69	W16L	329	38.2	20.3	202.5	31.1	6390	23	25
37056006AL	580/70R38		155A8/152B		TL	73	W18A	403	71.5	32.2	210.4	32.1	8540	23	25
37056011AL	580/70R38		170A8/167B		TL	73	W18A	454	71.5	32.2	210.4	32.1	13220	41	25
37056155AL	580/70R38		180A8		TL	73	W18A	461	71.5	32.2	210.4	32.1	17620	67	25
37058007AL	800/70R38		173A8/173B		TL	78	DW25B	801	82	31.7	240.2	36.9	14320	23	25
37057100AL	580/70R42		158A8/158B		TL	73	W18L	492	74.8	23.7	221.7	34	9360	23	25

372 AGRIFLEX IF/VF CFO STEEL BELTED

OEM FITMENT

The Alliance 372 has state-of-the-art materials and steel-belted construction allowing our IF/VF radial tires to deliver outstanding performance. VF tires carry up to 40% more load at the same inflation pressure as conventional radials, or require 40% lower inflation pressure for the same load, reducing soil compaction. IF tires carry up to 20% more load at the same inflation pressure as conventional radials, or require 20% lower inflation pressure for the same load. Stronger carcass designed for cyclic service and intended for use on minimal torque applications such as combines, harvesters and grain carts (up to 1 mile). (TUBELESS - STEEL BELTED - STUBBLE GUARD)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
37200080AL	VF 620/70R26		170D		TL	57	DW21B	345	58.5	24.6	172.7	25.4	13220	35	40
37200006AL	IF 420/85R28 CFO		145D		TL	58	DW15	248	56.6	17.6	167.8	28	6400	23	40
37200048AL	VF 600/60R28		146D		TL	62	DW20B	316	61.4	24.6	179.9	26.8	14320	41	40
37200052AL	IF600/65R28 CFO		160D		TL	57	DW21B	349	58.5	23.9	176.4	26.2	9900	35	40
37200091AL	IF 600/70R28 CFO		164D		TL	71	DW21B	427	61.4	24.6	181	27.4	11000	35	40
37200096AL	VF 600/70R28 CFO		173D		TL	71	DW21B	432	61.4	24.6	179.9	26.8	14300	41	40
37200054AL	VF 600/60R30		147D		TL	63	DW20B	337	58.7	23.2	170	25.6	6770	15	40
37200088AL	IF 600/70R30 CFO		159D		TL	70	DW20	469	63.4	24.2	193.5	28	9650	23	40
37200090AL	IF 600/70R30		165D		TL	70	DW20	475	63.4	24.2	187.8	28.3	11400	35	40
37200105AL	VF 600/70R30 CFO		170D		TL	70	DW21B	487	63	24.6	187.8	28	13200	35	40
37200126AL	VF 650/75R30 CFO		172D		TL	74	DW20B	521	67.7	26	194.6	28.9	13900	23	40
37200135AL	IF 800/65R32		178A8		TL	79	DW27	639	72.6	30.5	213.2	32.1	16500	35	25
37200104AL	IF 800/70R32 CFO		182A8		TL	74	DW27B	707	76.1	30.9	224.6	33.7	18700	35	25
37200103AL	IF 900/60R32CFO		193D		TL	73	DW30B	872	74.4	34.8	222.4	33.3	22000	46	40
37200097AL	IF 650/65R34		161D		TL	73	DW23	446	67.7	25.6	198.1	30.3	10200	23	40
37200031AL	IF 520/85R38		167D		TL	70	DW16L	449	77	21.3	230.9	34.6	12800	35	40
37200130AL	VF 710/60R38		160D		TL	68	DW25B	512	71.5	28	209.2	31.6	9910	28	40
37200092AL	IF 710/85R38 CFO		178D		TL	84	DW25B	784	85.2	28.7	249.5	37.6	16500	23	40
37200112AL	IF 800/70R38 CFO		184A8		TL	79	DW27	846	81.9	32.3	240.2	36.5	19800	35	25
37200118AL	IF 800/70R38 CFO		187A8		TL	79	DW27	861	81.9	32.3	240.2	36.5	21500	41	25
37200106AL	IF 900/60R38		184A8		TL	73	DW30B	833	80.1	34.6	236.7	35.1	19820	35	25
37200035AL	IF 520/85R42		169D		TL	70	DW16L	493	77	21.3	230.9	34.6	12780	35	40
37200060AL	IF 580/85R42		178D		TL	72	DW20	580	80.3	23.4	238.8	36.1	16500	40	40
37200133AL	VF 710/60R42		161D		TL	68	DW25B	560	75.7	28	224	33.5	10190	15	40
37200094AL	IF 710/70R42		179D		TL	79	DW25B	742	81.2	29.3	240.7	36.6	17100	35	40
37200099AL	IF 710/75R42 CFO		176D		TL	79	DW25B	787	84.6	28.5	249.1	37.4	15640	23	40

376 MULTISTAR STEEL BELTED R-1

OEM FITMENT

The Alliance 376 Multistar is designed to offer great traction and soil protection on harvesters and floaters. Steel belts and a stubble-resistant rubber compound ensures a long tire life and maximum durability. (TUBELESS - STEEL BELTED - STUBBLE GUARD)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
37600010AL	750/50R26		157A8/151D		TL	50	DW25B	345	55.9	29.6	168	25.3	7600	35	40
37600093AL	680/85R32		178A8/178B		TL	63	DW21B	617	77.2	26	229.3	34.7	16520	46	25
37600051AL-IN	900/60R32	35.5LR32	176D		TL	72	DW27B	778	74.7	34.1	222	33.5	15640	35	40
37600065AL	900/60R32	35.5LR32	185A8/185B		TL	71	DW27B	818	74.7	34.1	222	33.5	20400	46	25
37600091AL	1050/50R32		185A8/182D		TL	52	DW36A	857	73.6	41.3	223.9	32.8	18700	63	40
37600040AL	620/70R46		162A8/159D		TL	73	DW20B	541	81.1	24.4	241.7	37	9650	23	40

AGRICULTURAL

RADIAL AG

378 AGRISTAR XL R-1W

The Alliance 378 has a reinforced bead and sidewall to ensure high load capacity for today's high horsepower tractors and forage harvesters. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
37800498AL	710/55R30		153D/156A8		TL	63	DW23B	359	59.7	26.7	176	26.3	8050	23	40
37800500AL	710/60R30		162D/165A8		TL	71	DW23B	430	63.6	27.8	189.8	28.4	11400	35	25
37800018AL-IN	620/75R30		169A8/166D		TL	57	DW20B	461	66.6	23.2	197.8	32.7	12800	46	25
37800010AL	600/70R34		160D/163A8		TL	64	DW20B	380	67.1	24	201.5	30.3	10700	35	25
37800504AL	710/60R34		167A8/170A8		TL	71	DW23B	467	67.4	28	201.9	30.4	12000	35	25
37800400AL	650/75R38		169D/172A8		TL	69	DW23B	546	76	26.4	225.6	34.3	13900	35	25
37801618AL	900/55R38		178D/181A8		TL	78	DW27	756	78.7	33.5	237	35.5	18200	35	25
37801200AL	710/75R42		175D/178A8		TL	79	DW23B	724	84.3	28.7	252.3	38	16500	35	25
37801642AL	900/50R42		168D		TL	73	DW28B	622	76.7	33.7	227.2	33.9	12330	23	40
37801640AL	900/60R42		180D		TL	80	DW28B	817	84.3	35	250.6	37.4	17620	35	40

356 POWER DRIVE RADIAL R-1

OEM FITMENT

The Alliance 365 is designed for MFWD and 2WD tractors. The mud guard and deep R-1 tread ensure traction and productivity.(TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
35601875AL	14.9R26		127A8/124B	**	TL	55	W13	179	51.2	14.9	151.9	23.3	3860	23	25
35619400AL	14.9R26		133A8/129B	***	TL	55	W12	175	51.2	14.9	151.9	23.3	4080	23	30
35601914AL	16.9R26		135A8/132B	**	TL	57	W15L	209	53.9	16.9	160.1	24.6	4800	30	25
35601924AL	18.4R26		140A8/137B	**	TL	57	W15L	237	56.1	18.7	165.6	23.3	5520	30	25
35605697AL	13.6R38		151A8	4*	TL	53	W12	202	61.0	13.6	183.6	28.4	7600	70	25
35605670AL	15.5R38	400/75R38	134A8/131B	**	TL	56	W14L	220	61.8	15.5	184.8	28.5	4300	23	30
35609110AL	18.4R42		148A8/145B	**	TL	57	W16L	327	72.8	18.4	217.8	33.6	6400	23	30
35622007AL	18.4R42		153A8/150B	3*	TL	57	W16L	331	72.8	18.4	217.8	33.6	7400	30	30
35622065AL	18.4R42		169A8/166B		TL	57	W16L	408	72.8	18.4	217.8	33.6	11700	30	30
35610020AL	18.4R46		155A8152B	3*	TL	57	W16L	378	77.1	18.4	230.6	35.6	7850	30	30
35610110AL	18.4R46		176A8/176B		TL	57	W16L	421	77.1	18.4	231.0	35.7	15700	51	30

385 AGRISTAR RADIAL R-1W

OEM FITMENT

The Alliance 385 Agristar is specially designed for today's MFWD and 2WD tractors. The multi-angle lug is uniquely suited to provide great forward traction and the lateral stability needed in the field. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
38501511AL	280/85R20	11.2R20	112A8/109D		TL	43	W10	74	39.1	11.3	115.4	17.6	2470	23	40
38501550AL	320/85R20	12.4R20	119A8/116B		TL	54	W10	99	41.1	12.8	123.6	18.3	3000	23	30
38502159AL	320/85R24	12.4R24	122A8/119D		TL	55	W10	119	45.3	13	134.3	20.6	3300	23	40
38501679AL	340/85R24	13.6R24	125A8/122D		TL	58	W11	137	46.7	13.8	138.1	21.2	3640	23	40
38501888AL	380/85R24	14.9R24	131A8/128D		TL	62	W11	167	49.4	15.4	145.9	22.3	4300	23	40
38502431AL	420/85R24	16.9R24	137A8/134D		TL	62	W15L	197	52.3	17.3	153.8	23.5	5080	23	40
38503771AL	380/85R28	14.9R28	133A8/130D		TL	62	W12	184	53.2	15.2	158.1	24.3	4540	23	40
38502700AL	420/85R28	16.9R28	139A8/136D		TL	64	W14L	227	56.5	17.7	166.9	25.6	5360	23	40
38503145AL	420/85R30	16.9R30	140A8/137D		TL	64	W14L	240	58.1	18.1	171.9	26.3	5520	23	40
38503827AL	380/85R34	14.9R34	137A8/134D		TL	62	W12	214	59.8	15.4	177.8	27.3	5080	23	40
38504708AL	420/85R34	16.9R34	142A8/139D		TL	64	W15L	271	62.2	18.1	183.7	28.1	5840	23	40
38504722AL	420/85R34	16.9R34	147A8/144D		TL	64	W15L	262	62.2	18.1	183.7	28.1	6800	23	40
38505468AL	460/85R34	18.4R34	147A8/144D		TL	67	W16L	303	65.1	19.3	192.9	29.6	6800	23	40
38505490AL	460/85R34	18.4R34	157A8/154B		TL	67	W16L	307	65.1	19.3	192.9	29.6	9100	30	30
38503845AL-IN	380/80R38		142A8/142B		TL	54	W12	241	62.8	15.2	188.2	29.1	5840	35	30
38503411AL	420/85R38	16.9R38	144A8/141D		TL	64	W15L	289	65.7	17.6	196	30.2	6150	23	40
38505432AL	460/85R38	18.4R38	149A8/146D		TL	67	W16L	330	69.1	19.3	205.6	31.6	7150	23	40
38540251AL	520/85R38	20.8R38	155A8/152D		TL	76	W16A	389	72.4	21.3	214.6	32.9	8550	23	40
38500270AL	520/85R38	20.8R38	169A8/166D		TL	76	W16A	422	72.4	21.3	214.6	32.9	12800	46	40
38550842AL	650/85R38		173A8/170D		TL	76	DW23B	678	80.8	27.6	239.7	36.8	14300	23	40
38540320AL	520/85R42	20.8R42	157A8/154D		TL	76	W16A	421	76.8	20.5	229.8	35.5	9100	23	40
38540450AL	520/85R42	20.8R42	167A8/164D		TL	76	W16A	445	76.8	20.5	229.8	35.5	12000	23	40
38540451AL	520/85R42	20.8R42	173A8/173D		TL	76	W16A	457	77	21.2	227.6	34.5	14300	52	40
38505600AL	420/80R46	16.9R46	162A2/151D		TL	60	W13	302	73.3	16.5	219.4	33.9	8250	35	40
38505605AL	420/80R46	16.9R46	170A2/159D		TL	60	W15L	305	73.3	16.5	219.4	33.9	10500	46	40
38505700AL-IN	480/80R46	18.4R46	158A8/158B		TL	63	W16A	404	76.7	19.1	229.6	35.4	9350	35	30
38505800AL	480/80R50	18.4R50	162A8/159D		TL	66	DW16B	447	81.1	18.9	245.2	37.7	10500	46	40
38505820AL	480/80R50	18.4R50	176A2/165D		TL	66	DW16B	451	81.1	18.9	245.2	37.7	12300	46	40

AGRICULTURAL

RADIAL AG

842 846 FARMPRO 85 RADIAL R-1W

OEM FITMENT

The Alliance FarmPRO is a modern R-1W designed to be used in a wide array of farm applications, providing up to 25% improvement in fuel economy over standard bias R1. Versatile multi-angle lug design provides long wear, smooth roading and excellent self cleaning. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
84200010AL-IN	280/85R20	11.2R20	112A8/109B		TL	48	W10	85	38.7	11.3	114.7	17.6	2270	23	30
84200022AL-IN	320/85R20	12.4R20	119A8/116B		TL	50	W11	100	41.1	13	121.8	18	2760	23	30
84600014AL-IG	250/85R24		109A8/B		TL	45	W8	83	40.8	9.7	121.8	18.7	2270	23	30
84600020AL-IN	280/85R24	11.2R24	115A8/B		TL	48	W10	92	42.8	10.7	126.6	19.4	2680	23	30
84600020AL-IG	280/85R24	11.2R24	115A8/B		TL	48	W10	92	42.8	10.7	126.6	19.4	2680	23	30
84600025AL-IN	320/85R24	12.4R24	122A8/B		TL	51	W10	118	45.2	13.2	133.8	20.3	3300	23	30
84600025AL-IG	320/85R24	12.4R24	122A8/B		TL	51	W10	118	45.2	13.2	133.8	20.3	3300	23	30
84600035AL-IN	340/85R24	13.6R24	125A8/B		TL	52	W11	136	46.5	14	137.6	20.9	3640	23	30
84600035AL-IG	340/85R24	13.6R24	125A8/B		TL	52	W11	136	46.5	14	137.6	20.9	3640	23	30
84600047AL-IN	380/85R24	14.9R24	131A8/B		TL	54	W12	171	49.3	15.2	145.9	21.9	4300	23	30
84600165AL-IN	420/85R24	16.9R24	137A8/B		TL	57	W14L	201	51.8	16.5	152.7	23.3	5080	23	30
84600028AL-IN	250/85R28		112A8/B		TL	46	W8	95	44.8	9.8	130.9	20.7	2470	23	30
84600021AL-IN	280/85R28	11.2R28	118A8/B		TL	48	W9	101	46.7	11	138.3	21.2	2910	23	30
84600021AL-IG	280/85R28		118A8/B		TL	48	W9	101	46.7	11	138.3	21.2	2910	23	30
84600026AL-IN	320/85R28	12.4R28	124A8/B		TL	51	W11	129	49.1	12.8	145.2	22.2	3520	23	30
84600040AL-IN	340/85R28	13.6R28	127A8/B		TL	51	W11	145	51	14.1	150.9	22.8	3860	23	30
84600040AL-IG	340/85R28	13.6R28	127A8/B		TL	51	W11	145	51	14.1	150.9	22.8	3860	23	30
84600070AL-IN	380/85R28	14.9R28	133A8/B		TL	54	W12	182	53.2	15	157.6	23.8	4540	23	30
84600070AL-IG	380/85R28	14.9R28	133A8/B		TL	54	W12	182	53.2	15	157.6	23.8	4540	23	30
84600190AL-IN	420/85R28	16.9R28	139A8/B		TL	57	W14L	214	55.9	16.5	164.9	24.8	5360	23	30
84600190AL-IG	420/85R28	16.9R28	139A8/B		TL	57	W14L	214	55.9	16.5	164.9	24.8	5360	23	30
84600180AL-IN	380/85R30	14.9R30	135A8/B		TL	57	W12	187	55.2	15	162.8	24.8	4800	23	30
84600180AL-IG	380/85R30	14.9R30	135A8/B		TL	57	W12	187	55.2	15	162.8	24.8	4800	23	30
84600200AL-IN	420/85R30	16.9R30	140A8/B		TL	57	W14L	235	57.8	17	170.5	25.9	5520	23	30
84600200AL-IG	420/85R30	16.9R30	140A8/B		TL	57	W14L	235	57.8	17	170.5	25.9	5520	23	30
84600525AL-IN	420/90R30		147A8/B		TL	59	W13	240	59.8	16.5	176.3	26.9	5840	23	30
84600525AL-IG	420/90R30		147A8/B		TL	59	W13	240	59.8	16.5	176.3	26.9	5840	23	30
84600140AL-IN	460/85R30	18.4R30	145A8/B		TL	61	W15L	264	60.2	18.7	178.3	26.9	6400	23	30
84600140AL-IG	460/85R30	18.4R30	145A8/B		TL	61	W15L	264	60.2	18.7	178.3	26.9	6400	23	30
84600032AL-IN	320/85R32	12.4R32	126A8/B		TL	50	W11	146	53.4	12.8	158.1	24.6	3740	23	30
84600080AL-IN	380/85R34	14.9R34	137A8/B		TL	57	W12	212	59.4	15	175.4	26.8	5080	23	30
84600080AL-IG	380/85R34	14.9R34	137A8/B		TL	57	W12	212	59.4	15	175.4	26.8	5080	23	30
84600100AL-IN	420/85R34	16.9R34	142A8/B		TL	57	W15L	248	62	16.5	182.9	28.1	5840	23	30
84600100AL-IG	420/85R34	16.9R34	142A8/B		TL	57	W15L	248	62	16.5	182.9	28.1	5840	23	30
84600145AL-IN	460/85R34	18.4R34	147A8/B		TL	57	W16L	297	64.4	18.9	190.7	28.9	6800	23	30
84600145AL-IG	460/85R34	18.4R34	147A8/B		TL	57	W16L	297	64.4	18.9	190.7	28.9	6800	23	30
84600151AL-IN	460/85R34	18.4R34	157A8/B		TL	57	W16L	301	64.4	18.9	190.7	28.9	9100	52	30
84600033AL-IN	320/85R36	12.4R36	128A8/B		TL	50	W11	160	57.4	12.8	169.9	26.6	39360	23	30
84600045AL-IN	340/85R36	13.6R36	132A8/B		TL	52	W12	184	58.9	13.6	174.2	27.1	4400	23	30
84200031AL-IN	320/85R38	12.4R38	143A8/B		TL	50	W11	175	59.4	12.8	178.4	27.6	6000	52	30

842 846 FARMPRO 85 RADIAL R-1W - continued

PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
84600046AL-IN	340/85R38	13.6R38	133A8/B		TL	52	W12	197	60.7	13.6	179.8	28.1	4540	23	30
84600120AL-IN	380/80R38	14.9R38	142A8/B		TL	57	W12	218	62.1	14.8	185.9	28.7	5840	35	30
84200121AL-IN	380/80R38	14.9R38	152A8/B		TL	57	W12	218	62.1	14.8	185.9	28.7	7850	58	30
84600130AL-IG	420/85R38	16.9R38	144A8/B		TL	57	W15L	267	66.1	16.4	195.8	30.3	6150	23	30
84600160AL-IG	460/85R38	18.4R38	149A8/B		TL	61	W16L	305	68.5	17.9	202.8	30.8	7150	23	30
84600166AL-IN	460/85R38	18.4R38	153A8/B		TL	61	W16L	325	68.5	17.9	202.8	30.8	8050	35	30
84600300AL-IG	520/85R38	20.8R38	155A8/B		TL	67	W16A	408	72.8	20.7	218.3	32.7	8550	23	30
84600301AL-IN	520/85R38	20.8R38	169A8/B		TL	66	W16A	434	72.8	20.7	218.3	32.7	12800	52	30
84200038AL-IN	320/80R42		141A8/B		TL	51	W10	289	62.2	12.6	184.1	29.1	5680	46	30
84200028AL-IN	320/90R42		147A8/B		TL	51	W10	208	64.7	12.6	194.5	30.1	6800	52	30
84600322AL-IN	480/80R42	18.4R42	151A8/B		TL	66	W16A	378	72.2	18.9	213.1	33.1	7600	23	30
84600322AL-IG	480/80R42	18.4R42	151A8/B		TL	66	W16A	378	72.2	18.9	213.1	33.1	7600	23	30
84600326AL-IN	480/80R42	18.4R42	169A8/B		TL	64	W16A	419	72.2	18.9	213.1	33.1	12800	64	30
84600325AL-IN	520/85R42	20.8R42	157A8/B		TL	68	W16A	428	76.8	20.3	227.4	35	9100	23	30
84600325AL-IG	520/85R42	20.8R42	157A8/B		TL	68	W16A	428	76.8	20.3	227.4	35	9100	23	30
84600334AL-IN	520/85R42	20.8R42	169A8/B		TL	68	W16L	474	76.8	20.3	227.4	35	12785	50	30
84200029AL-IN	320/90R46		148A8		TL	51	W10	304	68.7	12.6	207	32.1	6950	52	30
84200310AL-IN	380/90R46	14.9R46	165A8/B		TL	59	W13A	316	73.3	15	217.1	33.8	11400	70	30
84600260AL-IN	480/80R46	18.4R46	158A8/B		TL	64	W16A	416	77.2	18.9	227.6	35	9350	23	30
84600260AL-IG	480/80R46	18.4R46	158A8/B		TL	64	W16A	416	77.2	18.9	227.6	35	9350	23	30
84600360AL-IN	520/85R46	20.8R46	158A8/B		TL	68	W16A	447	80.8	20.3	238.6	36.9	9350	23	30

AGRICULTURAL

RADIAL AG

845 ALLIANCE FARMPRO 70 RADIAL R-1W

OEM FITMENT



The Alliance FarmPRO 70 is a modern R-1W design used in a wide variety of farm applications and up to 25% improvement in fuel economy over standard bias R-1. Versatile multi-angle lug design provides long wear, smooth roading and excellent self cleaning. (TUBELESS)

PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
84501048AL-IN	280/70R20		116A8/113B		TL	42	W10	69	35.9	10.9	106.5	16.3	2540	23	30
84501055AL-IN	300/70R20		120A8/117B		TL	42	W10	78	37.6	11.5	111.5	17.1	2830	35	30
84501060AL-IN	320/70R20		123A8/120B		TL	42	W10	86	38.8	12.8	114.5	17.5	3080	35	30
84501300AL-IN	320/70R24		116A8/113B		TL	51	W10	110	43.1	12.6	127.1	19.6	2540	23	30
84501300AL-IG	320/70R24		116A8/113B		TL	51	W10	110	43.1	12.6	127.1	19.6	2540	23	30
84501320AL-IN	360/70R24		122A8/119B		TL	52	W11	132	45.2	14.1	133.3	20.6	3000	23	30
84501320AL-IG	360/70R24		122A8/119B		TL	52	W11	132	45.2	14.1	133.3	20.6	3000	23	30
84501340AL-IN	380/70R24		125A8/122B		TL	53	W12	143	46.9	15	138.2	21.2	3300	23	30
84501340AL-IG	380/70R24		125A8/122B		TL	53	W12	143	46.9	15	138.2	21.2	3300	23	30
84501360AL-IN	420/70R24		130A8/127B		TL	54	W13	170	49.1	16.5	144.9	22.1	3860	23	30
84501360AL-IG	420/70R24		130A8/127B		TL	54	W13	170	49.1	16.5	144.9	22.1	3860	23	30
84501470AL-IN	480/70R24		138A8/B		TL	58	W15L	215	51.8	18.9	151.9	23.3	5200	23	30
84501400AL-IN	320/70R28		119A8/116B		TL	51	W10	127	46.9	12.6	138.4	21.5	2760	23	30
84501420AL-IN	360/70R28		125A8/122B		TL	52	W11	152	48.8	14.1	144	22.5	3300	23	30
84501450AL-IN	380/70R28		127A8/124B		TL	53	W12	158	50.9	15	150.2	23.2	3520	23	30
84501450AL-IG	380/70R28		127A8/124B		TL	53	W12	158	50.9	15	150.2	23.2	3520	23	30
84501462AL-IN	420/70R28		133A8/129B		TL	54	W13	190	53.1	16.5	156.7	24.1	4080	23	30
84501462AL-IG	420/70R28		133A8/129B		TL	54	W13	190	53.1	16.5	156.7	24.1	4080	23	30
84501480AL-IN	480/70R28		140A8/137B		TL	58	W15L	232	55.7	18.9	164.3	25.2	5080	23	30
84502570AL-IN	600/70R28		161A8/B		TL	54	DW20	377	61.1	24.1	181.4	27.4	10190	41	30
84501505AL-IN	420/70R30		134A8/131B		TL	54	W13	202	55	16.5	162.4	25	4300	23	30
84501535AL-IN	480/70R30		141A8/138B		TL	58	W15L	246	58.2	18.9	171.7	26.3	5200	23	30
84501535AL-IG	480/70R30		141A8/138B		TL	58	W15L	246	58.2	18.9	171.7	26.3	5200	23	30
84501537AL-IN	480/70R30		150A8/144E		TL	58	W15L	270	58.2	18.9	171.7	26.3	7400	41	25
84501550AL-IN	520/70R30		145A8/B		TL	59	W16L	284	64.6	20.3	190.5	29.3	6950	23	30
84502571AL-IN	600/70R30		152A8/B		TL	58	DW20B	363	63.1	24.1	184.2	28.1	7820	24	30
84501540AL-IN	480/70R34		143A8/B		TL	58	W15L	293	62.2	18.9	183.5	28.3	6000	23	30
84501540AL-IG	480/70R34		143A8/B		TL	58	W15L	293	62.2	18.9	183.5	28.3	6000	23	30
84501580AL-IN	520/70R34		148A8/B		TL	59	W16L	318	64.6	20.3	190.5	29.3	6950	23	30
84502500AL-IN	480/70R38		145A8/B		TL	58	W15L	302	66.2	18.9	195.2	30.3	6400	23	30
84502525AL-IN	520/70R38		150A8/B		TL	59	W16L	351	69.1	20.3	203.8	31.4	7400	23	30
84502525AL-IG	520/70R38		150A8/B		TL	59	W16L	351	69.1	20.3	203.8	31.4	7400	23	30
84502560AL-IN	580/70R38		155A8/B		TL	62	W18A	426	72.2	22.7	213.1	32.6	8550	23	30
84502586AL-IN	710/70R38		172A8/B		TL	74	DW23B	661	77.1	28.2	227.1	34.6	13900	23	30
84502586AL-IG	710/70R38		172A8/B		TL	74	DW23B	661	77.1	28.2	227.1	34.6	13900	23	30
84502597AL-IN	710/70R42		173A8/B		TL	74	DW23B	706	81.1	28.2	239.4	36.9	14300	23	30
84502597AL-IG	710/70R42		173A8/B		TL	74	DW23B	706	81.1	28.2	239.4	36.9	14300	23	30

AGRICULTURAL

BIAS AG

768 IRRIGATION

The Alliance 768 Irrigation has a unique 23° tread angle for great forward traction on pivot irrigation systems. This product line is also built with special ozone resistant rubber compound for added resistance to the sun. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
76800002AL-IG	11.2-24			6	TL	32	W10	61	43.5	11.2	130.5	20.2	2340	26	25
76800012AL-IG	14.9-24			8	TL	35	W13	102	49.2	14.9	145.7	22.6	3960	26	25
76800009AL-IG	11.2-38			6	TL	30	W10	105	57.4	11.2	172.8	26.7	2600	26	25

349 YIELD MASTER R-1

OEM FITMENT

The Alliance 349 Yard Master is specially designed for harvesters. The reinforced bead area and nylon casing ensures long tire life, even under heavy loads. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
34900010AL-IN	23.1-26			14	TL	54	DW20B	382	63.2	23.3	186.2	28.4	7850	29	20
34900015AL-IN	28L-26			12	TL	56	DW25A	422	63.7	28.1	182.2	27.6	7400	20	20
34910004AL-IN	30.5L-32			12	TL	60	DW27A	580	72.6	30.5	213.4	32.6	9900	22	20
34910021AL-IN	30.5L-32			18	TL	60	DW27A	630	72.6	30.5	213.4	32.6	13200	30	20

347 HI TRACTION BIAS R1

OEM FITMENT

The Alliance 347 Hi traction is designed with a special bar angle to guarantee maximum forward traction in the field. It is also built with a strong nylon casing for durability and a long casing life.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
34702210AL-IN	23.1-26			12	TL	54	DW20A	293	63.2	23.1	183	27.7	8050	25	25
34702227AL-IN	23.1-26			16	TL	54	DW20A	337	63.2	23.1	183	27.7	9650	33	25
34702667AL-IN	23.1-30			14	TT	54	DW20A	366	67.2	23.1	195.6	29.7	9350	29	25
34702720AL	24.5-32			12	TL	55	DW21A	441	71.1	24.5	208.1	31.7	9900	25	25
34702810AL	23.1-34			12	TT	54	DW21A	369	71.2	23.1	207.4	31.5	9100	25	25
34702825AL-IN	16.9-38			8	TT	49	W14L	215	66.5	16.9	197	30.2	5680	25	25
34710007AL-IN	18.4-38			8	TT	52	W15L	236	68.9	18.4	204.1	31.3	6000	20	25
34710011AL-IN	18.4-38			10	TT	52	W15L	251	68.9	18.4	204.1	31.3	6950	26	25
34710014AL-IN	18.4-38			14	TT	52	W15L	265	68.9	18.4	204.1	31.3	8550	36	25
34710032AL-IN	20.8-38			8	TT	53	W18A	323	72.4	20.8	213	32.5	6950	19	25
34710051AL-IN	20.8-38			14	TT	53	W18A	354	72.4	20.8	231	32.5	9650	33	25

AGRICULTURAL

BIAS AG

324 BIAS R-1

OEM FITMENT

The Alliance 324 is specially designed with a strong nylon casing and a 45° tread bar. The 45° tread ensures excellent forward and lateral traction for a broad variety of applications.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
32400809AL-IN	6.5/80-15			6	TT	20	5.00F	22	26.1	6.4	76.5	11.6	1500	52	25
32400906AL-IN	650-16			6	TT	21	5.50F	25	29.7	7.4	88.6	13.7	1540	39	25
32401007AL-IN	650-16			8	TT	21	5.50F	27	29.7	7.4	88.6	13.7	1830	39	25
32402402AL-IN	700-18			6	TT	29	5.00F	36	31.6	7	95	14.7	3080	29	25
32401708AL-IN	750-16			8	TT	29	6.00F	40	31.6	8.4	94.5	14.6	2220	45	25
32401902AL-IN	8.25-16			6	TT	33	6.00F	46	32.2	9	95.4	14.6	2050	29	25
32432403FP-IG	9.5-20			6	TT	35	W8	50	37	9.5	112	17.4	1820	30	25
32432412FP-IG	9.5-20			8	TT	35	W8	52	37	9.5	112	17.4	1820	30	25
32405918FP-IG	8.3-24			8	TT	28	W7	47	39.2	8.3	118.9	18.5	2040	45	25
32402251AL-IN	9.5-22			6	TT	35	W8	54	39.2	9.5	118.6	18.4	1980	32	25
32402252AL-IN	9.5-22			8	TL	38	W8	59	39.2	9.5	118.6	18.4	2090	39	25
32405808FP-IG	9.5-24			8	TT	35	W8	57	41.3	9.5	125	19.4	2470	41	25
32409806AL	8.3-28			6	TT	38	W7	61	43.1	8.3	131.4	20.5	1930	35	25
32409815AL	8.3-28			8	TT	38	W7	64	43.1	8.3	131.4	20.5	2280	46	25
32404720FP-IG	11.2-24			8	TT	42	W10	68	43.5	11.2	130.5	20.2	2760	35	25
32404724FP-IG	11.2-24			8	TL	42	W10	68	43.5	11.2	130.5	20.2	2760	35	25
32405020FP-IG	12.4-24			8	TT	43	W11	87	45.7	12.4	136.3	21	3200	33	25
32405301FP-IG	12.4-24			8	TL	43	W11	95	45.7	12.4	136.3	21	3190	33	25
32405670FP-IG	12.4-24			12	TT	43	W11	98	45.7	12.4	136.3	21	4078	51	25
32405661AL-IN	12.4-24			12	TT	46	W11	110	45.7	12.4	136.3	21	4078	42	25
32412490FP-IG	11.2-28			8	TT	42	W10	78	47.4	11.2	142.6	22	2910	35	25
32412494FP-IG	11.2-28			8	TL	42	W10	87	47.4	11.2	142.6	22	2910	35	25
32406112FP-IG	13.6-24			8	TT	45	W12	104	47.6	13.6	141	21.6	3415	29	25
32406120FP-IG	13.6-24			8	TL	45	W12	112	47.6	13.6	141.1	21.6	3405	29	25
32418190AL-IN	9.5-32			6	TT	38	W8	118	49.3	9.5	134.5	19.7	2090	30	25
32412520FP-IG	12.4-28			8	TT	43	W10	99	49.6	12.4	148.7	23	3420	33	25
32412715AL-IN	12.4-28			12	TT	45	W11L	118	49.6	12.4	148.7	23	3635	36	25
32452003AL-IN	15.5/80-24			12	TL	33	W12	144	49.7	15.1	149.1	22.3	8170	44	25
32452011AL-IN	15.5/80-24			16	TL	33	W12	159	49.7	15.1	149.1	22.3	9670	58	25
32407108FP-IG	14.9-24			8	TT	48	W13	115	49.8	14.9	147.4	22.6	3960	26	25
32407140FP-IG	14.9-24			8	TL	48	W13	124	49.8	14.9	147.4	22.6	3960	26	25
32407218FP-IG	14.9-24			12	TT	48	W13	132	49.8	14.9	147.4	22.6	4930	38	25
32407115AL-IN	14.9-24			8	TL	48	W13	117	49.8	14.9	147.4	22.6	3410	26	25
32412600FP-IG	13.6-28			8	TT	45	W12	114	51.6	13.6	153	23.5	3640	29	25
32412558FP-IG	13.6-28			12	TT	45	W12	128	51.6	13.6	153	23.5	4670	44	25
32412555AL-IN	13.6-28			12	TT	47	W12	133	51.6	13.6	153	23.5	4670	44	25
32461520FP-IG	16.9-24			8	TT	48	W15	143	52.6	16.9	154.8	23.7	4540	25	25
32421492AL-IN	9.5-36			6	TT	38	W8	83	53.3	9.5	153.8	23.2	2270	30	25
32421714AL-IN	9.5-36			14	TT	38	W8	137	53.3	9.5	153.8	23.2	4540	73	25
32418245AL-IN	12.4-32			8	TT	45	W11L	74	53.5	12.4	161	24.9	3640	32	25
32414002FP-IG	14.9-28			8	TT	48	W13	132	53.7	14.9	158.9	24.3	4180	26	25
32414005FP-IG	14.9-28			12	TT	48	W13	144	53.7	14.9	158.9	24.3	5200	38	25
32413960AL-IN	14.9-28			12	TT	48	W13	146	53.7	14.9	158.9	24.3	5200	38	25
32415206AL-IN	14.9-30			8	TT	48	W13	145	55.7	14.9	146.7	26	4400	26	25

324 BIAS R-1 - continued

PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
32467300AL-IN	16.5/85-28			12	TT	48	W13	171	56	16.4	162.6	24.6	9670	41	25
32415020FP-IG	16.9-28			8	TT	48	W15	154	56.5	16.9	166.3	25.4	6000	35	25
32415022FP-IG	16.9-28			12	TT	48	W15L	171	56.5	16.9	166.3	25.4	6000	35	25
32414907AL-IN	16.9-28			12	TT	48	W15L	170	56.5	16.9	166.3	25.4	6000	35	25
32470010FP-IN	18.4-26			12	TL	49	W16L	186	57.1	18.4	167.1	25.4	6600	33	25
32421520FP-IG	12.4-36			8	TT	47	W11L	121	57.7	12.4	173.5	26.9	3740	35	25
32421507AL-IN	12.4-36			8	TT	45	W11L	130	57.7	12.4	173.5	26.9	3740	32	25
32416900FP-IG	16.9-30			8	TT	48	W15	165	58.5	16.9	172	26.3	5080	25	25
32416910FP-IG	16.9-30			12	TT	48	W15	173	58.5	16.9	172	26.3	6150	36	25
32416712AL-IN	16.9-30			12	TT	48	W15L	168	58.5	16.9	172	26.3	6300	25	25
32416756AL-IN	16.9-30			14	TT	48	W15L	178	58.5	16.9	172	26.3	6940	42	25
32417862FP-IG	18.4-30			8	TT	49	W16L	187	61	18.4	179	27.3	5360	20	25
32417380FP-IG	18.4-30			8	TL	49	W16L	198	61	18.4	179	27.3	5350	20	25
32417865FP-IG	18.4-30			12	TT	49	W16L	207	61	18.4	179	27.3	7160	33	25
32417701AL-IN	18.4-30			12	TT	49	W16L	229	61	18.4	179	27.3	7160	33	25
32417718AL-IN	18.4-30			12	TL	49	W16L	244	61	18.4	179	27.3	7160	33	25
32417809AL-IN	18.4-30			14	TT	49	W16L	237	61	18.4	179	27.3	8520	45	25
32453010FP-IG	15.5-38			8	TT	46	W15L	163	61.8	15.5	184.8	28.5	4540	26	25
32419602FP-IG	16.9-34			8	TT	48	W15	191	62.4	16.9	185.7	28.5	5360	25	25
32419608FP-IG	16.9-34			8	TL	48	W15	201	62.4	16.9	185.7	28.5	5360	25	25
32419500AL-IN	16.9-34			14	TT	48	W15L	216	62.4	16.9	185.7	28.5	7160	41	25
32420015FP-IG	18.4-34			8	TT	49	W16L	209	65	18.4	192.2	29.4	5840	20	25
32420303AL-IN	18.4-34			10	TT	49	W16L	212	65	18.4	192.2	29.4	6610	26	25
32420907AL-IN	18.4-34			14	TT	49	W16L	228	65	18.4	192.2	29.4	8050	36	25
32419720FP-IG	16.9-38			8	TT	48	W15L	212	66.5	17.1	197	30.1	5680	25	25
32422150FP-IG	18.4-38			8	TT	49	W16L	239	68.9	18.4	204.1	31.3	6000	20	25
32422152FP-IG	18.4-38			12	TT	49	W16L	250	68.9	18.4	204.1	31.3	8040	30	25

304 BIAS R-1

The Alliance 304 is specially designed to provide excellent side-hill traction. Also, the open-shoulder design ensures great cleanout for maximum traction.

OEM FITMENT



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
30407601AL-IN	18.4-28			8	TT	50	W16L	158	59.1	18.4	173.5	26.5	5200	20	25
30413105AL-IN	13.6-36			8	TT	46	W12	145	59.6	13.6	179.1	27.7	4300	30	25
30413407AL-IN	12.4-38			6	TT	43	W11	116	59.6	12.4	180.2	28	3300	25	25
30414306AL-IN	13.6-38			8	TT	46	W12	137	61.6	13.6	185.4	27.7	4300	29	25
30414350AL-IN	13.6-38			8	TL	46	W12	145	61.6	13.6	185.4	28.7	4300	29	25
30415205AL-IN	14.9-38			8	TT	47	W13	159	63.6	14.9	190.7	29.4	4800	26	25

AGRICULTURAL

BIAS AG

357 BIAS R-1

The Alliance 357 is built with a unique 45° tread bar with a robust center line for smooth roading and minimal slip.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
35710400AL-IN	13.6-38			8	TT	57	W12	142	61.6	13.6	185.4	28.7	4300	29	25
35712320AL-IN	18.4-38			12	TT	58	W16L	251	68.9	18.4	204.1	31.3	6000	20	25

358 BIAS R-1

The Alliance 358 is built with a special reinforced multi-angle lug for smooth roading. The reinforcement also helps reduce damage to the lugs under heavy loads.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
35806212AL-IN	14.9-24			12	TT	59	W13	129	49.8	14.9	147.4	22.6	4940	38	25
35861120AL-IN	16.5/85-24			12	TT	63	W13	164	52.9	16.4	152.5	23	10460	41	25
35861134AL-IN	16.5/85-24			14	TL	63	W13	157	52.9	16.4	152.5	23	11340	48	25
35861140AL-IN	16.5/85-24			14	TT	63	W13	178	52.9	16.4	152.5	23	11340	48	25

316 MULTIPURPOSE R-3

OEM FITMENT

The Alliance 316 Multipurpose is designed to ensure minimal disturbance to the ground. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
31600804AL-IN	12.4-16			10	TT	22	W11	68	36.7	12.4	109.6	16.9	3200	51	25

329 MULTIPURPOSE R3

OEM FITMENT

The Alliance 329 Multipurpose is designed to minimize ground disturbance while still providing excellent traction. This line is also built with a strong nylon casing to ensure a long tire life even when used under heavy loads. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
32906109AL-IN	13.5-16.1			10	TL	19	W11C	79	40.2	13.9	116.9	17.7	3420	41	25
32903350AL-IN	14.9-24			6	TL	33	W13	105	48.9	15.5	145.6	22.4	3420	20	25
32903353AL-IN	14.9-24			8	TL	33	W13	115	48.9	15.5	145.6	22.4	3960	26	25
32903363AL-IN	16.9-24			8	TL	34	W15L	139	51.5	17.4	150.2	22.8	4540	25	25
32904203AL-IN	18.4-26			10	TL	38	W16L	197	56.1	18.9	165.9	25.4	5840	26	25
32904300AL-IN	18.4-26			12	TL	38	W16L	201	56.1	18.9	165.9	25.4	6600	33	25
32905102AL-IN	23.1-26			12	TL	22	DW20B	264	61.4	23.1	178.9	27.2	8050	25	25
32905250AL-IN	23.1-26			16	TL	22	DW20B	275	61.4	23.1	178.9	27.2	9650	33	25
32905803AL-IN	28L-26			16	TL	22	DW25A	327	62.6	28.1	182.2	27.6	9900	29	25
32905851AL-IN	13.6-28			6	TL	33	W12	117	51.6	13.6	155.2	24	3200	23	25

AGRICULTURAL

FRONTS AND IMPLEMENTS

330 MULTIPURPOSE R-3

OEM FITMENT

The Alliance 330 Multipurpose has a unique pattern and profile to minimize ground disruption. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
33030010AL-IN	650/75R32	24.5R32	160A8		TL	35	W21	458	69.5	24.7	202.2	31.5	9920	23	25
33030013AL-IN	650/75R32	24.5R32	175A8		TL	35	DW21B	506	70	24.5	205	31.1	15700	54	25
33005105AL-IN	23.1-26			12	TL	35	DW20B	308	61.4	23.1	178.9	27.2	8050	25	25
33005610AL-IN	23.1-26		153A8/153B		TL	35	DW20B	339	61.4	23.1	178.9	27.2	8050	25	25
33005205AL-IN	23.1-26			16	TL	35	DW20B	341	61.4	23	179	27	9650	32	25
33020017AL-IN	28L-26			16	TL	35	DW25B	380	62.6	28.1	182.2	27.6	9900	29	25
33020026AL-IN	28L-26			16	TL	35	DW25B	408	61	28	182.2	27.6	9900	29	25

313 F-2M 4 RIB

The Alliance 313 4 Rib is specially built to provide excellent lateral traction for steering applications. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
31300040AL-IN	9.5L-15			8	TL	21	8LB	42	30.8	9.8	92	14.1	1870	48	25
31300001AL-IN	11L-15			8	TL	28	8LB	50	31.5	11	94	14.4	2090	44	25
31300005AL-IN	1000-16			8	TL	27	W8L	59	35.1	11.1	105	15.9	2340	44	25
31300015AL-IN	1100-16			8	TL	28	W10L	73	37.6	12.2	112	16.9	2600	40	25
31310164AL-IN	14L-16.1			12	TL	36	W11C	97	37.9	13.9	113	17.1	3860	52	25

303 F-2 3 RIB

OEM FITMENT

The Alliance 303 3 Rib is designed to be a great option for steering axles on compact utility tractors.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
30301108FP-IN	500-15			4	TT	20	4.00E	15	25.8	5.5	77.9	12.1	800	61	30
30301706FP-IG	550-16			6	TT	19	4	19	28	5.9	84.3	13.1	1170	54	30
30302353FP-IG	600-16			6	TT	20	4.50E	20	28.9	6.5	86.9	13.4	1140	52	25
30302655FP-IG	650-16			6	TT	23	4.00E	24	29.9	6.9	89.9	13.9	1230	48	25
30302957FP-IG	750-16			6	TT	26	5.50F	31	31.7	8.1	94.6	14.6	1650	41	30
30303252FP-IG	750-16			8	TT	26	5.50F	34	31.7	8.1	94.6	14.6	1710	56	25
30303305FP-IG	900-16			10	TT	30	W8L	45	33.7	9.2	100.6	15.5	2400	60	25
30303910FP-IG	1000-16			8	TT	33	W8L	52	35.2	10.8	104.3	16	2340	44	25
30304104FP-IG	1100-16			8	TT	36	W10L	66	38	12.4	112.2	17.2	3080	52	25
30305050FP-IN	750-18			8	TT	30	5.50F	37	33.9	8.1	101	156	1870	56	25
30300020FP-IN	400-19			4	TT	14		13	Under Development						
30306251FP-IN	600-19			6	TT	20	4.50E	22	32	6.5	96.9	15	1280	52	25
30305022FP-IN	750-20			8	TT	26		40	Under Development						

AGRICULTURAL

FRONTS AND IMPLEMENTS

571 AGRICULTURAL IMPLEMENT RADIAL OEM FITMENT

The Alliance 571 has a unique pattern specialized for turf and grassland applications. Steel belts provide added durability while under high loads at speeds up to 43 MPH. (TUBELESS - STEEL BELTED)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
57100010AL	340/65R18		145E/148A8		TL	11	11	81	35.1	13.4	107.4	15.8	6,400	73	43

222 AGRICULTURAL IMPLEMENT I-1 OEM FITMENT

The Alliance 222 I-1 is designed for both free-rolling and powered axles. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
22201107AL	11L-15			10	TT	10	W8L	54	30.6	11	88.4	13.3	2750	44	25
22202103AL-IN	16.5L-16.1SL			10	TL	14	14LB	82	40.3	16.5	115	17.2	5840	36	20
22204980AL-IN	15.0/55-17			18	TL	14	13	91	33.5	15.4	97	14.7	7400	87	25
22213675AL-IN	19.0/45-17			14	TL	14	16	96	33.5	18.9	97.2	14.8	6000	58	25
22207709AL	2000-20		169A6/165A8 FR	20	TT	15	16	195	55.1	19.6	157.1	23.5	12780	57	25
22214500AL	21.0/80-20		166A8/162B FR	12	TL	15	16SDC	181	54.5	20.7	153.5	22.8	11670	32	25
22232304AL	550/60-22.5			16	TL	20	16.00DC	188	48.7	21.7	140.9	21.3	12000	41	25
22235109AL	600/55-22.5			16	TL	20	20.00DC	217	48.6	23.7	139.4	21	12780	38	25

351 AGRICULTURAL IMPLEMENT I-1 OEM FITMENT

The Alliance 351 is a classic ribbed implement tire pattern.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
35100300AL-IN	11.25-24			8	TL	12	W10H	82	46.1	12.8	136.2	20.9	3960	32	25
35101115AL-IN	11.25-28			12	TL	15	W10H	103	50.1	12.8	148.8	22.8	5360	48	25
35101136AL-IN	11.25-28			14	TT	15	W10H	104	50.1	12.8	148.8	22.8	5840	54	25

319 AGRICULTURAL IMPLEMENT OEM FITMENT

The Alliance 319 AG Implement is designed for both on and off road applications. Its strong nylon construction ensures casing durability and overall tire life.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
31900005AL-IN	11L-15FI			D	TL	16	8LB	50	30.7	10.7	92.6	14.1	3080	60	52
31901107AL	15.0/55-17			14	TT	23	13	71	33.5	15.4	97.2	14.7	5510	52	25

320 AGRICULTURE IMPLEMENT VALUE PLUS I-1

OEM FITMENT



The Alliance 320 Value Plus is a low-section height implement tire designed for both on and off road use.

PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
32013600VP-IG	7.00-12			6	TL	Under Development									
32002010VP-IG	10.0/80-12			10	TL	Under Development									
32001622VP-IN	10.0/75-15.3			10	TL	15	9	32	29.9	10.4	88.3	13.5	1650	76	25
32001652VP-IN	10.0/75-15.3			14	TL	15	9	33	29.9	10.4	88.3	13.5	2000	108	25
32011615VP-IG	11.5/80-15.3			10	TL	14	9	51	33.3	11.4	96.7	14.6	5150	68	25
32011922VP-IN	11.5/80-15.3			14	TL	14	9	42	33.3	11.4	96.7	14.6	2575	94	25
32011957VP-IN	12.5/80-15.3			14	TL	14	9	49	34.4	12.1	100.7	15.3	5840	62	25
32012112VP-IN	400/60-15.5			16	TL	12	13DC	64	34.4	15.9	98.8	14.8	6944	79	25
32013210VP-IG	6.00-16			6	TL	8	4	18	28	6.7	85	13	1540	40	25
32000601VP-IG	10.5/65-16			14	TL	10	9	36	29.7	10.8	91.9	13.6	4200	81	25
32015010VP-IG	13.0/55-16			14	TL	13	11	43	30.3	13.2	92.5	13.6	4550	61	25
32016400VP-IG	15.0/55-17			10	TL	Under Development									
32016450VP-IG	15.0/55-17			14	TL	Under Development									
32021701VP-IG	19.0/45-17			14	TL	Under Development									
32013120VP-IG	500/50-17			14	TL	16	16	106	37	19.7	107.7	16.3	7750	55	30
32013725VP-IG	10.5/80-18			10	TL	10	9	57	34.8	10.8	103.9	16	4650	74	30
32014918VP-IG	12.5/80-18			12	TL	11	9	62	38	12.1	112.9	16.6	5742	54	25
32014930VP-IG	12.5/80-18			16	TL	11	9	64	38	12.1	112.9	16.6	7040	71	25
32017610VP-IG	16.0/70-20			12	TL	14	14	103	42.3	16.5	124.3	18.9	9120	59	25

239 MULTIPURPOSE

OEM FITMENT



The Alliance 239 is a multipurpose low-section steering wheel tire for heavy duty tractors. It provides high mileage on the road and in industrial applications. Its strong nylon construction and the use of high grade compounds provide long tire life.

PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
23910055AL	14.5/75-16.1SL			10	TL	18	W11C	74	35.7	14.7	106.1	16.3	2830	40	25
23920050AL-IN	14-17.5ML			14	TL	18	10.5	87	36.5	14.3	107.5	16.5	6000	100	55

AGRICULTURAL

FRONTS AND IMPLEMENTS

327 FarmPro Implement I-1

OEM FITMENT

The Alliance 327 FarmPRO Implement has a soil-friendly tread design characterized by central ribs and shoulder lugs. The central ribs together with a wide and flat contact area provide the lowest possible soil compaction and damage.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
32700110AL-IN	400/60-15.5			14	TL	17	13	80	34.4	15.9	98.3	14.8	6400	52	25
32700308AL-IN	340/55-16			12	TL	15	11	63	30.7	13.4	92.7	14.4	4540	49	25
32700015AL-IN	14.0/65-16			18	TL	15	11	69	34.4	14.1	102	15.3	7382	66	25
32700025AL-IN	15.0/55-17			12	TL	16	13	72	33.5	15.4	99.1	15.1	5200	40	25
32700045AL-IN	19.0/45-17			10	TL	17	16	88	34.1	18.9	102	15.7	5510	33	25
32700050AL-IN	19.0/45-17			14	TL	17	16	91	34.1	18.9	102	15.7	6610	41	25
32700265AL-IN	19.0/45-17			18	TL	17	16	101	34.1	18.9	102	15.7	7165	48	25
32700350AL-IN	500/50-17			10	TL	17	17	114	37.8	19.7	111.8	17.1	6000	29	25
32700365AL-IN	500/50-17			14	TL	17	17	115	37.8	19.7	111.8	17.1	7150	40	25
32700390AL-IN	500/50-17			18	TL	17	17	117	37.8	19.7	111.8	17.1	8250	51	25
32700112AL-IN	320/80-18	12.5/80-18		12	TL	16	9	99	38.2	12.6	112.6	17.1	5840	54	25
32700230AL-IN	16.0/70-20			12	TL	15	13	104	42.3	16.1	122.5	18.7	7605	43	25
32700500AL-IN	500/55-20			10	TL	16	16	117	41.7	19.8	120.6	18.3	7380	35	25
32700520AL-IN	500/55-20			12	TL	16	16	128	41.7	19.8	120.6	18.3	8550	47	25
32701000AL-IN	560/60-22.5			12	TL	27	16	188	49.2	22.2	142.4	21.5	13220	51	25
32701020AL-IN	560/60-22.5			16	TL	27	16	192	49.2	22.2	142.4	21.5	12780	54	25

542 AGRICULTURE RIB IMPLEMENT I-1

OEM FITMENT

The Alliance 542 Rib Implement is designed for use on both free-rolling and powered axles. The profile of the tire encourages a light implement footprint and low rolling resistance. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
54200044AL-IN	9.5L-14SL			8	TL	10	7	30	39.4	9.5	87.9	13.4	2400	44	30
54200085AL-IN	11L-14SL			8	TL	10	8LB	33	29.7	11	88	13.5	2470	36	30
54200020AL-IN	6.70-15SL			6	TL	7	4J	19	28.4	6.7	84.1	12.9	1610	44	30
54200035AL-IN	7.60-15SL			8	TL	8	7J	28	29	8.2	85.6	13.1	2090	52	30
54200060AL-IN	9.5L-15			8	TL	10	8LB	32	30.2	9.8	89.3	13.9	2470	44	30
54200074AL-IN	9.5L-15			12	TL	10	8LB	37	30.2	9.8	89.3	13.9	3200	64	30
54200100AL-IN	11L-15SL			8	TL	10	8LB	38	30.7	10.5	90.1	13.8	2540	36	30
54200107AL-IN	11L-15SL			12	TL	10	8LB	39	32.9	12.6	95.7	14.6	3200	52	30
54200118AL-IN	12.5L-15SL			10	TL	11	10LB	45	32.9	12.6	95.7	14.6	3420	44	30
54200115AL-IN	12.5L-15SL			12	TL	11	10LB	47	32.9	12.6	95.7	14.6	3860	52	30
54200124AL-IN	12.5L-15SL			14	TL	11	10LB	51	32.9	12.6	95.7	14.6	3960	62	30
54200210AL-IN	750-16			8	TL	8	5.5	28	31	8.5	93.3	14.3	2340	48	30
54200225AL-IN	900-16			10	TL	10	6LB	45	33.7	10.4	100.3	15.4	3300	52	30
54200108AL-IN	1100-16SL			12	TL	10	8	54	37.4	12.4	108	16.5	4940	50	30
54200129AL-IN	19L-16.1			12	TL	16	W16C	121	41.7	18.9	118.9	18.2	6600	36	30
54200128AL-IN	21.5L-16.1			10	TL	15	W18	143	44.8	21.5	127	19.4	6600	28	30
54200130AL-IN	21.5L-16.1			14	TL	15	W18	155	44.8	21.5	127	19.4	7850	36	30






ALLIANCE FLOTATION TIRES

MINIMIZE SOIL COMPACTION, MAXIMIZE PERFORMANCE

Alliance has been a leader in flotation tire technology for decades, pioneering the innovation of radial flotation tires and highway-rated fast flotation designs. Farmers call on flotation tires when conditions are challenging, traction is vital and soil compaction is a constant threat. Our engineers are world-renowned experts in minimizing soil compaction and maximizing performance with flotation tires. The result: a broad line of high-performance flotation tires with great traction and a light touch.

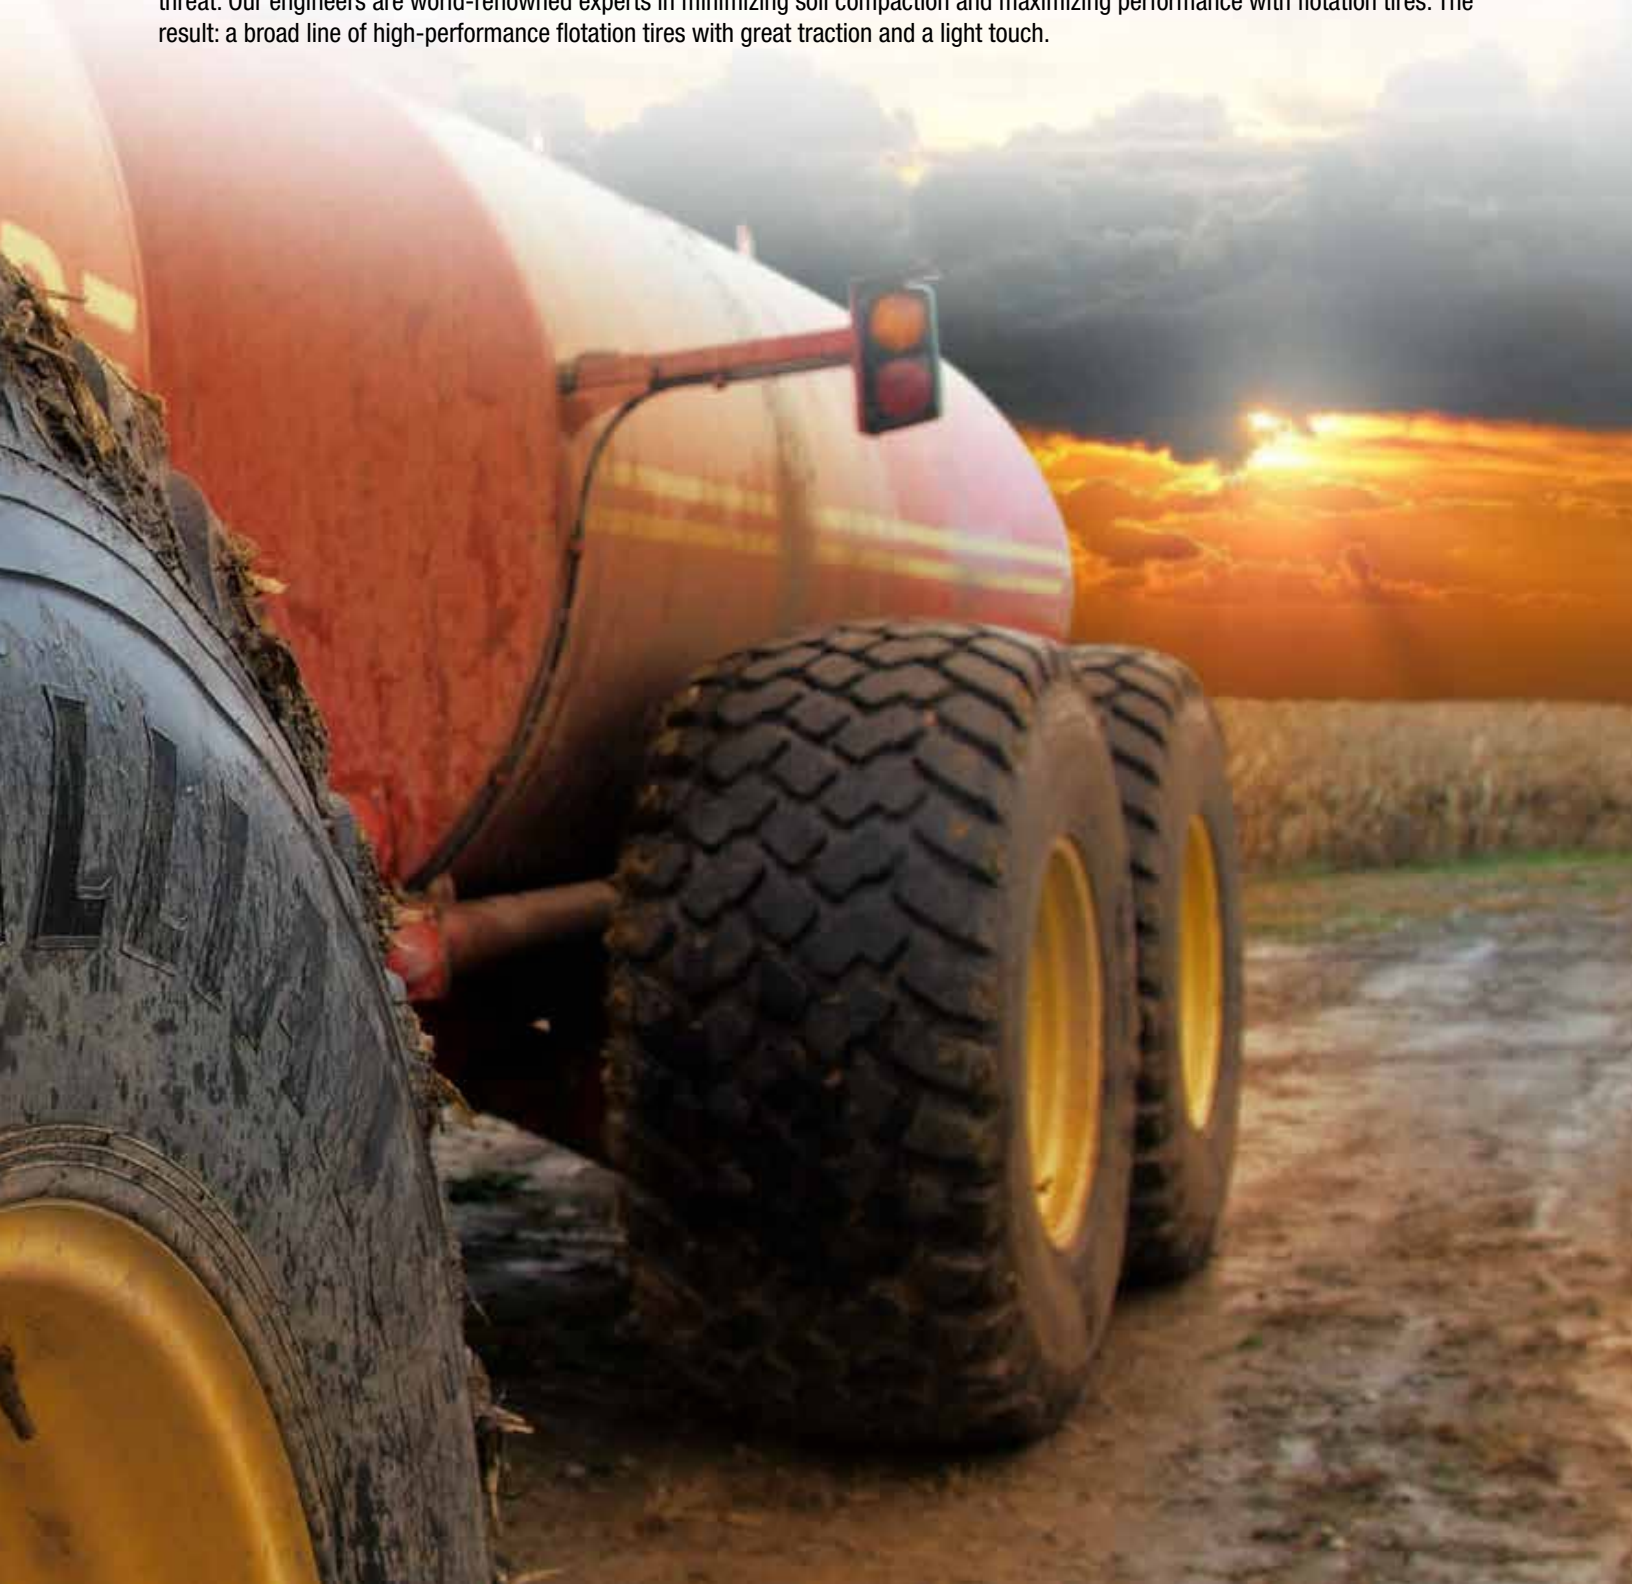

FLOTATION

RADIAL FLOTATION

885 STEEL BELTED FLOTATION RADIAL IMPLEMENT

The Alliance 885 is the new generation in steel-belted radial flotation tires engineered for all applications. Strong bead bundle, extra-thick reinforced sidewall and a high turn-up plies ensure excellent stability and protection against external damages. (TUBELESS - STEEL BELTED)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
8850003AL-IN	560/45R22.5		152D		TL	25	AG16.00	195	41.7	21.4	128.3	18.8	7850	58	40
88500015AL-IN	560/60R22.5		164D		TL	25	AG16.00	225	48.4	21.9	142.5	21.8	11000	58	40
88500502AL-IN	580/65R22.5		166D		TL	25	AG16.00	258	51.8	22.6	159.1	22.8	11700	58	40
88500582AL-IN	600/50R22.5		159D		TL	26	AG20.00	233	46.1	23.9	136.6	20.9	9650	58	40
88500612AL-IN	650/50R22.5		163D		TL	25	AG20.00	286	48.6	25.6	142.9	21.8	10700	58	40
88500622AL-IN	710/45R22.5		165D		TL	30	AG24.00	304	47.6	28.5	144.7	21.1	11400	58	40
88500588AL-IN	600/55R26.5		165D		TL	33	AG20.00	301	53	24.6	156.6	24	11340	58	40
88500620AL-IN	650/55R26.5		170D		TL	33	AG26.50	313	54.3	25.5	160.6	24.8	13200	58	40
88500621AL-IN	650/65R26.5		174D		TL	33	AG20.00	363	59.8	25.4	180.3	26.4	14760	58	40
88500640AL-IN	710/50R26.5		170D		TL	33	AG24.00	364	55.1	28.8	168.9	24.8	13200	58	40
88500670AL-IN	750/45R26.5		170D		TL	33	AG24.00	367	53.5	29.1	162.9	24.3	13200	58	40
88500710AL-IN	750/60R30.5		181D		TL	33	AG24.00	504	66.1	30.2	201.3	29.7	18200	58	40

388 STEEL BELTED FLOTATION RADIAL

The Alliance 388 is designed for minimal soil compaction and maximum tire life. For agricultural applications, primarily used on spreaders and special trailers (i.e. sugar cane production). Flat footprint, steel belts, rounded shoulders and low inflation pressure for superior performance over bias flotation. (TUBELESS - STEEL BELTED)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
38828012AL	500/60R22.5		155D		TL	26	AG16.00	176	46.1	19.8	126.5	20.2	8550	58	40
38828025AL	560/60R22.5		156D		TL	26	AG16.00	215	48.2	21.2	146.5	21.5	8800	55	40
38828220AL	600/50R22.5		156D		TL	26	AG20.00	288	46	23.4	139.4	20.7	8800	52	40
38829000AL	710/45R22.5		156D		TL	25	AG24.00	257	47.6	28	144.9	21.1	8800	41	40
38830005AL	600/55R26.5		165D		TL	29	AG20.00	264	52.5	23.7	161.4	23.7	11400	58	40
38830030AL	650/65R26.5		165D		TL	33	20.00DC	348	59.8	25.7	177.5	26.8	11400	41	40
38830220AL	750/55R26.5		164D		TL	33	AG24.00	360	60	29.7	175.7	26.9	11000	35	40
38830000AL	600/65R34		164D		TL	34	DW20	366	65	24.2	200.8	28.8	11000	41	40
38830060AL	650/60R34		175D		TL	34	DW20	371	65.2	25.8	201.5	29.4	15200	58	40
38830150AL	710/55R34		169D		TL	34	DW24	369	65.2	28.2	193.3	28.9	12800	41	40
38830350AL	800/50R34		168D		TL	34	DW25	470	65.2	31.7	200.3	28.9	12300	35	40
38830380AL	850/45R34		168D		TL	34	DW28	479	65.2	33.2	190.6	28.9	12300	30	40

882 STEEL BELTED AGRI-TRANSPORT FLOTATION RADIAL

The Alliance 882 has shoulder lugs provide better grip in muddy fields as well as in other soil conditions. Strong bead bundle and high turn-up plies ensure excellent stability and protection against external damages on and off road. (TUBELESS - STEEL BELTED)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
88200020AL-IN	385/65R22.5		164D		TL	16	AG11.75	176	42.3	15.3	126.2	19.4	11000	131	40
88200005AL-IN	560/45R22.5		152D		TL	23	AG16.00	198	49	22.2	143.7	21.9	11000	58	40

390 STEEL BELTED AGRI-TRANSPORT FLOTATION RADIAL

OEM FITMENT

The Alliance 390 is the completely original Agri-Transport tire that set the standard for flotation—the tire the competition strives to duplicate. This steel-belted, high-speed tire is sought after by OEMs and in the replacement market for a wide range of on-road and off-road applications. (TUBELESS - STEEL BELTED)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
39021040AL	500/45R22.5		154F		TL	25	AG16.00	213	40.4	20	124.3	18.6	8250	87	50
39021100AL	500/60R22.5		155D		TL	22	16.00DC	243	46.5	20.1	142.4	20.8	8540	58	40
39020700AL	560/45R22.5		152D		TL	22	AG16.00	204	42.4	21.5	133.5	19	7820	58	40
39021250AL	560/60R22.5		164D		TL	22	AG16.00	249	49.3	22.5	144.5	22	11010	58	40
39021292AL	560/60R22.5		170D		TL	22	AG16.00	281	49.7	22.2	151.3	22.1	13220	73	40
39021310AL	560/60R22.5 AS		170D		TL	22	AG16.00	287	49.3	21.9	150.9	22	13220	73	40
39021285AL	580/65R22.5		166D		TL	24	AG16.00	286	51.7	22.9	156.9	22.9	11670	58	40
39022808AL	600/50R22.5		159E		TL	31	20.00DC	280	46.1	23	136.6	20.9	9640	58	44
39022822AL	600/50R22.5		166F		TL	31	20.00DC	314	46.5	23	138.2	21.2	11700	87	50
39023150AL	600/50R22.5		174A8		TL	31	20.00DC	290	46	23.8	135.8	20.8	14800	94	25
39005722AL	620/75R26	23.1R26	153A8/153B		TL	34	DW20B	367	62.6	24.4	189.2	28.1	8050	24	30
39005728AL	620/75R26	23.1R26	174D		TL	34	DW20B	422	62.6	24.4	185.9	27.8	14760	58	40
39005710AL	710/65R26		176D		TL	35	DW25	464	60.8	28	178.3	27.2	15640	58	40
39005725AL	710/65R26		185D		TL	35	DW25	472	61.8	28.7	188.3	27.4	20370	73	40
39005731AL	28LR26	750/65R26	176A8/173B		TL	35	DW25	470	60.7	28.6	178	27.1	14300	41	30
39021300AL	600/55R26.5		165D		TL	31	AG20.00	331	53.3	24.6	162.2	24.1	11340	58	40
39021315AL	600/55R26.5		177D		TL	31	AG20.00	357	53.1	24.6	162.2	24	16080	73	40
39030125AL	650/55R26.5		170D		TL	31	20.00DC	382	54.9	26	161.8	24.8	13220	58	40
39021600AL	650/55R26.5		178D		TL	31	20.00DC	393	54.9	26.2	162.2	24.8	16500	73	40
39022521AL	710/50R26.5		172D		TL	33	24.00DC	407	54.7	28.7	167.3	24.7	13900	58	40
39022524AL	710/50R26.5		180D		TL	33	24.00DC	432	55	28.9	167.3	24.6	17620	73	40
39022334AL	800/45R26.5		177D		TL	33	28.00DC	433	54.7	31.9	161.4	24.7	16080	58	40
39022620AL	600/60R30.5		173D		TL	33	20.00DC	398	59.3	25	175.6	26.9	14320	58	40
39022632AL	600/60R30.5		179D		TL	33	20.00DC	447	59.4	24.8	181.9	27	17070	73	40
39022775AL	710/50R30.5		176D		TL	33	24.00DC	447	58.9	28.6	174.4	26.8	15640	58	40
39022790AL	710/50R30.5		184D		TL	33	24.00DC	496	59.1	28.5	180.2	26.6	19820	73	40
39022112AL	750/60R30.5		181D		TL	33	24.00DC	576	65.9	30.7	194.9	29.8	18170	58	40
39022135AL	750/60R30.5		190D		TL	33	24.00DC	579	66.3	30.3	201.8	29.6	23350	73	40
39030277AL	850/50R30.5		182D		TL	34	28.00DC	591	70.9	31.5	208.3	31.7	19820	58	40
39022661AL	800/60R32		184D/181E		TL	39	DW27A	605	70.9	31.3	209.8	32.1	19800	58	40
39022456AL	30.5LR32		181B		TL	39	DW27A	594	70.9	31.1	207.9	31.7	18200	44	30

393 STEEL BELTED FLOTATION RADIAL

OEM FITMENT

The Alliance 393 is a steel-belted tire for both on and off road applications. Shoulder lugs provides better grip in muddy fields as well as in other soil conditions. Strong bead bundle with extra-thick reinforced sidewalls and high turn-up plies ensure excellent stability and protection against external damages. (TUBELESS - STEEL BELTED)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
39322800AL	35.5LR32	900/60R32	193A8/190B		TL	34	DH31	822	78.2	36.4	234.7	30	25400	87	25

FLOTATION

RADIAL FLOTATION

381 STEEL BELTED FLOTATION RADIAL

OEM FITMENT

The Alliance 381 is a radial flotation tire specially designed for minimal soil compaction and minimal plant damage. Flat footprints, steel belts and reduced inflation pressures prove to be clear advantages compared to standard bias implement tires. (TUBELESS - STEEL BELTED)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
38110005AL-IN	IF 280/70R15		137D		TL	12	W8	64	30.5	11	90.7	13.8	5070	73	40
38110010AL-IN	340/60R16.5		147D		TL	16	9.75	83	32.5	13.2	96.7	14.8	6780	80	40
38110015AL-IN	380/55R16.5		152D		TL	16	12	92	32.8	15	97.8	15	7825	80	40
38100005AL	500/50R17		146D		TL	18	AG16.00	125	37.4	19.4	113	16.6	6600	58	40
38100007AL	500/50R17		149D		TL	18	AG16.00	126	37.4	19.4	113	16.6	7150	65	40
38100100AL	560/45R22.5 (Nylon)		146D		TL	23	AG16.00	187	42.5	21.3	129.7	19.1	6600	46	40
38100135AL	560/45R22.5		146D		TL	23	AG16.00	178	42.5	21.3	129.7	19.1	6600	46	40
38102600AL-IN	620/40R22.5		148D		TL	23	AG20.00	196	42.5	24.1	129.7	19.1	6950	46	40
38102620AL	620/40R22.5		154D		TL	23	AG20.00	221	42.5	24.1	129.7	19.1	8250	58	40
38102618AL	620/50R22.5		161D		TL	24	AG20.00	225	46.1	23.6	141.8	20.5	10200	58	40
38100810AL	710/40R22.5		162D		TL	24	AG24.00	262	45.7	27.6	140.6	20.5	10500	58	40
38100900AL	620/55R26.5		166D		TL	25	AG20.00	288	53.4	24.1	163.3	23.9	11700	58	40
38101000AL	710/50R26.5		170D		TL	35	AG24.00	321	53.5	28	164.2	24	13200	58	40
38101600AL	800/45R26.5		174D		TL	40	AG28.00	370	54.1	31.5	166.9	24.1	14800	58	40

382 ALL-STEEL HIGH SPEED FLOTATION RADIAL MPT

OEM FITMENT

The Alliance 382 All-Steel is built for speeds of up to 62 mph. The block-type pattern enables high-speed travel and provides exceptional grip and a smooth ride on the road. Semi-sharp shoulder lugs provides better grip in muddy fields as well as in other soil conditions. (TUBELESS - ALL STEEL)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
38200008AL	400/55R22.5		148F		TL	30	13.00DC	183	40.2	15.9	120.9	18.7	6940	87	50
38200010AL	400/55R22.5		146J		TL	30	13.00DC	175	40.2	15.7	120.5	18.6	6600	87	62
38200430AL	600/50R22.5		164J		TL	32	20.00DC	306	46.1	23.6	141.3	21.1	11000	94	62

380 STEEL BELTED FLOTATION RADIAL

OEM FITMENT

The Alliance 380 is a premium non-directional radial with steel belts for durability. The flat profile and thick lug design minimizes compaction. (TUBELESS - STEEL BELTED)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
38022953AL	550/45R22.5		151E		TL	31	AG16.00	205	42.1	21.7	125.2	19.3	7600	58	43
38026010AL-IN	560/45R22.5		152D		TL	31	AG16.00	198	42.3	21.4	128.5	19.1	7850	58	40
38025001AL	560/60R22.5		172D		TL	29	AG16.00	265	49.2	21.7	150.6	21.8	13880	73	40
38022922AL	560/60R22.5		161E		TL	29	AG16.00	250	49	21.8	144.1	22	10200	58	44
38022945AL	580/65R22.5		166D		TL	29	AG16.00	278	51.9	23	159.1	22.8	11670	58	40
38022960AL	600/50R22.5		164J		TL	32	AG20.00	301	46.1	23.9	142.4	21.2	11010	94	62
38022999AL	600/55R22.5		162E		TL	29	AG20.00	256	49	23.6	144.5	22.1	10500	58	43
38028020AL	620/40R22.5		155D		TL	33	AG20.00	242	42.2	24.4	125.2	19.2	8550	58	40
38028058AL	620/40R22.5		171A8		TL	33	AG20.00	278	42.2	24.4	125.2	19.2	13600	102	25
38022975AL	650/50R22.5		163E		TL	33	AG20.00	283	48.6	25.6	142.9	21.8	10700	58	43
38023010AL	750/45R22.5		177D		TL	33	AG24.00	388	49.2	29.3	150.7	21.9	16100	73	40
38022961AL	750/45R22.5		166E		TL	33	AG24.00	329	49	29.5	144.5	22.1	11700	58	43
38022800AL	600/55R26.5		165E		TL	33	AG20.00	336	53	24.6	156.7	24	11340	58	44
38030001AL	600/55R26.5		177D		TL	33	AG20.00	354	53.1	24.6	162.8	23.9	16080	73	44
38031010AL-IN	650/55R26.5		167E		TL	33	AG20.00	331	53.5	25.4	158.7	24.3	12000	58	43
38030110AL	650/55R26.5		178D		TL	33	AG20.00	335	53.8	25.2	163.4	24.2	16520	73	40
38030522AL	650/60R26.5		173D		TL	33	AG20.00	366	57.1	26	168.5	25.8	14320	58	40
38030545AL	650/60R26.5		181D		TL	33	AG20.00	390	57.1	26	168.5	25.8	18200	73	40
38030700AL	650/65R26.5		174D		TL	33	AG20.00	374	59.8	26.1	176	26.9	14760	58	40
38030740AL	650/65R26.5		181D		TL	33	AG20.00	435	59.9	26.1	184.1	27.1	18170	73	40
38041001AL	710/50R26.5		170D		TL	33	AG24.00	380	55.1	28.8	168.9	24.8	13220	58	40
38041005AL	710/50R26.5		178D		TL	33	AG24.00	406	55.2	28.7	168.8	24.8	16500	73	40
38022992AL	750/45R26.5 (SG)		170E		TL	33	AG24.00	376	53.5	29.1	162.9	24.3	13220	58	44
38040751AL	650/65R30.5		176D		TL	33	AG20.00	433	64	26.8	187.8	28.6	15640	58	40
38040790AL	650/65R30.5		181D		TL	33	AG20.00	482	64.1	26.6	197	29.2	18170	73	40
38060001AL	750/60R30.5		181D		TL	33	AG24.00	518	66.1	30.2	201.3	29.7	18200	58	40
38060008AL	800/60R32		185D		TL	33	DW27A	638	70.9	31.7	212.9	32	20370	58	40

FLOTATION

RADIAL FLOTATION

328 FLOTATION IMPLEMENT I-3

OEM FITMENT

The Alliance 328 I-3 is the broadest line of bias flotation tires in the market. High load capacities and low inflation pressures ensure minimal soil compaction. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
32827420AL	500/50R17		145D		TL	35	16.00DC	123	19.5	37.6	110	16.8	6400	58	40
32826751AL-IN	400/60-15.5		145A8	14	TL	21	13.00DC	72	34.4	15.9	98.8	14.8	5520	41	25
32826833AL-IN	400/60-15.5			16	TL	21	13.00DC	75	34.4	15.9	98.9	14.8	6400	52	25
32826671AL	500/60-15.5			12	TL	35	16.00DC	119	39.1	19.8	113.9	17.3	9100	48	25
32829560AL	500/55-17			12	TL	35	16.00DC	123	39.1	19.8	112.2	17.1	6940	48	25
32826004AL	400/55-17.5			8	TL	33	13.00DC	98	34.9	15.3	102.5	15.2	4540	39	25
32826593AL	400/55-17.5		149A8/145B F.R.	16	TL	33	13.00DC	101	34.9	15.3	102.5	15.2	7150	58	25
32827011AL	44X1800-20		145D	8	TL	33	W14L	159	45	18	128.7	19.4	6410	41	30
32879505AL-IN	42X2500-20		137A8	12	TL	32	20.50VF	207	24.5	42.5	124.4	18.9	5080	45	25
32880005AL	48X2500-20		149A8/145B F.R.	12	TL	33	20.50VF	283	49	25	142.5	21.6	7600	45	25
32881107AL	48X3100-20			12	TL	33	26.00VF	304	49	30.5	142.9	21.7	7400	41	25
32827033AL-IN	400/55-22.5		149B	16	TL	33	13.00DC	132	40.6	15.8	124	17.9	7820	58	25
32897024AL-IN	400/55-22.5			18	TL	33	13.00DC	143	40.6	15.8	124	17.9	8800	65	25
32827045AL-IN	400/60-22.5		160A8	18	TL	33	11.75	129	42.1	15.7	122.8	18.6	9920	62	25
32827042AL-IN	500/45-22.5		144B	12	TL	33	16.00DC	154	40.6	19.7	118.1	17.9	6940	39	25
32827046AL-IN	500/45-22.5		150B	16	TL	33	16.00DC	161	40.6	19.7	118.1	17.9	8250	52	25
32827061AL-IN	500/45-22.5		146E	16	TL	33	16.00DC	161	40.6	19.7	118.1	17.9	6600	52	43
32828000AL-IN	500/60-22.5			12	TL	32	16.00DC	170	46.1	19.7	136.6	20.1	9090	35	25
32828111AL	500/60-22.5		155E/159B F.R.	16	TL	32	16.00DC	179	48.7	21.7	140.9	21.3	8550	46	43
32828123AL-IN	500/60-22.5		159B	16	TL	32	16.00DC	173	46.1	19.7	136.6	20.1	10740	46	25
32827210AL-IN	550/45-22.5		153B	12	TL	33	16.00DC	169	42.1	21.7	122.2	18.5	8040	30	25
32827054AL-IN	550/45-22.5		156B	16	TL	33	16.00DC	168	42.1	21.7	122.2	18.5	9640	41	25
32827055AL-IN	550/45-22.5		151E	16	TL	33	16.00DC	179	42.1	21.7	122.2	18.5	7600	41	43
32832298AL-IN	550/60-22.5			12	TL	32	16.00DC	190	48.7	21.7	140.9	21.3	9900	33	25
32832318AL-IN	550/60-22.5		162B	16	TL	32	16.00DC	203	48.7	21.7	140.9	21.3	9910	33	25
32841024AL	550/60-22.5		159E	16	TL	32	16.00DC	208	48.7	21.7	147.4	22.0	9650	41	43
32832285AL	550/60-22.5		166D	20	TL	32	16.00DC	226	48.7	21.7	147.4	22.0	9650	41	40
32832320AL-IG	600/50-22.5			8	TL	32	20.00DC	176	46.1	23.6	135.8	20.1	6160	20	25
32832455AL-IN	600/50-22.5		156B	12	TL	32	20.00DC	203	46.1	23.6	135.8	20.1	9640	29	25
32832520AL-IN	600/50-22.5		161B	16	TL	32	20.00DC	239	46.1	23.6	135.8	20.1	11340	38	25
32832676AL	600/50-22.5		159E	16	TL	32	20.00DC	234	46.1	23.6	133.1	20.1	9100	38	43
32833065AL	600/55-22.5		164A8/151A8	12	TL	32	20.00DC	216	50	23.6	143.7	23.6	11010	29	25
32841117AL	600/55-22.5		169A8/156A8	16	TL	32	20.00DC	230	50	23.6	143.7	23.6	12780	38	25
32833108AL	600/55-22.5		161E	16	TL	32	20.00DC	229	50	23.6	143.7	21.7	10200	41	43
32835319AL-IN	700/40-22.5		162B	16	TL	32	24.00DC	254	46.1	27.6	137.2	20.1	11670	38	25
32835324AL	700/40-22.5		168A8/164B F.R.	18	TL	32	24.00DC	265	46.1	27.6	137.2	20.1	12330	49	25
32840020AL-IN	700/50-22.5			16	TL	32	24.00DC	283	50	27.6	143.7	21.7	14760	41	25
32840020AL	700/50-22.5		174A8/170B	16	TL	32	24.00DC	282	50.0	27.6	143.7	21.7	14800	41	25
32841144AL	700/50-22.5		166E	16	TL	32	24.00DC	273	50.0	27.6	143.7	21.7	11700	35	43
32850011AL	600/55-26.5		165A8/161B F.R.	12	TL	32	20.00DC	271	52.5	23.3	151.6	22.8	13610	39	25

328 FLOTATION IMPLEMENT I-3 - continued

PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
32852215AL	600/55-26.5		163C/167B	16	TL	32	20.00DC	276	52.5	23.6	151.6	22.8	10700	38	35
32853003AL	600/55-26.5		170A8/167B F.R.	16	TL	32	20.00DC	276	52.5	23.3	151.6	22.8	13200	38	25
32862011AL	700/50-26.5		166C/170B F.R.	16	TL	32	24.00DC	306	52.5	27.6	151.6	22.8	11700	35	35
32862023AL	700/50-26.5		174A8/170B F.R.	16	TL	32	24.00DC	307	52.5	27.6	151.4	22.8	14800	35	25
32871514AL	800/45-26.5		177A8/173B F.R.	16	TL	32	28.00DC	337	54.8	31.5	159.4	24.2	16100	32	25
32872509AL	650/60-30.5		174A8/170B F.R.	12	TL	33	20.00DC	337	65.7	25.6	188.6	28.3	14760	25	25
32872607AL	650/60-30.5		167A8/163B	16	TL	33	20.00DC	415	65.7	25.6	188.6	28.3	17070	32	25
32873604AL	750/60-30.5		182A8/179B F.R.	16	TL	33	24.00DC	462	65.7	29.5	188.6	28.3	18700	32	25
32873903AL	750/60-30.5		172D/179B	16	TL	33	24.00DC	463	65.7	29.5	188.6	28.3	13900	36	40
32872000AL-IN	800/45-30.5			16	TL	33	28.00DC	428	59.4	31.9	175.1	26.1	16500	35	25
32874609AL	850/50-30.5		186A8/182B F.R.	16	TL	33	28.00DC	510	65.7	33.5	188.6	28.3	20900	32	25
32874610AL	850/50-30.5		180A8/177B	18	TL	33	28.00DC	523	65.7	33.5	188.6	28.3	25330	44	25

328 FLOTATION IMPLEMENT VALUE PLUS I-3

The Alliance 328 Value Plus is designed for use on free-rolling axles. The tread pattern provides low rolling resistance and minimal soil compaction. (TUBELESS - ALL STEEL)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
32826825VP-IN	400/60-15.5		148A8 F.R.	16	TL	21	13.00DC	73	34.4	15.9	98.8	14.8	4940	64	25
32897021VP-IN	400/55-22.5		152A8 F.R.	16	TL	33	13.00DC	112	40.6	15.8	118.1	17.9	5520	58	25
32897081VP-IN	500/45-22.5		154A8 F.R.	16	TL	33	16.00DC	144	40.6	19.7	118.1	17.9	8250	52	25
32828108VP-IN	500/60-22.5		163A8 F.R.	16	TL	32	16.00DC	160	46.1	19.7	133.1	20.1	7600	46	25
32887060VP-IN	550/45-22.5		159A8 F.R.	16	TL	33	16.00DC	162	42.1	21.7	122.2	18.5	9640	41	25
32832150VP-IN	550/60-22.5		166A8 F.R.	16	TL	32	16.00DC	184	48.7	21.7	140.9	21.3	11670	44	25

332 TRENCHER

The Alliance 332 is a high-flotation tire which improves the mobility of utility vehicles and agricultural implements. It can be used to replace dual configuration tires. The tire is engineered for high load carrying capacity with reduced inflation and rolling resistance. The large footprint minimizes damage to field and crops. A nylon carcass and special ozone-resistant compound ensure longer tire life.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
33201400AL-IN	31X1550-15			8	TL	24	13LB	60	31.2	15.4	91.3	13.9	2,910	45	25

FLOTATION

RADIAL FLOTATION

331 FLOTATION IMPLEMENT I-3 / HF-3

OEM FITMENT

The Alliance 331 I-3/HF-3 offers an aggressive directional pattern commonly used on drive axles. The robust lug also provided a smooth transition from lug to lug. TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
33122541AL	600/45R22.5		165A8/161B		TL	47	20	268	45.4	23.9	132.3	20.1	11340	58	25
33172000AL	710/50R30.5		176D		TL	50	AG24.00	424	59.1	27.6	179.9	26.5	21280	58	25
33115046AL	500/45-20		147A8 FR	12	TL	48	16.00DC	140	37.4	19.3	111	17	6770	28	25
33115052AL	500/45-20		160A8/164A6	16	TL	48	16.00DC	127	38.6	19.3	114.6	17.6	9900	87	25
33177985AL	38X1800-20			12	TL	48	W14L	116	39	18	113.8	17.2	4080	54	25
33178011AL	42X2500-20			12	TL	48	20.50VF	216	42.5	24.5	124.4	18.9	5080	45	25
33178108AL	48X2500-20			12	TL	49	20.50VF	321	49	25	142.5	21.6	7600	45	25
33181109AL	48X3100-20			12	TL	49	26.00VF	362	49	30.5	142.9	21.7	7400	41	25
33117108AL-IN	500/60-22.5			16	TL	49	16.00DC	201	46.1	19.7	133.1	20.1	10740	46	25
33117113AL	500/60-22.5			16	TL	49	16.00DC	198	46.1	19.7	133.1	20.1	10740	46	25
33120001AL	550/45-22.5		153A8/149B	12	TL	47	16.00DC	198	42.1	21.7	125.2	19.2	8040	30	25
33120206AL	550/45-22.5		159A8/156B	16	TL	47	16.00DC	193	42.1	21.7	122.2	18.5	9650	41	25
33160210AL	550/45-22.5			22	TL	42	16.00DC	214	42.1	21.7	125.2	19.2	11670	58	25
33132211AL	550/60-22.5			16	TL	49	16.00DC	243	48.7	21.7	140.9	21.3	12000	41	25
33132243AL	600/40-22.5		154A8/150B	12	TL	47	20.00DC	187	42.9	23.6	124.7	18.9	8260	30	25
33132247AL	600/40-22.5		169A8/173A6	16	TL	47	20.00DC	219	42.9	23.6	129.1	19.9	12800	87	25
33132608AL	600/50-22.5			16	TL	47	20.00DC	225	46.1	23.6	133.1	20.1	11340	38	25
33132623AL	600/50-22.5		174A6/170A8	18	TL	47	20.00DC	228	46.1	23.6	136.6	21	13200	87	25
33134008AL	600/55-22.5			16	TL	49	20.00DC	290	50	23.7	140.9	21	12780	38	25
33135108AL	700/40-22.5			16	TL	49	24.00DC	256	46.1	27.6	133	20.1	11670	32	25
33135112AL	700/40-22.5		177A6/173A8	18	TL	49	24.00DC	259	46.1	27.6	143.7	22	14300	87	25
33139513AL	700/50-22.5			16	TL	49	24.00DC	311	50	27.6	143.7	21.7	14800	35	25
33190010AL-IN	66x4300-25			20	TL	73	36	819	66.5	40.6	188	28.8	14800	50	30
33140126AL	500/60-26.5			16	TL	49	16.00DC	233	50	19.7	145.3	22	11340	46	25
33141205AL	600/50-26.5			16	TL	49	20.00DC	255	50	23.6	145.4	22	12000	38	25
33151204AL	600/55-26.5			16	TL	49	20.00DC	297	52.5	23.3	151.6	22.8	13220	38	25
33155272AL	700/40-26.5			16	TL	49	24.00DC	293	50	27.6	145.3	22	12330	32	25
33170015AL	700/50-26.5			16	TL	49	24.00DC	335	52.5	27.6	156.5	22.8	14760	35	25
33173010AL	800/45-26.5			16	TL	49	28.00DC	360	54.8	31.5	159.5	24.2	16080	32	25
33177208AL	600/60-30.5			16	TL	50	20.00DC	368	59.1	23.6	170.9	25.8	14760	38	25
33177321AL	700/50-30.5			16	TL	50	24.00DC	425	59.1	27.6	170.7	25.8	15640	32	25
33177522AL	800/45-30.5			16	TL	50	28.00DC	444	59.1	31.5	170.9	25.8	17070	32	25





ALLIANCE FORESTRY TIRES

SUPERIOR TRACTION, DURABILITY AND PERFORMANCE

Few environments are as tough on tires as the woods. High loads, uneven ground, and endless puncture and bead hazards demand some of the toughest tires in the world. In rain, snow and dust, forestry tires need to deliver unbeatable traction while protecting fragile forest soils from long-term damage. Alliance forestry tires are used in timber lots and plantations worldwide, on skidders, harvesters and CTL rigs, in every condition—every day.



328 FORESTRY FLOTATION I-3 STEEL BELTED

The Alliance 328 Heavy Duty Flotation tire is a specially designed tire constructed to carry heavy loads and is used in harsh conditions. It provides improved stability over dual-tire configuration. The tire also provides much better ride comfort, higher machine mobility, better self cleaning and better overall performance on the road. Special reinforced bead, steel belt and heavy duty construction are some of the unique features of this tire. Apart from its standard applications in trailers, forestry trailers and forest harvesters, the special HD tire is also ideal for agricultural baler applications.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
32826442AL	400/60-15.5			14	TL	21	13.00DC	90	34.4	15.9	98.8	15.0	8940	51	5
32826480AL	400/60-15.5			16	TL	21	13.00DC	92	34.4	15.9	98.8	15.0	9710	58	5
32826485AL	400/60-15.5			20	TL	21	13.00DC	102	34.4	15.9	98.8	15.0	10950	73	5
32826712AL	500/60-15.5			12	TL	35	16.00DC	152	39.1	19.8	113.9	17.3	9100	48	5
32829611AL	500/55-17			12	TL	35	16.00DC	153	39.1	19.8	114.6	17.4	8550	48	5
32827645AL	500/45-22.5			16	TL	33	16.00DC	196	41.3	19.7	124.4	19.3	8550	52	5

343 FORESTAR FLOTATION LS-2 STEEL BELTED

The Alliance 343 Forestar is the most advanced tire design for application on short-cut forestry machines, such as harvesters and forwarders. Wide and robust lugs with low lug angles provide excellent grip on wide range of forestry terrains. (TUBELESS - STEEL BELTED)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
34301800AL	600/50-22.5			16	TL	33	20.00DC	252	45.8	23.0	138.0	21.4	8800@46	46	5
34301820AL	600/50-22.5			24	TL	33	20.00DC	304	45.8	23.0	138.0	21.4	13600@80	80	5
34302000AL	710/40-22.5			16	TL	33	24.00DC	292	46.1	28.0	138.8	21.5	9650@46	46	5
34302005AL	650/45-24.5			20	TL	34	22.00DC	347	48.4	25.2	144.7	22.6	12300@73	73	5
34302300AL	710/40-24.5			20	TL	37	24.00DC	391	48.6	28.0	146.2	22.9	13200@73	73	5
34315000AL	600/55-26.5			20	TL	38	20.00DC	407	52.8	23.6	158.1	24.4	13900@73	73	5
34315450AL	650/65-26.5			20	TL	40	20.00DC	515	58.5	25.6	175.7	27.2	18200@73	73	5
34316000AL	710/45-26.5		168A8/175A2	20	TL	38	24.00DC	453	52.8	28.0	158.1	24.4	15200@73	73	5
34316015AL	710/45-26.5			24	TL	38	24.00DC	480	52.8	28.0	158.1	24.4	17600@87	87	5
34316650AL	750/55-26.5			20	TL	40	24.00DC	550	58.5	29.5	175.7	27.2	19800@73	73	5
34316652AL	750/55-26.5			26	TL	40	24.00DC	626	58.5	29.5	175.7	27.2	24000@94	94	5
34317000AL	800/40-26.5			20	TL	38	28.00DC	488	52.8	31.5	158.1	24.4	16100@73	73	5
34317050AL	850/45-26.5			20	TL	40	28.00DC	603	58.5	33.1	175.7	27.2	21500@73	73	5

342 FORESTAR FLOTATION LS-2 STEEL BELTED

The Alliance 342 includes a robust tread pattern for long tire life, excellent traction, grip and reliability while working on slopes. The tread pattern is reinforced by small lugs located on the shoulders.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
34200620AL	650/45R24.5		161A8/168A2		TL	47	24.00DC	343	48.2	25.0	147.8	22.4	12300	73	5
34200650AL	710/40R24.5		163A8/170A2		TL	49	24.00DC	405	48.4	28.0	150.0	22.4	13200	73	5
34200010AL	600/55R26.5		165A8/172A2		TL	49	20.00DC	405	52.8	23.6	161.0	24.5	13900	73	5
34200850AL	710/45R26.5		168A8/175A2		TL	49	24.00DC	452	52.5	28.1	161.8	24.4	15200	73	5
34200100AL	600/60R28		159A8/167A2		TL	63	DW20B	457	55.9	24.3	171.2	26.0	12000	46	5
34201005AL	600/65R34		165A8/172A2		TL	67	DW20B	541	64.6	24.0	195.9	30.4	13900	52	5
34201040AL	710/55R34		171A8/178A2		TL	62	DW24B	607	64.7	28.3	196.8	30.3	16500	58	5
34200600AL	650/65R38		171A8/178A2		TL	67	DW20B	675	71.3	25.6	214.5	33.1	16500	52	5

333 AGRO-FOREST STEEL BELTED

The Alliance Agro-Forestry 333 Flotation tire represents cutting edge design for harvesters and forwarders. This tire has wide and robust low-angle lugs to provide excellent grip on a wide range of forestry terrains in addition to the known bogie truck standard design defined by leading track producers. Some of its features are strong steel breakers, basic nylon tire structure, special durable tread compound, high under-tread gauge and strong, thick sidewalls.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
33300012AL-IN	320/85-24	12.4-24	127A8/124B	14	TL	44	W11	138	45.7	12.6	135.6	20.8	3860	35	25
33300054AL-IN	380/85-24	14.9-24	137A8/134B	14	TL	55	W12	184	49.6	15.0	146.6	22.4	5080	35	25
33300104AL-IN	380/85-28	14.9-28	139A8/136B	14	TL	55	W12	204	53.9	15.0	159.8	24.5	5360	35	25
33300118AL-IN	420/85-28	16.9-28	144A8/141B	14	TL	62	W15L	246	56.1	16.9	169.8	26.4	6150	35	25
33300126AL-IN	420/85-30	16.9-30	145A8/142B	14	TL	62	W15L	270	58.1	17.3	172.3	26.5	5400	35	25
33300134AL-IN	460/85-30	18.4-30	150A8	14	TL	67	W16L	335	61.0	18.1	180.5	27.6	7400	35	25
33300146AL-IN	420/85-34	16.9-34	147A8	14	TL	62	W15L	303	62.2	16.9	185.2	28.5	6800	35	25
33300172AL-IN	460/85-34	18.4-34	152A8/149B	14	TL	67	W16L	359	64.8	18.1	192.4	29.6	7850	35	25
33300149AL-IN	420/85-38	16.9-38	149A8/144B	14	TL	62	W15L	335	66.1	16.9	197.7	30.5	7150	35	25
33300242AL-IN	460/85-38	18.4-38	154A8/151B	14	TL	67	W16L	375	68.8	18.1	205.0	31.5	8250	35	25
33300275AL-IN	520/85-38	20.8-38	160A8/157B	14	TL	68	DW16L	454	73.2	20.5	217.3	33.3	9900	35	25

331 FORESTRY FLOTATION I-3 / HF-3 STEEL BELTED

The Alliance 331 Heavy Duty Flotation tread design is a high traction profile with good self cleaning suitable for on and off road service. High load carrying capacity and low inflation pressure are the main characteristics of this tire. Strong nylon construction and compounds ensure long tire life.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
33115217AL	500/50-20			16	TL	48	16.00DC	163	39.0	18.5	115.7	17.8	7150	46	5
33117193AL	500/60-22.5			16	TL	49	16.00DC	249	46.1	19.7	137.8	21.3	9350	46	5
33117350AL	500/60-22.5		158A8	20	TL	49	16.00DC	259	46.1	19.7	137.8	21.3	11400	58	5
33120536AL	550/45-22.5		140A8/149A2	12	TL	47	16.00DC	232	42.5	21.7	127.2	19.6	6800	35	5
33132540AL	600/40-22.5			16	TL	47	20.00DC	243	43.7	23.6	131.1	20.3	8550	46	5
33140197AL	500/60-26.5			16	TL	49	16.00DC	260	50.0	19.7	150.4	23.1	13200	58	5
33140445AL	500/60-26.5		170A8	22	TL	49	16.00DC	279	50.0	19.7	150.4	23.2	16100	83	5
33177343AL	800/45-30.5			20	TL	50	28.00DC	551	59.8	31.5	179.5	27.7	18200	51	5
33177555AL	600/60-30.5			20	TL	50	20.00DC	437	59.1	23.6	177.3	27.4	15200	58	5
33177666AL	700/50-30.5			20	TL	50	24.00DC	494	59.4	27.6	170.7	25.8	15700	54	5

346 FORESTAR FLOTATION STEEL BELTED LS-2

The Alliance 346 Forestar is a bias flotation forestry tire developed mainly for use on modern forestry harvesters and forwarders. Designed to deliver exceptional traction, minimize slip, promote fuel efficiency and reduce compaction. (TUBELESS - STEEL BELTED)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
34602756AL	600/65-34			14	TL	63	DW20	481	64.6	23.6	194.0	30.0	11000@35	35	5
34602910AL	600/65-34			16	TL	63	DW20	513	64.6	23.6	194.0	30.0	12000@65	65	5
34602111AL	700/55-34			14	TL	63	DW24	533	65.0	27.6	195.1	30.2	12300@35	35	5
34602365AL	700/55-34			20	TL	63	DW24	565	65.0	27.6	195.1	30.2	13600@65	65	5
34602385AL	700/70-34			16	TL	65	DW20	695	72.8	28.4	219.4	34.0	15200@51	51	5
34602410AL	700/70-34			20	TL	65	DW20	717	72.8	28.4	219.4	34.0	17600@61	51	5

344 FORESTAR FLOTATION LS-2 STEEL BELTED

OEM FITMENT

The Alliance 344 Forestar LS-2 is a bias belted tire with steel reinforcement for high puncture resistance. The tire uses special tread compound and has very thick sidewalls and under tread. The reinforced bead of the tire provides exceptional performance. Its lower lug angle and wide spacing provide excellent grip and self cleaning.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
34462598AL	600/40-22.5		175A6		TL	55	AG20.00	280	42.9	23.2	132.2	19.7	15200	102	20
34432716AL	600/50-22.5			16	TL	64	20.00DC	332	46.1	23.6	137.9	21.3	9350@46	46	5
34435416AL	710/40-22.5			16	TL	64	24.00DC	361	46.1	27.6	137.9	21.3	10200@52	52	5
34410000AL	54X3700-25			12	TL	54	VA32	669	56.5	36.2	171.9	26.5	13200@35	35	5
34410004AL	54X3700-25			20	TL	54	VA32	710	56.5	36.2	171.9	26.5	17100@58	58	5
34453120AL	600/55-26.5			20	TL	64	20.00DC	418	52.8	24.4	158.1	24.4	13900@73	73	5
34453165AL	600/55-26.5			24	TL	64	20.00DC	439	52.8	24.4	158.1	24.4	16100@87	87	5
34464200AL	650/65-26.5			20	TL	65	20.00DC	499	58.5	25.6	175.7	27.2	18200@73	73	5
34464350AL	700/50-26.5			20	TL	64	24.00DC	462	52.8	28.0	158.1	24.4	15200@73	73	5
34470444AL	710/45-26.5			20	TL	64	24.00DC	461	52.8	28.0	158.1	24.4	15200@73	73	5
34470470AL	710/45-26.5			24	TL	64	24.00DC	486	52.8	28.0	158.1	24.4	17600@87	87	5
34470500AL	710/60-26.5			20	TL	64	AG20.00	556	58.7	27.8	176.2	27.2	19800@73	73	5
34472100AL	750/55-26.5			20	TL	65	24.00DC	563	58.5	29.5	175.7	27.2	19800@73	73	5
34474200AL	750/55R26.5		177A8	20	TL	58	AG24.00	462	58.5	29.1	178.4	26.5	16100	65	25
34488200AL	800/40-26.5			20	TL	64	28.00DC	495	52.8	31.5	158.1	24.4	16100@73	73	5
34474215AL	800/40R26.5			20	TL	64	AG.0028	484	52.1	31.5	158.9	24.0	16100@73	73	5
34488320AL	870/45-26.5			20	TL	66	28.00DC	645	56.3	34.3	172.6	26.2	16100@58	58	5

345 FORESTAR STEEL BELTED LS-2

The Alliance 345 Forestar is a premier logger skidder tire designed to outperform all leading competitors. Flat profile tire with steel belts, cut resistant tread compound, multi-angle lugs, and extra thick sidewalls. (STEEL BELTED)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
34508514AL	18.4-26			14	TT	67	DW16	338	56.9	18.4	169.7	26.1	9700	42	5
34502875AL	23.1-26			16	TL	69	DW20	557	63.4	23.1	188.2	28.9	13900	40	5
34502982AL-IN	28L-26			16	TL	74	DW25	606	64.5	28.1	191.4	29.4	14000	33	5
34502989AL	28L-26			20	TL	74	DW25	634	64.5	28.1	191.4	29.4	16000	40	5
34502995AL	28L-26			26	TL	74	DW25	678	64.5	28.1	191.4	29.4	19800	52	5
34515914AL	16.9-30			14	TT	63	DW15	336	59.2	16.9	177.5	27.4	9250	48	5
34505025AL	18.4-30			14	TL	67	DW16	392	60.9	18.5	183.7	28.5	10000	42	5
34502720AL	24.5-32			16	TL	80	DW21	727	71.5	24.5	213.1	32.8	15400	35	5
34502735AL	24.5-32			20	TL	80	DW21	750	71.5	24.5	213.1	32.8	18200	45	5
34530080AL	30.5L32			20	TL	76	DH27	902	72.7	30.5	216.5	33.3	18500	35	5
34530175AL	30.5L32			26	TL	76	DH27	922	72.7	30.5	216.5	33.3	22000	45	5
34531100AL	35.5L32			20	TL	82	DH31	1226	79.1	35.3	235.0	36.2	22500	30	5
34531300AL	35.5L32			26	TL	82	DH31	1253	79.1	35.3	235.0	36.2	27000	40	5
34505114AL	18.4-34			14	TT	67	DW16	409	65.2	18.4	195.7	30.2	10200	42	5

356 SEVERE DUTY SERVICE STEEL BELTED BIAS R-1

The Alliance 356 Severe Duty Service is puncture resistant due to steel belts, triple underskid, triple sidewall and upright bias stance. Extreme durability makes this rugged forestry tire a perfect choice for the rigors of highway lawn mowing and cotton field service. Steel belted, triple underskid. (TUBELESS - STEEL BELTED)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
35605101AL	11.2-24		119A8/125A2	10	TL	50	W10	109	43.8	11.4	131.7	20.4	3000	44	25
35605129AL	12.4-24			12	TL	53	W11	139	45.1	12.4	134.1	20.6	3960	51	25
35601529AL	13.6-24		128A8/136A2	10	TL	54	W12	168	46.9	13.6	139.0	21.3	3960	36	25
35619444AL	14.9-24		138A8/144A2	14	TL	55	W13	195	49.0	14.9	149.3	22.1	5200	44	25
35619818AL	14.9-24		143A8/150A2	18	TL	55	W13	206	49.0	14.9	149.3	22.1	6000	55	25
35608341AL	18.4-26			10	TL	57	W16L	271	56.7	18.4	168.2	25.8	5680	30	25
35612909AL	13.6-28		130A8/138A2	10	TL	54	W12	164	51.0	13.6	152.1	23.4	4180	36	25
35603177AL	14.9-28		140A8/147A2	14	TL	55	W13	215	53.1	14.9	158.2	24.3	5520	44	25
35603166AL	16.9-28		145A8/152A2	14	TL	57	W15	262	55.9	16.9	165.6	25.4	6400	39	25
35615777AL	14.9-30			14	TL	55	W13	233	55.1	14.9	164.6	25.4	6150	44	25
35615820AL	16.9-30		144A8151A2	14	TL	55	W15	272	58.1	16.9	174.3	26.9	6150	38	25
35617227AL	18.4-30			14	TL	55	W16L	309	60.8	18.4	181.8	28.0	7600	38	25
35604513AL	16.9-34		146A8/153A2	14	TL	55	W15L	294	62.0	16.9	184.8	28.4	6600	36	25
35604618AL	16.9-34			18	TL	55	W15L	305	62.0	16.9	184.8	28.4	7850	46	25
35602748AL	16.9-38			14	TL	55	W15L	317	65.9	16.9	197.1	30.4	7150	38	25
35610033AL	18.4-38		155A8/162A2	14	TL	57	W16L	373	68.9	18.4	205.4	31.6	8550	36	25

370 AGRO-FOREST STEEL BELTED

The Alliance 370 Agro-Forest is exceedingly puncture resistant due to steel belts, triple underskid, triple sidewall and upright bias stance. Extreme durability makes this rugged forestry tire a perfect choice for the rigors of highway lawn mowing and cotton field service. Steel belted, triple underskid. (TUBELESS - STEEL BELTED)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
37042394AL	380/70-24		130A8/127B	14	TL	55	W12	182	47.5	15.0	142.3	22.0	4180	39	25
37044221AL	420/70-24		138A8/134B	14	TL	57	W13	207	49.8	16.5	148.6	22.9	5200	44	25
37045111AL	380/70-28		138A8/134B	14	TL	55	W12	224	51.5	15.0	154.9	24.0	5200	44	25
37046511AL	420/70-28		140A8/137B	14	TL	57	W13	229	53.7	16.5	161.2	24.9	5520	36	25
37048259AL	480/70-28		145A8/142B	14	TL	59	W15L	264	57.0	18.9	170.6	26.3	6400	39	25
37051115AL	480/70-34		146A8/143B	14	TL	59	W15L	333	63.0	18.9	189.4	29.3	6600	36	25
37052109AL	520/70-34		154A8/151B	14	TL	69	DW16	393	65.3	20.3	196.1	30.3	8250	36	25
37054111AL	480/70-38		150A8/157A2	14	TL	66	W15L	376	67.5	18.9	203.5	31.5	7400	39	25
37055222AL	520/70-38		155A8162A2	14	TL	69	W16L	405	69.2	20.5	208.3	32.2	8550	36	25
37056333AL	580/70-38		160A8/168A2	14	TL	73	W18L	503	72.5	22.4	217.6	33.6	9900	36	25





ALLIANCE INDUSTRIAL TIRES

RUGGED CONSTRUCTION, MAXIMUM PERFORMANCE

A wide range of working surfaces, driving distances short and long, endless possibilities in loads—industrial tires face all sorts of challenges. That's why Alliance engineers and constructs a broad range of industrial tires, ensuring that there's an ideal Alliance tire for any task, any site, any day of the year. Rugged construction, special tread compounds and lug designs, all optimized for your machinery and your job site.



550 MULTI-USE STEEL BELTED RADIAL

OEM FITMENT

The Alliance 550 provides exceptional traction whatever the terrain; snow, sand, hard surfaces and soft surface alike. Steel belts and a cut- and chip-resistant compound make this tire exceedingly puncture resistant. (TUBELESS - STEEL BELTED)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
55000042AL	250/75R16		120G		TL	20	W8	45	30.7	10.0	92.2	14.2	3080	65	55
55000035AL	250/80R16		126A8/123D		TL	22	W8	54	32.0	10.6	97.2	14.7	3420	64	40
55000040AL	265/70R16.5	10R16.5	130A2		TL	29	8.25	67	30.4	10.5	92.3	13.7	4180	58	5
55000012AL	305/70R16.5	12R16.5	141A5		TL	30	9.75	94	32.8	12.0	97.2	14.7	5680	58	15
55010460AL	340/80R18	12.5/80R18	143A8/138D		TL	31	DW11	124	39.4	13.5	117.4	17.7	6000	46	40
55010405AL	365/70R18		142A2/135B		TL	31	DW11	108	38.1	14.0	113.1	17.6	4940	54	30
55001480AL	400/70R18		147A8/144D		TL	33	W13	133	40.2	15.9	120.4	18.4	6150	58	40
55000055AL	405/70R18		153A2/141B		TL	33	W13	136	40.2	15.9	120.4	18.4	5670	54	30
55010535AL	340/80R20	12.5R20	144A8/140D		TL	31	DW11	128	41.4	13.5	124.1	18.9	5520	58	40
55001617AL	360/70R20		129A8/124D		TL	24	DW11	121	41.4	14.0	122.9	18.6	3520	35	40
55001620AL	360/80R20		147A8/143D		TL	34	DW11	139	43.0	14.1	128.5	19.3	6800	58	40
55001510AL	400/70R20		149B		TL	33	DW13	151	42.0	15.9	125.2	19.0	7150	58	30
55000060AL	405/70R20	16.0/70R20	149B		TL	33	DW13	152	42.4	15.9	126.2	19.1	7150	58	30
55001450AL	300/80R24		133A8/128D		TL	32	W9	122	43.0	11.6	127.5	19.8	3860	46	40
55001615AL	340/80R24		140A8/135D		TL	31	W11	144	45.4	13.5	135.4	20.8	4800	46	40
55001400AL	360/80R24	13.6R24	143A8/138D		TL	32	W11	160	46.7	14.1	139.9	21.1	5200	46	40
55001700AL	400/80R24	14.9R24	149A8/144D		TL	34	W13	190	49.2	15.9	145.8	22.0	6150	46	40
55002475AL	420/65R24		151A8/146D		TL	33	W13	179	45.6	16.1	137.4	20.7	6600	46	40
55002025AL	440/80R24	16.9R24	154A8/149D		TL	34	W13L	218	51.7	17.4	156.1	23.3	7150	46	40
55000025AL	460/65R24		156A8/151D		TL	34	W15L	190	47.6	17.9	141.6	21.5	7600	46	40
55000120AL	460/70R24	17.5LR24	159B		TL	34	W15L	220	49.2	18.4	149.0	22.4	9650	46	30
55002400AL	480/65R24		151A8/146D		TL	37	W15L	219	48.8	18.9	146.9	22.1	6600	46	40
55005410AL	500/70R24	19.5LR24	164B		TL	36	W16L	258	51.5	19.9	154.4	23.3	11000	46	30
55005330AL	540/65R24		158A8/154D		TL	39	W18L	264	51.7	21.3	155.6	23.3	8250	46	40
55024950AL	480/80R26	18.4R26	160B		TL	34	W16L	276	56.1	19.0	168.0	25.4	9900	46	30
55002350AL	400/80R28	14.9R28	151A8/146D		TL	34	W13L	211	53.2	15.9	159.7	24.1	6600	46	40
55002600AL	440/80R28	16.9R28	156A8/151D		TL	34	W14L	230	55.8	17.3	166.9	25.2	7600	46	40
55002810AL	480/65R28		154A8/149D		TL	34	W15L	253	52.9	18.7	158.3	23.9	7150	46	40
55005390AL	540/65R28		160A8/155D		TL	39	W18L	288	55.6	21.7	168.0	25.6	8550	46	40
55002625AL	440/80R30		157A8/153D		TL	34	W14L	275	57.8	17.1	174.6	26.4	8050	46	40
55003015AL	480/80R30	18.4R30	162A8/157D		TL	35	W15L	310	60.3	18.5	181.7	27.4	9100	46	40
55005500AL	540/65R30		161A8/156D		TL	39	DW18A	301	57.5	21.5	173.3	26.2	8800	46	40
55005910AL	600/70R30		161A8/158D		TL	38	DW20A/B	386	63.1	24.1	188.7	28.6	9350	35	40
55002750AL	440/80R34	16.9R34	159A8/155D		TL	36	W14L	315	61.7	17.4	186.5	28.3	8550	46	40
55003300AL	480/80R34	18.4R34	164A8/159D		TL	35	W15L	335	64.1	18.9	192.6	29.1	8550	46	40
55005342AL	480/80R38	18.4R38	166A8/161D		TL	35	W15L	369	68.0	18.9	204.6	30.9	10200	46	40
55005800AL	540/80R38	20.8R38	172A8/167D		TL	38	DW18A	421	71.8	21.5	216.4	32.8	12000	46	40
55005860AL	600/65R38		170A8/166D		TL	38	DW18A	434	68.9	23.3	207.5	31.2	11700	46	40
55006700AL	650/65R38		175A8/170D		TL	40	DW20A/B	480	71.4	25.4	214.6	32.2	13200	46	40
55006725AL	650/85R38		181A8/177D		TL	40	DW23B	618	81.4	26.5	245.3	35.9	18170	35	40
55007030AL	620/80R42		181A8/177D		TL	45	DW20A/B	604	80.9	25.4	242.9	37.3	16100	46	40
55007150AL	650/65R42		176A8/171D		TL	40	DW20A/B	513	75.4	25.1	228.1	33.8	13600	46	40
55007180AL	710/70R42		181A8/177D		TL	45	DW23A/B	680	80.8	28.2	243.6	37.0	16100	41	40

580 INDUSTRIAL R-4 STEEL BELTED

OEM FITMENT

The Alliance 580 provides superior stability under load, bolstered by outstanding traction. Extremely puncture resistant steel-belted package makes this a highly durable and long-lasting tire. (TUBELESS - STEEL BELTED)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
58024530AL-IN	500/70R28		164A8/164B		TL	50	W16L	298	55.6	19.8	164.8	25.3	11000	58.0	30
58010120AL	280/80R18	10.5R18	132A8		TL	42	W9	98	35.6	11.1	105.7	16.2	4400	58	30
58010460AL	340/80R18	12.5R18	143A8		TL	40	11	131	39.4	13.8	116.9	17.7	6000	58	30
58010436AL	280/80R20	10.5R20	133A8/133B		TL	42	W9	95	37.6	11.1	112.0	17.2	4540	58	30
58010475AL	340/80R20	12.5R20	139G		TL	40	11	138	41.4	13.5	122.6	18.8	5360	58	55
58010480AL	340/80R20	12.5/80R20	144A8		TL	40	11	132	41.4	13.5	122.6	18.8	6150	58	30
58015000AL	380/75R20	14.5R20	148A8/148B		TL	42	W12	140	42.4	15.0	125.4	19.2	6950	58	30
58010748AL	400/70R20		149A8/149B		TL	47	W13	166	42.2	16.1	124.7	19.1	7150	58	30
58013100AL	420/75R20		154A8		TL	45	13	179	44.8	16.5	132.0	20.2	8250	58	30
58011500AL	405/70R24		152A8		TL	45	13	187	46.3	15.8	137.7	21.1	7400	58	30
58024800AL	440/80R24	16.9R24	161A8B		TL	50	W13L	248	51.5	17.7	152.2	23.3	10200	58	30
58020800AL-IN	460/70R24	17.5LR24	159A8/159B		TL	48	DW15L	231	49.2	18.2	145.7	22.3	9640	58	30
58024810AL-IN	500/70R24	19.5LR24	164A8/164B		TL	50	DW16L	253	51.5	19.9	152.6	23.4	11010	58	30
58024950AL	480/80R26		160A8		TL	51	W16L	287	56.0	19.3	166.9	25.3	9900	46	30
58025300AL	440/80R28	16.9R28	156A8/156B		TL	50	W14L	275	55.5	18.1	164.7	25.3	8800	46	30

606 RADIAL STEEL BELTED BACKHOE/LOADER DOZER

The Alliance 606 has a massive block tread design and a radial construction to ensure dependable traction and longer tire life. (TUBELESS - STEEL BELTED)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
60640026AL	335/80R18	12.5/80R18	145A2/134B		TL	31	11	117	38.7	14.6	114.2	17.4	4680	65	30
60600075AL	365/70R18		146A2/135B		TL	31	11	128	39.4	15.7	114.2	17.3	4800	65	30
60635005AL	405/70R18		153A2/141B		TL	31	13SDC	150	42.1	17.8	120.9	18.1	5680	65	30
60640009AL	335/80R20	12.5R20	147A2/136B		TL	31	11	109	42.4	14.4	123.2	18.7	4940	65	30
60641005AL	365/80R20		153A2/141B		TL	31	11	140	44.4	15.7	128.3	19.4	4680	65	30
60653003AL	405/70R20	16/70R20	155A2/143B		TL	31	13SDC	164	42.4	16.8	123.2	18.6	6000	65	30
60660000AL	405/70R24	16/70R20	158A2/146B		TL	31	13	185	48.1	17.8	139.8	21.2	6600	65	30
60666008AL	455/70R24		165A2/154B		TL	33	W14L	213	49.1	18.6	140.9	21.2	8250	65	30

624 INDUSTRIAL RADIAL

The Alliance 624 is a long-lasting radial which delivers outstanding performance in a wide range of applications. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
62400045AL	445/70R19.5	18R19.5	180A2/173A8		TL	33	14	247	43.5	17.5	133.3	19.6	14320	109	25
62400110AL	445/70R22.5	18R22.5	175A8/170D		TL	33	14	266	47.0	17.9	138.8	21.2	15200	109	25

570 INDUSTRIAL RADIAL R-4

The Alliance 570's radial design provides better traction and longer service hours. Tough nylon casing and compounding resists hazards and debris. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
57010020AL	425/55R17		140A8/140B		TL	39	13	112	35.0	16.7	104.8	15.6	5840	58	25
57010028AL	425/55R17		142A8/142B		TL	39	13	116	35.0	16.7	104.8	13.7	5840	58	30
57010054AL	405/70R20EM		155A2/143B		TL	33	DW13	142	42.5	16.6	126.7	19.5	6600	54	25
57010058AL	405/70R20		136G		TL	33	DW13	150	42.5	16.6	126.7	19.5	4940	58	55
57020009AL-IN	17.5LR24		150A8		TL	43	W15L	192	49.0	17.5	145.0	22.2	7400	44	25
57020150AL-IN	17.5LR24		159A8		TL	43	W15L	202	49.0	17.5	145.0	22.2	9650	58	25
57022001AL	445/70R24MPT		151G		TL	43	W15L	194	48.6	17.5	144.5	22.2	7600	58	55
57024015AL	495/70R24MPT		155G		TL	44	W16L	259	51.3	19.6	151.4	23.1	8550	58	55
57024002AL-IN	19.5LR24	500/70R24	149A8		TL	44	W16L	213	52.0	19.5	154.0	23.6	7160	36	25
57024008AL-IN	19.5LR24	500/70R24	156A8		TL	44	W16L	233	52.0	19.5	154.0	23.6	8800	44	25
57024220AL	19.5LR24	500/70R24	164A8		TL	43	W16L	245	51.8	19.5	150.0	22.4	11000	44	25
57025200AL	500/85R24		171A8		TL	44	W16L	295	57.4	20.8	168.5	25.7	13600	41	25
57025080AL	500/85R30	19.5R30	170A8		TL	44	W16L	341	63.1	18.9	190.0	28.3	13200	44	25
57025290AL	620/70R30		166A8		TL	47	W18L	382	63.8	23.3	190.0	28.6	11700	44	25
57010791AL	400/70-20		150B/161A2		TL	33	11	142	43.0	16.3	128.8	19.9	7310	58	30
57020300AL-IN	17.5L-24			12	TL	43	W15L	191	49.2	17.5	146.7	22.6	7400	45	25

323 AGRO-INDUSTRIAL MPT

The Alliance 323 MPT is designed for optimal performance on telescopic handlers and compact wheel loaders. It has superior carcass and bead construction which aids in improving tire life. The extra deep lug provides excellent wear under most severe working conditions.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
32300010AL-IN	10.0/75-15.3			10	TL	29	9	46	30.7	10.4	90.3	13.7	2400	56	25
32300025AL-IN	11.5/80-15.3			12	TL	29	9	61	34.1	11.4	100.4	15.0	3420	60	25
32300810AL-IN	750-16			8	TL	27	5.5	33	31.7	8.2	93.2	14.3	1710	47	25
32301020AL-IN	405/70-20			14	TL	36	DW13	129	42.4	16.0	124.4	19.5	7150	51	30
32301000AL-IN	405/70-20			14	TL	36	DW13	141	42.4	16.0	124.4	19.5	7150	51	30
32301022AL-IN	405/70-20		152B	16	TL	36	DW13	143	42.4	16.0	124.4	19.5	7850	58	30
32301130AL-IN	405/70-24			14	TL	36	DW13	155	46.4	16.0	136.2	21.5	7850	58	30

903 SKID STEER

The Alliance 903 is specially designed for skid steers. The deep, open shoulder design provides great traction in off-road applications. The thick nose of the lug improves wear and ride quality on hard surfaces.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
90300001AL-IN	10-16.5			8	TL	18	8.25	43	30.4	10.2	92.6	14.0	4140	60	5
90300006AL-IN	12-16.5			10	TL	21	9.75	58	32.7	12.1	98.8	15.0	5600	65	5
90300008AL-IN	12-16.5			12	TL	21	9.75	62	32.7	12.1	98.8	15.0	6320	80	5

906 SKID STEER

The Alliance 906 has a thick center lug for long wear on hard surfaces. It has an open, deep shoulder for traction in soft soils. The tire also comes with abrasive-resistant rubber compounds and a rim guard. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
90600010AL-IN	10-16.5			8	TL	21	8.25	48	30.2	10.2	90.2	14.0	4180	60	5
90600012AL-IN	10-16.5			10	TL	21	8.25	49	30.3	10.0	90.2	14.0	4680	75	5
90600060AL-IN	12-16.5			10	TL	23	9.75	62	32.5	11.9	99.5	15.1	5680	65	5
90600065AL-IN	12-16.5			12	TL	23	9.75	62	32.5	11.9	99.5	15.1	6400	80	5

310 EARTHMOVER SPECIAL E-3/L-3

The Alliance 310 is engineered to extend service hours under adverse and abrasive conditions. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
31000300AL	1600-24			24	TL	40	10AV	357	58.8	17.0	175.2	27.0	23400	94	5
31002702AL	1600-25			32	TL	40	11.25/2.0	393	58.8	17.0	175.6	27.0	27600	127	5

322 TURF

OEM FITMENT

The Alliance 322 is primarily used for high end turf maintenance or golf course operation, tread design leaves virtually no footprint. Unique round shoulder design minimizes turf damage on hills and around sharp corners. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
32227610AL	33X16LL-16.1			10	TL	8	14	60	33.5	16.8	99.2	15.2	3860@40	40	30
32241146AL	41X1400-20			6	TL	23	11	104	43.0	15.0	126.9	19.4	3860@36	36	30
32218266AL	44X1800-20			6	TL	26	14	147	45.0	18.0	132.5	20.2	4400@30	30	30

228 MEDIUM BIAS CROSS LUG

The Alliance 228 is designed for on and off road use. It has a tough nylon casing for reliability in rough terrain.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
22805304AL	1200-20			16	TT	24	8.5	120	45.1	12.4	132.1	21.0	7850	105	25
22806807AL	1400-20			20	TT	26	W10	180	48.9	14.7	150.0	23.5	11000	110	25
22807404AL	1400-20			24	TT	26	W10	184	48.9	14.7	150.0	23.5	12300	135	25

601 MUD & SNOW

OEM FITMENT

The Alliance 601 has extra-wide lugs to provide superior traction and extended service hours. Extra-thick sidewall and undertread with a massive lug design reduces downtime. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
60100190AL	15.5/55R18	385/55R18	140A8/B		TL	22	DW14L	89	35.0	14.6	102.3	15.6	5520	51	30

608 INDUSTRIAL RADIAL BACKHOE

The Alliance 608 has a unique non-directional tread design that performs well in all applications. The radial design inherently lends itself to better traction and longer service hours. (TUBELESS - STEEL BELTED)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
60800052AL-IN	335/80R18		136A8		TL	30	11	106	39.1	13.5	117.5	17.5	4940	46	25
60800042AL	365/70R18		135B/146A2		TL	30	11	104	38.1	14.2	115.6	17.5	4800	54	30
60800010AL	405/70R18	16/70R18	153A2/141B		TL	30	13	126	40.4	16.1	122.2	17.7	5680	54	30
60800055AL	335/80R20	12.5R20	147A8		TL	30	11	110	41.1	13.8	123.9	18.3	4940	54	30
60800100AL	365/80R20	14.5R20	153A2/141B		TL	30	11	129	43.0	14.2	129.9	19.0	6830	54	30
60800025AL	405/70R20	16/70R20	155A2/143B		TL	30	13	138	42.4	16.0	127.7	18.5	6000	54	30
60800200AL	455/70R20		150B/162A2		TL	31	14	165	45.1	17.5	136.4	20.4	7400	54	30

210 SUPER TRANSPORT LUG

The Alliance 210 Super Transport Lug tire is engineered to carry heavy loads on all types of surfaces such as sand, rock, mud, snow, etc. Its special tread design provides good traction and high mileage. The cap and base tread construction coupled with a strong nylon carcass ensures smooth running and long tire life.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
21001104AL	1100-20			16	TT	28	8	130	43.5	11.5	132.1	20.3	6390	104	50
21002100AL	1200-20			20	TT	28	8.5	149	45.1	12.4	132.1	21.0	7750	110	50
21003816AL	1200-24ML			20	TT	28	8.5	170	49.1	12.4	132.1	23.0	8810	115	50

839 EXCAVATOR

The Alliance 839 has strong carcass construction that provides good puncture resistance and stability. Improved tread design gives good traction in off-road conditions and improved tread life, in addition to excellent self cleaning and a smooth driving experience.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
83900010AL-IG	1000-20		148B	16	TT	25	7.55	86	42.1	10.8	127.2	19.4	6950	109	30

533 INDUSTRIAL REAR BACKHOE R-4

The Alliance 533 is engineered specifically to provide increased traction and braking power along with long service hours. Special compounding is designed to provide extended wear for on and off road applications. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
53307816AL-IN	14.9-24			12	TL	40	W13	146	48.9	14.9	144.1	22.0	6400	42	25
53350015AL-IN	15.5/80-24			12	TT	40	W14	153	49.7	15.5	143.8	21.7	5840	44	25
53350022AL-IN	15.5/80-24			12	TL	40	W14	147	49.7	15.5	143.8	21.7	5840	44	25
53310205AL-IN	16.9-24			12	TL	43	W15L	177	52.0	16.4	150.8	22.8	6000	39	25
53310205AL-IG	16.9-24			12	TL	43	W15L	179	51.5	16.9	151.8	23.2	7150	38	25
53310711AL-IN	17.5L-24			8	TL	40	W15L	148	48.8	17.5	142.6	21.7	5360	25	25
53311008AL-IN	17.5L-24			10	TL	40	W15L	154	48.8	17.5	142.6	21.7	6150	32	25
53311902AL-IN	18.4-24			12	TL	44	W16L	195	54.1	18.4	157.2	23.8	8550	36	25
53312001AL-IN	19.5L-24			10	TL	43	W16L	197	51.7	19.5	150.5	22.8	6800	28	25
53312004AL-IN	19.5L-24			12	TL	43	W16L	199	51.7	19.5	150.5	22.8	7600	32	25
53316106AL-IN	21L-24			12	TL	44	DW18L	226	54.2	21.0	157.3	23.8	8550	32	25
53316201AL-IN	21L-24			16	TL	44	DW18L	238	54.2	21.0	157.3	23.8	9900	41	25
53316323AL-IN	18.4-26			12	TL	44	DW16L	220	56.1	18.4	163.1	24.7	8800	36	25
53305512AL-IN	16.9-28			12	TL	43	W15L	189	55.5	16.9	164.5	25.2	7850	38	25
53342801AL-IN	18.4-28			12	TL	44	W16L	220	58.1	18.4	169.7	25.8	9100	36	25
53330444AL-IN	16.9-30			14	TL	35	W15L	212	57.9	17.3	170.8	26.1	8800	45	25

321 FRONT WHEEL ASSIST BACKHOE R-4

The Alliance 321 has a directional tread with wide deep lugs, engineered to provide maximum traction. Tough nylon casing and compounding resists hazards and debris in all applications. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
32103505AL-IN	10.5/80-18			10	TL	32	9	69	35.8	10.9	105.5	16.1	3000	54	30
32103690AL-IN	12.5/80-18			12	TL	32	9	92	38.9	12.1	113.8	17.3	4080	54	30
32103695AL-IN	12.5/80-18			16	TL	32	9	97	38.9	12.1	113.8	17.3	4800	71	30

690 OTR ALL-STEEL E-3/L-3

The Alliance 690 is a modern wide-base, all-steel radial tire for all types of earthmoving equipments. Its unique tread design and sophisticated construction enable superior performance and high mileage coupled with smoother rides. The all steel construction ensures low downtime and higher productivity.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
69020999AL	17.5R25		182A2	**	TL	40	14/1.5	369	53.0	17.6	158.3	24.4	18700	83	5

317 FRONT WHEEL ASSIST BACKHOE R-4

OEM FITMENT

The Alliance 317 has a 45° lug along with the high rubber to void ratio center provides superior on-road characteristics. Tough nylon casing and rugged compound resist hazards and debris in all applications.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
31701104AL-IN	10.0/75-15.3			10	TT	25	9	50	30.7	10.4	89.4	13.5	2150	57	25
31701376AL-IN	10.0/75-15.3			12	TT	25	9	51	30.7	10.4	89.4	13.5	2400	69	25
31701627AL-IN	11.5/80-15.3			14	TT	28	9	70	34.1	11.4	99.2	15.1	3420	69	25
31703611AL-IN	10.5/80-18			10	TT	35	9	61	35.7	10.8	105.1	16.1	3680	54	25
31714060AL-IN	10.5-18MPT		126G	10	TL	27	9	71	35.6	10.6	106.3	16.3	3740	54	55
31703778AL-IN	12.0/75-18			12	TT	28	9	77	36.0	11.8	105.9	16.2	3420	58	25
31703951AL-IN	12.0-18			12	TL	28	9	84	37.4	11.6	109.1	16.5	6000	65	25
31714501AL-IN	12.5-18MPT		126G	10	TL	27	11	90	39.0	12.8	115.7	17.7	3960	43	55
31714503AL-IN	12.5-18MPT		131G	12	TL	27	11	90	39.0	12.8	115.7	17.7	4930	65	55
31714354AL-IN	12.5/80-18			12	TL	27	9	95	38.9	12.1	113.8	17.3	3640	54	25
31716101AL-IN	10.5-20MPT			10	TL	27	11	86	39.0	12.8	115.7	17.7	3960	43	55
31706505AL-IN	10.5-20MPT			12	TT	27	9	82	37.6	10.6	113.4	17.5	4300	62	30
31714560AL-IN	12.5-20MPT		129G	10	TL	31	11	98	40.9	12.8	121.7	18.7	4070	43	55
31706939AL-IN	12.5-20MPT			12	TT	31	11	98	40.9	12.8	121.7	18.7	4400	51	55
31714563AL-IN	12.5-20MPT		132G	12	TL	31	11	100	40.9	12.8	121.7	18.7	4410	51	55
31714550AL-IN	14.5-20MPT		132G	10	TL	31	11	124	43.1	14.0	128.3	19.7	4410	36	55
31714552AL-IN	14.5-20MPT		136G	12	TL	31	11	127	43.1	14.0	128.3	19.7	4930	44	55
31714551AL-IN	14.5-20MPT		139G	14	TL	31	11	136	43.1	14.0	128.3	19.7	5350	51	55
31714566AL-IN	16/70-20	405/70-20	145G	14	TL	22	13SDC	140	42.4	16.0	126.0	31.1	6390	51	55

318 SUPER GRIP E-3/L-3

OEM FITMENT

The Alliance 318 is a massive heavy duty tire used in a variety of severe-duty applications including mining, construction and rock service. Extra-wide lugs provide superior traction and extended service hours. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
31800501AL-IN	17.5-25			12	TL	33	14/1.5	225	53.1	17.5	155.1	23.6	13550	51	5
31800899AL-IN	17.5-25			16	TL	33	14/1.5	256	53.1	17.5	155.1	23.6	16080	69	5
31801400AL-IN	20.5-25			16	TL	36	17/2.0	356	58.7	20.5	170.9	25.9	18200	51	5
31801711AL-IN	20.5-25			20	TL	36	17/2.0	398	58.7	20.5	170.9	25.9	20900	65	5
31802331AL-IN	1800-25			40	TL	40	13/2.5	707	63.7	19.6	187.4	28.6	37440	138	5
31802988AL-IN	23.5-25			20	TL	40	19.5/2.5	565	63.7	23.5	185.8	28.2	24000	54	5
31804108AL-IN	26.5-25			20	TL	48	22/3.0	796	68.9	26.5	200.0	30.3	29100	51	5
31804302AL-IN	26.5-25			24	TL	48	22/3.0	813	68.9	26.5	200.0	30.3	30900	58	5
31804333AL-IN	26.5-25			28	TL	48	25.00/3.5	837	73.7	29.5	213.4	32.2	38550	62	5
31804156AL	29.5-25			32	TL	48	25/3.5	1046	73.7	29.5	213.4	32.2	41900	73	5

308 SPECIAL WIDE BASE E-2/L-2/G-2

The Alliance 308 is a tire designed for rugged service on front-end loaders. Husky tread bars are sized and angled for maximum traction and specially contoured to resist tearing and chipping. The overlapping lugs ensure smooth rolling on any type of surface and the spacing between lugs provides self-cleaning. It is built with ozone and weather-resistant compounds and has a strong nylon casing.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
30800800AL-IN	15.5-25			12	TL	38	12/1.3	172	50.3	15.5	146.5	22.2	12300	58	5
30801407AL-IN	17.5-25			12	TL	40	14/1.5	215	53.1	17.5	155.1	23.6	13600	51	5
30801709AL-IN	17.5-25			16	TL	40	14/1.5	241	53.1	17.5	155.1	23.6	16100	69	5
30802306AL-IN	20.5-25			16	TL	45	17/2.0	340	58.7	20.5	170.9	25.9	18200	51	5
30802608AL-IN	20.5-25			20	TL	45	17/2.0	367	58.7	20.5	170.9	25.9	20900	65	5

302 SUPER TRACTION L-2/G-2

The Alliance 302 has a directional tread design delivers maximum performance in soft terrain. Angled tread bars provide maximum power and traction. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
30215508AL-IN	15.5-25			12	TL	38	12/1.3	148	50.3	15.5	146.5	22.2	12300	58	5
30219708AL-IN	14.9-28			12	TT	31	W13	171	52.9	14.9	156.0	23.9	6950	45	25
30227301AL-IN	16.9-28			12	TL	35	W15L	214	55.5	16.9	164.5	25.2	7850	38	25
30221891AL-IN	16.9-28			14	TT	35	W15L	207	55.5	16.9	164.5	25.2	8550	44	25

307 LOADER GRADER L-2/G-2

The Alliance 307 is a pattern developed for Grader-Loader applications. The design provides optimal traction and cut resistance and also enables the tire to have excellent self cleaning characteristics and long life.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
30700001AL-IG	1300-24			12	TL	32	8.00TG	134	13.0	50.0	146.8	22.8	12300	65	5
30700018AL-IG	1400-24			12	TL	32	8.00TG	159	14.2	52.7	153.9	23.9	13900	62	5
30700030AL-IG	15.5-25			12	TL	32	12	158	15.4	50.3	148.2	23	12300	58	5
30700050AL-IG	17.5-25			16	TL	32	14	202	17.3	53	155.1	23.5	16100	69	5
30700070AL-IG	20.5-25			16	TL	36	17.00/2.5	288	20.4	58.8	175	26.5	18200	51	5

306 SUPER TRACTION E-2/L-2/G-2

The Alliance 306 design is a tough road grader tire developed especially to withstand rugged terrains. Its massive lugs are reinforced and connected to an extra thick center tread rubber belt. This design feature enables the tire to be used for long lasting service in tough conditions.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
30601618AL-IN	1300-24			16	TT	30	8TG	159	50.3	13.1	149.2	22.9	14300	87	5
30603800AL	1400-24			24	TT	32	8TG	221	53.1	14.3	157.9	24.3	20900	123	5
30611900AL-IN	1600-24			16	TL	36	10AV	282	57.5	16.8	171.3	26.4	18200	62	5
30612507AL-IN	17.5-25			12	TL	32	14/1.5	195	53.1	17.5	155.1	23.6	13600	51	5

600 LOADER DOZER

The Alliance 600 is a modern wide base, all-steel radial tire for all types of earthmoving equipment. Its unique tread design and sophisticated construction ensure superior performance coupled with smoother rides and higher productivity



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
60010005AL	15.5R25		169A2/152B	*	TL	30	12.00/1.3	268	50.2	15.4	148.0	22.7	12780	65	5
60020000AL	17.5R25		176A2	*	TL	32	14.00/1.5	347	53.0	17.5	154.3	23.4	15640	65	5

326 WIDE GRIP "70 SERIES" L2

The Alliance 326 has a directional offering designed to provide maximum traction as well as high flotation in off-road applications. Heavy-duty nylon construction and ozone resistant compounding ensures long service hours. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
32610706AL-IN	16/70-20	405/70-20		14	TL	32	13SDC	152	42.4	16.0	123.2	18.7	11700	65	5
32620701AL-IN	16/70-24	405/70-24		14	TL	32	13SDC	169	46.4	16.0	144.1	22.7	12800	65	5
32600808AL	20-24EM	22/70-24	176A2/163B	14	TL	22	16SDC	310	54.7	21.5	160.0	24.1	15700	51	5

309 CONTAINER TRANSPORT

The Alliance Portstar 309 is designed especially for heavy duty forklift trucks and container handlers operating on hard improved surfaces. Its unique tread design and special rubber compound provides long tread life. The heavy duty nylon construction protects the sidewalls against damage and ensures long tire life.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
30910907AL	1600-25		203A5	32	TL	44	11.25/2.0	431	58.8	17.0	174.0	27.0	34200	145	15

630 MOBILE CRANE ALL STEEL

The Alliance 630 has been designed to meet the requirement of comfort in high-speed crane applications, as well as to enable efficient operations in off the road applications. A specific non-directional tread pattern enables precise steering response, reduces noise and enables high driving comfort. Strong all-steel casing combined with low heat-build-up tread rubber compound provides long tire life.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
63020351AL	16.00R25	445/95R25	177E		TL	33	11.25/2.0	469	58.5	17.1	176.0	27.2	16100	131.0	45

224 CONSTRUCTION MACHINERY

The Alliance 224 Construction Machinery tire is a wide base tire that is designed for cranes, dump trucks and excavators. It provides excellent traction in all working excavators. It provides excellent traction in all working conditions as well as resistance to side slips. For best results in running wheels of vehicles engaged in on road applications, it is recommended to mount the tires in the opposite direction than usual.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
22400509AL-IN	18-19.5			16	TL	30	14	170	42.5	18	126.8	19.5	9910	87	30
22400800AL-IN	18-19.5			18	TL	30	14	175	42.5	18	126.8	19.5	11340	105	30

225 WIDE BASE MPT L-2

The Alliance 225 is a proven performer in a multitude of terrains including dirt, asphalt, gravel and various field conditions. When drive wheels are working over the road, mount tires in the opposite direction for best results.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
22502000AL	900-20ML			14	TT	25	7	91	40.7	10.1	124	19.3	6170	104	30
22502905AL-IN	1000-20ML			14	TT	28	7.5	116	41.9	10.8	127.6	19.9	6390	96	30
22502910AL-IN	1000-20ML			16	TT	28	7.5	118	41.9	10.8	127.6	19.9	6945	100	30
22505505AL-IN	12.5-20MPT			12	TL	28	11	110	40.9	12.8	121.7	18.7	4300	44	50

325 TOUGH TRAC

The Alliance 325 is specially designed for heavy duty compact machinery with very good resistance to shock and perforation. Massive lugs design, extra-thick sidewall and undertread, aggressive tread pattern and flat stable crown. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
32500050AL-IN	280/80-18		132A8		TL	34	W9	85	35.6	11.1	105.6	16.2	4410	58	25
32500052AL-IN	280/80-18		145A8		TL	34	W9	89	35.6	11.1	105.6	16.2	6393	81	25
32500104AL-IN	340/80-20		144A8		TL	37	11	134	41.1	13.4	121.6	18.6	6170	58	25
32500110AL-IN	400/80-24		162A8		TL	44	DW13	196	49.2	15.9	146.7	22.4	10470	73	25
32500008AL-IN	440/80-24		168A8		TL	46	DW14L	234	51.7	17.4	153.1	23.7	12330	73	25

655 MUD & SNOW G-2

The Alliance 665 is specially designed for heavy duty compact machinery with very good resistance to shock and perforation. Massive lugs design, extra-thick sidewall and undertread, aggressive tread pattern and flat stable crown. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
65500105AL	14.00R24		153A8		TL	31	10.00VA	277	53.7	15.2	160.2	24.5	6920	54	35
65500004AL	15.5R25		152B/169A2		TL	36	12/1.3	236	50.2	15.7	146.2	22.2	12800	65	5
65500010AL	17.5R25		157B/176A2		TL	36	14/1.5	306	53.1	17.3	159.3	24.2	15700	65	5
65500030AL	20.5R25		168B/186A2		TL	36	17/2.0	508	58.9	20.6	121.7	26.1	20900	65	5

312 TRENCHER

The Alliance 312 Trencher is designed to improve the mobility of utility vehicles and other AG implements. The tire carries heavy loads at low pressures for low rolling resistance. The nylon casing and special ozone-resistant rubber compounds ensure a long tire life.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	WT (LBS)	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
31201004AL-IN	26X1200-12			4	TL	22	10.5	34	26.2	11.4	75.9	11.5	1480	20	25
31201101AL-IN	26X1200-12			6	TL	22	10.5	35	26.2	11.4	75.9	11.5	1930	30	25



ATG | BETTER VALUE.
SMARTER CHOICE.

Alliance Tire Americas Inc. (Corporate & Sales Office)
201 Edgewater Drive, Suite 285 | Wakefield, MA 01880
Toll Free: 800-343-3276 | Fax: 781-322-2147

ordertires@atgtire.com
www.onlineatg.com
www.atgtire.com