



2017 DATA BOOK JUNE EDITION

BF Goodrich
Tires





ADVENTURE
AWAITS.



TABLE OF CONTENTS

ULTRA-HIGH PERFORMANCE PASSENGER

4 – 5	g-Force™ R1™ & R1™ S
6 – 7	g-Force™ Rival®
8 – 9	g-Force™ Rival® S
10 – 11	g-Force™ Sport COMP-2™
12 – 13	g-Force™ COMP-2™ A/S

PERFORMANCE/TOURING

16 – 17	Advantage T/A® Sport
18 – 19	Advantage T/A®
20 – 21	Radial T/A®

WINTER

24 – 25	Commercial T/A® Traction
---------	--------------------------

LIGHT TRUCK/SUV

28 – 29	Long Trail T/A® Tour
30 – 31	Radial Long Trail T/A®
32 – 33	Rugged Trail T/A®
34 – 35	Mud-Terrain T/A® KM2
36 – 37	All-Terrain T/A® KO2
38 – 39	Krawler™ T/A® KX
40 – 41	Commercial T/A® All Season 2

TIPS & IMPORTANT INFORMATION

42	Tire Tips
43	Speed Rating
44 – 45	Important Product Information

BFGoodrich® tires are proven to dominate the gnarliest landscapes imaginable, from the 1,000-mile trek across Baja to the legendary corkscrew at Laguna Seca. Whatever thrill you're chasing, our tires are your ticket to fun.



UNLEASH
RAW POWER.



ULTRA-HIGH PERFORMANCE

Sports coupes and factory-tuned sedans are built to thrill with speed and handling capabilities that demand a true performance tire to match.



KEY TIRE LINE COMPARISONS	WEAR LIFE	FUEL EFFICIENCY	HANDLING	BRAKING	COMFORT
g-Force™ R1™ & R1™ S	2	2	10	10	2
g-Force™ Rival®	5	4	8	8	5
g-Force™ Rival® S	3	4	9	9	5
g-Force™ Sport COMP-2™	8	6	9	9	7
g-Force™ COMP-2™ A/S	8	7	9	8	9

BFGOODRICH®

g-FORCE™ R1™ & R1™ S

The DOT-approved track tires that take winning as seriously as you do. The g-Force™ R1™ was designed for track days, road racing and consistency, lap after lap. The g-Force™ R1™ S was designed for quicker warmup, autocross and sprint racing.



SUMMER TIRE



BENEFITS OF BFGOODRICH

- Easy to drive at the grip limit**
 Specialized tread compound with a predictable and consistent grip character that's easy to drive at the limit and inspires confidence for the quickest lap times.¹
- Razor-sharp steering response**
 g-Control sidewall inserts generate tremendous cornering force with excellent driver feedback.²
- Competition-ready**
 Minimal break-in required; molded at 4/32-inch tread depth; no shaving required.
- Quick warmup**
 Softer compound on R1™S warms up quicker for high performance during autocross, cold-temperature tracks, and spring racing.

2 WEAR LIFE

2 FUEL EFFICIENCY

10 HANDLING

10 BRAKING

2 COMFORT

POPULAR REPLACEMENT MARKET FITMENTS:

BMW M3
 Chevrolet Corvette
 Dodge Viper
 Ford Mustang
 Mazda MX-5 Miata
 Porsche 911

¹ Test conducted by The Tire Rack at the Michelin LPG facility.

² Compared to leading competitor.



BFGOODRICH® g-FORCE™ R1™ & R1™ S

Tire Size	Service Description	R1™ MSPN	R1™ S MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/Mile @ 45 mph	Max Load Single (lbs@psi)
P205/50ZR15	84W	31575	22024	5.5 - 7.5	8.4 on 6.5	22.8	4.0	912	1113@51
P225/50ZR15	90W	61446	23988	6.0 - 8.0	9.1 on 7.0	23.6	4.0	881	1301@51
P225/45ZR15			63810						
P275/45ZR16	94W		09461	8.5 - 10.5	10.8 on 9.0	25.7	4.0	808	1477@51
P235/40ZR17	84W		12814	8.0 - 9.5	9.5 on 8.5	24.2	4.0	860	1102@51
P245/40ZR17	86W	50260	38249	8.0 - 9.5	9.8 on 8.5	24.2	4.0	860	1168@51
P255/40ZR17	89W		74066	8.5 - 10.0	10.2 on 9.0	24.8	4.0	839	1279@51
P275/40ZR17	93W		47297	9.0 - 11.0	10.9 on 9.5	25.5	4.0	816	1433@51
P225/45ZR17	84W	49121	20244	7.0 - 8.5	8.9 on 7.5	24.8	4.0	839	1102@51
P285/30ZR18	86W	47005	05904	10.0 - 11.0	11.4 on 10.0	24.9	4.0	829	1168@51
P335/30ZR18	95W		09211	12.0 - 13.0	13.5 on 12.0	25.7	4.0	809	1521@51
P265/35ZR18	85W		18351	9.0 - 10.0	10.7 on 9.5	25.0	4.0	832	1135@51
P275/35ZR18	87W	74887	96476	9.0 - 11.0	10.9 on 9.5	25.4	4.0	819	1201@51
P225/40ZR18	83W		23897	7.5 - 9.0	9.1 on 8.0	24.9	4.0	829	1074@51
P245/40ZR18	88W	03884	44217	8.0 - 9.5	9.8 on 8.5	25.4	4.0	819	1235@51
P315/30ZR18	91W		27073	10.5 - 11.5	12.6 on 11.0	25.4	4.0	817	1367@51

Important Note:

The g-Force™ R1™ and R1™ S tires are special-use products designed for competitive racing. As such, the following precautions must be observed when using these products.

UTQG = 40/B/A
Available Sidewall = BSW

At the Racetrack:

Never inflate the tire to less than 19 psi. Use the information provided in the BFGoodrich® g-Force™ R1™ Care & Feeding Brochure for cold inflation pressure guidelines and other product usage recommendations.

LL = Light Load

On the Street:

g-Force™ R1™ and R1™ S tires have a reduced tread depth when new and a tread rubber compound optimized for maximum dry grip. As such, they will wear out much sooner and offer less wet grip when compared to normal passenger car tires. Therefore, observe tire-wear condition often. Do not use the tires on the street when the tread depth wears to less than 2/32-inch. Reduce speeds in wet conditions and whenever any standing water is present. The g-Force™ R1™ and R1™ S are not intended for use in snow and ice conditions.

Exceeding the safe, legal speed limit is neither recommended nor endorsed.

See pages 114 – 115 for important product information.

BFGOODRICH®

g-FORCE™ RIVAL®

STREET OR TRACK - If It's Paved, Own It. The UHP choice for long lasting performance in low-cost endurance racing.



SUMMER TIRE



BENEFITS OF BFGOODRICH

- **FASTER THAN THE LEADING COMPETITORS¹ - turn lower lap times at the track¹ and turn heads on the street.**

Extreme Tread Edge (ETE) design for increased grip during hard cornering with predictable feedback.

- **CONSISTENT GRIP LAP AFTER LAP - Silica-infused competition compound delivers better grip from start to finish.**

Asymmetric tread design with large, solid tread blocks on the outside shoulder to optimize cornering grip and lateral draft angles to improve consistency, and provide uniform circuit wear.

- **DRIVE AT THE NEXT LEVEL - with extreme grip that's highly predictable, it's like getting a talent upgrade.**

Performance Racing Core (PRC) - reinforced internal structure to reduce sidewall flex for precision steering response.

**POPULAR REPLACEMENT MARKET FITMENTS:**

Honda Civic
Scion FR-S
Ford Mustang
Pro-Touring
Auto-X
Track Day

¹ Based on internal testing vs. Hankook® Ventus R-S3™, Yokohama® ADVAN Neova™ AD08™, Dunlop® Direzza™ Sport Z1 Star Spec, Toyo Tires® Proxes™ R1R™. Street legal with a UTQG treadwear rating of 200 so you can drive to the track and back.



BFGOODRICH® g-FORCE™ RIVAL®

Tire Size	Service Description	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/ Mile @45 mph	Max Load Single (lbs@psi)	UTQG	O.E. Fit-ments
205/50ZR15 ASY, 3-rib	86W	Std	BSW	89474	7.5 - 5.5	8.4 on 6.5	23.1	7.2	900	1168@51	200/AA/A	
205/50ZR15 ASY, 3-rib	86W	Std	BSW	09086	7.5 - 5.5	8.4 on 6.5	23.1	7.2	900	1168@51	200/AA/A	
225/45ZR15 ASY, 3-rib	87W	Std	BSW	47180	8.5 - 7	8.9 on 7.5	22.9	7.2	906	1201@51	200/AA/A	
245/40ZR15 ASY, 3-rib	88W	Std	BSW	10944	9.5 - 8	9.8 on 8.5	22.7	7.2	915	1235@51	200/AA/A	
215/45ZR16 ASY, 3-rib	86W	Std	BSW	05782	8 - 7	8.4 on 7	23.6	7.2	881	1168@51	200/AA/A	
225/50ZR16 ASY, 3-rib	92W	Std	BSW	04877	8 - 6	9.2 on 7	24.8	7.2	836	1389@51	200/AA/A	
215/45ZR17/XL ASY, 3-rib	91W	Std	BSW	66704	8 - 7	8.4 on 7	24.6	7.2	844	1356@50	200/AA/A	
225/45ZR17 ASY, 3-rib	91W	Std	BSW	74124	8.5 - 7	8.9 on 7.5	24.9	7.2	833	1356@51	200/AA/A	
245/40ZR17 ASY, 3-rib	91W	Std	BSW	00123	9.5 - 8	9.8 on 8.5	24.7	7.2	841	1356@51	200/AA/A	
255/40ZR17 ASY, 3-rib	94W	Std	BSW	89770	10 - 8.5	10.2 on 9	25	7.2	831	1477@51	200/AA/A	
275/40ZR17 ASY, 4-rib	98W	Std	BSW	43189	11 - 9	10.9 on 9.5	25.6	7.2	810	1653@51	200/AA/A	
225/40ZR18/XL ASY, 3-rib	92W	Std	BSW	69262	9 - 7.5	9.1 on 8	25	7.2	829	1389@50	200/AA/A	
245/40ZR18 ASY, 3-rib	93W	Std	BSW	00804	9.5 - 8	9.8 on 8.5	25.7	7.2	809	1433@51	200/AA/A	
275/35ZR18 ASY, 4-rib	95W	Std	BSW	70617	11 - 9	10.9 on 9.5	25.5	7.2	814	1521@51	200/AA/A	
275/35ZR18 ASY, 4-rib	95W	Std	BSW	28218	11 - 9	10.9 on 9.5	25.5	7.2	814	1521@51	200/AA/A	
295/35ZR18 ASY, 4-rib	99W	Std	BSW	98937	11.5 - 10	11.9 on 10.5	26.1	7.2	797	1709@51	200/AA/A	
315/30ZR18 ASY, 4-rib	98W	Std	BSW	36596	11.5 - 10.5	12.6 on 11	25.4	7.2	817	1653@51	200/AA/A	
335/30ZR18 ASY, 4-rib	102W	Std	BSW	93293	12.5 - 11.5	13.5 on 12	25.9	7.2	802	1874@51	200/AA/A	
265/35ZR20/XL ASY, 3-rib	99W	Std	BSW	45338	10.5 - 9	10.7 on 9.5	27.3	7.2	761	1709@50	200/AA/A	
275/35ZR20/XL ASY, 4-rib	102W	Std	BSW	55573	11 - 9	10.9 on 9.5	27.5	7.2	755	1874@50	200/AA/A	

BFGOODRICH®

g-FORCE™ RIVAL® S

STREET, AUTOCROSS, OR TIME ATTACK - If It's Paved, Own It.



SUMMER TIRE



BENEFITS OF BFGOODRICH

- **Updated for 2017 v1.5 uses the same time tested Rival S compound for quick warm-up in autocross and time attack competition.**

Enhanced "S" compound offers maximum dry performance, sacrificing some wear, while still exceeding UTQG 200 standards.

- **Rival S v1.5 offers internal construction enhancements for improved turn-in and transional handling.**

Performance Racing Core (PRC) - reinforced internal structure reduces sidewall flex for instant steering response.

- **DOT Legal UTQG 200 semi-competition tire legal for SCCA Solo, SCCA Pro Solo, Goodguys Pro Touring, and One Lap of America competition.**

Rival S v1.5 is legal for amateur autocross and time attack competition with most sanctioning bodies in the USA and Canada.

**POPULAR REPLACEMENT MARKET FITMENTS:**

Auto-X
Track Day
Honda Civic
Scion FR-S
Ford Mustang
American Muscle
Pro-Touring



BFGOODRICH® g-FORCE™ RIVAL® S

Tire Size	Service Description	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/ Mile @45 mph	Max Load Single (lbs@psi)	UTQG	O.E. Fit-ments
205/50R15	86V		BSW	36905	7.5 - 5.5	8.4 on 6.5	23.1	7.2	900			
225/45R15	87V		BSW	48530	8.5 - 7	8.9 on 7.5	22.9	7.2	906			
245/40R15 S	88V	Std	BSW	84280	9.5 - 8	9.9 on 8.5	22.6	7.2	915	1235@44	200/AA/A	
215/45R16	86V		BSW	97902	8 - 7	8.4 on 7	23.6	7.2	881			
225/45R17	91V		BSW	79018	8.5 - 7	8.9 on 7.5	24.9	7.2	833			
245/40R17	91V		BSW	55941	9.5 - 8	9.8 on 8.5	24.7	7.2	841			
255/40R17	94V		BSW	85885	10 - 8.5	10.2 on 9	25	7.2	831			
245/40R18	93V		BSW	08432	9.5 - 8	9.8 on 8.5	25.7	7.2	809			
P275/35ZR18/LL S	87W	Std	BSW	01864	11 - 9	10.9 on 9.5	25.5	7.2	814	1201@35	200/AA/A	
P315/30ZR18/LL S	91W	Std	BSW	29508	11.5 - 10.5	12.6 on 11	25.4	7.2	817	1356@35	200/AA/A	
P335/30ZR18/LL S	95W	Std	BSW	36328	12.5 - 11.5	13.5 on 12	25.9	7.2	802	1521@35	200/AA/A	

BFGOODRICH®

g-FORCE™ SPORT COMP-2™Accelerate faster¹, corner harder² & brake shorter³ for next-level control and next-level fun on the street.

SUMMER TIRE



BENEFITS OF BFGOODRICH

- **ACCELERATE FASTER. Best dry traction vs. the competition⁴ on the track for 100% more fun on the street.¹**


COMP-2 Compound - Silica-infused "COMP-2" compound is derived from racing technology and delivers sharp steering response and leading grip in wet and dry conditions, without sacrificing tread wear.

- **BRAKE SHORTER. Stops up to 16 feet shorter in the wet³ and even up to 9 feet shorter in the dry⁵ for more control entering the corners.**

Sport Tread Design - g-Force Sport tread pattern provides proven stability and maximum cornering power while g-Hooks provide biting edges for grip at any cornering angle.

- **CORNER HARDER. More control for precise cornering with 30% better wet and 8% better dry grip.²**

Performance Racing Core (PRC) - Internal structure features a reinforced construction that delivers increased responsiveness, control and durability, as well as serious control in hard cornering.

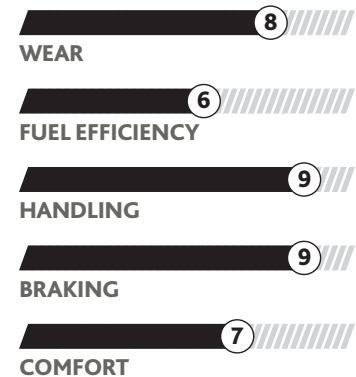**POPULAR REPLACEMENT MARKET FITMENTS:**

Chevrolet Camaro SS
 Dodge Challenger SRT-8
 Ford Mustang GT
 Honda Civic Si
 Mazda MX-5 Miata
 Subaru Impreza WRX STI
 Volkswagen Golf GTI

¹ Based on internal subjective dry and wet autocross and subjective max handling test results vs. Yokohama® S-Drive™, Kumho® Ecsta SPT KU31, and Dunlop® Direzza® DZ101

² Based on internal subjective dry and wet autocross and subjective max handling test results vs. BFGoodrich® g-Force™ Sport

³ Based on commissioned third-party test results vs. the Yokohama® S-Drive™

⁴ Competition refers to the following: Yokohama® S-Drive™, Kumho® Ecsta SPT KU31, and Dunlop® Direzza® DZ101

⁵ Based on dry braking test results vs. the Kumho® Ecsta SPT KU31



BFGOODRICH® g-FORCE™ SPORT COMP-2™

Tire Size	Service Description	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/ Mile @45 mph	Max Load Single (lbs@psi)	UTQG	O.E. Fitments
195/50R15 DIR	82V	Std	BSW	49667	7 - 5.5	7.9 on 6	22.7	9	915	1047@44	340/AA/A	
195/55R15 DIR	85V	Std	BSW	74954	7 - 5.5	7.9 on 6	23.4	9	888	1135@44	340/AA/A	
205/45ZR16 DIR	83W	Std	BSW	39679	7.5 - 6.5	8.1 on 7	23.2	9	895	1074@50	340/AA/A	
205/50ZR16 DIR	87W	Std	BSW	01928	7.5 - 5.5	8.4 on 6.5	24.1	9.5	863	1201@51	340/AA/A	
205/55ZR16 DIR	91W	Std	BSW	55712	7.5 - 5.5	8.4 on 6.5	24.9	9	836	1356@51	340/AA/A	
225/50ZR16 DIR	92W	Std	BSW	03450	8 - 6	9.2 on 7	24.9	9	836	1389@51	340/AA/A	
225/55ZR16 DIR	95W	Std	BSW	50004	8 - 6	9.2 on 7	25.8	9.5	808	1521@51	340/AA/A	
245/50ZR16 DIR	97W	Std	BSW	13737	8.5 - 7	10 on 7.5	25.7	9	810	1609@51	340/AA/A	
255/50ZR16 DIR	99W	Std	BSW	29304	9 - 7	10.4 on 8	26.1	9	798	1709@51	340/AA/A	
205/45ZR17/XL DIR	88W	Std	BSW	87731	7.5 - 6.5	8.1 on 7	24.3	9	858	1235@50	340/AA/A	
205/50ZR17 DIR	89W	Std	BSW	15000	7.5 - 5.5	8.4 on 6.5	25.1	9	828	1279@51	340/AA/A	
215/45ZR17 DIR	87W	Std	BSW	95148	8 - 7	8.4 on 7	24.7	9	844	1201@51	340/AA/A	
215/50ZR17/XL DIR	95W	Std	BSW	09894	7.5 - 6	8.9 on 7	25.5	9	815	1521@50	340/AA/A	
225/45ZR17 DIR	91W	Std	BSW	27062	8.5 - 7	8.9 on 7.5	25	9.5	833	1356@51	340/AA/A	
225/50ZR17 DIR	94W	Std	BSW	37324	8 - 6	9.2 on 7	25.9	9.5	803	1477@51	340/AA/A	
225/55ZR17 DIR	97W	Std	BSW	09040	8 - 6	9.2 on 7	26.8	9.5	777	1609@51	340/AA/A	
235/45ZR17 DIR	94W	Std	BSW	41420	9 - 7.5	9.3 on 8	25.4	9.5	821	1477@51	340/AA/A	
245/40ZR17 DIR	91W	Std	BSW	55411	9.5 - 8	9.8 on 8.5	24.7	9.5	841	1356@51	340/AA/A	
245/45ZR17 DIR	95W	Std	BSW	03762	9 - 7.5	9.6 on 8	25.7	9.5	810	1521@51	340/AA/A	
255/40ZR17 DIR	94W	Std	BSW	50903	10 - 8.5	10.2 on 9	25	9	831	1477@51	340/AA/A	
255/45ZR17 DIR	98W	Std	BSW	78758	9.5 - 8	10 on 8.5	26.1	9	798	1653@51	340/AA/A	
275/40ZR17 DIR	98W	Std	BSW	31629	11 - 9	10.9 on 9.5	25.7	9.5	810	1653@51	340/AA/A	
215/40ZR18/XL DIR	89W	Std	BSW	16470	8.5 - 7	8.6 on 7.5	24.8	9.5	840	1279@50	340/AA/A	
225/40ZR18 DIR	88W	Std	BSW	11558	9 - 7.5	9.1 on 8	25.1	9	829	1235@51	340/AA/A	
225/45ZR18/XL DIR	95W	Std	BSW	09303	8.5 - 7	8.9 on 7.5	25.9	9.5	802	1521@50	340/AA/A	
235/40ZR18 DIR	91W	Std	BSW	66818	9.5 - 8	9.5 on 8.5	25.4	9.5	819	1356@51	340/AA/A	
235/45ZR18/XL DIR	98W	Std	BSW	08998	9 - 7.5	9.3 on 8	26.3	9	790	1653@50	340/AA/A	
235/50ZR18 DIR	97W	Std	BSW	88750	8.5 - 6.5	9.7 on 7.5	27.3	9	762	1609@51	340/AA/A	
245/40ZR18 DIR	93W	Std	BSW	26006	9.5 - 8	9.8 on 8.5	25.7	9	809	1433@51	340/AA/A	
245/45ZR18 DIR	96W	Std	BSW	23012	9 - 7.5	9.6 on 8	26.7	9	780	1565@51	340/AA/A	
255/35ZR18 DIR	90W	Std	BSW	09951	10 - 8.5	10.2 on 9	25	9	832	1323@51	340/AA/A	
255/40ZR18 DIR	95W	Std	BSW	12571	10 - 8.5	10.2 on 9	26	9	799	1521@51	340/AA/A	
255/45ZR18 DIR	99W	Std	BSW	01563	9.5 - 8	10 on 8.5	27.1	9	769	1709@51	340/AA/A	
265/35ZR18 DIR	93W	Std	BSW	17880	10.5 - 9	10.7 on 9.5	25.3	9	822	1433@51	340/AA/A	
275/35ZR18 DIR	95W	Std	BSW	75520	11 - 9	10.9 on 9.5	25.6	9	814	1521@51	340/AA/A	
275/40ZR18 DIR	99W	Std	BSW	09929	11 - 9	10.9 on 9.5	26.7	9	780	1433@51	340/AA/A	
245/40ZR19/XL DIR	98W	Std	BSW	18887	9.5 - 8	9.8 on 8.5	26.7	9	778	1653@50	340/AA/A	
255/35ZR19/XL DIR	96W	Std	BSW	12626	10 - 8.5	10.2 on 9	26	9.5	799	2041@50	340/AA/A	
255/40ZR19/XL DIR	100W	Std	BSW	89550	10 - 8.5	10.2 on 9	27	9	769	1764@50	340/AA/A	
275/40ZR19 DIR	101W	Std	BSW	30546	11 - 9	10.9 on 9.5	27.7	9.5	751	1819@51	340/AA/A	
285/35ZR19/XL DIR	103W	Std	BSW	38139	11 - 9.5	11.4 on 10	26.8	9	774	1930@50	340/AA/A	
245/45ZR20/XL DIR	103W	Std	BSW	77147	9 - 7.5	9.6 on 8	28.7	9	726	1930@50	340/AA/A	
255/45ZR20 DIR	101W	Std	BSW	29432	9.5 - 8	10 on 8.5	29.1	9	716	1819@51	340/AA/A	

BFGOODRICH® g-FORCE™ COMP-2™ A/S

BFGoodrich's Best Ultra-High Performance All-Season Tire Ever.



ALL-SEASON TIRE



BENEFITS OF BFGOODRICH

• ACCELERATE FASTER. Best wet and dry traction vs. leading competitors.¹

UltiGrip Technology: 1) Large, rigid tread blocks optimize rubber-to-road contact for ultimate dry grip. 2) Consistent tread block rigidity balances acceleration forces within the tire footprint.

Performance Racing Core: ETEC System (TM) Equal Tension Containment System optimizes the contact patch for enhanced traction at speed.

• BRAKE SHORTER. Stops up to 15 feet shorter on wet roads and up to 5 feet shorter on dry roads vs. leading competitors.²

UltiGrip Technology: 1) Optimized rubber-to-road contact for ultimate dry grip 2) All-season compound designed for the best wet and dry grip.

g-Force (TM) Tread: 1) Squared-off shoulder and enhanced contact patch shape evenly distributes stresses across the footprint. 2) Performance Tread Profile resists irregular wear typically associated with directional tread designs.

• CONTROL IN ALL SEASONS. Better snow traction than leading competitors.³

UltiGrip Technology: 1) High-silica, cold-weather flexing compound for best wet and dry grip and all-season traction. 2) V-shaped angled lateral and longitudinal grooves efficiently evacuate water for better wet traction. 3) High-lateral void with beveled biting edges and wide lateral grooves improve snow retention and adherence for greater mobility during winter.


Dynamic Suspension System (DSS) is a reinforced internal structure that increases control while maintaining ride comfort

g-Control (TM) Sidewall Inserts add sidewall stiffness to resist deflection for immediate turning response.

¹ Based on internal dry handling and internal wet and dry autocross test results using a 1995 BMW M3 lightweight and a 2011 BMW 328i versus the General® G-Max AS-03, and Yokohama® AVID ENVigor in tire size 225/45 ZR17.

² Based on internal wet and dry braking test results using a 2011 BMW 328i versus General® G-Max AS-03, Yokohama® AVID ENVigor and Hankook® Ventus S1 Noble2 in tire size 225/45 ZR17.

³ Based on third party commissioned snow spin traction test results versus General® G-Max AS-03, Yokohama® AVID ENVigor and Hankook® Ventus S1 Noble2 in tire size 225/45 ZR17. Snow traction performance may vary depending upon factors such as road conditions, weather and environment, driver performance, etc. Snow Spin Traction Test (GM Spin) following ASTM F1805 [for Federal Motor Vehicle Safety Standard (FMVSS) No. 139 (Passenger Car)]

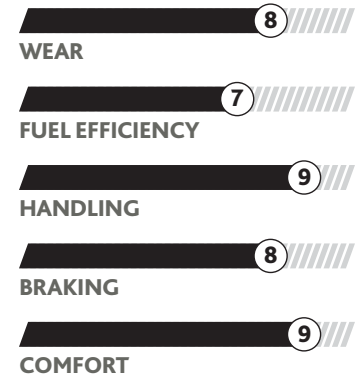

POPULAR REPLACEMENT MARKET FITMENTS:

- Audi A5
- Ford Mustang
- Honda Civic Si
- Mazda 3
- Mazda MX-5 Miata
- Subaru Impreza WRX STI
- Volkswagen Golf GTI

Tire Size	Service Description	Limited Warranty	Sidewall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/Mile @45 mph	Max Load Single (lbs@psi)	UTQG	O.E. Fitments
205/45ZR16/XL DIR	87W	45K	BSW	06908	7.5 - 6.5	8.1 on 7	23.2	9	895	1201@50	400/AA/A	
205/50ZR16 DIR	87W	45K	BSW	27889	7.5 - 5.5	8.4 on 6.5	24	9	863	1201@51	400/AA/A	
205/55ZR16 DIR	91W	45K	BSW	36969	7.5 - 5.5	8.4 on 6.5	24.8	9	836	1356@51	400/AA/A	
225/50ZR16 DIR	92W	45K	BSW	37570	8 - 6	9.2 on 7	24.8	9	836	1389@51	400/AA/A	
225/55ZR16 DIR	95W	45K	BSW	03897	8 - 6	9.2 on 7	25.7	9	808	1521@51	400/AA/A	
245/50ZR16 DIR	97W	45K	BSW	65801	8.5 - 7	10 on 7.5	25.6	9	810	1609@51	400/AA/A	
205/45ZR17/XL DIR	88W	45K	BSW	00924	7.5 - 6.5	8.1 on 7	24.2	9	858	1235@50	400/AA/A	
205/50ZR17/XL DIR	93W	45K	BSW	31113	7.5 - 5.5	8.4 on 6.5	25.1	9	828	1433@50	400/AA/A	

BFGOODRICH® g-FORCE™ COMP-2™ A/S

Tire Size	Service Description	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/ Mile @45 mph	Max Load Single (lbs@psi)	UTQG	O.E. Fitments
215/45ZR17/XL DIR	91W	45K	BSW	19100	8 - 7	8.4 on 7	24.6	9	844	1356@50	400/AA/A	
215/50ZR17/XL DIR	95W	45K	BSW	13715	7.5 - 6	8.9 on 7	25.5	9	815	1521@50	400/AA/A	
215/55ZR17 DIR	94W	45K	BSW	29016	7.5 - 6	8.9 on 7	26.3	9	791	1477@51	400/AA/A	
225/45ZR17/XL DIR	94W	45K	BSW	37942	8.5 - 7	8.9 on 7.5	24.9	9	833	1477@50	400/AA/A	
225/50ZR17 DIR	94W	45K	BSW	17354	8 - 6	9.2 on 7	25.9	9	803	1477@51	400/AA/A	
225/55ZR17 DIR	97W	45K	BSW	60444	8 - 6	9.2 on 7	26.7	9	777	1609@51	400/AA/A	
235/45ZR17/XL DIR	97W	45K	BSW	87971	9 - 7.5	9.3 on 8	25.3	9	821	1609@50	400/AA/A	
235/50ZR17 DIR	96W	45K	BSW	27274	8.5 - 6.5	9.7 on 7.5	26.3	9	791	1565@51	400/AA/A	
235/55ZR17 DIR	99W	45K	BSW	29901	8.5 - 6.5	9.7 on 7.5	27.1	9	766	1709@51	400/AA/A	
245/40ZR17 DIR	91W	45K	BSW	24965	9.5 - 8	9.8 on 8.5	24.7	9	841	1356@51	400/AA/A	
245/45ZR17/XL DIR	99W	45K	BSW	18621	9 - 7.5	9.6 on 8	25.6	9	810	1709@50	400/AA/A	
255/40ZR17 DIR	94W	45K	BSW	14143	10 - 8.5	10.2 on 9	25	9	831	1477@51	400/AA/A	
275/40ZR17 DIR	98W	45K	BSW	21945	11 - 9	10.9 on 9.5	25.6	9	810	1653@51	400/AA/A	
215/45ZR18/XL DIR	93W	45K	BSW	46035	8 - 7	8.4 on 7	25.6	9	812	1433@50	400/AA/A	
225/40ZR18/XL DIR	92W	45K	BSW	70191	9 - 7.5	9.1 on 8	25	9	829	1389@50	400/AA/A	
225/45ZR18/XL DIR	95W	45K	BSW	04031	8.5 - 7	8.9 on 7.5	25.9	9	802	1521@50	400/AA/A	
225/50ZR18 DIR	95W	45K	BSW	45091	8 - 6	9.2 on 7	26.8	9	774	1521@51	400/AA/A	
235/40ZR18/XL DIR	95W	45K	BSW	08126	9.5 - 8	9.5 on 8.5	25.3	9	819	1521@50	400/AA/A	
235/45ZR18/XL DIR	98W	45K	BSW	61946	9 - 7.5	9.3 on 8	26.3	9	790	1653@50	400/AA/A	
235/50ZR18 DIR	97W	45K	BSW	20279	8.5 - 6.5	9.7 on 7.5	27.2	9	762	1609@51	400/AA/A	
245/40ZR18/XL DIR	97W	45K	BSW	80886	9.5 - 8	9.8 on 8.5	25.7	9	809	1609@50	400/AA/A	
245/40ZR18/XL DIR	97Y	45K	BSW	05226	9.5 - 8	9.8 on 8.5	25.7	9	809	1609@50	400/AA/A	
245/45ZR18 DIR	96W	45K	BSW	38853	9 - 7.5	9.6 on 8	26.6	9	780	1565@51	400/AA/A	
255/35ZR18/XL DIR	94W	45K	BSW	77984	10 - 8.5	10.2 on 9	25	9	832	1477@50	400/AA/A	
255/40ZR18/XL DIR	99W	45K	BSW	60347	10 - 8.5	10.2 on 9	26	9	799	1709@50	400/AA/A	
255/45ZR18 DIR	99W	45K	BSW	15054	9.5 - 8	10 on 8.5	27	9	769	1709@51	400/AA/A	
265/35ZR18/XL DIR	97W	45K	BSW	35709	10.5 - 9	10.7 on 9.5	25.3	9	822	1609@50	400/AA/A	
275/35ZR18 DIR	95W	45K	BSW	79669	11 - 9	10.9 on 9.5	25.5	9	814	1521@51	400/AA/A	
275/40ZR18 DIR	99W	45K	BSW	56680	11 - 9	10.9 on 9.5	26.6	9	780	1709@51	400/AA/A	
225/40ZR19/XL DIR	93W	45K	BSW	56599	9 - 7.5	9.1 on 8	26.1	9	797	1433@50	400/AA/A	
225/45ZR19 DIR	92W	45K	BSW	81545	8.5 - 7	8.9 on 7.5	26.9	9	771	1389@51	400/AA/A	
245/35ZR19/XL DIR	93W	45K	BSW	24467	9.5 - 8	9.8 on 8.5	25.7	9	807	1433@50	400/AA/A	
245/40ZR19 DIR	94W	45K	BSW	77099	9.5 - 8	9.8 on 8.5	26.7	9	778	1477@51	400/AA/A	
245/45ZR19 DIR	98W	45K	BSW	38110	9 - 7.5	9.6 on 8	27.6	9	751	1653@51	400/AA/A	
245/50ZR19/XL DIR	105W	45K	BSW	08793	8.5 - 7	10 on 7.5	28.7	9	725	2041@50	400/AA/A	
255/35ZR19/XL DIR	96W	45K	BSW	24235	10 - 8.5	10.2 on 9	26	9	799	1565@50	400/AA/A	
255/40ZR19/XL DIR	100W	45K	BSW	89100	10 - 8.5	10.2 on 9	27	9	769	1764@50	400/AA/A	
255/40ZR19/XL DIR	100Y	45K	BSW	92946	10 - 8.5	10.2 on 9	27	9	769	1764@50	400/AA/A	
275/35ZR19 DIR	96W	45K	BSW	04801	11 - 9	10.9 on 9.5	26.5	9	783	1565@51	400/AA/A	
275/40ZR19 DIR	101W	45K	BSW	27812	11 - 9	10.9 on 9.5	27.6	9	751	1819@51	400/AA/A	
285/35ZR19/XL DIR	103W	45K	BSW	73542	11 - 9.5	11.4 on 10	26.8	9	774	1930@50	400/AA/A	
285/35ZR19/XL DIR	103Y	45K	BSW	11292	11 - 9.5	11.4 on 10	26.8	9	774	1929@50	400/AA/A	
245/35ZR20/XL DIR	95W	45K	BSW	62252	9.5 - 8	9.8 on 8.5	26.7	9	777	1521@50	400/AA/A	
245/40ZR20/XL DIR	99W	45K	BSW	32583	9.5 - 8	9.8 on 8.5	27.7	9	750	1709@50	400/AA/A	
245/45ZR20/XL DIR	103W	45K	BSW	46912	9 - 7.5	9.6 on 8	28.6	9	726	1930@50	400/AA/A	
245/45ZR20/XL DIR	103Y	45K	BSW	20491	9 - 7.5	9.6 on 8	28.6	9	726	1929@50	400/AA/A	
255/35ZR20/XL DIR	97W	45K	BSW	30376	10 - 8.5	10.2 on 9	27	9	770	1609@50	400/AA/A	
255/45ZR20 DIR	101W	45K	BSW	94555	9.5 - 8	10 on 8.5	29	9	716	1819@51	400/AA/A	
275/35ZR20/XL DIR	102W	45K	BSW	19943	11 - 9	10.9 on 9.5	27.5	9	755	1874@50	400/AA/A	
275/40ZR20/XL DIR	106W	45K	BSW	11108	11 - 9	10.9 on 9.5	28.6	9	726	2094@50	400/AA/A	
275/40ZR20/XL DIR	106Y	45K	BSW	91904	11 - 9	10.9 on 9.5	28.6	9	726	2094@50	400/AA/A	
285/35ZR20 DIR	100W	45K	BSW	09693	11 - 9.5	11.4 on 10	27.8	9	746	1764@51	400/AA/A	
285/35ZR20 DIR	100Y	45K	BSW	20717	11 - 9.5	11.4 on 10	27.8	9	746	1764@51	400/AA/A	
305/35ZR20 DIR	104W	45K	BSW	04642	12 - 10	12.3 on 11	28.4	9	732	1984@51	400/AA/A	
305/35ZR20 DIR	104Y	45K	BSW	32255	12 - 10	12.3 on 11	28.4	9	732	1984@51	400/AA/A	

|| DON'T SETTLE
FOR TAME.



PERFORMANCE/TOURING

We don't believe you have to trade fun for practicality. With the RIGHT tire, you can find the driving spirit in your everyday car.



KEY TIRE LINE COMPARISONS	WEAR LIFE	FUEL EFFICIENCY	HANDLING	BRAKING	COMFORT
Advantage T/A® Sport	10	8	10	10	9
Advantage T/A®	9	7	9	9	9
Radial T/A®	7	5	8	7	7

BFGOODRICH®
ADVANTAGE T/A® SPORT

Defy the weather, control the curves, and enjoy the drive for miles and miles



ALL-SEASON TIRE



BENEFITS OF BFGOODRICH

• **ALL SEASON, ALL PURPOSE: 12% better Wet Braking¹ & 15% better snow traction²**

Locking 3-D Active Sipe Technology provides more biting edges for significantly increased wet and light snow traction. Advanced All-Season Tread Compounds are silica-infused compounds to deliver outstanding grip year round. Aqua-Flume™ Technology is a curvilinear groove network designed to disperse water from under the contact patch.


• **ADVANCED MILEAGE: Backed by 70,000 mile warranty³**

Computer Optimized Footprint manages tread wear evolution for longer life and a quiet ride. Locking 3-D Active Sipe Technology designed to lock together under tire's footprint providing stability for longer wear. Full Depth Tread Features maintain consistent performance and look throughout the life of the tire

• **AGILE HANDLING: 15% better Dry Handling⁴**

Next Generation ETEC System™ (Equal Tension Containment System) maintains optimal footprint shape during cornering and high speed situations+. Next Generation g-Wedge Sidewall Stabilizer™ stabilizes sidewall for crisp handling and comfortable ride. Continuous Center Rib provides consistent steering response and road feel.

1 Based on internal wet braking results from 50 MPH using a 2013 Honda Accord LX versus previous generation BFGoodrich® Advantage T/A® tire in size 215/55R17 94V. Actual on-road results may vary.
 2 Based on third-party snow traction tests using ASTM Test Method F1805-12 versus previous generation BFGoodrich® Advantage T/A® tire in size 215/55R17 94V. Actual on-road results may vary.
 3 70,000 mile limited treadlife warranty- T-rated, 60,000 mile limited treadlife warranty- H/V rated
 4 Based on internal dry handling results using a 2013 Honda Accord LX vs. previous generation BFGoodrich® Advantage T/A® tire in size 215/55R17 94V. Actual on-road results may vary.

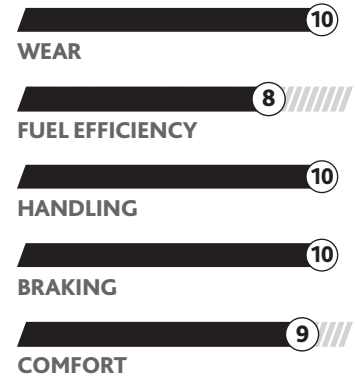

POPULAR REPLACEMENT MARKET FITMENTS:

- Honda Accord
- Toyota Camry
- Mazda 3 and 6
- Ford Focus
- Chevrolet Malibu
- Nissan Altima
- Subaru Crosstrek



BFGOODRICH® ADVANTAGE T/A® SPORT

Tire Size	Service Description	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/ Mile @45 mph	Max Load Single (lbs@psi)	UTQG	O.E. Fitments
185/60R15	84T	70K	BSW	10189	6.5 - 5	7.4 on 5.5	23.7	9.5	876	1102@44	660/A/A	
185/65R15	88H	60K	BSW	51187	6.5 - 5	7.4 on 5.5	24.4	9.5	851	1235@44	600/A/A	
185/65R15	88T	70K	BSW	98559	6.5 - 5	7.4 on 5.5	24.4	9.5	851	1235@44	660/A/A	
195/55R15	85V	60K	BSW	03054	7 - 5.5	7.9 on 6	23.4	9.5	888	1135@44	600/A/A	
195/60R15	88H	60K	BSW	03110	7 - 5.5	7.9 on 6	24.2	9.5	859	1235@44	600/A/A	
195/60R15	88T	70K	BSW	66582	7 - 5.5	7.9 on 6	24.2	9.5	859	1235@44	660/A/A	
195/65R15	91H	60K	BSW	12687	7 - 5.5	7.9 on 6	25	9.5	832	1356@44	600/A/A	
195/65R15	91T	70K	BSW	09460	7 - 5.5	7.9 on 6	25	9.5	832	1356@44	660/A/A	
205/60R15	91H	60K	BSW	86626	7.5 - 5.5	8.2 on 6	24.6	9.5	842	1356@44	600/A/A	
205/65R15	94H	60K	BSW	21777	7.5 - 5.5	8.2 on 6	25.4	9.5	817	1477@44	600/A/A	
205/65R15	94T	70K	BSW	55133	7.5 - 5.5	8.2 on 6	25.4	9.5	817	1477@44	660/A/A	
215/70R15	98T	70K	BSW	92004	7 - 5.5	8.7 on 6.5	26.8	9.5	774	1653@44	660/A/A	
195/55R16	87V	60K	BSW	25375	7 - 5.5	7.9 on 6	24.4	9.5	852	1202@44	600/A/A	
205/50R16	87V	60K	BSW	14732	7.5 - 5.5	8.4 on 6.5	24	9.5	863	1202@44	600/A/A	
205/55R16	91H	60K	BSW	08979	7.5 - 5.5	8.4 on 6.5	24.8	9.5	836	1356@44	600/A/A	
205/55R16	91T	70K	BSW	58598	7.5 - 5.5	8.4 on 6.5	24.8	9.5	836	1356@44	660/A/A	
205/60R16	92H	60K	BSW	34511	7.5 - 5.5	8.2 on 6	25.6	9.5	810	1389@44	600/A/A	
205/60R16	92V	60K	BSW	45602	7.5 - 5.5	8.2 on 6	25.6	9.5	810	1389@44	600/A/A	
205/65R16	95H	60K	BSW	22797	7.5 - 5.5	8.2 on 6	26.4	9.5	786	1521@44	600/A/A	
215/55R16/XL	97H	60K	BSW	35466	7.5 - 6	8.9 on 7	25.2	9.5	823	1609@50	600/A/A	
215/60R16	95H	60K	BSW	96984	7.5 - 6	8.7 on 6.5	26.1	9.5	796	1521@44	600/A/A	
215/60R16	95T	70K	BSW	05012	7.5 - 6	8.7 on 6.5	26.1	9.5	796	1521@44	660/A/A	
215/60R16	95V	60K	BSW	02941	7.5 - 6	8.7 on 6.5	26.1	9.5	796	1521@44	600/A/A	
215/65R16	98T	70K	BSW	10764	7.5 - 6	8.7 on 6.5	27	9.5	770	1653@44	660/A/A	
225/60R16	98H	60K	BSW	01676	8 - 6	9 on 6.5	26.6	9.5	782	1653@44	600/A/A	
225/60R16	98T	70K	BSW	28656	8 - 6	9 on 6.5	26.6	9.5	782	1653@44	660/A/A	
225/65R16	100T	70K	BSW	30294	8 - 6	9 on 6.5	27.4	9.5	757	1764@44	660/A/A	
235/60R16	100T	70K	BSW	19046	8.5 - 6.5	9.5 on 7	27	9.5	768	1764@44	660/A/A	
235/65R16	103T	70K	BSW	07312	8.5 - 6.5	9.5 on 7	28	9.5	742	1929@44	660/A/A	
205/50R17/XL	93V	60K	BSW	40061	7.5 - 5.5	8.4 on 6.5	25.1	9.5	828	1433@50	600/A/A	
215/45R17	87V	60K	BSW	55068	8 - 7	8.4 on 7	24.6	9.5	844	1202@44	600/A/A	
215/50R17/XL	95V	60K	BSW	46569	7.5 - 6	8.9 on 7	25.5	9.5	815	1521@50	600/A/A	
215/55R17	94H	60K	BSW	70453	7.5 - 6	8.9 on 7	26.3	9.5	791	1477@44	600/A/A	
215/55R17	94V	60K	BSW	39136	7.5 - 6	8.9 on 7	26.3	9.5	791	1477@44	600/A/A	
215/60R17	96H	60K	BSW	29380	7.5 - 6	8.7 on 6.5	27.1	9.5	766	1565@44	600/A/A	
215/60R17	96T	70K	BSW	72139	7.5 - 6	8.7 on 6.5	27.1	9.5	766	1565@44	660/A/A	
225/45R17	91H	60K	BSW	67232	8.5 - 7	8.9 on 7.5	24.9	9.5	833	1356@44	600/A/A	
225/50R17	94T	70K	BSW	72111	8 - 6	9.2 on 7	25.9	9.5	803	1477@44	660/A/A	
225/50R17	94V	60K	BSW	36882	8 - 6	9.2 on 7	25.9	9.5	803	1477@44	600/A/A	
225/55R17	97H	60K	BSW	10449	8 - 6	9.2 on 7	26.7	9.5	777	1609@44	600/A/A	
225/55R17	97V	60K	BSW	29843	8 - 6	9.2 on 7	26.7	9.5	777	1609@44	600/A/A	
225/60R17	99H	60K	BSW	28604	8 - 6	9 on 6.5	27.6	9.5	753	1709@44	600/A/A	
235/45R17/XL	97H	60K	BSW	48627	9 - 7.5	9.3 on 8	25.3	9.5	821	1609@50	600/A/A	
235/55R17	99H	60K	BSW	29257	8.5 - 6.5	9.7 on 7.5	27.1	9.5	766	1709@44	600/A/A	
235/60R17	102H	60K	BSW	24390	8.5 - 6.5	9.5 on 7	28.1	9.5	740	1874@44	600/A/A	
235/60R17	102T	70K	BSW	35308	8.5 - 6.5	9.5 on 7	28.1	9.5	740	1874@44	660/A/A	
215/55R18	95H	60K	BSW	85646	7.5 - 6	8.9 on 7	27.2	9.5	762	1521@44	600/A/A	
225/45R18/XL	95V	60K	BSW	58709	8.5 - 7	8.9 on 7.5	25.9	9.5	802	1521@50	600/A/A	
225/50R18	95T	70K	BSW	27076	8 - 6	9.2 on 7	26.8	9.5	774	1521@44	660/A/A	
225/55R18	98V	60K	BSW	09339	8 - 6	9.2 on 7	27.7	9.5	749	1653@44	600/A/A	
225/60R18	100H	60K	BSW	16685	8 - 6	9 on 6.5	28.6	9.5	727	1764@44	600/A/A	
235/45R18/XL	98V	60K	BSW	38693	9 - 7.5	9.3 on 8	26.3	9.5	790	1653@50	600/A/A	
235/55R18	100T	70K	BSW	10044	8.5 - 6.5	9.7 on 7.5	28.1	9.5	739	1764@44	660/A/A	
245/45R18	96V	60K	BSW	07049	9 - 7.5	9.6 on 8	26.6	9.5	780	1565@44	600/A/A	

BFGOODRICH®
ADVANTAGE T/A®

Offers an upgraded grip and a smooth, long-lasting ride for an awesome everyday drive.




ALL-SEASON TIRE



BENEFITS OF BFGOODRICH

- **Experience real driving excitement for 75,000 miles.¹**
Strong, limited tread life warranty.
- **Provide excellent all-weather bite and responsive handling that enthusiasts demand.**
New g-Grip™ interlocking sipe technology and an all-season tread compound.
- **Designed to provide maximum water evacuation.**
Deep, wide circumferential grooves.
- **Provides excellent strength and maintains maximum tread contact, even in high-speed² conditions.**
ETEC System™ (Equal Tension Containment System) filament reinforcement.
- **Reinforcement where it counts for a comfortable ride and crisp handling.**
g-Wedge™ sidewall stabilizer (H/V series only) and rigid shoulder blocks.
- **Offers ease of maintenance and increased tread life.**
Non-directional tread pattern.
- **BFGoodrich racing heritage puts performance into everyday driving with authentic go-fast looks.**
Signature aesthetics.

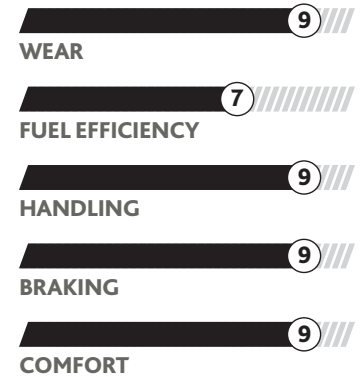

POPULAR REPLACEMENT MARKET FITMENTS:

- Chevrolet Malibu
- Ford Fusion
- Honda Accord
- Toyota Camry
- MINI Cooper

¹ 75,000 mile limited warranty for T-speed rated sizes, 60,000 mile warranty for H/V rated sizes - see warranty for details.
² Exceeding the safe, legal speed limit is neither recommended nor endorsed.



BFGOODRICH® ADVANTAGE T/A®

Tire Size	Service Description	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/ Mile @45 mph	Max Load Single (lbs@psi)	UTQG	O.E. Fit-ments
185/65R14	86T	75K	BSW	24853	6.5 - 5	7.4 on 5.5	23.5	11.5	887	1168@44	680/A/B	
P185/70R14	87T	75K	BSW	28653	6 - 4.5	7.4 on 5.5	24.3	11.5	858	1201@44	680/A/B	
P195/70R14	90T	75K	BSW	12729	6.5 - 5	7.9 on 6	24.8	11.5	839	1312@44	680/A/B	
185/60R15	84T	75K	BSW	19478	6.5 - 5	7.4 on 5.5	23.7	11.5	876	1102@44	680/A/B	
185/65R15	88H	60K	BSW	08163	6.5 - 5	7.4 on 5.5	24.5	10	851	1235@44	560/A/A	
185/65R15	88T	75K	BSW	15299	6.5 - 5	7.4 on 5.5	24.5	11.5	851	1235@44	680/A/B	
195/60R15	88H	60K	BSW	69345	7 - 5.5	7.9 on 6	24.2	10	859	1235@44	560/A/A	
195/60R15	88T	75K	BSW	82309	7 - 5.5	7.9 on 6	24.2	11.5	859	1235@44	680/A/B	
195/65R15	91H	60K	BSW	07671	7 - 5.5	7.9 on 6	25	10	832	1356@44	560/A/A	
195/65R15	91T	75K	BSW	90933	7 - 5.5	7.9 on 6	25	11.5	832	1356@44	680/A/B	
205/60R15	91H	60K	BSW	10233	7.5 - 5.5	8.2 on 6	24.7	10	842	1356@44	560/A/A	
205/65R15	94H	60K	BSW	32707	7.5 - 5.5	8.2 on 6	25.5	10	817	1477@44	560/A/A	
205/65R15	94T	75K	BSW	98654	7.5 - 5.5	8.2 on 6	25.5	11.5	817	1477@44	680/A/B	
P205/70R15	95T	75K	BSW	30010	7 - 5	8.2 on 6	26.3	11.5	790	1499@44	680/A/B	
215/60R15	94H	60K	BSW	21409	7.5 - 6	8.7 on 6.5	25.2	10	827	1477@44	560/A/A	
215/70R15	98T	75K	BSW	10056	7 - 5.5	8.7 on 6.5	26.9	11.5	774	1653@44	680/A/B	
195/55R16	87V	60K	BSW	80052	7 - 5.5	7.9 on 6	24.4	10	852	1201@44	560/A/A	
205/55R16	91H	60K	BSW	27200	7.5 - 5.5	8.4 on 6.5	24.9	10	836	1356@44	560/A/A	
205/55R16	91T	75K	BSW	10596	7.5 - 5.5	8.4 on 6.5	24.9	11.5	836	1356@44	680/A/B	
205/60R16	92H	60K	BSW	04259	7.5 - 5.5	8.2 on 6	25.7	10	810	1389@44	560/A/A	
205/60R16	92T	75K	BSW	26379	7.5 - 5.5	8.2 on 6	25.7	11.5	810	1389@44	680/A/B	
205/60R16	92V	60K	BSW	76465	7.5 - 5.5	8.2 on 6	25.7	10	810	1389@44	560/A/A	
215/55R16/XL	97H	60K	BSW	16767	7.5 - 6	8.9 on 7	25.3	10	823	1609@50	560/A/A	
215/60R16	95H	60K	BSW	02107	7.5 - 6	8.7 on 6.5	26.1	10	796	1521@44	560/A/A	
215/60R16	95T	75K	BSW	21779	7.5 - 6	8.7 on 6.5	26.1	11.5	796	1521@44	680/A/B	
215/60R16	95V	60K	BSW	39484	7.5 - 6	8.7 on 6.5	26.1	10	796	1521@44	560/A/A	
215/65R16	98T	75K	BSW	77906	7.5 - 6	8.7 on 6.5	27	11.5	770	1653@44	680/A/B	
225/60R16	98H	60K	BSW	08431	8 - 6	9 on 6.5	26.6	10	782	1653@44	560/A/A	
225/60R16	98T	75K	BSW	64557	8 - 6	9 on 6.5	26.6	11.5	782	1653@44	680/A/B	
225/60R16	98V	60K	BSW	58028	8 - 6	9 on 6.5	26.6	10	782	1653@44	560/A/A	
225/65R16	100T	75K	BSW	24615	8 - 6	9 on 6.5	27.5	11.5	757	1764@44	680/A/B	
235/60R16	100H	60K	BSW	99319	8.5 - 6.5	9.5 on 7	27.1	10	768	1764@44	560/A/A	
235/65R16	103T	75K	BSW	97843	8.5 - 6.5	9.5 on 7	28	11.5	742	1929@44	680/A/B	
215/50R17/XL	95V	60K	BSW	46850	7.5 - 6	8.9 on 7	25.5	10	815	1521@50	560/A/A	
215/55R17	94H	60K	BSW	19616	7.5 - 6	8.9 on 7	26.3	10	791	1477@44	560/A/A	
215/55R17	94T	75K	BSW	09259	7.5 - 6	8.9 on 7	26.3	11.5	791	1477@44	680/A/B	
215/55R17	94V	60K	BSW	82042	7.5 - 6	8.9 on 7	26.3	10	791	1477@44	560/A/A	
215/60R17	96T	75K	BSW	76468	7.5 - 6	8.7 on 6.5	27.2	11.5	766	1565@44	680/A/B	
215/65R17	99T	75K	BSW	61840	7.5 - 6	8.7 on 6.5	28	11.5	742	1709@44	680/A/B	
225/50R17	94T	75K	BSW	51434	8 - 6	9.2 on 7	25.9	11.5	803	1477@44	680/A/B	
225/50R17	94V	60K	BSW	72341	8 - 6	9.2 on 7	25.9	10	803	1477@44	560/A/A	
225/55R17	97H	60K	BSW	12565	8 - 6	9.2 on 7	26.8	10	777	1609@44	560/A/A	
225/55R17	97T	75K	BSW	16512	8 - 6	9.2 on 7	26.8	11.5	777	1609@44	680/A/B	
225/55R17	97V	60K	BSW	12516	8 - 6	9.2 on 7	26.8	10	777	1609@44	560/A/A	
225/60R17	99T	75K	BSW	01507	8 - 6	9 on 6.5	27.6	11.5	753	1709@44	680/A/B	
225/65R17	102T	75K	BSW	26926	8 - 6	9 on 6.5	28.5	11.5	730	1874@44	680/A/B	
235/55R17	99H	60K	BSW	05491	8.5 - 6.5	9.7 on 7.5	27.2	10	766	1709@44	560/A/A	
235/60R17	102T	75K	BSW	03135	8.5 - 6.5	9.5 on 7	28.1	11.5	740	1874@44	680/A/B	
215/55R18	95H	60K	BSW	35417	7.5 - 6	8.9 on 7	27.2	10	762	1521@44	560/A/A	
215/55R18	95T	75K	BSW	01539	7.5 - 6	8.9 on 7	27.3	11.5	762	1521@44	680/A/B	
225/50R18	95T	75K	BSW	04912	8 - 6	9.2 on 7	26.9	11.5	774	1521@44	680/A/B	
225/55R18	98H	60K	BSW	96542	8 - 6	9.2 on 7	27.7	10	749	1653@44	560/A/A	
225/60R18	100H	60K	BSW	38527	8 - 6	9 on 6.5	28.6	10	727	1764@44	560/A/A	
235/55R18	100T	75K	BSW	18772	8.5 - 6.5	9.7 on 7.5	28.1	11.5	739	1764@44	680/A/B	

BFGOODRICH® RADIAL T/A®

An American performance icon.




ALL-SEASON TIRE



BENEFITS OF BFGOODRICH

- **Wide profile styling for modern muscle.**
Raised white letter and wide profile styling.
- **Superb lateral stability and steering response.**
Classic look with modern technology.
- **Nearly 40 years of real racing heritage and technology.**
North America's first performance radial tire.
- **High performance with low noise levels.**
Unique tread block phasing
- **Exceptional wet and dry traction and control, with long, even wear.**
Variable groove angle geometry and performance tread compounding.

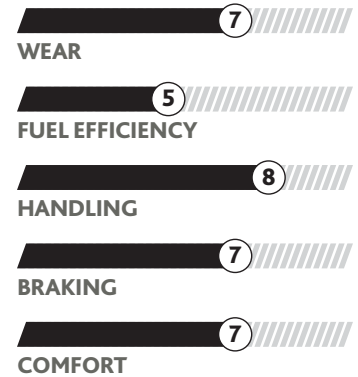

POPULAR REPLACEMENT MARKET FITMENTS:

- Hot Rods and Tuners
- Vintage Performance Cars
- American Muscle



BFGOODRICH® RADIAL T/A

Tire Size	Service Description	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/ Mile @45 mph	Max Load Single (lbs@psi)	UTQG	O.E. Fit-ments
P205/70R14	93S	Std	RWL	23353	7 - 5	8.2 on 6	25.3	11	821	1433@35	400/A/B	
P215/60R14	91S	Std	RWL	87370	7.5 - 6	8.7 on 6.5	24.1	11	861	1345@35	400/A/B	
P215/70R14	96S	Std	RWL	13823	7 - 5.5	8.7 on 6.5	25.9	12	803	1554@35	400/A/B	
P225/60R14	94S	Std	RWL	03769	8 - 6	9 on 6.5	24.6	11	844	1455@35	400/A/B	
P225/70R14	98S	Std	RWL	78138	7.5 - 6	9 on 6.5	26.4	12	786	1675@35	400/A/B	
P235/60R14	96S	Std	RWL	38765	8.5 - 6.5	9.5 on 7	25.1	11	828	1565@35	400/A/B	
P245/60R14	98S	Std	RWL	87449	8.5 - 7	9.8 on 7	25.5	11	813	1675@35	400/A/B	
P155/80R15	83S	Std	RWL	06462	5.5 - 4.5	6.2 on 4.5	24.8	12	840	1069@35	400/A/B	
P195/60R15	87S	Std	RWL	96408	7 - 5.5	7.9 on 6	24.2	11	859	1190@35	400/A/B	
P205/60R15	90S	Std	RWL	94684	7.5 - 5.5	8.2 on 6	24.6	11	842	1301@35	400/A/B	
P215/60R15	93S	Std	RWL	35841	7.5 - 6	8.7 on 6.5	25.1	11	827	1411@35	400/A/B	
P215/65R15	95S	Std	RWL	15015	7.5 - 6	8.7 on 6.5	26	10.5	799	1510@35	400/A/B	
P215/70R15	97S	Std	RWL	94777	7 - 5.5	8.7 on 6.5	26.8	12	774	1620@35	400/A/B	
P225/60R15	95S	Std	RWL	10971	8 - 6	9 on 6.5	25.6	11	812	1521@	400/A/B	
P225/70R15	100S	Std	RWL	72175	7.5 - 6	9 on 6.5	27.4	12	758	1753@35	400/A/B	
P235/60R15	98S	Std	RWL	19922	8.5 - 6.5	9.5 on 7	26.1	11	797	1642@35	400/A/B	
P235/70R15	102S	Std	RWL	58935	8 - 6	9.5 on 7	27.9	12	743	1896@35	400/A/B	
P245/60R15	100S	Std	RWL	99620	8.5 - 7	9.8 on 7	26.6	11	783	1753@35	400/A/B	
P255/60R15	102S	Std	RWL	29893	9 - 7	10.2 on 7.5	27.1	11	769	1885@35	400/A/B	
P255/70R15	108S	Std	RWL	07685	8.5 - 6.5	10.2 on 7.5	29.1	12	715	2183@35	400/A/B	
P275/60R15	107S	Std	RWL	61789	9.5 - 7.5	11 on 8	28	11	743	2149@	400/A/B	
P295/50R15	105S	Std	RWL	12707	10.5 - 8	12.1 on 9.5	26.6	11	780	2061@35	400/A/B	

A scenic winter landscape featuring a snow-covered mountain slope. In the foreground, a large, snow-laden evergreen tree stands prominently on the left. Below it, a wide, groomed ski run descends the slope, showing tracks and shadows cast by the sun. The background is filled with more snow-covered trees and a clear, bright sky. The overall atmosphere is serene and inviting for winter sports.

|| TAKE ON
FRESH POWDER.



WINTER

You can't stop your life every time a winter storm rolls through. When the weather is harsh, winter tires help make getting around safe - and fun.




BFGOODRICH® COMMERCIAL T/A® TRACTION

A truck and fleet tire with aggressive tread to go wherever your route requires.



BENEFITS OF BFGOODRICH

- Ideal for less-than-ideal roads.**
 Tread designed for snow, mud and practically any conditions (suitable for drive axle or both axles on trucks that spend time off-road).
- Made for extreme snow and ice.**
 Molded to accept studs when conditions demand the ultimate in traction.

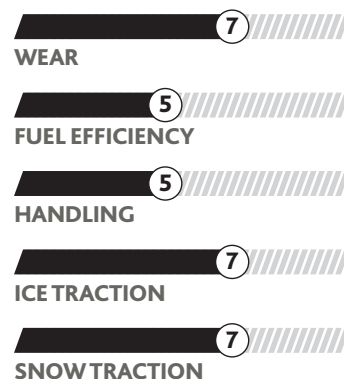

Tire Size	Service Description	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/Mile @45 mph	Max Load Single (lbs@psi)	Max Load Dual (lbs@psi)	UTQG	O.E. Fit-ments
LT215/85R16/D	110Q	Std	BSW	61161	7 - 5.5	8.5 on 6	30.2	18	688	2335@65	2150@65		
LT225/75R16/E	115Q	Std	BSW	72846	7 - 6	8.8 on 6	29.3	18	710	2680@80	2470@80		
LT235/85R16/E	120Q	Std	BSW	58509	7 - 6	9.4 on 6.5	31.6	18	658	3042@80	2778@80		
LT245/75R16/E	120Q	Std	BSW	85980	8 - 6.5	10 on 7	30.6	18	680	3042@80	2778@80		
LT265/75R16/E	123Q	Std	BSW	53176	8 - 7	10.5 on 7.5	31.8	15.5	654	3415@80	3085@80		



A close-up, low-angle shot of a tire tread on a rocky, uneven surface. The tire is dark and appears to be a heavy-duty truck or SUV tire. The tread pattern is clearly visible, showing deep grooves and sipes. The surrounding terrain is composed of large, jagged rocks and loose soil, suggesting a rugged, off-road environment. The lighting is dramatic, with strong highlights and deep shadows, emphasizing the texture of the tire and the ground.

**PUT YOUR GPS
TO THE TEST.**

LIGHT TRUCK/SUV

On the job site or out in the places you fish, camp or hunt, trucks and SUVs are made to work hard. And play even harder.



KEY TIRE LINE COMPARISONS	WEAR LIFE	FUEL EFFICIENCY	OFF-ROAD	BRAKING	COMFORT
Long Trail T/A® Tour	10	7	3	9	10
Rugged Trail T/A®	7	8	6	7	7
Mud-Terrain T/A® KM2	6	4	10	7	5
All-Terrain T/A® KO2	9	6	10	8	6

BFGOODRICH® LONG TRAIL T/A® TOUR

High level performance for crossovers and SUV's that are in it for the long haul.




ALL-SEASON TIRE



BENEFITS OF BFGOODRICH

- **For people who love to drive - and drive a lot.**
Backed by a 60,000-Mile Manufacturer's Limited Treadlife Warranty¹
- **Designed for a responsive and spirited highway ride driving on the road.**
Proprietary ETEC System™ (Equal Tension Containment System) delivers durability and stability at high speeds.
- **You're in control, not the weather.**
Strategic siping and rain channels that keep you in control in rainy, snowy and dry weather.

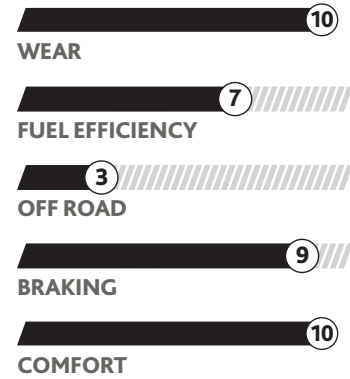

POPULAR REPLACEMENT MARKET FITMENTS:

- Honda CR-V
- Toyota RAV4
- Ford Escape
- Ford Explorer
- Chevrolet Tahoe
- Chevrolet Suburban
- Dodge Journey

¹ See warranty for details



BFGOODRICH® LONG TRAIL T/A® TOUR

Tire Size	Service Description	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/ Mile @45 mph	Max Load Single (lbs@psi)	UTQG	O.E. Fit-ments
P215/75R15	100T	60K	ORWL	80882	7 - 5.5	8.5 on 6	27.7	12	751	1584@44	580/A/B	
P225/70R15	100T	60K	ORWL	07228	7.5 - 6	9 on 6.5	27.4	12	758	1594@44	580/A/B	
P225/75R15	102T	60K	ORWL	22662	7.5 - 6	8.8 on 6	28.3	12	735	1704@44	580/A/B	
P235/70R15	102T	60K	ORWL	30023	8 - 6	9.5 on 7	28	12	743	1724@44	580/A/B	
P235/75R15/XL	108T	60K	ORWL	89471	8 - 6	9.3 on 6.5	28.9	12	721	1985@50	580/A/B	
P265/70R15	110T	60K	ORWL	68983	9 - 7	10.7 on 8	29.7	12	702	2125@44	580/A/B	
P265/75R15	112T	60K	ORWL	93100	9 - 7	10.5 on 7.5	30.7	12	678	2245@44	580/A/B	
215/70R16	100H	50K	BSW	07127	7 - 5.5	8.7 on 6.5	27.9	11.5	746	1604@44	440/A/A	
P215/70R16	99T	60K	ORWL	04091	7 - 5.5	8.7 on 6.5	27.9	12	746	1554@44	580/A/B	
P215/75R16	101T	60K	ORWL	27133	7 - 5.5	8.5 on 6	28.7	12	726	1654@44	580/A/B	
P225/70R16	101T	60K	ORWL	12528	7.5 - 6	9 on 6.5	28.4	12	732	1654@44	580/A/B	
P225/75R16/XL	106T	60K	ORWL	44404	7.5 - 6	8.8 on 6	29.3	12	710	1904@50	580/A/B	
P235/70R16	104T	60K	ORWL	98706	8 - 6	9.5 on 7	29	12	718	1804@44	580/A/B	
P235/75R16/XL	109T	60K	ORWL	22027	8 - 6	9.3 on 6.5	29.8	12	697	2065@50	580/A/B	
P245/70R16	106T	60K	ORWL	85358	8 - 6.5	9.8 on 7	29.5	12	704	1904@44	580/A/B	
P245/75R16	109T	60K	ORWL	90103	8 - 6.5	9.8 on 7	30.5	12	683	2065@44	580/A/B	
P255/65R16	106T	60K	BSW	00796	9 - 7	10.2 on 7.5	29.1	12	716	1904@44	580/A/B	
P255/70R16	109T	60K	ORWL	78976	8.5 - 6.5	10.2 on 7.5	30.1	12	691	2065@44	580/A/B	
P265/75R16	114T	60K	ORWL	26167	9 - 7	10.5 on 7.5	31.7	12	657	2365@44	580/A/B	
225/65R17	102H	50K	BSW	48275	8 - 6	9 on 6.5	28.5	11.5	730	1704@44	440/A/A	
P235/60R17	100T	60K	BSW	29509	8.5 - 6.5	9.5 on 7	28.1	12	740	1604@44	580/A/B	
P235/65R17	103T	60K	ORWL	18701	8.5 - 6.5	9.5 on 7	29.1	12	716	1754@44	580/A/B	
235/65R17	104H	50K	BSW	80976	8.5 - 6.5	9.5 on 7	29.1	11.5	716	1804@44	440/A/A	
P235/70R17/XL	108T	60K	BSW	00843	8 - 6	9.5 on 7	30	12	693	2005@50	580/A/B	
P235/75R17	108T	60K	BSW	34949	8 - 6	9.3 on 6.5	30.9	12	674	2005@44	580/A/B	
P245/65R17	105T	60K	ORWL	42091	8.5 - 7	9.8 on 7	29.5	12	704	1854@44	580/A/B	
P245/70R17	108T	60K	ORWL	31653	8 - 6.5	9.8 on 7	30.6	12	681	2005@44	580/A/B	
255/60R17	106V	40K	BSW	34456	9 - 7	10.2 on 7.5	29.1	11.5	716	1904@44	440/A/A	
P255/65R17	108T	60K	ORWL	19236	9 - 7	10.2 on 7.5	30.1	12	691	2005@44	580/A/B	
P255/70R17	110T	60K	ORWL	12487	8.5 - 6.5	10.2 on 7.5	31.1	12	669	2125@44	580/A/B	
P265/65R17	110T	60K	BSW	92930	9.5 - 7.5	10.7 on 8	30.6	12	681	2125@44	580/A/B	
P265/70R17	113T	60K	ORWL	39719	9 - 7	10.7 on 8	31.7	12	657	2305@44	580/A/B	
P275/60R17	110T	60K	ORWL	13374	9.5 - 7.5	11 on 8	30	12	693	2125@44	580/A/B	
235/55R18	100V	40K	BSW	39138	8.5 - 6.5	9.7 on 7.5	28.2	11.5	739	1604@44	440/A/A	
235/60R18	103V	40K	BSW	06598	8.5 - 6.5	9.5 on 7	29.1	11.5	715	1754@44	440/A/A	
P235/65R18	104T	60K	BSW	30080	8.5 - 6.5	9.5 on 7	30	12	692	1804@44	580/A/B	
245/60R18	105H	50K	BSW	02829	8.5 - 7	9.8 on 7	29.6	11.5	703	1854@44	440/A/A	
255/55R18	105V	40K	BSW	22371	9 - 7	10.4 on 8	29	11.5	717	1854@44	440/A/A	
P265/70R18	114T	60K	ORWL	06615	9 - 7	10.7 on 8	32.6	12	637	2365@44	580/A/B	
P275/55R20	111T	60K	BSW	28531	9.5 - 7.5	11.2 on 8.5	31.9	12	652	2185@44	580/A/B	
P275/60R20	114T	60K	BSW	32247	9.5 - 7.5	11 on 8	33	12	630	2365@44	580/A/B	

BFGOODRICH®
RADIAL LONG TRAIL T/A®

Tried and true all-season tire for popular SUVs.




ALL-SEASON TIRE



BENEFITS OF BFGOODRICH

- **Long on performance, long on mileage**
Dual-compound tread for improved grip in a long-lasting tire.
- **Designed for highway travel**
Minimal highway noise with excellent steering feel.

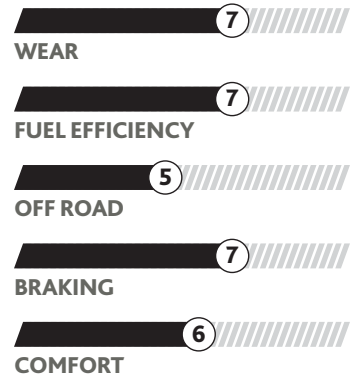

POPULAR REPLACEMENT MARKET FITMENTS:

- Ford E-Series 150
- Nissan Xterra

Tire Size	Service Description	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/ Mile @45 mph	Max Load Single (lbs@psi)	UTQG	O.E. Fit-ments
P265/60R18	109T	Std	ORWL	91173	9.5 - 7	10.2 on 7.5	30.6	11.5	685	2065@44	440/A/B	F



BFGOODRICH®
RUGGED TRAIL™/A®

On and off-road performance for popular trucks.




ALL-SEASON TIRE



BENEFITS OF BFGOODRICH

• **Great highway performance plus off-road traction**

High-speed durability and stable handling on the road.¹

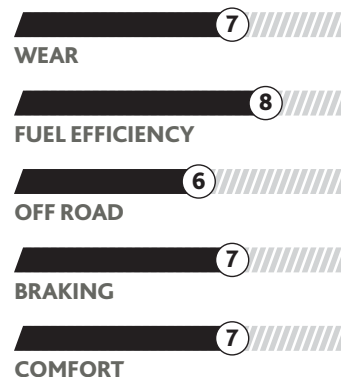

POPULAR REPLACEMENT MARKET FITMENTS:

- Nissan Frontier
- Nissan Titan
- Toyota Tacoma
- Toyota Tundra

¹ Exceeding the safe, legal speed limit is neither recommended nor endorsed.

Tire Size	Service Description	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/Mile @45 mph	Max Load Single (lbs@psi)	Max Load Dual (lbs@psi)	UTQG	O.E. Fitments
P265/70R16 DT	111T	Std	RWL	73986	9 - 7	10.6 on 8	30.6	10.5	680	2185@35		400/A/B	T
P265/75R16 DT	114T	Std	ORWL	66649	9 - 7	10.4 on 7	31.8	11	654	2365@44		400/A/B	N
P245/65R17 DT	105H	Std	BSW	79845	8.5 - 7	9.9 on 7.5	29.4	12	708	1854@44		400/A/B	FOR
P275/65R18 DT	114T	Std	ORWL	04509	9.5 - 7.5	11 on 8	32.1	13	648	2601@35		400/A/B	FOR
P275/70R18	116T	Std	ORWL	01195	9 - 7	11.1 on 8	33	10	630	2505@36		400/A/B	N
LT245/75R17/E	121R	Std	BSW	61626	7.5 - 6.5	9.8 on 7	31.5	14.5	660	3195@80	2910@80		FOR
LT245/75R17/E	121R	Std	ORWL	52343	7.5 - 6.5	9.8 on 7	31.5	14.5	660	3195@80	2910@80		FOR
LT265/70R17/E	121R	Std	ORWL	92139	8.5 - 7	10.7 on 8	31.6	14.5	657	3195@80	2910@80		FOR



TUNDRA

BFGOODRICH® MUD-TERRAIN T/A® KM2

The no-limits tire for serious off-road enthusiasts.



ALL-SEASON TIRE



BENEFITS OF BFGOODRICH

• When roadside assistance is not an option

Super-tough sidewall compound and 3-ply construction resists cuts and bruises to take the edge off of rocks and other off-road hazards.

• Overcome nearly any obstacle

Linear flex zones allow the tire to conform and grab obstacles in aired-down driving.

• Leave the tow rig at home

Drive to the trails with better road manners and less noise than you'd expect in an unstoppable off-road tire.



POPULAR REPLACEMENT MARKET FITMENTS:

Dodge Ram

Ford F-Series

Jeep Wrangler Rubicon



BFGOODRICH® MUD-TERRAIN T/A® KM2

Tire Size	Service Description	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/ Mile @45 mph	Max Load Single (lbs@psi)	Max Load Dual (lbs@psi)	UTQG	O.E. Fit-ments
30x9.50R15/C	104Q	Std	RWL	71576	8.5 - 6.5	9.5 on 7.5	29.8	18	698	1985@50			
31x10.50R15/C	109Q	Std	RWL	98952	9 - 7	10.5 on 8.5	30.8	19	675	2270@50			
32x11.50R15/C	113Q	Std	RWL	13833	10 - 8	11.4 on 9	31.5	20	654	2535@50			
33x10.50R15/C	114Q	Std	RWL	38563	9 - 7	10.5 on 8.5	32.8	18	634	2600@50			
33x12.50R15/C	108Q	Std	RWL	37047	11 - 8.5	12.5 on 10	32.5	20	640	2205@35			
35x12.50R15/C	113Q	Std	RWL	53290	11 - 8.5	12.5 on 10	34.8	20	598	2535@35			
35x12.50R17/D	119Q	Std	RWL	38371	11 - 8.5	12.5 on 10	34.8	20	598	3000@50			
37x12.50R17/D	124Q	Std	RWL	25419	11 - 8.5	12.5 on 10	36.5	20	569	3525@50			
35x12.50R18/D	118Q	Std	RWL	28459	11 - 8.5	12.5 on 10	34.8	20	598	2910@50			
37x12.50R18/D	123Q	Std	RWL	97218	11 - 8.5	12.5 on 10	36.8	20	566	3415@50			
37x12.50R20/D	120Q	Std	RWL	39143	11 - 8.5	12.5 on 10	36.8	20	566	3085@50			
LT215/75R15/C	100Q	Std	RWL	51738	7 - 5.5	8.5 on 6	27.9	18	746	1765@50	1610@50		
LT235/75R15/C	104Q	Std	RWL	05926	7 - 6	9.3 on 6.5	29.1	18	715	1985@50	1820@50		
LT225/75R16/D	110Q	Std	RWL	30329	7 - 6	8.8 on 6	29.5	18	705	2335@65	2150@65		
LT235/70R16/C	104Q	Std	RWL	01802	7.5 - 6	9.5 on 7	29.2	18	712	1985@50	1820@50		
LT255/70R16/D	115Q	Std	RWL	10698	8 - 6.5	10.2 on 7.5	30.3	18	686	2680@65	2470@65		
LT255/85R16/E	123Q	Std	RWL	04222	8 - 6.5	10 on 7	33	18	629	3415@80	3085@80		
LT265/75R16/E	123Q	Std	RWL	19683	8 - 7	10.5 on 7.5	31.9	18	652	3415@80	3085@80		
LT285/75R16/E	126Q	Std	RWL	12544	9 - 7.5	11.3 on 8	33.1	19	628	3750@80	3415@80		
LT305/70R16/D	118Q	Std	RWL	39967	9.5 - 8	12.2 on 9	33.1	20	628	2910@50	2680@50		
LT315/75R16/D	121Q	Std	RWL	24970	10 - 8	12.3 on 8.5	34.8	20	598	3195@50	2910@50		
LT245/70R17/E	119Q	Std	RWL	13859	8 - 6.5	9.8 on 7	30.8	18	676	3000@80	2755@80		
LT255/80R17/E	121Q	Std	RWL	35737	8.5 - 6.5	10 on 7	33.3	18	625	3195@80	2910@80		
LT265/70R17/E	121Q	Std	RWL	73083	8.5 - 7	10.7 on 8	31.7	18	657	3195@80	2910@80		
LT285/70R17/D	121Q	Std	RWL	37037	9 - 7.5	11.5 on 8.5	33	19	630	3195@65	2910@65		
LT285/75R17/E	121Q	Std	RWL	79793	9.5 - 7.5	11.3 on 8	33.8	20	614	3195@80	2910@80		
LT305/65R17/E	121Q	Std	RWL	34424	11 - 8.5	12.2 on 9	32.8	20	634	3195@65	2910@65		
LT305/70R17/E	121Q	Std	RWL	42197	9.5 - 8	12.2 on 9	33.8	20	614	3195@65	2910@65		
LT285/70R18/E	127Q	Std	RWL	22412	9.5 - 7.5	11.5 on 8.5	33.7	20	616	3860@80	3525@80		
LT305/60R18/E	121Q	Std	RWL	31489	11 - 8.5	12.2 on 9	32.6	20	637	3195@65	2910@65		
LT305/55R20/E	121Q	Std	RWL	20881	11 - 8.5	12.4 on 9.5	33.5	20	622	3195@65	2910@65		
LT325/60R20/D	121Q	Std	RWL	34143	12 - 9	13 on 9.5	35.6	20	584	3195@50			

BFGOODRICH®
ALL-TERRAIN T/A® KO2
 BFGoodrich's toughest All-Terrain tire. Ever.



YEAR-ROUND ALL-TERRAIN TIRE



ALL-SEASON TIRE



BENEFITS OF BFGOODRICH

• **20% Tougher Sidewalls: Featuring race-proven CoreGard™ Technology to take on the toughest road hazards with confidence.¹**

CoreGard Technology: Tougher Sidewall Rubber: Split & bruise resistant sidewall rubber, derived from BFGoodrich's race proven Baja T/A®KR2 tire. Thicker, Extended Shoulder Rubber: Increased rubber thickness, extending down the sidewall to protect more of the critical sidewall failure zone. Advanced Deflection Design: Computer predicted object path design deflects protruding objects from snagging & splitting the sidewall.


• **Longer Treadlife On and Off-Road: To extend your adventure.²**

Specially formulated tread rubber: Optimally blended to reduce chip and tear for superior gravel road endurance. Advanced tire footprint shape: results in more evenly distributed stress, for longer more uniform wear. Interlocking Tread Design: provide increased tread block stability, for more even wear over the long haul Stone Ejectors: Rejects stone retention & provides extra tread cleanout protection against stone drilling.

• **Aggressive All-Terrain Traction: Exceeding RMA Severe Snow Traction performance requirements.³ to confidently get where you want to go.**

Upper Sidewall Traction Bars: Protruding sidewall rubber blocks that provide increased mud, snow & rock traction, especially in aired-down driving situations. Mud-Phobic Bars: Raised bars in the shoulder tread area that helps to release compacted mud for enhanced traction in muddy and soft soil conditions. Serrated Shoulder Design: Staggered shoulder blocks that provide greater maneuverability in soft soil and deep snow conditions. Locking 3-D Sipes: 3-D active sipe technology, that provides more biting edges for significantly increased snow traction. 3 Peak Mountain Snowflake: Exceeds Rubber Manufacturer Association (RMA) Severe Snow Traction requirements.

¹ Improvement depends on the size of the tire purchased. 20% improvement based on internal sidewall splitting test results derived from a simulated sidewall aggression testing machine (patent pending US20120245859A1) vs. BFGoodrich® All-Terrain T/A KO tire in size LT265/70R17. Actual on-road results may vary.
² On-Road: Based on internal wear tests vs. BFGoodrich® All-Terrain T/A KO tire in size LT 265/70R17 Off-Road: Based on commissioned third-party gravel endurance tests vs. BFGoodrich® All-Terrain T/A KO tire in size LT 265/70R17.
³ Snow: Based on third-party snow traction tests vs. BFGoodrich® All-Terrain T/A KO tire in size LT 265/70R17 using the ASTM F1805 Test.. Mud Traction: Based on internal subjective mud testing vs. the BFGoodrich® All-Terrain T/A KO tire in size LT 265/70R17

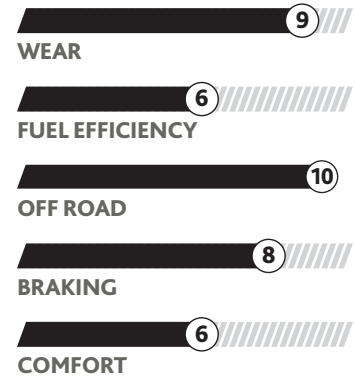

POPULAR REPLACEMENT MARKET FITMENTS:

- Ford F-Series
- Jeep Wrangler
- Ford Expedition
- Toyota Tundra

Tire Size	Service Description	Limited Warranty	Sidewall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/Mile @45 mph	Max Load Single (lbs@psi)	Max Load Dual (lbs@psi)	UTQG	O.E. Fitments
30x9.50R15/C	104S	Std	RWL	64055	8.5 - 6.5	9.5 on 7.5	29.5	15	705	1990@50			
31x10.50R15/C	109S	Std	RWL	69948	9 - 7	10.6 on 8.5	30.5	15	682	2270@50			
32x11.50R15/C	113R	Std	RWL	13079	10 - 8	11.4 on 9	31.5	15	659	2535@50			
33x10.50R15/C	114R	Std	RWL	11548	9 - 7	10.6 on 8.5	32.5	15	640	2600@50			
33x12.50R15/C	108R	Std	RWL	37881	11 - 8.5	12.5 on 10	32.5	15	640	2205@35			
35x12.50R15/C	113Q	Std	RWL	33572	11 - 8.5	12.5 on 10	34.5	15	602	2535@35			
34x10.50R17/D	120R	Std	RWL	91644	9 - 7	10.6 on 8.5	33.5	15	621	3085@65			
35x12.50R17/E	121R	Std	RWL	50022	11 - 8.5	12.5 on 10	34.5	15	602	3195@65			

BFGOODRICH® ALL-TERRAIN T/A® KO2

Tire Size	Service Description	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/ Mile @45 mph	Max Load Single (lbs@psi)	Max Load Dual (lbs@psi)	UTQG	O.E. Fit-ments
37x12.50R17/D	124R	Std	RWL	12987	11 - 8.5	12.5 on 10	36.5	15	569	3525@50			
34x12.50R18/E	121R	Std	BSW	36312	11 - 8.5	12.5 on 10	33.5	15	621	3195@65			
35x12.50R18/E	123R	Std	RWL	13389	11 - 8.5	12.5 on 10	34.5	15	602	3415@65			
35x12.50R20/E	121R	Std	BSW	23413	11 - 8.5	12.5 on 10	34.5	15	602	3195@75			
LT215/75R15/C	100S	Std	BSW	41640	7 - 5.5	8.5 on 6	27.6	15	751	1765@50	1610@50		
LT235/75R15/C	104S	Std	RWL	11341	7 - 6	9.3 on 6.5	28.8	15	721	1985@50	1820@50		
LT215/65R16/D	103S	Std	BSW	93878	7.5 - 6	8.7 on 6.5	27	13	770	1930@65	1765@65		
LT215/70R16/C	100R	Std	RWL	93533	7 - 5.5	8.7 on 6.5	27.8	15	746	1765@50	1610@50		
LT225/70R16/C	102R	Std	RWL	21070	7 - 6	9 on 6.5	28.4	15	732	1875@50	1710@50		
LT225/75R16/E	115S	Std	RWL	37527	7 - 6	8.8 on 6	29.2	15	710	2680@80	2470@80		
LT235/70R16/C	104S	Std	RWL	33403	7.5 - 6	9.5 on 7	28.9	15	718	1985@50	1820@50		
LT235/85R16/E	120S	Std	RWL	75445	7.5 - 6	9.3 on 6.5	31.7	15	656	3042@80	2778@80		
LT245/70R16/D	113S	Std	RWL	28855	7 - 6.5	9.8 on 7	29.5	15	704	2535@65	2335@65		
LT245/75R16/E	120S	Std	RWL	15477	8 - 6.5	9.8 on 7	30.4	15	683	3042@80	2778@80		
LT255/70R16/E	120S	Std	RWL	65289	8 - 6.5	10.2 on 7.5	30	15	691	3085@80	2835@80		
LT265/70R16/E	121S	Std	RWL	62023	8.5 - 7	10.7 on 8	30.6	15	679	3195@80	2910@80		
LT265/75R16/E	123R	Std	RWL	67179	8 - 7	10.5 on 7.5	31.6	15	657	3415@80	3085@80		
LT275/70R16/D	119S	Std	RWL	97884	8.5 - 7	11 on 8	31.1	15	667	3000@65	2755@65		
LT285/75R16/E	126R	Std	RWL	05855	9 - 7.5	11.3 on 8	32.8	15	634	3750@80	3415@80		
LT295/75R16/E	128R	Std	RWL	99926	9.5 - 7.5	11.6 on 8	33.3	15	623	3970@80	3640@80		
LT305/70R16/E	124R	Std	RWL	34102	9.5 - 8	12.2 on 9	32.8	15	634	3525@65	3195@65		
LT315/75R16/E	127R	Std	RWL	50203	11 - 8	12.3 on 8.5	34.5	15	602	3860@65	3525@65		
LT225/65R17/D	107S	Std	BSW	95341	8 - 6	9 on 6.5	28.5	13	730	2150@65	1930@65		
LT235/80R17/E	120S	Std	BSW	10158	7.5 - 6	9.3 on 6.5	31.8	15	654	3085@80	2835@80		
LT245/65R17/D	111S	Std	RWL	52433	8 - 7	9.8 on 7	29.5	13	704	2405@65	2205@65		
LT245/70R17/E	119S	Std	RWL	09666	8 - 6.5	9.8 on 7	30.5	15	681	3000@80	2755@80		
LT245/75R17/E	121S	Std	RWL	26470	7.5 - 6.5	9.8 on 7	31.5	15	660	3195@80	2910@80		
LT255/70R17/E	121S	Std	BSW	37495	8.5 - 6.5	10.2 on 7.5	31.1	15	669	3195@80	2910@80		
LT255/75R17/C	111S	Std	BSW	11450	8.5 - 6.5	10 on 7	32	15	649	2405@50	2205@50		
LT265/65R17/E	120S	Std	RWL	16681	9.5 - 7.5	10.7 on 8	30.5	15	681	3085@80	2835@80		
LT265/70R17/C	112S	Std	RWL	66255	8.5 - 7	10.7 on 8	31.6	15	657	2470@50	2270@50		
LT265/70R17/C	112S	Std	BSW	10892	8.5 - 7	10.7 on 8	31.6	15	657	2470@50	2270@50		JEP
LT265/70R17/E	121S	Std	RWL	29668	8.5 - 7	10.7 on 8	31.6	15	657	3195@80	2910@80		
LT275/65R17/E	121S	Std	RWL	42347	9.5 - 7.5	11 on 8	31.1	15	669	3195@80	2910@80		
LT275/70R17/E	121R	Std	RWL	76597	8.5 - 7	11 on 8	32.2	15	646	3195@80	2910@80		
LT285/70R17/E	121R	Std	RWL	99728	9 - 7.5	11.5 on 8.5	32.7	15	635	3195@80	2910@80		
LT305/65R17/E	121R	Std	RWL	48785	11 - 8.5	12.2 on 9	32.6	15	638	3195@65	2910@65		
LT315/70R17/C	113S	Std	BSW	58424	11 - 8	12.7 on 9.5	34.4	15	604	2535@45	2335@45		FOR
LT315/70R17/E	121S	Std	BSW	08806	11 - 8	12.7 on 9.5	34.4	15	604	3195@65	2910@65		
LT255/55R18/D	109R	Std	BSW	75389	9 - 7	10.4 on 8	29	13	717	2270@65	2040@65		
LT255/70R18/D	117S	Std	BSW	70539	8.5 - 6.5	10.2 on 7.5	32	15	648	2835@65	2600@65		
LT265/60R18/E	119S	Std	BSW	63681	9.5 - 7.5	10.7 on 8	30.5	15	682	3000@80	2755@80		
LT265/65R18/E	122R	Std	RWL	05260	9.5 - 7.5	10.7 on 8	31.5	15	659	3305@80	3000@80		
LT265/70R18/E	124R	Std	RWL	40855	9 - 7	10.7 on 8	32.6	15	637	3525@80	3195@80		
LT275/65R18/E	123R	Std	RWL	36457	9 - 7.5	11 on 8	32	15	648	3415@80	3085@80		
LT275/70R18/E	125R	Std	RWL	80867	8.5 - 7	11 on 8	33.2	15	627	3640@80	3305@80		
LT285/60R18/D	118S	Std	RWL	99506	10 - 8	11.5 on 8.5	31.4	15	661	2910@65	2680@65		
LT285/65R18/E	125R	Std	RWL	93857	10 - 8	11.5 on 8.5	32.5	15	639	3640@80	3305@80		
LT305/65R18/E	124R	Std	BSW	08017	11 - 8.5	12.2 on 9	33.5	15	619	3525@65	3195@65		
LT325/65R18/E	127R	Std	RWL	01547	12 - 9	13 on 9.5	34.6	15	601	3860@65	3525@65		
LT275/55R20/D	115S	Std	BSW	12579	9.5 - 7.5	11.2 on 8.5	31.8	15	652	2680@65	2470@65		
LT275/60R20/D	119S	Std	BSW	64811	9.5 - 7.5	11 on 8	32.9	15	630	3000@65	2755@65		
LT275/65R20/E	126S	Std	BSW	17764	9.5 - 7.5	11 on 8	34	15	610	3750@80	3415@80		
LT285/55R20/D	117T	Std	BSW	03638	10 - 8	11.7 on 9	32.3	15	643	2835@65	2600@65		
LT285/65R20/E	127S	Std	BSW	88423	10 - 8	11.5 on 8.5	34.5	15	602	3860@80	3525@80		
LT305/55R20/E	121S	Std	BSW	64746	11 - 8.5	12.4 on 9.5	33.2	15	626	3195@65	2910@65		
LT325/60R20/E	126S	Std	BSW	70069	12 - 9	13 on 9.5	35.3	15	588	3750@65	3415@65		

BFGOODRICH®
KRAWLER™ T/A® KX

Winner Ultra4 King of Hammers Everyman Challenge 2016-17




ALL-SEASON TIRE



BENEFITS OF BFGOODRICH

- Unprecedented grip on rocks, mud and dirt**
Super-tough carcass with deep-lug tread pattern and soft, grippy compound that grabs onto uneven surfaces for better traction
- World's best rock-crawling tire**
Tread can be carved to better suit your individual off-road requirements.
- Extreme puncture resistance**
Four nylon sidewall plies for toughness

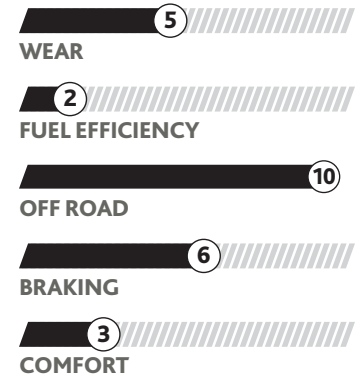

POPULAR REPLACEMENT MARKET FITMENTS:

Non-DOT Red Label Krawler™ for off-highway use are available exclusively at 1-800-RACE-BFG. Additional information available at BFGoodrichRacing.com

Tire Size	Service Description	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/ Mile @45 mph	Max Load Single (lbs@psi)	UTQG	O.E. Fit-ments
37x12.50R17/C	116L	Std	BSW	51716	11 - 8.5	12.9 on 10	37	22	562	2755@35		
39x13.50R17/C	121L	Std	BSW	10559	11 - 8.5	13.6 on 11	38.5	22	540	3195@35		



BFGOODRICH®
COMMERCIAL T/A® ALL SEASON 2

The reinforced all-season truck tire designed to meet your business needs.




ALL-SEASON TIRE



BENEFITS OF BFGOODRICH

- **Help your fleet budget go further**
An optimized footprint better distributes stress to increase treadlife and lower operating costs.
- **Commercial Grade toughness, that's built for the long haul**
Improved durability vs. the BFGoodrich Commercial T/A All-Season; CoolWedge™ shoulder insert enhances cooling and prolongs tire life.

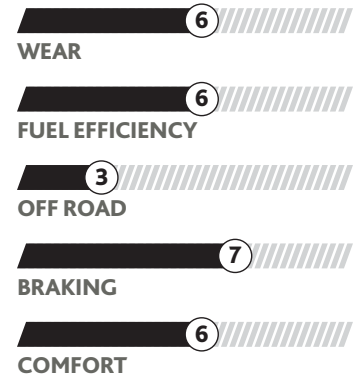

POPULAR REPLACEMENT MARKET FITMENTS:

- Ford E-Series 150/250/350
- Ford F-Series 150/250/350
- Chevrolet Silverado
- Dodge Ram 2500/3500
- Dodge 2500/3500

Tire Size	Service Description	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/ Mile @45 mph	Max Load Single (lbs@psi)	Max Load Dual (lbs@psi)	UTQG	O.E. Fit-ments
LT215/85R16/E	115R	Std	BSW	19836	7 - 5.5	8.5 on 6	30.3	13	684	2680@80	2470@80		
LT225/75R16/E	115R	Std	BSW	93775	7 - 6	8.8 on 6	29.2	13	710	2680@80	2470@80		
LT235/85R16/E	120R	Std	BSW	34213	7.5 - 6	9.3 on 6.5	31.7	13	656	3042@80	2778@80		
LT245/75R16/E	120R	Std	BSW	05485	8 - 6.5	9.8 on 7	30.4	13	683	3042@80	2778@80		
LT265/75R16/E	123R	Std	BSW	01665	8 - 7	10.5 on 7.5	31.6	13	657	3415@80	3085@80		
LT235/80R17/E	120R	Std	BSW	11616	7.5 - 6	9.3 on 6.5	31.8	15	654	3085@80	2835@80		
LT245/70R17/E	119R	Std	BSW	30539	8 - 6.5	9.8 on 7	30.5	14	681	3000@80	2755@80		
LT245/75R17/E	121R	Std	BSW	39532	7.5 - 6.5	9.8 on 7	31.5	15	660	3195@80	2910@80		
LT265/70R17/E	121R	Std	BSW	17795	8.5 - 7	10.7 on 8	31.6	14	657	3195@80	2910@80		



TIRE TIPS

- Regularly rotating your vehicle's tires helps extend the life of the tires and saves time and money in the long run.
- Inflate tires according to the vehicle manufacturer's recommendations.
- The penny trick: To check if the tire tread is worn out, place a penny into the shallowest tread groove with the top of Lincoln's head down. If the top of his head remains visible, then the tire should be replaced.
- Inflation pressure in a tire goes up (in warm weather) or down (in cold weather) 1 to 2 pounds for every 10 degrees of temperature change.
- Overloading the vehicle and tire builds up excessive heat in the tire and could result in failure.
- Visually inspect the tires to make sure there are no nails or other embedded objects that could poke a hole in the tire and cause an air leak.
- Proper alignment helps ensure that the vehicle handles correctly and helps increase the life and performance of the tires.
- For best all-around performance, the same type of tire should be used on all four wheel positions.
- Inflation information can be found in the vehicle owner's manual, on the door jamb placard, inside the fuel hatch or on the glove compartment door.
- Remember to check inflation pressure on the spare tire.
- When replacing speed-rated tires, you must use replacement tires with ratings equal to or greater than those of the Original Equipment tires if the speed capability is to be maintained. The handling of a performance vehicle may be different when the replacement tires are not the same speed rating.





SPEED RATINGS

SPEED SYMBOL	SPEED CATEGORY (MAX SPEED)	OPEN-ENDED SPEED CATEGORY
S	112 mph	
T	118 mph	
U	124 mph	
H	130 mph	
V	149 mph	
W	168 mph	ZR*
Y	186 mph	
(Y)	Above 186 mph	

*For tires having a maximum speed capability above 149 mph, a "ZR" may appear in the tire size designation. For tires having a maximum speed capability above 186 mph, a "ZR" must appear in the size designation. Consult the tire manufacturer for the tire's maximum speed capability when there is no Service Description or when the Service Description is stated in parentheses.

Example:	TIRE DESIGNATION	MAXIMUM SPEED
	P275/40R17 93W	168 mph
	P275/40ZR17	Above 149 mph; consult the tire manufacturer
	P275/40ZR17 93W	168 mph
	P275/40ZR17 93Y	186 mph
	P275/40ZR17 (93Y)	Above 186 mph; consult the tire manufacturer

IMPORTANT PRODUCT NOTIFICATIONS

Original Equipment Key for Size Charts: F = Ford, N = Nissan, T= Toyota

Government UTQG Ratings do not apply to Light Truck tires that are LT metric or flotation size.



These products meet the Rubber Manufacturers Association (RMA) Severe Snow Traction performance requirements.

The sizes shown are average design values for tires measured on specified measuring rim widths. Some tires may vary from this value by +/-3% of the section height (affecting overall diameter) and +/-4% of the section width.

Section width varies approximately 0.2" (5mm) for every 0.5" change in rim width.

WARNING: Serious or fatal injury may result from tire failure due to underinflation or overloading. To ensure correct air pressure and vehicle load, refer to vehicle owner's manual or tire information placard on the vehicle. Serious injury or death may result from explosion of tire/rim assembly due to improper mounting. Only tire professionals should mount tires, and they should never inflate beyond 40 psi to seat the beads. Before mixing types of tires in any configuration on any vehicle, be sure to check the vehicle owner's manual for recommendations.

DANGER: Never mount a 15" diameter tire on a 15.5" rim.

DANGER: Never mount a 16" diameter tire on a 16.5" rim.

DANGER: Never mount a 17" diameter tire on a 17.5" rim.

Inflation pressure increase must not exceed the maximum pressure branded on the tire sidewall. When a customer requests a replacement tire with a lower speed rating than the Original Equipment tire, you must clearly communicate to him or her that the handling of the vehicle may be different, and that its maximum speed capability is limited to that of the lowest speed-rated tire on the vehicle.

Exceeding the safe, legal speed limit is neither recommended nor endorsed.

For high-speed driving, additional inflation pressure, and possibly reduced tire loading and/or upsizing, is required. In the absence of specific recommendations by the vehicle manufacturer, use the guidelines on the following page, which are based on those in the European Tyre and Rim Technical Organisation Standards Manual.

FOR SPEEDS ABOVE 100 MPH (160 KM/H), LOAD AND INFLATION MUST BE ADJUSTED ACCORDING TO THE TABLE BELOW.**H-Speed-Rated Sizes:**

Maximum Speed (mph)	100	106	112	118	124	130
Inflation Increase (psi)	0.0	1.0	2.0	3.0	4.0	5.0
Load Capacity (% of max)	100	100	100	100	100	100

Q-Speed-Rated Sizes:

Maximum Speed (mph)	100
Inflation Increase (psi)	0.0
Load Capacity (% of max)	100

R-Speed-Rated Sizes:

Maximum Speed (mph)	100	106
Inflation Increase (psi)	0.0	1.0
Load Capacity (% of max)	100	100

S-Speed-Rated Sizes:

Maximum Speed (mph)	100	106	112
Inflation Increase (psi)	0.0	1.0	2.0
Load Capacity (% of max)	100	100	100

T-Speed-Rated Sizes:

Maximum Speed (mph)	100	106	112	118
Inflation Increase (psi)	0.0	1.0	2.0	3.0
Load Capacity (% of max)	100	100	100	100

V-Speed-Rated Sizes:

Maximum Speed (mph)	100	106	112	118	124	130	136	143	149
Inflation Increase (psi)	0.0	1.0	2.0	3.0	4.0	5.0	5.0	5.0	5.0
Load Capacity (% of max)	100	100	100	100	100	100	97	94	91

W-Speed-Rated Sizes:

Maximum Speed (mph)	118	124	130	136	143	149	155	161	168
Inflation Increase (psi)	0.0	1.5	3.0	4.5	6.0	7.5	7.5	7.5	7.5
Load Capacity (% of max)	100	100	100	100	100	100	95	90	85

Y-Speed-Rated Sizes:

Maximum Speed (mph)	118	124	130	136	143	149	155	161	168	174	180	186
Inflation Increase (psi)	0.0	0.0	0.0	0.0	1.5	3.0	4.5	6.0	7.5	7.5	7.5	7.5
Load Capacity (% of max)	100	100	100	100	100	100	100	100	100	95	90	85

FOR SPEEDS ABOVE 186 MPH (300 KM/H), LOAD AND INFLATION MUST BE ADJUSTED ACCORDING TO THE TABLE BELOW.**W-Speed Rated Sizes:**

Maximum Speed (mph)	118	124	130	136	143	149	155	161	168	174	180	186
Inflation Increase (psi)	0.0	1.5	3.0	4.5	6.0	7.5	7.5	7.5	7.5	7.5	7.5	7.5
Load Capacity (% of max)	100	100	100	100	100	100	95	90	85	95	90	85



BFGoodrichTires.com #DriverEnough    