

Moving America ahead since 1892



*Every generation
discovers Uniroyal.®*



**JUNE EDITION 2017
PASSENGER & LIGHT TRUCK DATA BOOK**

www.UniroyalTires.com

 www.facebook.com/uniroyaltire

Comparison Charts



Passenger Tires Comparison Chart	Warranty Coverage
Tiger Paw® GTZ All Season	
Tiger Paw® Touring	
Tiger Paw® AWP II	

Light Truck/SUV/Crossover & Commercial Tires Comparison Chart	Warranty Coverage
Laredo® Cross Country Tour	
Laredo® Cross Country	
Laredo® HD/T™	
Laredo® HD/H™	

Find what you want

Questions? Call your distributor
or your Uniroyal representative.



TIRE CATEGORIES..... 2

ULTRA-HIGH PERFORMANCE TIRES

TIGER PAW® GTZ ALL SEASON 4

PERFORMANCE/PASSENGER TIRES

TIGER PAW® TOURING 6

TIGER PAW® AWP II 10

LIGHT TRUCK/SUV/CROSSOVER TIRES

LAREDO® CROSS COUNTRY TOUR 12

LAREDO® CROSS COUNTRY 14

COMMERCIAL TIRES

LAREDO® HD/H™ 16

LAREDO® HD/T™ 18

DURASHIELD® CONSTRUCTION 20

SPEED RATINGS 21

IMPORTANT PRODUCT NOTIFICATIONS .. 22

NOTES 23

125 YEARS OF UNIROYAL..... 25

The 2017 Uniroyal® Data Book is here.

Even with 125 years under our steel belts, Uniroyal® isn't slowing down. In 2017, we're rolling forward with new tire launches, consumer promos and updates to several of our dealer programs.

Uniroyal remains committed to providing our customers with the confidence that they have chosen a strong partner with profitable programs and quality products for their value-seeking tire consumers.

A lot has changed since 1892. But our desire to meet the needs of a new generation is as strong as it was for the United States Rubber Company five generations ago. After more than a century, Uniroyal is moving ahead faster than ever.

**Read on to see what
we can offer you in 2017.**

Tire Categories

Ultra-High Performance and
Performance/Passenger Tires



Ultra-High Performance Tires

With the Uniroyal® Tiger Paw® GTZ All Season tire, ultra-high performance affordability meets all-season reliability.

Engineered to meet the ultra-high performance needs of drivers of sports cars and sedans in a range of weather conditions, the Uniroyal® Tiger Paw® GTZ All Season tire offers high-end quality at an affordable price. Advanced technology helps the tire absorb impact and run cooler, extending belt and tire life.

Performance/Passenger Tires

The Tiger Paw® family of passenger car and minivan tires provides a comfortable, quiet ride, long-lasting treadlife and all-season traction on the highway and around town.

Ride in confidence on virtually any road and in virtually any weather. Uniroyal passenger tires give you and your family the comfort you want along with the performance you want. Get outstanding everyday performance that's designed for your style of driving.



Tire Categories

Light Truck/SUV/Crossover and
Commercial Tires



Light Truck/SUV/Crossover Tires

Get the long treadlife, toughness and all-season grip you want in a tire that helps keep you comfortable and safe on and off the road. You can depend on the Laredo® family of tires in any environment.

From off-road ruggedness to smooth, performance-based on-road use, these tires are engineered to help drivers get the most out of their particular vehicles and driving styles. All at a surprisingly affordable price.

Commercial Tires

These heavy-duty tires are built for hard-to-reach locations and extreme weather conditions.

If you're looking for truck tires that work as hard as you do at an affordable price, these tires fit the bill. The Uniroyal® Laredo® HD/H™ tire is designed for everyday job sites while the Uniroyal® Laredo® HD/T™ tire is great for those hard-to-reach sites. Both tires absorb big impacts and carry heavy loads while providing all-season traction.



Tiger Paw® GTZ All Season

Ultra-high performance affordability meets all-season reliability.



ALL-SEASON TIRE



Benefits of Uniroyal

High-performance handling and stability in all seasons.

Optimized tread compound combined with a solid center rib

Long-lasting tread life and balanced wear

Non-directional tread design allows easy rotation

Dependable high performance technology within a sporty design

Tiger Claw tread pattern

Get a high-performance replacement for less than you think.

Many new vehicle owners are shocked when they discover their recommended replacement fitment is ultra high performance and pricier than they expected. Uniroyal® Tiger Paw® GTZ All Season is a great solution – the perfect combination of high performance at a low price. And with our line extension in 2016 that added 6 new sizes, it now offers more than 76% market coverage.



Popular Replacement Market Fitments:

BMW 5-Series
Nissan 350Z
Ford Mustang
Honda Accord
Lesus IS300
Audi A3
Scion TC

UNIROYAL® Tiger Paw® GTZ All Season

Tire Size	Service Description	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/ Mile @45 mph	Max Load Single (lbs@psi)	UTQG	O.E. Fit-ments
195/55R15	85V	Std	BSW	00273	7 - 5.5	7.9 on 6	23.4	9	888	1135@51	400/AA/A	
205/50ZR16	87W	Std	BSW	47509	7.5 - 5.5	8.4 on 6.5	24.1	9	863	1201@51	400/AA/A	
205/55ZR16	91W	Std	BSW	74522	7.5 - 5.5	8.4 on 6.5	24.9	9	836	1356@51	400/AA/A	
215/55ZR16	93W	Std	BSW	27396	7.5 - 6	8.9 on 7	25.3	9	823	1433@51	400/AA/A	
225/50ZR16	92W	Std	BSW	38842	8 - 6	9.2 on 7	24.9	9	836	1389@51	400/AA/A	
225/55ZR16	95W	Std	BSW	15525	8 - 6	9.2 on 7	25.8	9	808	1521@51	400/AA/A	
245/50ZR16	97W	Std	BSW	33207	8.5 - 7	10 on 7.5	25.7	9	810	1609@51	400/AA/A	
205/45ZR17	84W	Std	BSW	78689	7.5 - 6.5	8.1 on 7	24.2	9	858	1102@51	400/AA/A	
205/50ZR17	89W	Std	BSW	39978	7.5 - 5.5	8.4 on 6.5	25.1	9	828	1279@51	400/AA/A	
215/45ZR17/XL	91W	Std	BSW	71251	8 - 7	8.4 on 7	24.7	9	844	1356@50	400/AA/A	
215/50ZR17	91W	Std	BSW	63159	7.5 - 6	8.9 on 7	25.5	9	815	1356@51	400/AA/A	
215/55ZR17	94W	Std	BSW	90999	7.5 - 6	8.9 on 7	26.3	9.2	791	1477@51	400/AA/A	
225/45ZR17/XL	94W	Std	BSW	60779	8.5 - 7	8.9 on 7.5	25	9	833	1477@50	400/AA/A	
225/50ZR17	94W	Std	BSW	04840	8 - 6	9.2 on 7	25.9	9	803	1477@51	400/AA/A	
225/55ZR17	97W	Std	BSW	96388	8 - 6	9.2 on 7	26.8	9	777	1609@51	400/AA/A	
235/45ZR17	94W	Std	BSW	14987	9 - 7.5	9.3 on 8	25.4	9	821	1477@51	400/AA/A	
235/50ZR17	96W	Std	BSW	05871	8.5 - 6.5	9.7 on 7.5	26.3	9	791	1565@51	400/AA/A	
235/55ZR17	99W	Std	BSW	38748	8.5 - 6.5	9.7 on 7.5	27.2	9	766	1709@51	400/AA/A	
245/40ZR17	91W	Std	BSW	34670	9.5 - 8	9.8 on 8.5	24.7	9	841	1356@51	400/AA/A	
245/45ZR17	95W	Std	BSW	07636	9 - 7.5	9.6 on 8	25.7	9	810	1521@51	400/AA/A	
275/40ZR17	98W	Std	BSW	34594	11 - 9	10.9 on 9.5	25.7	9	810	1653@51	400/AA/A	
215/45ZR18/XL	93W	Std	BSW	14301	8 - 7	8.4 on 7	25.6	9	812	1433@50	400/AA/A	
225/40ZR18/XL	92W	Std	BSW	50207	9 - 7.5	9.1 on 8	25.1	9	829	1389@50	400/AA/A	
225/45ZR18/XL	95W	Std	BSW	49472	8.5 - 7	8.9 on 7.5	25.9	9	802	1521@50	400/AA/A	
235/40ZR18	91W	Std	BSW	08369	9.5 - 8	9.5 on 8.5	25.4	9	819	1356@51	400/AA/A	
235/45ZR18/XL	98W	Std	BSW	93111	9 - 7.5	9.3 on 8	26.3	9	790	1653@50	400/AA/A	
235/50ZR18	97W	Std	BSW	29578	8.5 - 6.5	9.7 on 7.5	27.2	9	762	1609@51	400/AA/A	
245/40ZR18	93W	Std	BSW	68638	9.5 - 8	9.8 on 8.5	25.7	9	809	1433@51	400/AA/A	
245/45ZR18	96W	Std	BSW	24338	9 - 7.5	9.6 on 8	26.7	9	780	1565@51	400/AA/A	
255/35ZR18/XL	94W		BSW	75509	10 - 8.5	10.2 on 9	25	9.3	832	1477@50	400/AA/A	
255/40ZR18	95W		BSW	67847	10 - 8.5	10.2 on 9	26	9.3	799	1521@51	400/AA/A	
275/40ZR18	99W	Std	BSW	35646	11 - 9	10.9 on 9.5	26.7	9	780	1709@51	400/AA/A	
245/40ZR19/XL	98W	Std	BSW	36558	9.5 - 8	9.8 on 8.5	26.7	9	778	1653@50	400/AA/A	
245/45ZR19	98W	Std	BSW	13347	9 - 7.5	9.6 on 8	27.6	9.4	751	1653@51	400/AA/A	
255/35ZR19/XL	96W		BSW	10076	10 - 8.5	10.2 on 9	26	9.3	799	1565@50	400/AA/A	
245/35ZR20/XL	95W	Std	BSW	92515	9.5 - 8	9.8 on 8.5	26.7	9.3	777	1521@50	400/AA/A	
245/45ZR20	99W	Std	BSW	04325	9 - 7.5	9.6 on 8	28.6	9	726	1709@51	400/AA/A	

Tiger Paw® Touring

An affordable, long-lasting passenger tire that provides a quiet, comfortable ride on the highway and around town.



ALL-SEASON TIRE



Benefits of Uniroyal

Reliable performance in all seasons

Highly sipe tread design with an All Season compound

Evacuates water fast for optimal traction on wet pavement

Wide, circumferential tread grooves

Offers durability and reliability on the road

DuraShield® construction

Our most popular line. Now with over 80% coverage.

Tiger Paw® tires have been redefining passenger tire performance since they were first introduced in the 1960s. With 10 new sizes added in 2016, one of the longest-wearing Uniroyal® passenger tires ever now offers more than 80% market coverage for passenger cars.



Popular Replacement Market Fitments:

- Honda Accord
- Toyota Camry
- Ford Fusion
- Honda Odyssey
- Dodge Caravan
- Hyundai Sonata
- Chevrolet Impala

UNIROYAL® Tiger Paw® Touring

Tire Size	Service Description	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/ Mile @45 mph	Max Load Single (lbs@psi)	UTQG	O.E. Fit-ments
175/65R14 NT	82T	70K	BSW	77119	6 - 5	7 on 5	23	11.5	905	1047@44	660/A/B	
185/60R14 NT	82H	55K	BSW	22164	6.5 - 5	7.4 on 5.5	22.8	10.5	914	1047@44	560/A/A	
185/65R14 NT	86H	55K	BSW	09125	6.5 - 5	7.4 on 5.5	23.5	10.5	887	1168@44	560/A/A	
185/65R14 NT	86T	70K	BSW	48477	6.5 - 5	7.4 on 5.5	23.5	11.5	887	1168@44	660/A/B	
195/60R14 NT	86H	55K	BSW	36243	7 - 5.5	7.9 on 6	23.2	10.5	895	1168@44	560/A/A	
175/65R15 NT	84H	55K	BSW	89600	6 - 5	7 on 5	23.9	10.5	867	1102@44	560/A/A	
185/60R15 NT	84T	70K	BSW	61899	6.5 - 5	7.4 on 5.5	23.7	11.5	876	1102@44	660/A/B	
185/65R15 NT	88H	55K	BSW	02784	6.5 - 5	7.4 on 5.5	24.5	10.5	851	1235@44	560/A/A	
185/65R15 NT	88T	70K	BSW	03958	6.5 - 5	7.4 on 5.5	24.5	11.5	851	1235@44	660/A/B	
195/55R15 NT	85V	55K	BSW	03387	7 - 5.5	7.9 on 6	23.4	10.5	888	1135@44	560/A/A	
195/60R15 NT	88H	55K	BSW	38635	7 - 5.5	7.9 on 6	24.2	10.5	859	1235@44	560/A/A	
195/60R15 NT	88T	70K	BSW	84683	7 - 5.5	7.9 on 6	24.2	11.5	859	1235@44	660/A/B	
195/65R15 NT	91H	55K	BSW	24287	7 - 5.5	7.9 on 6	25	10.5	832	1356@44	560/A/A	
195/65R15 NT	91T	70K	BSW	04186	7 - 5.5	7.9 on 6	25	11.5	832	1356@44	660/A/B	
205/60R15 NT	91H	55K	BSW	11177	7.5 - 5.5	8.2 on 6	24.7	10.5	842	1356@44	560/A/A	
205/65R15 NT	94H	55K	BSW	39347	7.5 - 5.5	8.2 on 6	25.5	10.5	817	1477@44	560/A/A	
205/65R15 NT	94T	70K	BSW	13593	7.5 - 5.5	8.2 on 6	25.5	11.5	817	1477@44	660/A/B	
205/65R15 NT	94V	55K	BSW	02265	7.5 - 5.5	8.2 on 6	25.5	10.5	817	1477@44	560/A/A	
P205/70R15 NT	95T	70K	BSW	95091	7 - 5	8.2 on 6	26.3	11.5	790	1499@44	660/A/B	
215/60R15 NT	94H	55K	BSW	32927	7.5 - 6	8.7 on 6.5	25.2	10.5	827	1477@44	560/A/A	
215/65R15 NT	96H	55K	BSW	00827	7.5 - 6	8.7 on 6.5	26	10.5	799	1565@44	560/A/A	
P215/70R15 NT	97T	70K	BSW	36385	7 - 5.5	8.7 on 6.5	26.9	11.5	774	1620@44	660/A/B	
225/60R15 NT	96H	55K	BSW	82963	8 - 6	9 on 6.5	25.6	10.5	812	1565@44	560/A/A	
195/55R16 NT	87V	55K	BSW	49501	7 - 5.5	7.9 on 6	24.4	10.5	852	1201@44	560/A/A	
205/50R16 NT	87H	55K	BSW	49254	7.5 - 5.5	8.4 on 6.5	24.1	10.5	863	1201@44	560/A/A	
205/55R16 NT	91H	55K	BSW	23757	7.5 - 5.5	8.4 on 6.5	24.9	10.5	836	1356@44	560/A/A	
205/55R16 NT	91T	70K	BSW	39575	7.5 - 5.5	8.4 on 6.5	24.9	11.5	836	1356@44	660/A/B	
205/55R16 NT	91V	55K	BSW	83130	7.5 - 5.5	8.4 on 6.5	24.9	10.5	836	1356@44	560/A/A	
205/60R16 NT	92H	55K	BSW	09343	7.5 - 5.5	8.2 on 6	25.7	10.5	810	1389@44	560/A/A	
205/60R16 NT	92T	70K	BSW	02979	7.5 - 5.5	8.2 on 6	25.7	11.5	810	1389@44	660/A/B	
205/60R16 NT	92V	55K	BSW	27863	7.5 - 5.5	8.2 on 6	25.7	10.5	810	1389@44	560/A/A	
205/65R16 NT	95H	55K	BSW	05693	7.5 - 5.5	8.2 on 6	26.4	10.5	786	1521@44	560/A/A	
205/65R16 NT	95T	70K	BSW	19199	7.5 - 5.5	8.2 on 6	26.5	11.5	786	1521@44	660/A/B	
215/55R16 NT	93H	55K	BSW	33445	7.5 - 6	8.9 on 7	25.3	10.5	823	1433@44	560/A/A	
215/60R16 NT	95H	55K	BSW	89116	7.5 - 6	8.7 on 6.5	26.1	10.5	796	1521@44	560/A/A	
215/60R16 NT	95T	70K	BSW	10259	7.5 - 6	8.7 on 6.5	26.1	11.5	796	1521@44	660/A/B	
215/60R16 NT	95V	55K	BSW	15101	7.5 - 6	8.7 on 6.5	26.1	10.5	796	1521@44	560/A/A	

Continued ►

See page 22 for important product notifications.

UNIROYAL® Tiger Paw® Touring

Tire Size	Service Description	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/ Mile @45 mph	Max Load Single (lbs@psi)	UTQG	O.E. Fit-ments
215/65R16 NT	98T	70K	BSW	27163	7.5 - 6	8.7 on 6.5	27	11.5	770	1653@44	660/A/B	
P215/70R16 NT	99T	70K	BSW	83454	7 - 5.5	8.7 on 6.5	27.9	11.5	746	1709@44	660/A/B	
225/50R16 NT	92V	55K	BSW	11228	8 - 6	9.2 on 7	24.9	10.5	836	1389@44	560/A/A	
225/55R16 NT	95V	55K	BSW	17035	8 - 6	9.2 on 7	25.8	10.5	808	1521@44	560/A/A	
225/60R16 NT	98H	55K	BSW	01451	8 - 6	9 on 6.5	26.6	10.5	782	1653@44	560/A/A	
225/60R16 NT	98T	70K	BSW	08427	8 - 6	9 on 6.5	26.6	11.5	782	1653@44	660/A/B	
225/65R16 NT	100T	70K	BSW	26033	8 - 6	9 on 6.5	27.5	11.5	757	1764@44	660/A/B	
235/60R16 NT	100H	55K	BSW	39895	8.5 - 6.5	9.5 on 7	27.1	10.5	768	1764@44	560/A/A	
235/60R16 NT	100T	70K	BSW	46656	8.5 - 6.5	9.5 on 7	27.1	11.5	768	1764@44	660/A/B	
235/65R16 NT	103T	70K	BSW	91449	8.5 - 6.5	9.5 on 7	28	11.5	742	1929@44	660/A/B	
205/50R17/XL NT	93V	55K	BSW	26308	7.5 - 5.5	8.4 on 6.5	25.1	10.5	828	1433@44	560/A/A	
215/45R17 NT	87V	55K	BSW	24169	8 - 7	8.4 on 7	24.6	10.5	844	1201@44	560/A/A	
215/50R17 NT	91T	70K	BSW	89153	7.5 - 6	8.9 on 7	25.5	11.5	815	1356@44	660/A/B	
215/50R17 NT	91V	55K	BSW	28139	7.5 - 6	8.9 on 7	25.5	10.5	815	1356@44	560/A/A	
215/55R17 NT	94H	55K	BSW	85740	7.5 - 6	8.9 on 7	26.3	10.5	791	1477@44	560/A/A	
215/55R17 NT	94V	55K	BSW	10405	7.5 - 6	8.9 on 7	26.3	10.5	791	1477@44	560/A/A	
P215/60R17 NT	95T	70K	BSW	26289	7.5 - 6	8.7 on 6.5	27.2	11.5	766	1521@44	660/A/B	
215/60R17 NT	96H	55K	BSW	05507	7.5 - 6	8.7 on 6.5	27.1	10.5	766	1565@44	560/A/A	
215/65R17 NT	99T	70K	BSW	36755	7.5 - 6	8.7 on 6.5	28	11.5	742	1709@44	660/A/B	
225/45R17 NT	91H	55K	BSW	42731	8.5 - 7	8.9 on 7.5	24.9	10.5	833	1356@44	560/A/A	
225/45R17 NT	91V	55K	BSW	57268	8.5 - 7	8.9 on 7.5	24.9	10.5	833	1356@44	560/A/A	
225/50R17 NT	94T	70K	BSW	06986	8 - 6	9.2 on 7	25.9	11.5	803	1477@44	660/A/B	
225/50R17 NT	94V	55K	BSW	30673	8 - 6	9.2 on 7	25.9	10.5	803	1477@44	560/A/A	
225/55R17 NT	97H	55K	BSW	58107	8 - 6	9.2 on 7	26.7	10.5	777	1609@44	560/A/A	
225/55R17 NT	97T	70K	BSW	15125	8 - 6	9.2 on 7	26.8	11.5	777	1609@44	660/A/B	
225/55R17 NT	97V	55K	BSW	03804	8 - 6	9.2 on 7	26.8	10.5	777	1609@44	560/A/A	
225/60R17 NT	99H	55K	BSW	37337	8 - 6	9 on 6.5	27.6	10.5	753	1709@44	560/A/A	
225/60R17 NT	99T	70K	BSW	11254	8 - 6	9 on 6.5	27.6	11.5	753	1709@44	660/A/B	
225/65R17 NT	102T	70K	BSW	63776	8 - 6	9 on 6.5	28.5	11.5	730	1874@44	660/A/B	
235/55R17 NT	99H	55K	BSW	37073	8.5 - 6.5	9.7 on 7.5	27.2	10.5	766	1709@44	560/A/A	
235/60R17 NT	102T	70K	BSW	38179	8.5 - 6.5	9.5 on 7	28.1	11.5	740	1874@44	660/A/B	
215/55R18 NT	95T	70K	BSW	29596	7.5 - 6	8.9 on 7	27.3	11.5	762	1521@44	660/A/B	
225/45R18 NT	91V	55K	BSW	51556	8.5 - 7	8.9 on 7.5	25.9	10.5	802	1356@44	560/A/A	
225/50R18 NT	95T	70K	BSW	11427	8 - 6	9.2 on 7	26.9	11.5	774	1521@44	660/A/B	
225/55R18 NT	98H	55K	BSW	02527	8 - 6	9.2 on 7	27.7	10.5	749	1653@44	560/A/A	
225/60R18 NT	100H	55K	BSW	21324	8 - 6	9 on 6.5	28.6	10.5	727	1764@44	560/A/A	
245/45R18 NT	96V	55K	BSW	82489	9 - 7.5	9.6 on 8	26.6	10.5	780	1565@44	560/A/A	



Tiger Paw[®] AWP II

A longtime favorite available with a classic white sidewall design.



ALL-SEASON TIRE



Benefits of Uniroyal

All-season tire available with a Classic White Sidewall design

All Season tread compound

Delivers a quiet and comfortable ride

Computer-phased tread design

Long, even treadwear with a 65,000 miles warranty

Optimized footprint shape

There's 125 years of history behind our tires.

Founded in 1892 as the U.S. Rubber Company, we've been making tires for almost as long as there have been automobiles to put them on and roads to drive on. Over all those years and over all those miles, we've become a trusted brand in the lives of millions of American drivers.



Popular Replacement Market Fitments:

Dodge Calibur

Buick Century

Chevrolet Impala

Honda Accord

UNIROYAL® Tiger Paw® AWP II

Tire Size	Service Description	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/ Mile @45 mph	Max Load Single (lbs@psi)	UTQG	O.E. Fit-ments
P155/80R13	79S	65K	WSW	28072	5 - 4	6.2 on 4.5	22.8	8.5	914	959@44	560/A/B	
P175/70R13	82T	65K	BSW	35705	6 - 4.5	7 on 5	22.7	11	917	1036@44	560/A/B	
P175/70R14	84T	65K	BSW	08059	6 - 4.5	7 on 5	23.7	10.5	878	1102@44	620/A/B	
P185/70R14	87T	65K	BSW	03525	6 - 4.5	7.4 on 5.5	24.3	11	858	1201@44	620/A/B	
P185/70R14	87T	65K	WSW	04910	6 - 4.5	7.4 on 5.5	24.3	11	858	1201@44	620/A/B	
P185/75R14	89S	65K	WSW	58787	6 - 4.5	7.2 on 5	25	11	833	1290@44	620/A/B	
P195/65R14	88T	65K	BSW	06039	7 - 5.5	7.9 on 6	24	10.5	866	1235@44	620/A/B	
P195/70R14	90T	65K	BSW	03330	6.5 - 5	7.9 on 6	24.8	11	839	1312@44	620/A/B	
P195/75R14	92S	65K	WSW	48403	6.5 - 5	7.7 on 5.5	25.5	11	815	1400@44	620/A/B	
P205/70R14	93T	65K	BSW	13155	7 - 5	8.2 on 6	25.4	11.5	821	1433@44	620/A/B	
P205/75R14	95S	65K	WSW	11937	7 - 5	8 on 5.5	26.1	11.5	796	1532@44	620/A/B	
P215/70R14	96T	65K	WSW	28435	7 - 5.5	8.7 on 6.5	25.9	11.5	803	1554@44	620/A/B	
P205/75R15	97S	65K	WSW	10183	7 - 5	8 on 5.5	27.1	11.5	767	1598@44	620/A/B	
P215/60R15	93T	65K	BSW	16494	7.5 - 6	8.7 on 6.5	25.2	10.5	827	1411@44	620/A/B	
P215/65R15	95T	65K	BSW	03300	7.5 - 6	8.7 on 6.5	26	10.5	799	1510@44	620/A/B	
P215/70R15	97T	65K	WSW	33471	7 - 5.5	8.7 on 6.5	26.9	11.5	774	1620@44	620/A/B	

Laredo® Cross Country Tour

The affordable SUV, CUV and light truck tire with the perfect combination of durability, long-lasting wear and all-season performance.



ALL-SEASON TIRE



Benefits of Uniroyal

A comfortable and quiet highway ride

Computer-phased tread design

Evacuates water fast for optimal traction on wet pavement

Wide, circumferential (tread) grooves

Offers durability and reliability on the road, with a 60,000-Mile Manufacturer's Limited Warranty*

Solid shoulder tread block design

The perfect tire for your everyday adventures.

For more than a century, we've been getting drivers to important places, even if it's just to drop the kids off or to pick up the groceries. The Uniroyal® Laredo® Cross Country Tour is for those SUV, CUV and light truck drivers who may be off-loading more than off-roading, but who still need a hard-working tire.



Popular Replacement Market Fitments:

Toyota RAV4

Toyota Highlander

Ford Escape

Chevrolet Traverse

Honda Pilot

Hyundai Santa Fe

UNIROYAL® Laredo® Cross Country Tour

Tire Size	Service Description	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/ Mile @45 mph	Max Load Single (lbs@psi)	UTQG	O.E. Fit-ments
P225/70R15	100T	60K	ORWL	67118	7.5 - 6	9 on 6.5	27.4	12.5	758	1594@44	540/A/B	
P235/70R15	102T	60K	ORWL	00648	8 - 6	9.5 on 7	28	12.5	743	1724@44	540/A/B	
235/75R15/XL	109T	60K	ORWL	97570	8 - 6	9.3 on 6.5	28.8	12.5	721	2065@50	540/A/B	
P215/70R16	99T	60K	BSW	31724	7 - 5.5	8.7 on 6.5	27.9	12.5	746	1554@44	540/A/B	
P225/70R16	101T	60K	ORWL	83997	7.5 - 6	9 on 6.5	28.4	12.5	732	1654@44	540/A/B	
225/75R16/XL	108T	60K	ORWL	18728	7.5 - 6	8.8 on 6	29.2	12.5	710	2005@50	540/A/B	
P235/65R16	101T	60K	BSW	42459	8.5 - 6.5	9.5 on 7	28	12.5	742	1654@44	540/A/B	
235/70R16	106T	60K	ORWL	06171	8 - 6	9.5 on 7	29	12.5	718	1904@44	540/A/B	
245/70R16	107T	60K	ORWL	73932	8 - 6.5	9.8 on 7	29.5	12.5	704	1955@44	540/A/B	
245/75R16	111T	60K	ORWL	10871	8 - 6.5	9.8 on 7	30.5	12.5	683	2185@44	540/A/B	
265/70R16	112T	60K	ORWL	68386	9 - 7	10.7 on 8	30.6	12.5	679	2245@44	540/A/B	
225/65R17	102T	60K	BSW	64935	8 - 6	9 on 6.5	28.5	12.5	730	1704@44	540/A/B	
P235/60R17	100T	60K	BSW	62794	8.5 - 6.5	9.5 on 7	28.1	12.5	740	1604@44	540/A/B	
P235/65R17	103T	60K	BSW	40065	8.5 - 6.5	9.5 on 7	29.1	12.5	716	1754@44	540/A/B	
245/65R17	107T	60K	ORWL	74935	8.5 - 7	9.8 on 7	29.5	12.5	704	1955@44	540/A/B	
255/65R17	110T	60K	ORWL	87325	9 - 7	10.2 on 7.5	30.1	12.5	691	2125@44	540/A/B	
265/65R17	112T	60K	BSW	04761	9.5 - 7.5	10.7 on 8	30.6	12.5	681	2245@44	540/A/B	
265/70R17	115T	60K	ORWL	40030	9 - 7	10.7 on 8	31.7	12.5	657	2436@44	540/A/B	
P235/60R18	102T	60K	BSW	31514	8.5 - 6.5	9.5 on 7	29.1	12.5	715	1704@44	540/A/B	
P235/65R18	104T	60K	BSW	24461	8.5 - 6.5	9.5 on 7	30	12.5	692	1804@44	540/A/B	
255/65R18	111T	60K	BSW	26607	9 - 7	10.2 on 7.5	31.1	12.5	669	2185@44	540/A/B	
245/55R19	103T	60K	BSW	10330	8.5 - 7	10 on 7.5	29.7	12.5	702	1754@44	540/A/B	
P245/50R20	102T	60K	BSW	24129	8.5 - 7	10 on 7.5	29.7	12.5	701	1704@44	540/A/B	
275/55R20	113T	60K	BSW	52100	9.5 - 7.5	11.2 on 8.5	31.9	12.5	652	2305@44	540/A/B	

Laredo® Cross Country

A quality SUV/light truck tire featuring raised white lettering



Benefits of Uniroyal

Long, even treadwear

Solid shoulder tread block design

Enhances off-pavement traction and helps improve tread life.

Full tread depth

Wet grip and all-season traction that sticks to the road

Optimized tread compound

Not just on the road, but towering over it.

Originally a Ferris wheel at the 1964/1965 New York World's Fair, the Giant Uniroyal® Tire now sits beside I-94 just outside Detroit, MI. Eight stories tall, the Giant Tire has become an important symbol of Uniroyal's long history and a cultural icon known the world over.



Popular Replacement Market Fitments:

- Chevrolet Silverado
- Chevrolet Trailblazer
- Dodge Ram

Tire Size	Service Description	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/ Mile @45 mph	Max Load Single (lbs@psi)	Max Load Dual (lbs@psi)	UTQG	O.E. Fitments
31x10.50R15/C	109R	50K	ORWL	91266	9 - 7	10.5 on 8.5	30.5	15	682	2270@50			
LT265/75R16/E	123R	50K	ORWL	90382	8 - 7	10.5 on 7.5	31.7	15	657	3415@80	3085@80		
LT285/75R16/D	122R	50K	ORWL	89654	9 - 7.5	11.3 on 8	32.8	16	634	3305@65	3000@65		
P255/70R16	109S	55K	ORWL	59382	8.5 - 6.5	10.2 on 7.5	30.1	13	691	2065@44		540/A/B	
P265/75R16	114S	55K	ORWL	93470	9 - 7	10.5 on 7.5	31.7	13	657	2365@44		540/A/B	



Laredo® HD/H™

The durable commercial tire for everyday job sites.



Benefits of Uniroyal

Absorbs impacts and carries heavy loads

Two polyester carcass plies

Provides all-season traction

Deep Lateral grooves and sipes

Delivers long, even treadwear

Solid shoulder tread block design

Tires so tough we named them after our testing track.

The Laredo® brand of tires got its name from our 5-mile testing track in Laredo, Texas. We've tested our CUV/SUV/light truck tires to make sure you can get almost anywhere on these durable tires.



Popular Replacement Market Fitments:

Ford Econoline Van

Tire Size	Service Description	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/ Mile @45 mph	Max Load Single (lbs@psi)	Max Load Dual (lbs@psi)	UTQG	O.E. Fitments
LT225/75R16/E	115S	50K	BSW	97652	7 - 6	8.8 on 6	29.1	13	715	2680@80	2470@80		GM



UNIROYAL[®]
FOR EVERYTHING YOU VALUE™

Laredo® HD/T™

The all-terrain commercial tire for hard-to-reach job sites and tough weather conditions.



Benefits of Uniroyal

Serious on- and off-road traction.

Aggressive tread design

Helps conquer the winter elements.

Studable tire with RMA Severe Snow Traction rating

Offers durability and reliability on- and off-road.

DuraShield® construction

A great value for fleet vehicles.

This is a tire your fleet customers can count on to get where they need to be, no matter the obstacles. The Uniroyal® Laredo® HD/T™ commercial tire barrels through tough environments and challenging weather with confidence.



Popular Replacement Market Fitments:

Ford Econoline Van

Tire Size	Service Description	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/ Mile @45 mph	Max Load Single (lbs@psi)	Max Load Dual (lbs@psi)	UTQG	O.E. Fitments
LT215/85R16/D	110Q	Std	BSW	88794	7 - 5.5	8.5 on 6	30.2	18	688	2335@65	2150@65		
LT225/75R16/E	115Q	Std	BSW	92503	7 - 6	8.8 on 6	29.3	18	710	2680@80	2470@80		
LT235/85R16/E	120Q	Std	BSW	86389	7 - 6	9.4 on 6.5	31.6	18	658	3042@80	2778@80		
LT245/75R16/E	120Q	Std	BSW	46510	8 - 6.5	10 on 7	30.6	18	680	3042@80	2778@80		
LT265/75R16/E	123Q	Std	BSW	54052	8 - 7	10.5 on 7.5	31.8	15.5	654	3415@80	3085@80		



UNIROYAL
FOR EVERYTHING YOU VALUE™

DuraShield®

The driving force behind Uniroyal® Tiger Paw® and Laredo® Tires.



At the heart of every Uniroyal® Tiger Paw® and Laredo® tire is DuraShield® construction: our unique combination of features for durability, dependability and performance.

Pyramidal steel belt construction with high content natural rubber coating

Two steel belts of different widths (wider on the bottom) help reduce stress at the belt edges. The coating has a high content of natural rubber that helps tires run cooler.

Insulating belt edge strips

Cushion and insulate the steel belts from working against each other. Designed to reduce stress on the belt edges.

Heavy gauge inner liner

Minimizes oxygen permeation that can lead to a degradation of the steel belt structure. Helps extend belt and tire life.



Other features

- High-density casing
- High-strength sidewalls
- Dual-compound tread
- High-strength beads

Speed Ratings Reference



SPEED SYMBOL	SPEED CATEGORY (MAX. SPEED)	OPEN-ENDED SPEED CATEGORY
Q	100 mph	
R	106 mph	
S	112 mph	
T	118 mph	
U	124 mph	
H	130 mph	
V	149 mph	
W	168 mph	*ZR ↓
Y	186 mph	
(Y)	Above 186 mph	

***ZR SPEED RATING DEFINED**

For tires having a maximum speed capability above 240 km/h (149 mph), a “Z” may appear in the tire size designation. For tires having a maximum speed capability above 300 km/h (186 mph), a “Z” must appear in the size designation and the service description must include a “Y” in parenthesis. Consult the tire manufacturer for the tire’s maximum speed capability when there is no service description.

Example:	TIRE DESIGNATION	MAXIMUM SPEED
	P275/40ZR17	Above 240 km/h (149 mph)
	P275/40R17 93Y	300 km/h (186 mph)
	P275/40ZR17 93Y	300 km/h (186 mph)
	P275/40R17 (93Y)	Above 300 km/h (186 mph)
		Consult the tire manufacturer

Note: Exceeding the lawful speed limit is neither recommended nor endorsed.

Important Product Notifications:

Passenger sizes used in CUV/SUV/Light Truck applications have reduced load capacity. This will differ from the maximum load branded on the tire sidewall. Government UTQG Ratings do not apply to light truck sized tires or winter tires.



1. The sizes shown are average design values for tires measured on specified measuring rim widths. Some tires may vary from this value by +/-3% of the section height (affecting overall diameter), and +/-4% of the section width.
2. Section width varies approximately 0.2" (5 mm) for every 0.5" change in rim width.
3. Tread patterns are often tuned to accommodate different tire widths. Tires for a particular dimension of a given tire line may vary in appearance from the tire shown in the photograph.

WARNING: Serious or fatal injury may result from tire failure due to underinflation or overloading. To ensure correct air pressure and vehicle load, refer to vehicle owner's manual or tire information placard on the vehicle. Serious injury or death may result from explosion of tire/rim assembly due to improper mounting. Only tire professionals should mount tires and they should never inflate beyond 40 psi to seat the beads. Before mixing types of tires in any configuration on any vehicle, be sure to check the vehicle owner's manual for its recommendations.

DANGER: Never mount a 16" diameter tire on a 16.5" rim.

DANGER: Never mount a 17" diameter tire on a 17.5" rim.

Q-Speed Rated Sizes:

Maximum Speed (mph)	100
Inflation Increase (psi)	0.0
Load Capacity (% of max.)	100

R-Speed Rated Sizes:

Maximum Speed (mph)	100	106
Inflation Increase (psi)	0.0	1.0
Load Capacity (% of max.)	100	100

S-Speed Rated Sizes:

Maximum Speed (mph)	100	106	112
Inflation Increase (psi)	0.0	1.0	2.0
Load Capacity (% of max.)	100	100	100

T-Speed Rated Sizes:

Maximum Speed (mph)	100	106	112	118
Inflation Increase (psi)	0.0	1.0	2.0	3.0
Load Capacity (% of max.)	100	100	100	100

H-Speed Rated Sizes:

Maximum Speed (mph)	100	106	112	118	124	130
Inflation Increase (psi)	0.0	1.0	2.0	3.0	4.0	5.0
Load Capacity (% of max.)	100	100	100	100	100	100

V-Speed Rated Sizes:

Maximum Speed (mph)	100	106	112	118	124	130	136	143	149
Inflation Increase (psi)	0.0	1.0	2.0	3.0	4.0	5.0	5.0	5.0	5.0
Load Capacity (% of max.)	100	100	100	100	100	100	97	94	91

W-Speed Rated Sizes:

Maximum Speed (mph)	118	124	130	136	143	149	155	161	168
Inflation Increase (psi)	0.0	1.5	3.0	4.5	6.0	7.5	7.5	7.5	7.5
Load Capacity (% of max.)	100	100	100	100	100	100	95	90	85

Y-Speed Rated Sizes:

Maximum Speed (mph)	118	124	130	136	143	149	155	161	168	174	180	186
Inflation Increase (psi)	0.0	0.0	0.0	0.0	1.5	3.0	4.5	6.0	7.5	7.5	7.5	7.5
Load Capacity (% of max.)	100	100	100	100	100	100	100	100	100	95	90	85

(Y)-Speed Rated Sizes:

Maximum Speed (mph)	118	124	130	136	143	149	155	161	168	174	180	186
Inflation Increase (psi)	0.0	0.0	0.0	0.0	1.5	3.0	4.5	6.0	7.5	7.5	7.5	7.5
Load Capacity (% of max.)	100	100	100	100	100	100	100	100	100	95	90	85

For speeds above 186 mph (300 km/h), consult your vehicle manufacturer and tire dealer.

Inflation pressure increase must not exceed the maximum pressure branded on the tire sidewall. When a customer requests a replacement tire with a lower speed rating than the original equipment tire, you must clearly communicate to him or her that the handling of the vehicle may be different, and that its maximum speed capability is limited to that of the lowest speed-rated tire on the vehicle. Exceeding the lawful speed limit is neither recommended nor endorsed.

For high-speed driving, additional inflation pressure and possibly reduced tire loading and/or upsizing is required. In the absence of specific recommendations by the vehicle manufacturer, use the following guidelines based on those in the European Tyre and Rim Technical Organization Standards Manual.

For speeds over 100 mph (160 km/h), load and inflation must be adjusted according to the table below.


OE Code [Original Equipment Key]: GM = General Motors


Government UTQG Ratings do not apply to Light Truck tires that are LT metric or flotation size.

For all P-metric sizes: Passenger sizes used in Light Truck/SUV applications have reduced load capacity. This will differ from the maximum load branded on the tire sidewall.

XL=Extra Load

For Laredo® HD/T™ all sizes accept #16 stud pins.

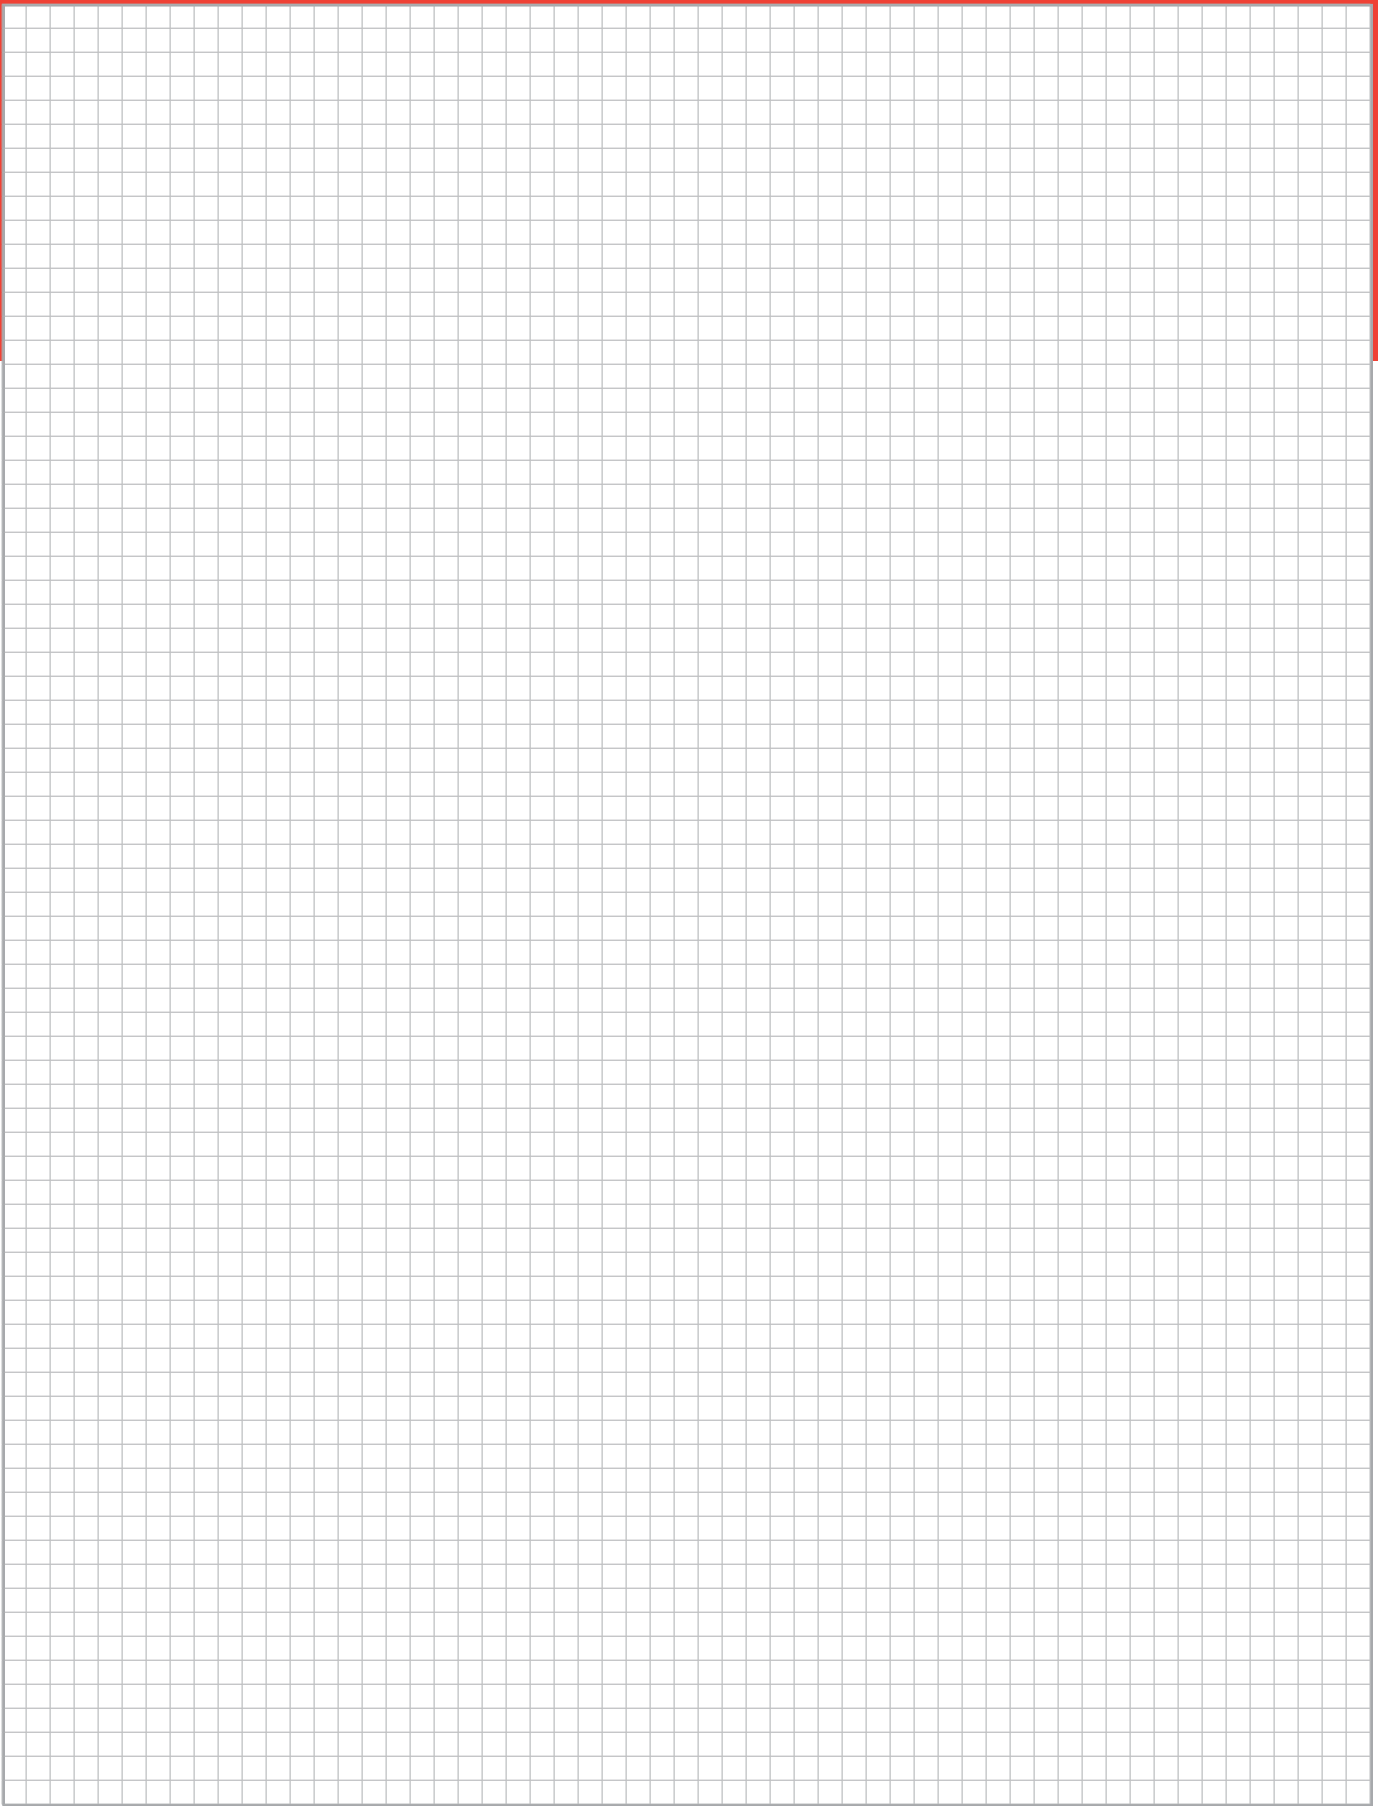

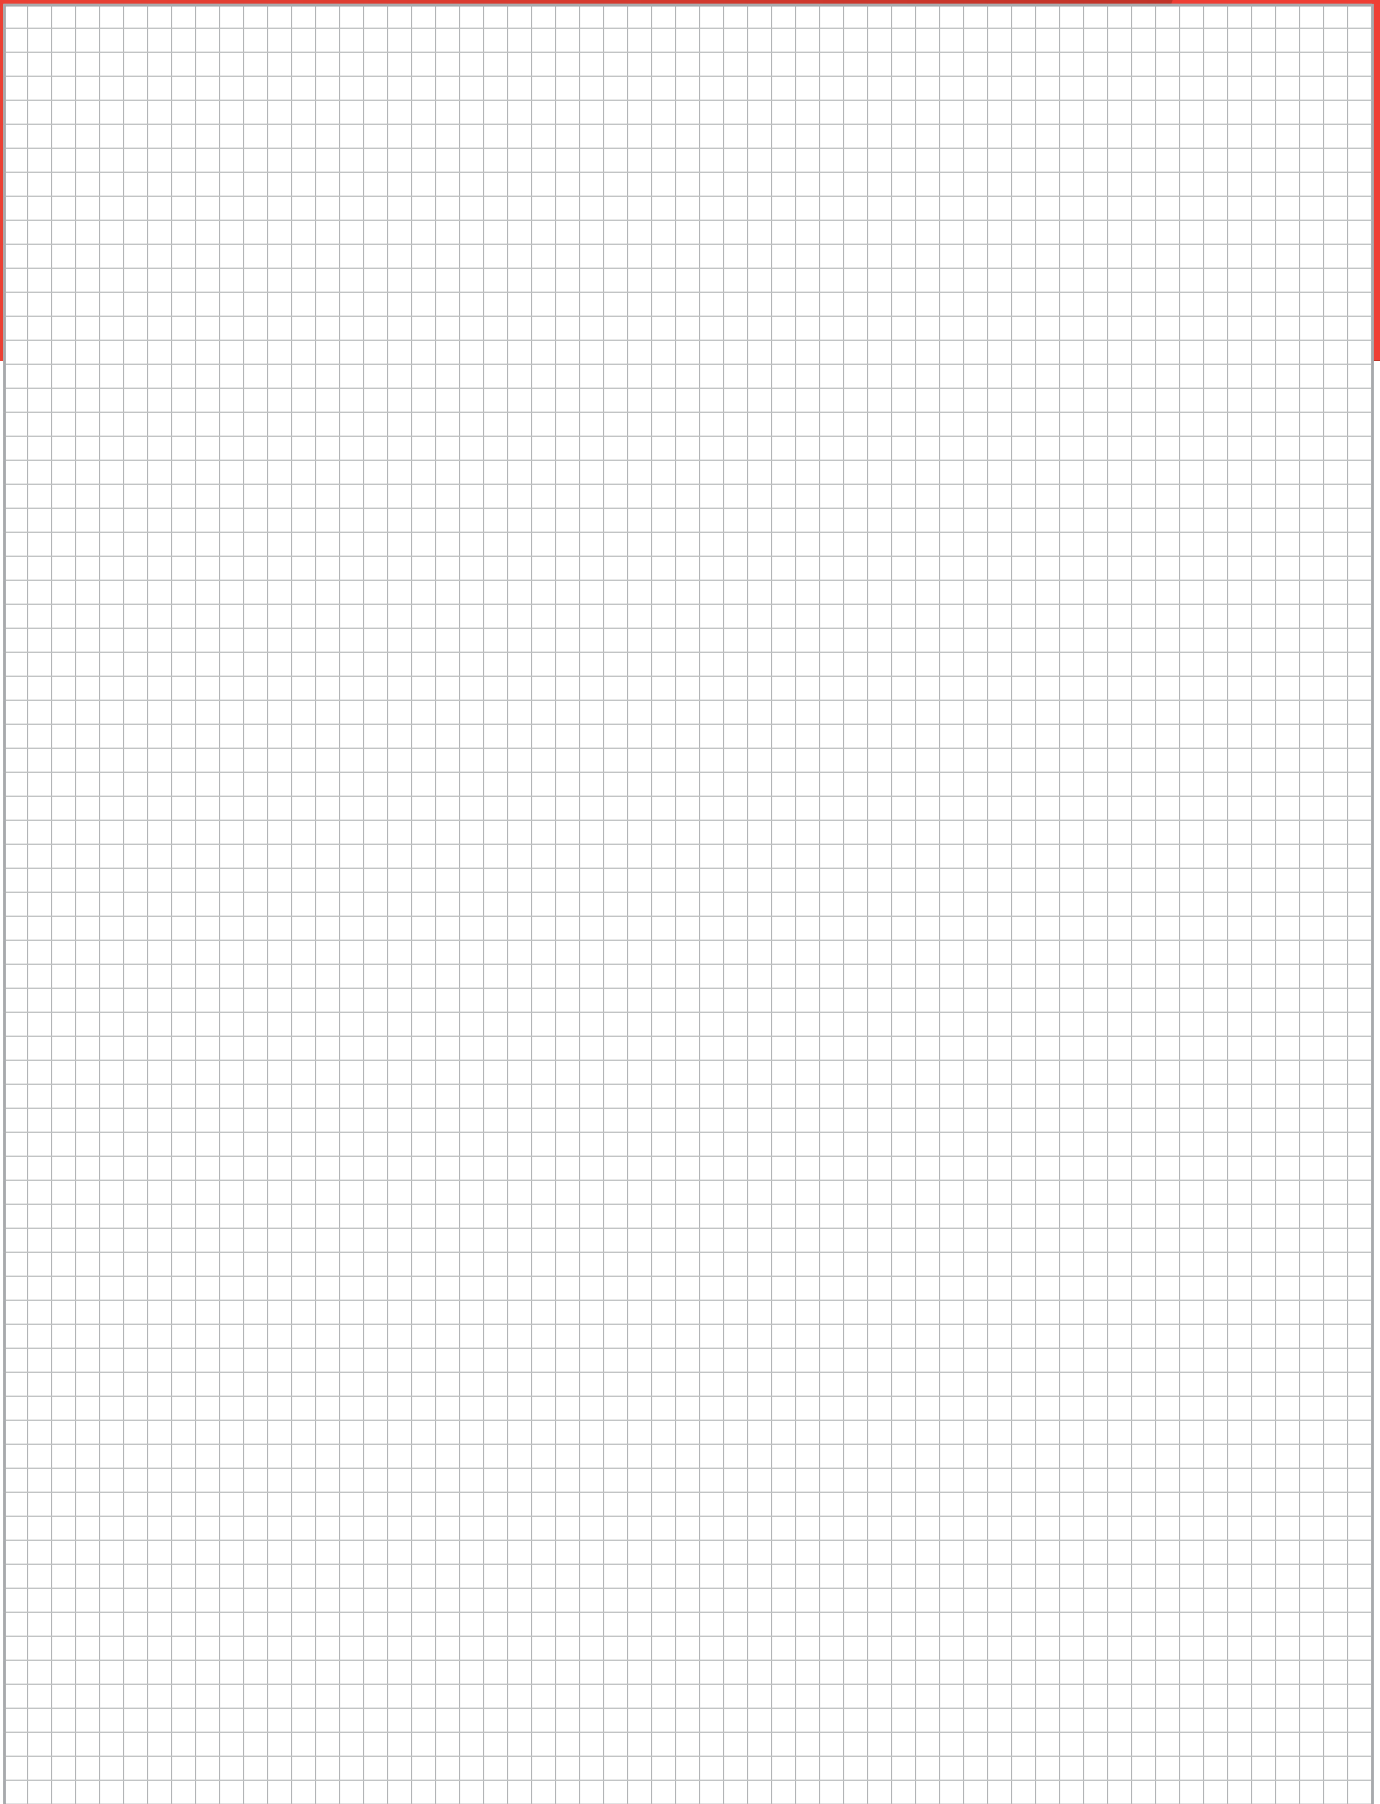

Moving America ahead since 1892



**UNITED STATES RUBBER
EXPORT Co., Ltd.**

NEW YORK
**WORLD'S
FAIR**
1964
1965



UNIROYAL



For 125 years, we've done everything but stay still.

The United States Rubber Company began making solid and pneumatic tires soon after incorporating in 1892. By 1917, we started using the U.S. Royal® name for our tires, and during World War II, the company produced military tires and other rubber goods for the war effort.


By 1960, we were one of the first tiremakers to turn out more than one million tires in one year.

During the 1960s, U.S. Royal became an iconic American brand with a new name (Uniroyal!) and the introduction of the popular Tiger Paw® tire, which was soon original equipment on several of the decade's most famous muscle cars, like the Ford Mustang and the Pontiac GTO.

As one of the "Big 4" tire brands, Uniroyal® pushed ahead with innovative technology like self-sealing tires (re-named NailGuard® in 1994) and several new tire lines. Becoming a part of the Michelin® family of tires in 1990, Uniroyal continued to impress with a broad range of tires for passenger cars, light trucks, SUVs and commercial vehicles.

125 years down the road, Uniroyal is still moving America ahead with tires that bring all-season dependability that's surprisingly affordable to our value-seeking consumers.



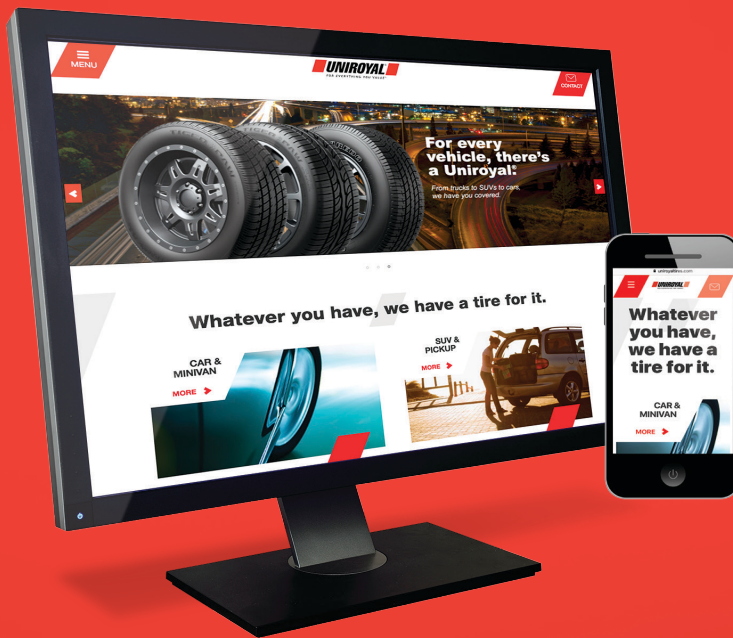

Uniroyal® is rolling ahead. Visit the new UniroyalTires.com.