

SoundOff
Signal 
Smart Design.

EMERGENCY



emergency vehicle
safety catalog



SoundOff Signal ® Smart Design.

For over 40 years, SoundOff Signal has provided innovative vehicle safety solutions for the markets we serve.

Our rich history commitment to our customers, and problem-solving design have resulted in an organization that delivers products and services you can trust.





quick

REFERENCE



Lightbars..... 4

Directional Warning 22

Perimeter Lighting..... 28

Sirens and Speakers 68

Electronics..... 76

Interior Lighting 92

Beacons..... 96

Work Area Lighting 108



sales PROFESSIONALS



Our experienced sales professionals at SoundOff Signal take pride in working with our customers, whom we view as strategic business partners. Our knowledgeable sales people understand which products and services build a solid foundation for you, to help your organization succeed.

sales@soundoffsignal.com



1.800.338.7337

Thomas Palumbo, **Vice President of Sales and Marketing**

Bob Van Ee
Northeast Regional Sales Manager

Rob Dykema
Northwest Regional Sales Manager

Chad Wollen
Southeast Regional Sales Manager

Matt Blanc
Southwest Regional Sales Manager

District Sales Managers

Cliff Bolhouse

Paul Cooke

Chris Corwith

Mike Cranmer

Seth Gamblin

Tom Grubba

David Lingle

Jennifer Cadaret
Corporate Sales Administrator

Phil Von Tom
**Director
North America Business Development**

Tom Brown
Federal Government Sales Manager

INTERNATIONAL

Fabrizio Giovara
Director of Eurasia Sales

Adam Klein
Internal Account Manager

COMMERCIAL VEHICLE PRODUCTS

Marc Riccio
National Account Manager

Paul Bukaweski
Customer Service/Sales

customer SERVICES



From left to right (front row):
Dawn Ramirez, **Customer Service Supervisor**

Sandy Krysch and Nicole Behrens
Customer Service Representatives

(back row):
Jayme Brouwer, Paul Bukaweski and Jane Phillips
Customer Service Representatives

At SoundOff Signal, customer service means a commitment to you—making your buying experience the best in the business. Our goal is to ship your order on time and resolve any potential issues that arise within 24 hours. The “first responders” of our Customer Service team offer our customers a blend of skills and industry knowledge, combined with a “can do” attitude that is unmatched. We’re happy to help you get what you need to keep your schedule on track.

customerservice@soundoffsignal.com



technical SERVICES




From left to right:
Ron Shelden, **Technical Department Manager**
Melissa Frick, **Technical Administrator**
Jerold Worthem, Bruce Hibma and Dan Lay
Electronic Technicians

Our technical services team is comprised of highly skilled and professional personnel who are ready to assist you with technical support and service, product repair, and returns. Feel free to contact our team between 8:00 a.m. - 5:00 p.m., Eastern Time.

techservices@soundoffsignal.com



IT ALL
begins
HERE...

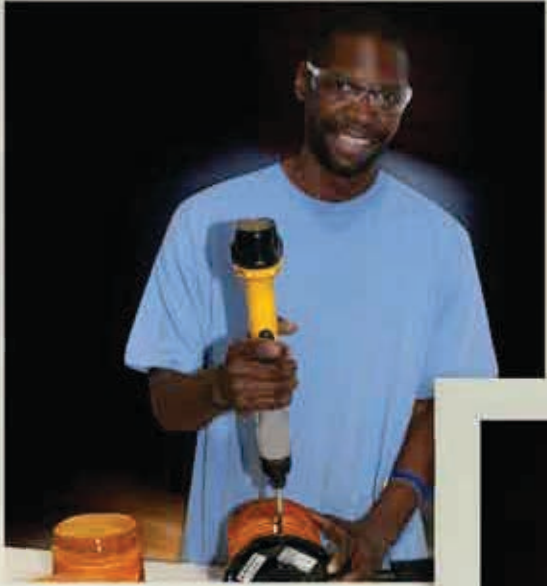

Greg Harris
Lighting Team Member
2 Years

Nick Elgersma
Lightbar Team Member
3 Years

Chris Northuis
Lighting Team Member
13 Years

Hudsonville, MI Facility



SoundOff
Signal  [®]
Smart Design.

SoundOff
Signal [®]
Smart Design.



Warning Bars

Exterior ULTRALITE	23
Interior ULTRALITE	25
Exterior TRAFFIC MASTER	27



UltraLITE Exterior Directional Warning Bars



Solid or Split Standard Bars

- 2 Module #EL3D02A00(x)
- 4 Module #EL3D04A00(x)
- 8 Module #EL3D08A00(x)
- 12 Module #EL3D12A00(x)

Single Warning Ends (flash with arrow)

- 8 Module #EL3D08A10(x)
- 12 Module #EL3D12A10(x)

Dual Warning Ends (flash with arrow)

- 12 Module #EL3D12A20(x)

Independent Warning Ends (ends flash independently from arrow)


- 8 Module, Single Ends #EL3D08B10(x)
- 12 Module, Single Ends #EL3D12B10(x)
- 12 Module, Dual Ends #EL3D12B20(x)

REPLACE (x) IN ORDER NUMBER FOR COLOR SELECTION

Solid Colors =



Dual Colors =

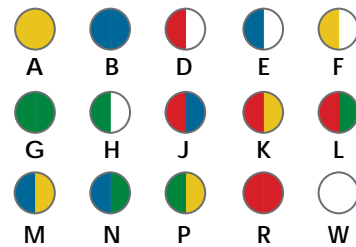

Interior and Exterior Color Choices

On 10 - 30 Vdc Part Numbers, add "-24" to the end of part number. Example: a 24 volt 4 Module bar would be #EL3D04A00J-24

Features

- Custom color configurations offered for exterior 4, 8 or 12 module bars (see website for order form)
- Program up to 3 warning patterns on the 8 and 12 module dual/split color bars
- Compatible with our directional arrow switch
- Includes adjustable height universal "L"-brackets (pair) for dash/deck or headliner mounts w/ 14' cable



1.800.338.7337

DIRECTIONAL WARNING

www.soundoffsignal.com



TECHNICAL SPECIFICATIONS

FLASH PATTERNS		12 to 20 flash patterns
VOLTAGE		10 - 16 Vdc or 10 - 30 Vdc
CURRENT DRAW		Less than 1 amp per module
TECHNOLOGY/Gen3LEDs	2 Module	6 LEDs
	4 Module	12 LEDs
	8 Module	24 LEDs
	12 Module	36 LEDs
OPERATING TEMPERATURE		-40° to +65° C / -40° to +149° F
DIMENSIONS	2 Module	6.9" (18 cm) L x 1.5" (38 mm) H x 1.7" (43 mm) D
	4 Module	13.25" (34 cm) L x 1.5" (38 mm) H x 1.7" (43 mm) D
	8 Module	26" (66 cm) L x 1.5" (38 mm) H x 1.7" (43 mm) D
	12 Module	38.75" (98 cm) L x 1.5" (38 mm) H x 1.7" (43 mm) D
WARRANTY		Five-year

1.800.338.7337

DIRECTIONAL WARNING

www.soundoffsignal.com

UltraLITE Interior Directional Warning Bars



Solid or Split Standard Bars

4 Module Bar	#EL3H04A00(x)
8 Module Bar	#EL3H08A00(x)
12 Module Bar	#EL3H12A00(x)

Warning Ends (flash w/ arrow)

8 Module, Single	#EL3H08A10(x)
12 Module, Single	#EL3H12A10(x)
12 Module, Dual	#EL3H12A20(x)

Independent Warning Ends

(ends flash independently from arrow)	
8 Module, Single	#EL3H08B10(x)
12 Module, Single	#EL3H12B10(x)
12 Module, Dual	#EL3H12B20(x)

Features

- Intense warning power provides a distinct safety advantage
- Each module has 3 very bright, high bin Gen3 LEDs for better reliability and performance
- Slim, narrow design is perfect for headliner, dash/windshield and rear deck mounts in all types of vehicles
- Program up to 3 warning patterns on the 8 and 12 module dual/split color bars
- Compatible with our directional arrow switch
- Includes adjustable height universal "L"-brackets (pair) for dash/deck or headliner mounts w/ 14' cable

REPLACE (x) IN ORDER NUMBER FOR COLOR SELECTION

Solid Colors =

A	B	G	R	W

Dual Colors =

A	B	D	E	F
G	H	J	K	L
M	N	P	R	W

Interior and Exterior Color Choices





TECHNICAL SPECIFICATIONS

FLASH PATTERNS	12 to 20 flash patterns
VOLTAGE	10 - 16 Vdc
CURRENT DRAW	Less than 1 amp per module
TECHNOLOGY/Gen3LEDs	
4 Module	12 LEDs
8 Module	24 LEDs
12 Module	36 LEDs
OPERATING TEMPERATURE	-40° to +65° C / -40° to +149° F
DIMENSIONS	
4 Module	13.25" (34 cm) L x 1.5" (38 mm) H x 1.7" (43 mm) D
8 Module	26" (66 cm) L x 1.5" (38 mm) H x 1.7" (43 mm) D
12 Module	38.75" (98 cm) L x 1.5" (38 mm) H x 1.7" (43 mm) D
WARRANTY	Five-year

1.800.338.7337

DIRECTIONAL WARNING

www.soundoffsignal.com

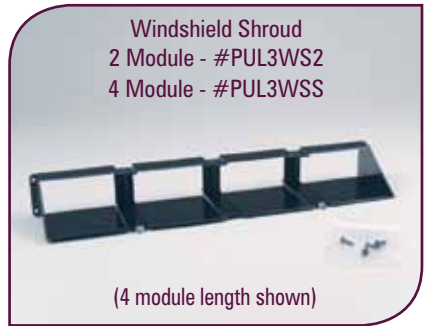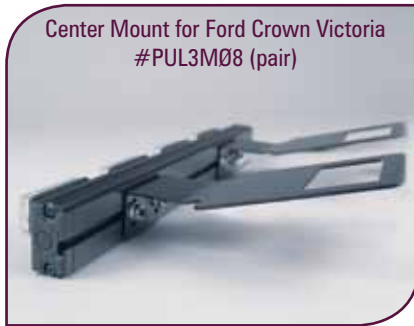

1.800.338.7337

DIRECTIONAL WARNING

www.soundoffsignal.com

TrafficMaster

Gen2 LED Directional/Warning Bars

1.800.338.7337

DIRECTIONAL WARNING



#ETTMLEDSA



#ETTMLED-P

Features

- Universal design fits interior rear windows in all types vehicles or can be mounted on the exterior
- 8 sealed weatherproof Gen2 modules
- Reliable self-contained solid state design
- Includes control box and mounting brackets
- Control box features illuminated display to show flash pattern selected and 5-position rotary switch to control all primary functions
- Hard wire installation with 25' cable

TECHNICAL SPECIFICATIONS

FLASH PATTERNS	2 warning patterns and 6 arrow patterns
LIGHT SYNC TECHNOLOGY	No
MOUNTING	Surface mount w/ included brackets
INPUT VOLTAGE	10 - 30 Vdc
CURRENT DRAW	2.2 amps max
OPERATING TEMPERATURE	-30° to +65° C / -22° to +149° F
DIMENSIONS	Solid Bar 42" (1 m) L x 2.75" (70 mm) H x 1.75" (44 mm) D Split Arrow 21" (53 cm) L (each end) x 2.75" (70 mm) H x 1.75" (44 mm) D
WARRANTY	Five-year

www.soundoffsignal.com



Exterior Full Size LED

APEX	5
ETL5000	7
PINNACLE	9
SKYFIRE	11
MAGNUM	13
MOUNTING OPTIONS	15

Interior

Rear Deck	
PINNACLE	16
Windshield	
PINNACLE	17

Mini

PINNACLE EPL7000	18
PINNACLE EPL7200	19
LED3	20
LED2	21

LIGHTBARS

Lightbars are custom ordered to your specifications. Visit www.soundoffsignal.com for an order form.



APEX™

LED LIGHTBAR

Exterior Full Size LED Lightbar

1.800.338.7337




#EPX3000

Features

- Streamlined design with unique “wing” shape that was wind tunnel tested and showed the lowest drag with no added lift force to the car with additional benefits of fuel savings and better vehicle handling
- Our thinnest lightbar with a slim inboard module of just 1.6” (39 mm) tall, optimized optic height for maximum photometric impact
- 180° scene light option uses alley lights and strategically placed wide angle take down lights (diagram following page)
- New inboard optic features striations on the lenses to bend the light for extreme off angle visibility
- New alley light design is positioned at just the right angle for advanced side viewing while operating the vehicle
- Clear or color lenses in amber, blue or red
- Dimming capability

Fuel Saving Design


Exclusive, aerodynamic shape is designed to reduce fuel consumption.
Wing shape glides through the air.

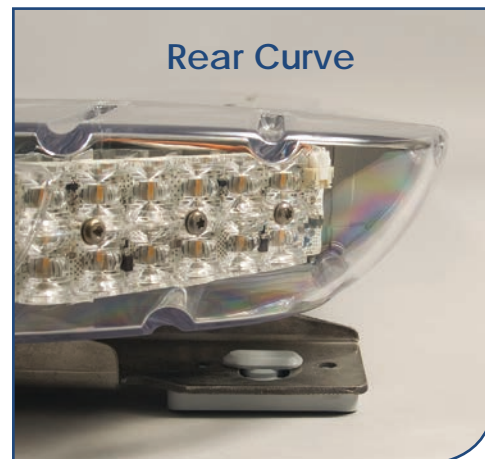

LIGHTBARS

www.soundoffsignal.com

Front of Vehicle

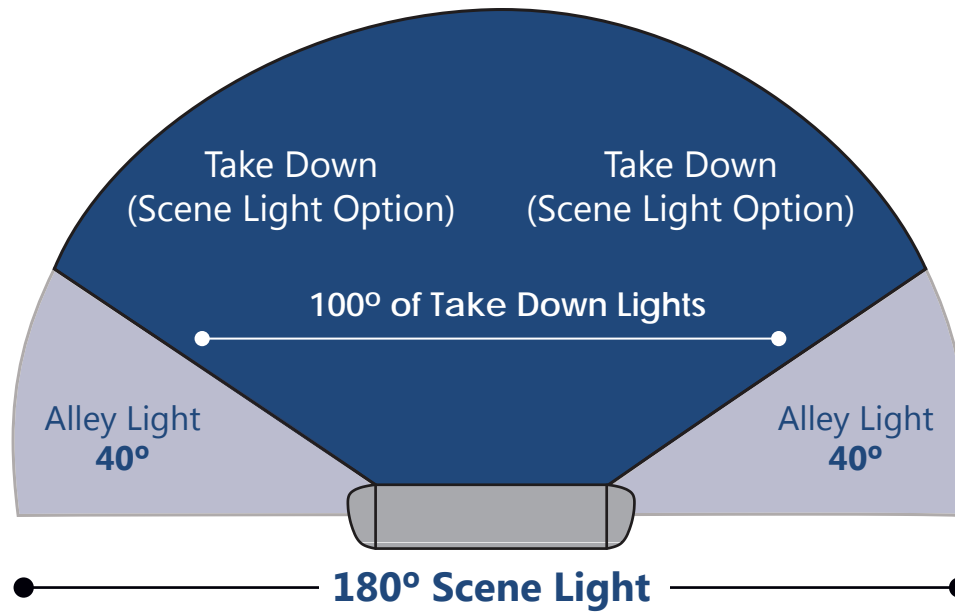

Amber, Blue and Red

TECHNICAL SPECIFICATIONS

FLASH PATTERNS	Standard Warning	21 flash patterns
	Alley Lights	5 flash patterns
	Take Down/Work Lights	5 flash patterns
	Arrow Left, Center & Arrow Right	4 flash patterns
	Arrow Warning	Solid Arrow: 9, Split Arrow: 17
VOLTAGE		10 - 16 Vdc or 10 - 30 Vdc
	CURRENT DRAW @ 128 VDC	
TECHNOLOGY	Inboard Module	Flashing: 0.5 Amps / Steady on: 1 Amp
	Corner Module	Flashing: 1 Amp / Steady on: 2 Amps (each corner)
	Alley Light	Flashing: 0.25 Amps / Steady on: 0.50 Amps
	Take Down Light	Flashing: 0.5 amps / Steady on: 1 Amp
	Inboard/Warning Module	6 Gen3 LEDs
OPERATING TEMPERATURE	Corner/End Module	12 Gen3 LEDs each corner
	Alley Light	4 Gen3 LEDs
	Take Down Light	6 Gen3 LEDs
	LENGTHS	
HEIGHT	4 Module	36" (91 cm)
	5 Module	43" (109 cm)
	6 Module	50" (127 cm)
	7 Module	56.5" (145 cm)
	8 Module	63" (160 cm)
DEPTH	9 Module	70" (178 cm)
	10 Module	76" (193 cm)
WARRANTY	All Modules	Inboard: 1.6" (4.064 cm), Corner: 5.08" (5.08 cm)
	All Modules	11.25" (29 cm)
OPTIONS		Five-year
	Mounts	Headache Bracket or Low Profile Fixed Bracket
	Rear Split Arrow	Every other diode flashes in each rear arrow inboard module along length of bar

1.800.338.7337

LIGHTBARS

www.soundoffsignal.com



Exterior Full Size LED Lightbar





#ETL5000

Features

- One of the most powerful and visible LED lightbars on the market, the ETL5000™ exceeds SAE light requirements with end cap output alone
- DSC Technology (Digital Serial Communication) provides 24 separate control lines (inputs) to connect to your switching devices (includes thin digital serial 15' RJ-11 cable which reduces installation time and expense)
- 6 LED solid dual color arrow option available
- Clear or color lenses in amber, blue or red
- Dimming capability

Split Rear Arrow

Unique Rear Split Arrow modules activate the upper row of LEDs against the bottom row of LEDs

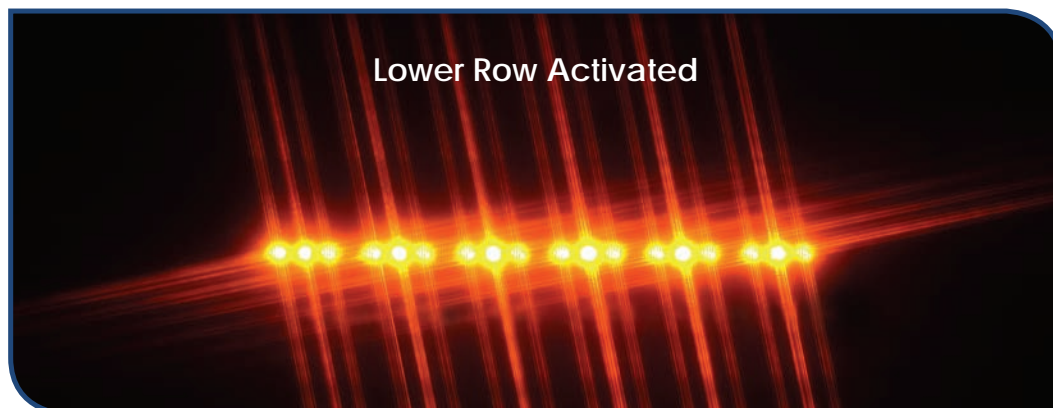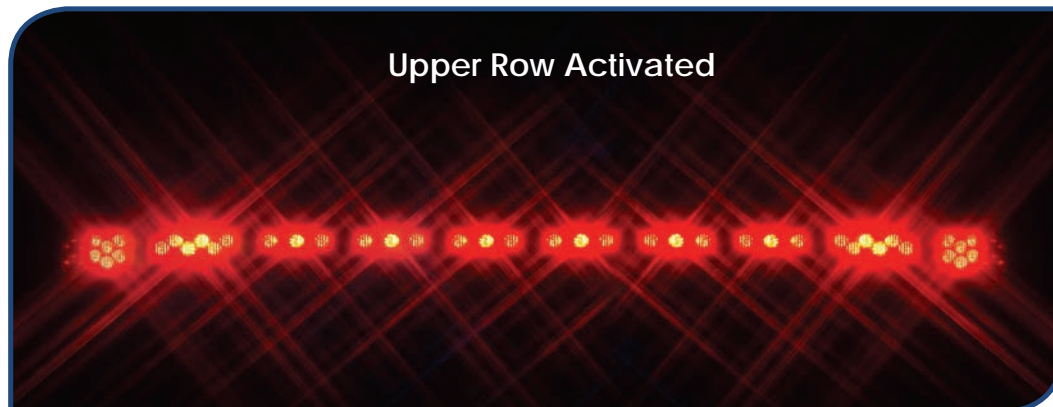

1.800.338.7337

LIGHTBARS

www.soundoffsignal.com

Red Lens lightbar with
Low Profile Fixed Mount bracket



TECHNICAL SPECIFICATIONS

FLASH PATTERNS	Standard Warning	21 flash patterns
	LED Take Down & Alley Lights	5 flash patterns
	Arrow Left, Center & Arrow Right	4 flash patterns
	Arrow Warning	Solid Arrow: 9 Warning, Split Arrow: 17 Warning
VOLTAGE		10 - 16 Vdc
	CURRENT DRAW @ 128 VDC	
	Inboard	Flashing: 0.5 Amps / Steady on: 1 Amp
	Corner Module	Flashing: 1 Amp / Steady on: 2 Amps
	Alley Light	Flashing: 0.25 Amps / Steady on: 0.5 Amps
	Take Down Light	Flashing: 0.5 Amps / Steady on: 1.0 Amps
TECHNOLOGY	Inboard Module	6 Gen3 LEDs
	Corner/End Module	12 Gen3 LEDs
	Alley Light	1 multi-chip Gen3 LED
	Take Down Light	6 Gen3 LEDs
OPERATING TEMPERATURE		-40° to +65° C / -40° to +149° F
LENGTHS	6 Module	38.5" (98 cm)
	7 Module	43.25" (110 cm)
	8 Module	48" (122 cm)
	9 Module	52.75" (134 cm)
	10 Module	57.5" (146 cm)
	All Modules	Inboard: 1.75" (4.445 cm), Corner: 2.5" (6.35 cm)
DEPTH	All Modules	10" (25 cm)
WARRANTY		Five-year
OPTIONS	Mounts	Adjustable, Headache, or Low Profile Fixed Bracket
	Rear Split Arrow	Upper 3 diodes flash against lower 3 diodes in each rear arrow inboard module


1.800.338.7337

LIGHTBARS

www.soundoffsignal.com



Exterior Full Size LED Lightbar

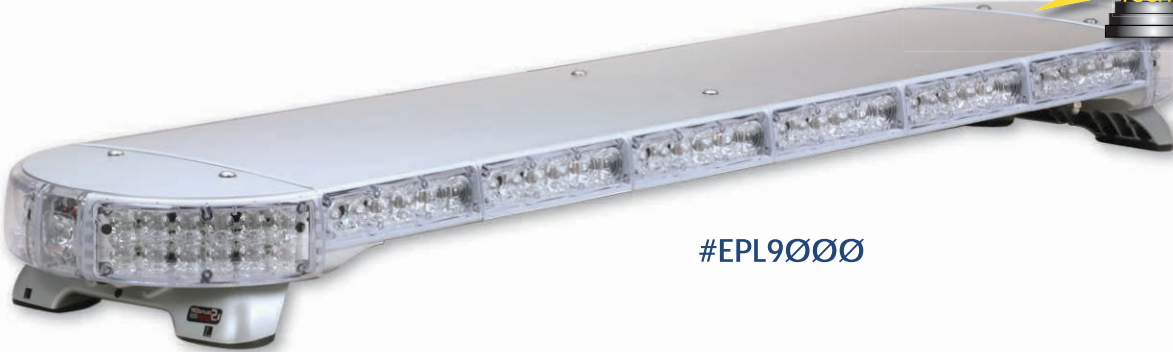

#EPL9000

Features

- Innovative optics design, "Fusion Technology", the first optics designed like a lighthouse to boost the light farther and wider for a brighter, safer warning signal
- Streamlined, modular design is easy to maintain with field replaceable modules that are easily upgradable
- 6 or 12 LED dual color arrow option available
- Clear or color lenses in amber, blue or red
- Dimming capability



1.800.338.7337

LIGHTBARS

www.soundoffsignal.com



TECHNICAL SPECIFICATIONS

FLASH PATTERNS	Standard Warning	21 flash patterns
	LED Take Down & Alley Lights	5 flash patterns
	Arrow Left, Center & Arrow Right	4 flash patterns
	Arrow Warning	Solid Arrow: 9 Warning/Split Arrow: 17 Warning
VOLTAGE		10 - 16 Vdc
CURRENT DRAW @ 128 VDC	Inboard/Warning Module	Flashing: 0.5 Amp/Steady on: 1.0 Amp
	Corner Module	Flashing: 1.0 Amp/Steady on: 2.0 Amp
	Alley Light	Flashing: 0.33 Amp/Steady on: 0.65 Amp
	Take Down Light	LED: Flashing: 0.5 Amp/Steady on: 1 Amp
TECHNOLOGY	Inboard Module	6 Gen3 LEDs
	Corner/End Module	12 Gen3 LEDs
	Alley Light	Gen3 LED
	Take Down Light	6 Gen3 LEDs
OPERATING TEMPERATURE		-40° to +65° C / -40° to +149° F
LENGTHS	4 Module	36" (91 cm)
	5 Module	42" (107 cm)
	6 Module	48" (122 cm)
	7 Module	54" (137 cm)
	8 Module	60" (152 cm)
	9 Module	72" (183 cm)
HEIGHT	All Modules	Inboard: 1.75" (4.445 cm), Corner: 2.5" (6.35 cm)
DEPTH	All Modules	10" (25 cm)
WARRANTY		Five-year
OPTIONS	Mounts	Adjustable, Headache, or Low Profile Fixed Bracket

1.800.338.7337

LIGHTBARS

www.soundoffsignal.com



Exterior Full Size LED Lightbar

1.800.338.7337



#ESF1000


Features

- Valued priced Skyfire LED lightbar is specifically designed for the Amber and volunteer market
- Strategically positioned 40° module placement on the end caps provide an optimum level of off angle performance - critically important at dangerous intersections
- Uninterrupted signal across the entire length - Work Light and Take Down modules are mounted below the warning modules for a full signal
- Work Light optics angled down 8° to clearly illuminate the rear work area or last 8 feet of a tow truck bed for better visibility for those working night shifts or during inclement weather
- Field configurable - outer dome is easy to remove and modules can be quickly changed out if needed

LIGHTBARS

60" Full Size LED Tow Bar

#ESF1K60AWLSTC (pre-configured part number)

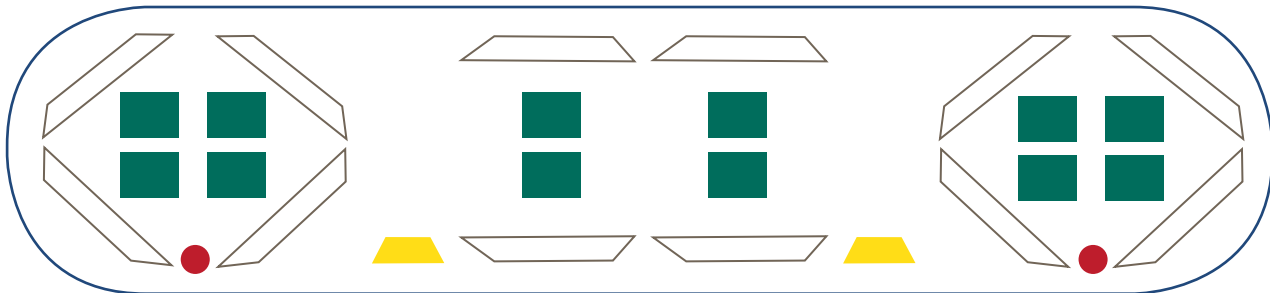

● = Inboard Modules ● = Work Lights ● = Rear STT Modules

www.soundoffsignal.com



TECHNICAL SPECIFICATIONS

FLASH PATTERNS
VOLTAGE
CURRENT DRAW @ 128 VDC
TECHNOLOGY
OPERATING TEMPERATURE
LENGTHS
HEIGHT
DEPTH
WARRANTY
OPTIONS

Standard Warning	27 flash patterns
Alley Lights	NA
Take Down/Work Lights	Steady Burn only
Arrow Left, Center & Arrow Right	NA
Arrow Warning	NA
	10 - 16 Vdc
Inboard/Warning Module	Flashing: 0.5 Amps / Steady on: 1.0 Amps
Corner	Flashing: 0.5 Amps / Steady on: 1.0 Amps
Alley Light	NA
Take Down Light	LED: 1 Amp Steady on Halogen: 2.6 Amps Steady on
Inboard Module	6 Gen3 LEDs
Corner/End Module	6 Gen3 LEDs
Alley Light	NA
Take Down Light	6 Gen3 LEDs
	-40° to +65° C / -40° to +149° F
	48" (122 cm), 55" (140 cm) or 60" (152 cm)
	3" (7.62 cm)
	11.25" (28.575 cm)
	Five-year
Mounts	Headache, Low Profile Fixed Bracket, or Flat Mount Hardware

1.800.338.7337

LIGHTBARS

www.soundoffsignal.com



Exterior Full Size LED Lightbar

1.800.338.7337

THINK NEW



#EMG2000

Features

- 6 LED inboard modules deliver Fusion Boost technology for extreme brightness
- 3 LED inboard modules designed with a new TurboOptic to deliver maximum intensity at an affordable price
- 6 or 12 LED corner modules
- Low profile design
- Cruise mode option
- Optimal rear stop/turn modules available
- Replaceable outer Lens
- Dimming capability

LIGHTBARS



www.soundoffsignal.com



1.800.338.7337

LIGHTBARS



Amber, Blue and Red

TECHNICAL SPECIFICATIONS

FLASH PATTERNS	Standard Warning	21 flash patterns
	LED Take Down & Alley Lights	5 flash patterns
	Take Down/Work Lights	5 flash patterns
	Arrow Left, Center & Arrow Right	4 flash patterns
VOLTAGE CURRENT DRAW @ 128 VDC	Arrow Warning	Solid Arrow: 9 Warning, Split Arrow: 17 Warning
		10 - 16 Vdc
	Inboard/Warning Module	Flashing: 0.5 Amps / Steady on: 1.0 Amps
	Corner	Flashing: 0.8 Amps / Steady on: 1.6 Amps
TECHNOLOGY	Alley Light	Flashing: 0.21 Amps / Steady on: 0.42 Amps
	Take Down Light	LED: 3 / Steady on: 0.42 / Flashing: 0.21 LED: 6 / Steady on: 0.84 / Flashing: 0.42 LED: 9 / Steady on: 1.26 / Flashing: 0.63
	Inboard Module	3 or 6 Gen3 LEDs
	Corner/End Module	6 or 12 Gen3 LEDs
OPERATING TEMPERATURE	Alley Light	3 LED
	Take Down Light	3, 6, or 9 LED Modules
LENGTHS		-40° to +65° C / -40° to +149° F
HEIGHT	23" (58.4 cm), 35.5" (90.2cm), 42" (106 cm), 48" (12.9 cm), 54" (137 cm), 73" (185.4 cm), 73" (185.4 cm)	
DEPTH	All Lengths	2.3" (5.8 cm)
WARRANTY	All Lengths	12.3 (31.2 cm)
OPTIONS		Five-year
	Mounts	Headache and Low Profile Fixed Bracket
	Rear Split Arrow	Available with 6 or 12 LED Dual Color Modules

www.soundoffsignal.com

Exterior Full Size LED Lightbar Mounting Options

1.800.338.7337

LIGHTBARS

www.soundoffsignal.com

Low Profile

Fixed Mount Bracket

APEX, ETL5000, Pinnacle, Skyfire and MAGNUM

Easy to install brackets mount the lightbar close to the roof line of the vehicle offering a stealthy, low profile appearance. Brackets are made from a durable stainless steel with non-slip rubber feet for extra grip. Clearance of just 3/4" on most vehicles.

MAGNUM now offers an extra low profile bracket option. (not shown)
Visit www.soundoffsignal.com for more information.



APEX



ETL5000 and Pinnacle



Skyfire and Magnum

Headache

Mount Bracket

Skyfire (shown), APEX, ETL5000, MAGNUM and Pinnacle

The Headache Mount Bracket is designed to attach to truck headache racks. Bracket is powder coated for a long-lasting, anti-rust finish.



Skyfire

Adjustable

Height Bracket

ETL5000 and Pinnacle

Bracket allows for custom height and tilt adjustments for more flexibility than any other lightbar mounting system. Unique mounting feet allows for vertical height adjustment of 3 inches to provide low mounting height on sedan applications and elevated mounting height for full size van and SUV applications to provide maximum visibility of the bar to traffic approaching from the front and the rear. Made with a durable and corrosive resistant stainless steel with large, rubber mounting pads for a cushioned, non-slip grip.



Lowest Height
As low as 3/4" clearance from roof line



Highest Height
Up to 3" clearance from roof line

Visit www.soundoffsignal.com for Hook Kit Charts for specific vehicle options



Interior Rear Deck Lightbar



#EPL8000RD

(Ford Crown Victoria model shown)

Features

- Built with our exclusive "Fusion Technology" optics to disperse an even distribution of light with a super wide angle output
- Low profile Rear Deck model is a sleek shrouded compact design that installs neatly into the rear deck for powerful rear warning signal
- Lower profile than competing lightbars with less overall obstruction and smaller footprint
- Compatible with many vehicle makes and models including Chevrolet Caprice, Impala, Dodge Charger and Ford Crown Victoria (visit www.soundoffsignal.com for more information)
- Custom ordered for your vehicle in Amber, Blue, Green or Red LEDs



TECHNICAL SPECIFICATIONS

FLASH PATTERNS	4 directional for left, center out and right 14 warning end patterns 10 directional warning bar patterns 6 or 8 rear arrow lengths available, 6 module length can accommodate single warning end modules	
VOLTAGE	10 - 16 Vdc	
CURRENT DRAW @ 128 VDC	Warning Module	Flashing: 0.5 Amps
	Take Down Light	Steady on: 0.6 Amps
TECHNOLOGY	48 Gen3 LEDs (6 LEDs per module)	
OPERATING TEMPERATURE	-40° to +65° C / -40° to +149° F	
LENGTH/DIMENSIONS	Ford Crown Victoria: 47" (120 cm) L x 1.75" (44 mm) H x 7.23" (18 cm) D (refer to website for other dimensions)	
WARRANTY	Five-year	
OPTION	Mount	Rear Deck

1.800.338.7337

LIGHTBARS

www.soundoffsignal.com



Interior Windshield Lightbar



#EPL8000WS

Ford F-150 Truck Model Shown

Features

- Built with our exclusive "Fusion Technology" optics to disperse an even distribution of light with a super wide angle output
- Lower profile than competing lightbars with less overall windshield obstruction and smaller footprint
- Many vehicle specific models for SUVs and trucks; Chevrolet Tahoe, Ford Expedition, and Explorer
- Universal model with adjustable mounting brackets accommodate most windshield angles for even greater compatibility with different vehicle models and years
- Compatible with many vehicle makes and models including Chevrolet Caprice, Impala, Dodge Charger and Ford Crown Victoria (visit www.soundoffsignal.com for more information)
- Up to 2 LED Take Down modules can be designated in your choice of position on the bar



TECHNICAL SPECIFICATIONS

FLASH PATTERNS	Standard Warning	36 flash patterns
	Alley Lights	NA
	Take Down Lights	9 flash patterns
	Arrow Left, Center & Arrow Right	NA
	Arrow Warning	NA
VOLTAGE		10 - 16 Vdc
CURRENT DRAW @ 128 VDC	Inboard/Warning Module	Flashing: 0.5 Amps / Steady on: 1.0 Amps
	Take Down Light	Flashing: 0.5 Amps / Steady on: 1.0 Amps
TECHNOLOGY	Inboard Module	6 Gen3 LEDs
	Take Down Light	6 Gen3 LEDs
OPERATING TEMPERATURE		-40° to +65° C / -40° to +149° F
LENGTHS/DIMENSIONS	Ford F-150:	39" (99 cm) L x 1.2" (3.0mm) H x 6" (15 cm) D
	Universal (each side):	20" (51 cm) L x 1" (25mm) H x 7.5" (19cm) D
WARRANTY		Five-year
OPTION	Mount	Universal Bracket model with adjustable mounting


1.800.338.7337

LIGHTBARS

www.soundoffsignal.com



Mini Lightbar

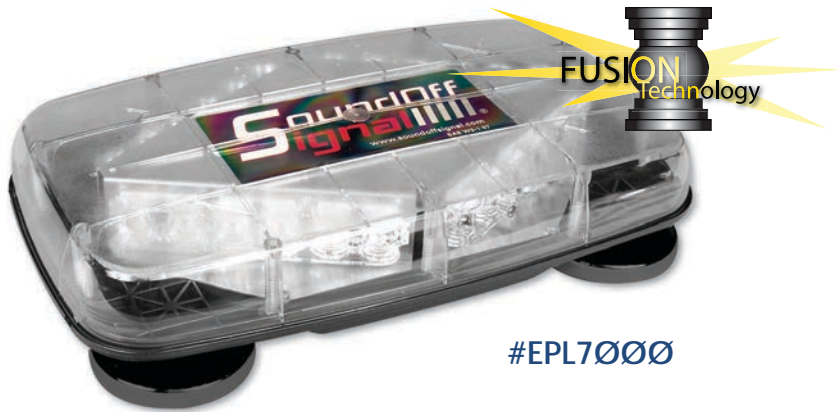

#EPL7000

- Magnetic Mount with Cigar Plug #EPL7M+(x)C
- Standard Permanent Mount #EPL7PD(x)C
- High Height Permanent Mount #EPL7HD(x)C

Amber Dome with Amber LEDs


- Magnetic Mount with Cigar Plug #EPL7M+AA
- Standard Permanent Mount #EPL7PDAA (25 foot cable) #EPL7PFAA
- High Height Permanent Mount #EPL7HDAA (25 foot cable) #EPL7HFAA

REPLACE (x) IN ORDER NUMBER FOR COLOR SELECTION

Solid Colors =



Dual/Split Colors =

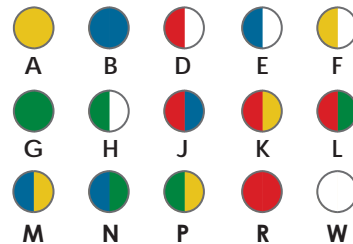

Visit our website for an order form for custom product configuration

Features

- Magnetic mount has Cig plug with 3-position rocker switch (on, off and flash pattern advance)
 - Red LED indicator light and 10' cord length
 - 4 extra strong magnets each with an 85 lb. pull each to prevent the bar from slipping or moving
- Permanent mount with 12' cable with bare wires for hard wire installation
- Fusion II Technology - optic for a bright, extra wide output
- Non-volatile memory - recalls last flash pattern used



Blue and Red Only

TECHNICAL SPECIFICATIONS

FLASH PATTERNS	28 flash patterns
VOLTAGE	10 - 16 Vdc
CURRENT DRAW	2 amps average
TECHNOLOGY	24 Gen3 LEDs
OPERATING TEMPERATURE	-40° to +65° C / -40° to +149° F
LENGTH/DIMENSION	14.16" (36 cm) L x 8.27" (21 cm) W x 1.90" (48 mm) H
WARRANTY	Five-year
OPTION	Mounts Magnetic: 2.97" (7.5 mm) Overall Height, 0.87" (2.2 mm) clearance Low Permanent: 2.28" (5.8 mm) Overall Height 0.38" (1.0 mm) clearance High Permanent: 4.25" (10.8 mm) Overall Height 2.35" (6.0 mm) clearance

1.800.338.7337

LIGHTBARS

www.soundoffsignal.com

1.800.338.7337

LIGHTBARS

www.soundoffsignal.com

PINNACLE Mini Lightbar

THINK NEW



#EPL7200

- SAE Magnetic Mount with Cigar Plug #EPL7SAM+AC
- SAE Standard Permanent Mount #EPL7SAPDAC (25 foot cable) #EPL7SAPFAC
- SAE High Height Permanent Mount #EPL7SAHDAC (25 foot cable) #EPL7SAHFAC

Amber Dome with Amber LEDs

- SAE Magnetic Mount with Cigar Plug #EPL7SAM+AA
- SAE Standard Permanent Mount #EPL7SAPDAA (25 foot cable) #EPL7SAPFAA
- SAE High Height Permanent Mount #EPL7SAHDAA (25 foot cable) #EPL7SAHFAA




- ECE Magnetic Mount with Cigar Plug #EPL7ECM+(x)C
- ECE Standard Permanent Mount #EPL7ECPD(x)C
- ECE High Height Permanent Mount #EPL7ECHD(x)C

Amber Dome with Amber LEDs

- ECE Magnetic Mount with Cigar Plug #EPL7ECM+AA
- ECE Standard Permanent Mount #EPL7ECPDAA
- ECE High Height Permanent Mount #EPL7ECHDAA

REPLACE (x) IN ORDER NUMBER FOR COLOR SELECTION

Solid Colors =

A B R

Features

- Magnetic mount has Cig plug with 3-position rocker switch (on, off and flash pattern advance)
 - Red LED indicator light and 10' cord length
 - 4 extra strong magnets each with an 85 lb. pull each to prevent the bar from slipping or moving
- Permanent mount with 12' cable with bare wires for hard wire installation
- Fusion II Technology - optic for a bright, extra wide output
- Non-volatile memory - recalls last flash pattern used



TECHNICAL SPECIFICATIONS	
FLASH PATTERNS	28 flash patterns
VOLTAGE	10 - 30 Vdc
CURRENT DRAW	2 amps average
TECHNOLOGY	20 Gen3 LEDs
OPERATING TEMPERATURE	-40° to +65° C / -40° to +140° F
LENGTH/DIMENSION	14.16" (36 cm) L x 8.27" (21 cm) W x 1.90" (4.8 cm) H
WARRANTY	Five-year
OPTION	Mounts Magnetic: 2.97" (75 mm) Overall Height, 0.87" (22 mm) clearance Standard Permanent: 2.28" (58 mm) Overall Height 0.38" (10 mm) clearance High Permanent: 4.25" (108 mm) Overall Height 2.35" (60 mm) clearance

LED3™

MINI LIGHTBAR

Mini Lightbar



10 - 16v

- Magnetic Mount #EL3MBM+(x)C
- Permanent Mount #EL3MBPD(x)C

10 - 30v

- Magnetic Mount #EL3MBM3Ø+(x)C
- Permanent Mount #EL3MBP3ØD(x)C

Features


- 10 powerful LED3 modules totaling 30 LEDs
- Magnetic mount includes 12 volt DC plug with 3-position rocker switch for on, off and flash pattern advance with red LED indicator light and 10' cord length
- Magnetic mount features 4 extra strong magnets - each with 85 lb. pull to prevent the bar from slipping or moving
- Permanent mount includes 12' cable with bare wires for hard wire installation
- Non-volatile memory recalls last flash pattern used at power up
- Clear outer dome with solid or split LED colors

REPLACE (x) IN ORDER NUMBER FOR COLOR SELECTION

Solid Colors =



Dual/Split Colors =

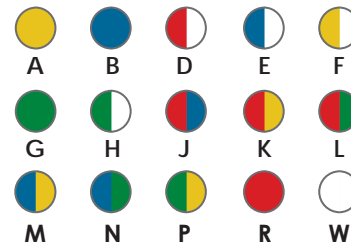

Visit our website for an order form for custom product configuration



TECHNICAL SPECIFICATIONS

FLASH PATTERNS	24 flash patterns
VOLTAGE	10 - 16 or 10 - 30 Vdc
CURRENT DRAW	Less than 6 amps
TECHNOLOGY	30 Gen3 LEDs
OPERATING TEMPERATURE	-40° to +60° C / -40° F to +140° F
LENGTH/DIMENSION	14.16" (36 cm) L x 8.27" (21 cm) W x 1.90" (48 mm) H
WARRANTY OPTION	Five-year
Mounts	Magnetic: 2.97" (75 mm) Overall Height 0.87" (22 mm) clearance Permanent: 2.28" (58 mm) Overall Height 0.38" (10 mm) clearance

1.800.338.7337

LIGHTBARS

www.soundoffsignal.com

LED2™ Mini Lightbar

MINI LIGHTBAR

1.800.338.7337

THINK
NEW



- Magnetic Mount #EL2MBM+AA
- Permanent Mount #EL2MBPØAA

Features

- Intense amber light output in an all new compact and cost efficient design
- Great for work trucks and utility vehicles
- Easy installation as well as low-maintenance
- Permanent mounts have 12' cable with bare wires for hard wire installation
- Magnetic mount includes a 12 volt DC plug with pattern select switch and 10' cord length

LIGHTBARS

www.soundoffsignal.com



TECHNICAL SPECIFICATIONS

FLASH PATTERNS	12 flash patterns
VOLTAGE	DC 12 V
CURRENT DRAW	Less than 6 amps
TECHNOLOGY	20 Gen3 LEDs
OPERATING TEMPERATURE	-40° to +55° C / -40° F to 131° F
LENGTH/DIMENSION	11" (28 cm) L x 6.5" (16.5 cm) W x 2.17" (6.52 cm) H
WARRANTY	One-year
OPTION	Mounts Magnetic: 2.18" (56 mm) Overall Height, 0.31" (8 mm) clearance Permanent: 2.82" (72 mm) Overall Height, 0.84" (21 mm) clearance



Under Mirror	
INTERSECTOR	29
Surface Mounts	
nFORCE	31
INTERSECTOR	33
GHOST	35
PREDATOR II	37
COMPASS FENDER LIGHTS	39
LED3 MINI LIGHT	41
RAPTOR	43
Deck/Grille Mounts	
nFORCE	45
GHOST	47
PREDATOR II	49
XP 63	50
LED3 WARNING TRUNK	51
Recess Mounts	
nFORCE	52
GHOST	53
R4 SERIES	54
Windshield (Interior)	
nFORCE	55
PREDATOR II	59
ULTRALITE	61
PILOT	63
Power Supplies	64
Visor Light	
GEN3	65
Strobe Inserts	
UNDER COVER	66
LED Inserts and Bezels	
UNIVERSAL UNDERCOVER	67

PERIMETER LIGHTING



intersecor

Under Mirror Light



~ U.S. Patent #D636,113 (on light only)~
Other Patents Pending

Under Mirror Light Kit

- Standard Configuration #ENT2B3(x)
- Xylex Lens #ENT2B3(x)-EU

Light only works on flat services.

Includes 1-light with in-line flasher, foam gasket, 3-wedges and screws for installation

REPLACE (x) IN ORDER NUMBER
FOR COLOR SELECTION

Solid Colors =



Visit our website for an order form
for vehicle specific mounting options

Features

- The first light of it's kind to offer critical intersection warning and side warning
- Design of light is based upon problem solving research - 30% of all emergency vehicle crashes are likely to occur at dangerous intersections
- No other light offers 180 degree output - specially designed reflector amplifies and throws the light at the perfect angle to increase visibility at intersections and offer side warning illumination
- Unique under mirror mount simplifies installation - labor saving light is much easier to install than traditional front mirror skull mounts - no mirrors to work behind or around
- Light can be surface mounted to any flat area on any type of vehicle - elevate your safety and visibility by mounting to the heachache rack or body of the vehicle wherever additional lighting is needed
- Features cruise mode for steady burn if desired



Single Light Kit, Standard Configuration


#ENT2B3(x)

Includes 1-light with in-line flasher, foam gasket, 3-wedges (0, 5 and 10 degrees) and screws for installation

1.800.338.7337

UNDER MIRROR

www.soundoffsignal.com

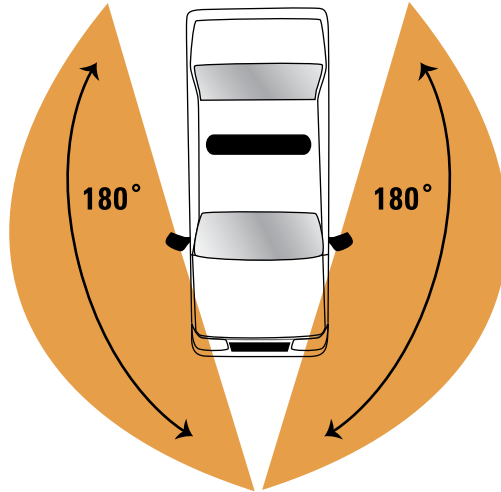

Intersector Under Mirror Light - Dodge Charger



TECHNICAL SPECIFICATIONS

FLASH PATTERNS	30 flash patterns
LIGHT SYNC	Yes
TECHNOLOGY	9 Gen3 LEDs
INPUT VOLTAGE	10 - 16 Vdc
CURRENT DRAW	Less than 1.5 amps & 12.8 Vdc
OPERATING TEMPERATURE	-40°C to +65°C / -40° to +149°F
LENGTH/DIMENSION	2.9" (7.4 cm) W x 1.9" (4.8 cm) H x 2.9" (7.4 cm) D
WARRANTY	Five-year
MOUNTS	Under Mirror or Surface Mount

**THINK
NEW**



~Patent Pending~

Features

- New vehicle design integration
- Single, Split, Dual and Tri-Color capability
- 6, 9, 12 and 18 LED counts
- Steady-burn white capability

CUSTOM ORDER

nForce is the only Perimeter Lighting product line on the market that can be specifically tailored to your unique requirements.

Visit our Website for an order form when ordering any of these custom options.

- 10-30 Vdc
- Xylex lens (improved chemical resistance)
- White or chrome housing
- Solid green LED color or combined with other available colors
- Amber LED color combined with red, blue and white LED colors
- White LED color combined with red or blue LED colors
- EMC compliant models can only be specified with 9 LEDs and solid color
- Dual Module: choose alternative LED colors and/or combined color configurations

Single Surface Mount (black housing)

- 6 LED, Solid or Split Color ENFSSS1(x)
- 9 LED, Solid Color ENFSSS2(x)
- 12 LED, Solid or Dual Color ENFSSS3(x)
- 18 LED, Tri Color - Blue/Red/Amber ENFSSS4BRA
- 18 LED, Tri Color - Blue/Red/White ENFSSS4BRW

STANDARD COLORS AVAILABLE

For Module LED Color Patterns, see chart on next page. Replace the (x) or (xx) in part number for color selection.

Single Solid Colors (x) =

- A = amber
- B = blue
- R = red
- W = white

Single Light, 6 LED Split Colors (x) =

- J = red/blue

Single Light, 12 LED Dual Colors (x) =

- J = red/blue

Dual Light, Solid Colors (xx) =

- AA = amber/amber
- AW = amber/white
- BA = blue/amber
- BB = blue/blue
- BW = blue/white
- RA = red/amber
- RB = red/blue
- RR = red/red
- RW = red/white

Dual Light, 6 LED Split Colors (xx) =

- JJ = red/blue

Dual Light, 12 LED Dual Colors (xx) =

- JJ = red/blue

Tri Colors =

- BRA = blue/red/amber
- BRW = blue/red/white

9 LED available only in Solid Colors (x) =

- A = amber
- B = blue
- R = red
- W = white

**THINK
NEW**



-Patent Pending-

Dual Stacked Surface Mount (black housing)

- 6 LED, Solid or Split Color ENFDSS1(xx)
- 9 LED, Solid Color ENFDSS2(xx)
- 12 LED, Solid or Dual Color ENFDSS3(xx)
- 18 LED, Tri Color - Blue/Red/Amber ENFDSS4BRA
- 18 LED Tri Color - Blue/Red/White ENFDSS4BRW

Single Surface Mount Brackets



- 45° angle bracket PNFSLBRK145



- 90° angle bracket PNFSLBRK190
- License plate bracket PNFSLBRK2LPH
Coming Soon!

Module LED Color Patterns

6 LED	Solid:	● ● ● ● ● ●
	Split:	● ● ● ● ● ●
9 LED	Solid:	● ● ● ● ● ● ● ● ●
12 LED	Solid:	● ● ● ● ● ● ● ● ● ● ● ●
	Dual:	● ● ● ● ● ● ● ● ● ● ● ●
18 LED	Tri-Color:	● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●



TECHNICAL SPECIFICATIONS

DIMENSIONS (single)	5.0" (12.7 cm) L x 1.72" (4.3 cm) H x 1.50" (3.8 cm) D
(dual)	5.0" (12.7 cm) L x 3.13" (7.9 cm) H x 1.50" (3.8 cm) D
CURRENT DRAW PER MODULE	
6 LED Single Color	< 1.0A @ 12.8Vdc
6 LED Split Color	< 0.5A @ 12.8Vdc
9 LED Single Color	< 1.5A @ 12.8Vdc
12 LED Single Color	< 2.0A @ 12.8Vdc
12 LED Split Color	< 1.0A @ 12.8Vdc
18 LED Tri-Color	< 1.0A @ 12.8Vdc
FLASH PATTERNS	12 Single color patterns, 24 Dual and Tri-color patterns
INPUT VOLTAGE	10 - 16 Vdc standard or 10 - 30 Vdc
OPERATING TEMPERATURE	-40°C to +65°C / -40° to +149°F
TECHNOLOGY	Gen3 LEDs
WARRANTY	Five-year

1.800.338.7337

SURFACE MOUNTS

www.soundoffsignal.com

intersecor

Surface Mount

THINK
NEW



- U.S. Patent #D636,113 (on light only)-
Other Patents Pending

Surface Mount

- Black Housing #ENT3B3(x)
- Chrome Housing #ENT3C3(x)
- White Housing #ENT3W3(x)

REPLACE (x) IN ORDER NUMBER
FOR COLOR SELECTION

Solid Colors =



Features

- No other light offers 180 degree output - specially designed reflector amplifies and throws the light at the perfect angle to increase visibility at intersections
- Includes Surface Mount Light in your choice of LED and housing colors, neoprene gasket and mounting hardware for installation
- Patented design, the first light of its kind to offer critical intersection warning and side warning illumination now available with surface mount capabilities

THINK
NEW



Deck/Grille Mount (optional bracket)

- Black Bracket #PNT3DGBB

1.800.338.7337

SURFACE MOUNTS

www.soundoffsignal.com



Intersector Surface Mount lights with Deck/Grille brackets



TECHNICAL SPECIFICATIONS

FLASH PATTERNS	30 flash patterns
LIGHT SYNC	Yes
TECHNOLOGY	9 Gen3 LEDs
INPUT VOLTAGE	10 - 16 Vdc
CURRENT DRAW	Less than 1.5 amps
OPERATING TEMPERATURE	-40°C to +65°C / -40° to +149°F
LENGTH/DIMENSION	3.7" (9.4 cm) W x 1.7" (4.3 cm) H x 1.8" (4.6 cm) D
WARRANTY	Five-year
MOUNT	Surface Mount and Deck/Grille Mount (optional)

1.800.338.7337

SURFACE MOUNTS

www.soundoffsignal.com

GHØST

Warning Lights by SoundOff Signal

Surface Mounts


1.800.338.7337



Single Stop/Tail Surface Mount

10-30 Vdc

- Black Housing #EGHSTT2RB (red)
#EGHSTT2AB (amber)
- Chrome Housing #EGHSTT2RC (red)
- White Housing #EGHSTT2RW (red)
#EGHSTT2BW (blue)

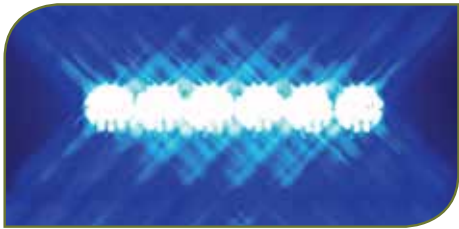

Features


- Sleek, narrow surface mount light, fits almost anywhere
- Premium optics offer optimal power and brightness
- Includes santoprene rubber mounting gasket and mounting hardware with 18" of 3-wire cable

REPLACE (x) IN ORDER NUMBER FOR COLOR SELECTION

Solid Colors =



Dual/Split Colors =

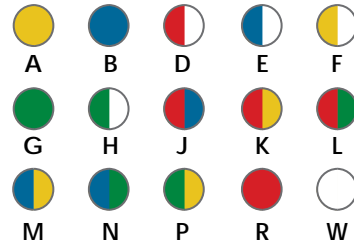

Dual Stacked Surface Mount

10-30 Vdc

10-16 Vdc

- Black Housing #EGHST6(x)B #EGHST6(x)B-12
- Chrome Housing #EGHST6(x)C #EGHST6(x)C-12
- White Housing #EGHST6(x)W #EGHST6(x)W-12

SURFACE MOUNTS

www.soundoffsignal.com



Single Surface Mount

	10-30 Vdc	10-16 Vdc	ECE R65/EMC (amber, blue, red only)
• Black Housing	#EGHST2(x)	#EGHST2(x)-12	#EGHSTE2(x)-B
• Chrome Housing	#EGHST2(x)C	#EGHST2(x)C-12	#EGHSTE2(x)-C
• White Housing	#EGHST2(x)W	#EGHST2(x)W-12	#EGHSTE2(x)-W



Surface mount design can be mounted on any flat area



TECHNICAL SPECIFICATIONS

FLASH PATTERNS	33 flash patterns
LIGHT SYNC	Yes
TECHNOLOGY	Single: 6 Gen3 LEDs , Dual Stacked: 12 Gen3 LEDs (6 per module)
INPUT VOLTAGE	10 - 16 Vdc or 10 - 30 Vdc
CURRENT DRAW	Single: 0.75 amps (flash pattern dependent), Dual Stacked: less than 1.5 amps
OPERATING TEMPERATURE	-40° to +65° C / -40° to +149° F
LENGTH/DIMENSION	Single/Stop Tail: 5.7" (14 cm) L x 1.06" (2.8 mm) H x 1.8" (4.6 cm) D Dual Stacked: 5.4" (14 cm) L x 2.4" (61 mm) H x 1' (2.5 cm) D
WARRANTY	Five-year
SURFACE MOUNTS	Single: On 4.9" (12.4 cm) centers, Dual Stacked: 4.85" (12 cm) centers



Surface Mounts

Features

- Wide, bright extreme angle output
- Light sync technology to synchronize your lights to alternate the flash patterns or flash simultaneously
- Includes santoprene rubber mounting gasket and mounting hardware with 18" of 3-wire cable



Single Surface Mount

- Black Housing
- White Housing
- Chrome Housing

Solid Colors

- #EP2SSMDB(x)
- #EP2SSMDB(x)W
- #EP2SSMDB(x)C

Split Colors

- #EP2SSMBS(x)
- #EP2SSMWS(x)
- #EP2SSMCS(x)

Dual Stacked Surface Mount

- Black Housing
- White Housing
- Chrome Housing

Solid Colors

- #EP2DSMDB(x)
- #EP2DSMDB(x)W
- #EP2DSMDB(x)C



Dual Stacked Stop/Tail* Surface Mount (not shown)

- Black Housing
- White Housing
- Chrome Housing

Solid Colors

- #EP2DSMSTT(x)
- #EP2DSMSTT(x)W
- #EP2DSMSTT(x)C

* Upper warning module can be Blue, Red or Amber.
Bottom module is Red only with Stop/Tail function.



Dual Side-by-Side Surface Mount

- Black Housing
- White Housing
- Chrome Housing

Solid Colors

- #EP2DSSDB(x)
- #EP2DSSDB(x)W
- #EP2DSSDB(x)C

1.800.338.7337

SURFACE MOUNTS

www.soundoffsignal.com



Harley Davidson
Crash Bar Brackets #PRDSMMLBM (pair)
1.25" diameter

Honda & Kawasaki
Crash Bar Brackets #PRDSMMSBM (pair)
1" diameter



License Plate Dual Side-by-Side Bracket #PPDSMLBKCV (each)

45° Brackets



Vertical #PPRSM45BRKT (pair)



Horizontal #PPRSM45HBRKT (pair)

REPLACE (x) IN ORDER NUMBER FOR COLOR SELECTION

Solid Colors =

A	B	G	R	W

Dual/Split Colors =

A	B	D	E	F
G	H	J	K	L
M	N	P	R	W

90° Bracket



#PPRSM90BRKT (pair)



TECHNICAL SPECIFICATIONS

FLASH PATTERNS	33 flash patterns
LIGHT SYNC	Yes
TECHNOLOGY	Single: 8 Gen3 LEDs , Dual Stacked: 16 Gen3 LEDs
INPUT VOLTAGE	10 - 30 Vdc
CURRENT DRAW	Single: 1.1 amps maximum, Dual Stacked: 2 amps maximum (flash pattern dependent)
OPERATING TEMPERATURE	-40° to +65° C / -40° to +149° F
LENGTH/DIMENSION	Single: 4.5" (11 cm) W x 2.4" (6.0 cm) H x 1.25" (3.2 cm) D, Stacked: 4.5" 11 cm) W x 3.8" (9.7 cm) H x 1.25" (3.2 cm) D, Side-by-Side: 8.2" (21 cm) W x 2.4" (6.0 cm) H x 1.25" (3.2 cm) D
WARRANTY	Five-year
SURFACE MOUNTS	Single: 4.125" (1.0 cm) centers, Stacked: 4.14" (1.0 cm) centers, Side-by-Side: 7.85" (20 cm) centers

Compass Fender Lights

2012 Chevrolet Caprice

Introducing the most comprehensive fender light offering on the market.

Choose from either **GHOST** or **Intersector** warning light solutions to upfit your 2012 Chevrolet Caprice vehicles.

**THINK
NEW**

- U.S. Patent #D636,113 (on light only)-
Other Patents Pending



Intersector Fender Light, 10-16 Vdc
ECPNTKC1B(xx) - pair

Right side shown, 9.5" W (24.13 cm) x 3" (7.62 cm) H

Features

- No other light offers 180 degree output - specially designed reflector amplifies and throws the light at the perfect angle to increase visibility at intersections
- The first light of its kind to offer critical intersection warning capabilities
- Includes Surface Mount Light with flasher module in your choice of LED colors; also includes mounting hardware with 36" of 3-wire cable
- Five-year warranty

**THINK
NEW**



GHOST Fender Light, 10-16 Vdc
ECPGHKC1B(xx) - pair

Right side shown, 9.5" W (24.13 cm) x 3" (7.62 cm) H

Features

- Sleek, narrow and flush surface mount light
- Premium optics offer the most power and brightness from a light of this size
- Includes surface mount light in your choice of LED colors; also includes mounting hardware with 36" of 3-wire cable
- Five-year warranty

REPLACE (xx) IN ORDER NUMBER FOR COLOR SELECTION

Solid Colors =      Split Color = 

AA BB RR WW RB JJ

RB = One red light and one blue light.

Split color only available with the Ghost Fender light.

1.800.338.7337

FENDER LIGHTS

www.soundoffsignal.com

Compass Fender Lights

2013 Ford Interceptor Sedan

Introducing the most comprehensive fender light offering on the market.

Choose from either **GHOST** or **Intersector** warning light solutions to upfit your new 2013 Ford Interceptor Sedan vehicles.

1.800.338.7337



Intersector Fender Light, 10-16 Vdc
ECPNTKF1B(xx) - pair

Right side shown, 9.5" W (24.13 cm) x 3" (7.62 cm) H

Features

- No other light offers 180 degree output - specially designed reflector amplifies and throws the light at the perfect angle to increase visibility at intersections
- The first light of its kind to offer critical intersection warning capabilities
- Includes Surface Mount Light with flasher module in your choice of LED colors; also includes mounting hardware with 36" of 3-wire cable
- Five-year warranty



GHOST Fender Light, 10-16 Vdc
ECPGHKF1B(xx) - pair

Right side shown, 9.5" W (24.13 cm) x 3" (7.62 cm) H

Features

- Sleek, narrow and flush surface mount light
- Premium optics offer the most power and brightness from a light of this size
- Includes surface mount light in your choice of LED colors; also includes mounting hardware with 36" of 3-wire cable
- Five-year warranty

REPLACE (xx) IN ORDER NUMBER FOR COLOR SELECTION

Solid Colors = AA BB RR WW RB Split Color = JJ

RB = One red light and one blue light.

Split color only available with the Ghost Fender light.

www.soundoffsignal.com

FENDER LIGHTS

LED3TM

MINI SURFACE MOUNT

Surface Mount

1.800.338.7337


SURFACE MOUNTS



Mini Surface Mount

- 10-16 Vdc #EL3SN(x)
- 10-30 Vdc #EL3SN3Ø(x)

REPLACE (x) IN ORDER NUMBER FOR COLOR SELECTION



Features

- High powered, versatile mini surface mount
- Our smallest compact size surface mount light
- Many versatile mounting options with optional brackets and bezels for any vehicle and any mount
- Includes rubber mounting gasket and mounting hardware with 18" of 3-wire cable for hard wire installation

THINK NEW



Dodge Charger 2011 (and newer) Fog Light Bezel

#PEL3FLBKDC

- 3.5" round bezel
- Snap two LED3 lights into bezel (LED3 lights ordered separately)
- 10-16 Vdc: or 10-30 Vdc:
- Up to four LED3 lights can be synced together
- Vehicle to have been specified with OEM fog light option
- Mounting hardware included




(Blue & Red = 1 light
Amber = 2 lights)

TECHNICAL SPECIFICATIONS

FLASH PATTERNS	33 flash patterns
LIGHT SYNC	Yes
TECHNOLOGY	3 Gen3 LEDs
INPUT VOLTAGE	10 - 16 Vdc or 10 - 30 Vdc
CURRENT DRAW	<0.5 amps
OPERATING TEMPERATURE	-40° to +65° C / -40° to +149° F
LENGTH/DIMENSION	2.5" (6.4 cm) W x 1.4" (3.6 cm) H x 1.25" (3.2 cm)
WARRANTY	Five-year
SURFACE MOUNT	2.21" (5.6 cm) centers

www.soundoffsignal.com

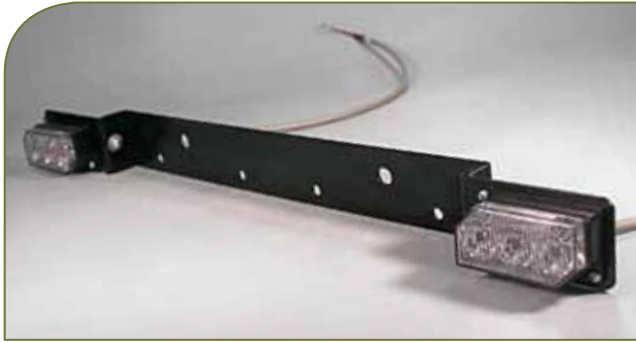

Universal License Plate bracket
Horizontal #EL3SNBRK2LPH
Vertical #EL3SNBRK2LPV

LED3 Optional Bracket and Bezel Options



Universal Grille bracket
#EL3SNBRK1GRU



45° bracket
Horizontal # EL3SNHBRK145
Vertical #EL3SNBRK145



90° bracket
#EL3SNBRK19Ø



Side-by-Side 90° bracket
#EL3SNBRK29ØH



Stacked 90° bracket
Horizontal #EL3SNBRK29ØH



Stacked 90° bracket
Vertical #EL3SNBRK29ØV



Single bezel
#PEL3BZSG(x)



Dual Stacked bezel
#PEL3BDS(x)

Dual Side-by-Side bezel
#PEL3BZSS(x)

Replace (x) for these available housing colors:
Black=B, Chrome=C, White=W



1.800.338.7337

SURFACE MOUNTS

www.soundoffsignal.com

RAPTOR™

EXPLOSIVE POWER. EXTREME ANGLE.

Surface Mount

1.800.338.7337

SURFACE MOUNTS

www.soundoffsignal.com




Surface Mount

- Black Housing #ERPT1SSMDB(x)

REPLACE (x) IN ORDER NUMBER FOR COLOR SELECTION

Solid Colors =



Features


- Durable Xylex molded lens and housing resists rust, corrosion and protects against harsh detergents
- Extreme angle optics for a bright, wide signal
- Light sync technology to synchronize your lights
- Features treated and potted internal heat sink to protect the driver board and wires from moisture penetration
- Includes Santoprene rubber mounting gasket, 6" of 4-wire cable and mounting hardware for installation

Labeling on Blue LED light clearly shows "e" mark designated for ECE65 compliant lights for international use





Raptor offers Extreme Angle optics with a durable and corrosion resistant Xylex lens and housing.

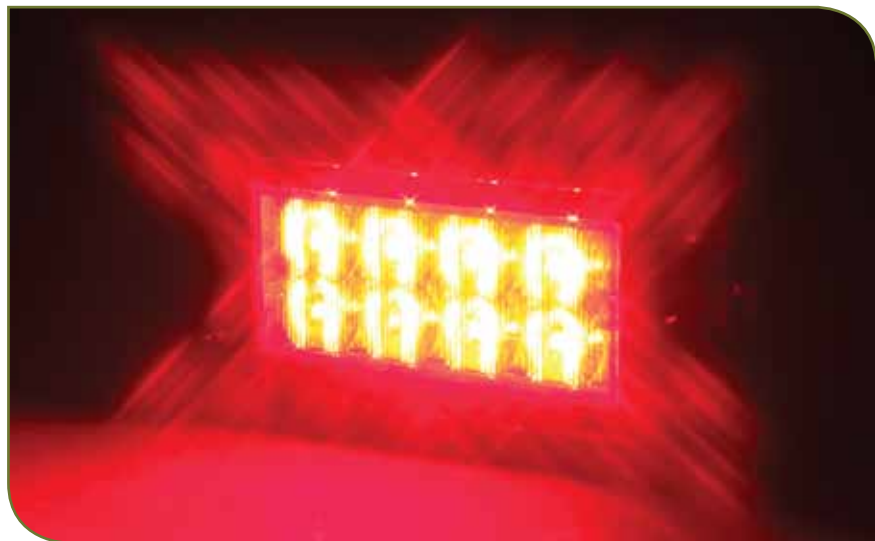

Red LED



Blue Only

TECHNICAL SPECIFICATIONS

FLASH PATTERNS	6 flash patterns (3 simultaneous, 3 alternating)
LIGHT SYNC	Yes
TECHNOLOGY	8 Gen3 LEDs
INPUT VOLTAGE	10 - 30 Vdc
CURRENT DRAW	Less than 2 amps
OPERATING TEMPERATURE	-40° to +65° C / -40° to +149° F
LENGTH/DIMENSION	5" (12.6 cm) W x 2.8" (7.0 cm) H x 1.4" (3.5 cm) D
WARRANTY	Five-year
SURFACE MOUNT	On 4.2" (10.5 cm) centers

1.800.338.7337

SURFACE MOUNTS

www.soundoffsignal.com

**THINK
NEW**



~Patent Pending~

Features

- New vehicle design integration
- Single, Split, Dual and Tri-Color capability
- 6, 9, 12 and 18 LED counts
- Steady-burn white capability

CUSTOM ORDER

nForce is the only Perimeter Lighting product line on the market that can be specifically tailored to your unique requirements.

Visit our Website for an order form when ordering any of these custom options.

- 10-30 Vdc
- Xylex lens (improved chemical resistance)
- Solid green LED color or combined with other available colors
- Amber LED color combined with red, blue and white LED colors
- White LED color combined with red or blue LED colors
- ECE R65/EMC compliant models can only be specified with 9 LEDs and solid colors, Amber, Blue and Red
- Dual Module: choose alternative LED colors and/or combined color configurations

Single Deck/Grille Mount (black housing)

- 6 LED, Solid or Split Color ENFSGS1(x)
- 9 LED, Solid Color ENFSGS2(x)
- 12 LED, Solid or Dual ENFSGS3(x)
- 18 LED, Tri Color - Blue/Red/Amber ENFSGS4BRA
- 18 LED, Tri Color - Blue/Red/White ENFSGS4BRW

STANDARD COLORS AVAILABLE

For Module LED Color Patterns, see chart on next page. Replace the (x) or (xx) in part number for color selection.

Single Solid Colors (x) =

- A = amber
- B = blue
- R = red
- W = white

Single Light, 6 LED Split Colors (x) =

- J = red/blue

Single Light, 12 LED Dual Colors (x) =

- J = red/blue

Dual Light, Solid Colors (xx) =

- AA = amber/amber
- AW = amber/white
- BA = blue/amber
- BB = blue/blue
- BW = blue/white
- RA = red/amber
- RB = red/blue
- RR = red/red
- RW = red/white

Dual Light, 6 LED Split Colors (xx) =

- JJ = red/blue

Dual Light, 12 LED Dual Colors (xx) =

- JJ = red/blue

Tri Colors =

- BRA = blue/red/amber
- BRW = blue/red/white

9 LED available only in Solid Colors (x) =

- A = amber
- B = blue
- R = red
- W = white

**THINK
NEW**




~Patent Pending~

Dual Side-by-Side Deck/Grille Mount (black housing)

- 6 LED, Solid or Split Color ENFDGS1(xx)
- 9 LED, Solid Color ENFDGS2(xx)
- 12 LED, Solid or Dual Color ENFDGS3(xx)
- 18 LED, Tri Color - Blue/Red/Amber ENFDGS4BRA
- 18 LED, Tri Color - Blue/Red/White ENFDGS4BRW

Module LED Color Patterns

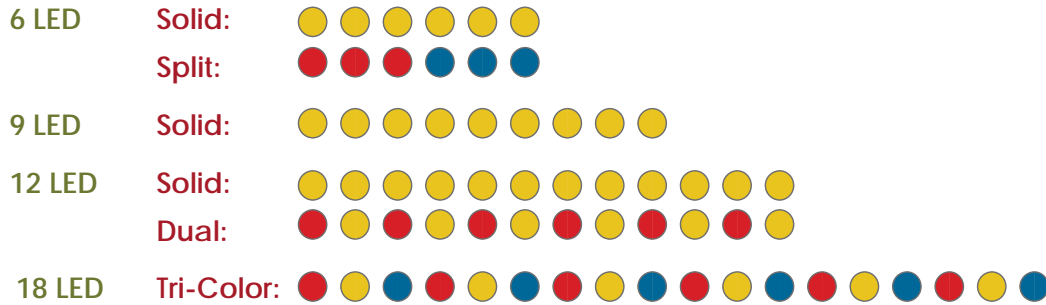

TECHNICAL SPECIFICATIONS

DIMENSIONS (single)	5.0" (12.7 cm) L x 1.88" (4.7 cm) H x 1.82 (4.3 cm) D
(dual)	9.50" (24.1 cm) L x 1.88" (4.7 cm) H x 1.82" (4.3 cm) D
CURRENT DRAW PER MODULE	
6 LED Single Color	< 1.0A @ 12.8Vdc
6 LED Split Color	< 0.5A @ 12.8Vdc
9 LED Single Color	< 1.5A @ 12.8Vdc
12 LED Single Color	< 2.0A @ 12.8Vdc
12 LED Split Color	< 1.0A @ 12.8Vdc
18 LED Tri-Color	< 1.0A @ 12.8Vdc
FLASH PATTERNS	12 Single color patterns, 24 Dual and Tri-color patterns
INPUT VOLTAGE	10 - 16 Vdc (standard) or 10-30 Vdc
OPERATING TEMPERATURE	-40°C to +65°C / -40° to + 149F
TECHNOLOGY	Gen3 LEDs
WARRANTY	Five-year

1.800.338.7337

DECK/GRILLE MOUNTS

www.soundoffsignal.com

GHOST

Warning Lights by SoundOff Signal

Deck/Grille Mounts



Permanent Mount



Single Edge Mount

Single Multi-Mount

- | | | |
|-----------------|------------------|------------------|
| | 10-16 Vdc | 10-30 Vdc |
| • Black Housing | #EGHST1(x)-12 | #EGHST1(x) |
| • White Housing | #EGHST1(x)W-12 | #EGHST1(x)W |

ECE R65/EMC Xylex Lens (Amber, Blue or Red only)

- | | |
|--------------|-----------------|
| #EGHSTE1(x)B | #EGHSTE1(x)B-EU |
| #EGHSTE1(x)W | #EGHSTE1(x)W-EU |

Dual Multi-Mount

- | | | |
|-----------------|------------------|------------------|
| | 10-16 Vdc | 10-30 Vdc |
| • Black Housing | #EGHDT1(xx)-12 | #EGHDT1(xx) |
| • White Housing | #EGHDT1(xx)W-12 | #EGHDT1(xx)W |

Lights include 3 Mounting Options:
Permanent, Single Edge Mount and 3M Adhesive Mount (not shown)

Single Stop/Tail Multi-Mount

- | | |
|-----------------|------------------|
| | 10-16 Vdc |
| • Black Housing | #EGHSTTR |
| • White Housing | #EGHSTTRW |


Light includes 2 Mounting Options: Permanent and Adhesive Mount

REPLACE (x) IN ORDER NUMBER
FOR COLOR SELECTION

Solid Colors =



Dual/Split Colors =

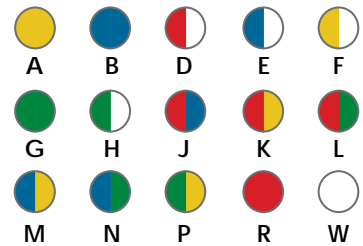

Features

- Sleek, narrow surface mount light, fits almost anywhere
- Premium optics offer optimal power and brightness
- Red Stop/Tail model is a low power, steady-on red running light once brake is applied, light flashes 5 times and remains on at full power while brake is activated
- Includes 18" of 3-wire cable
- Rock Light offers an anti-crush, super duty bracket for the most demanding applications and environments
- Extreme duty Rock Bracket offers up to 30 degrees of light head adjustability to angle light



GHOST Single and Dual lights mounted to the hood and grille of a Give E m a Brake work truck are highly visible

1.800.338.7337

DECK/GRILLE MOUNTS

www.soundoffsignal.com



Rock Light

	10-16 Vdc	10-30 Vdc
• Warning	#EGHST3(x)-12	#EGHST3(x)
• Stop/Tail		#EGHSTT3R

Bracket Options	Black	White
• Single Edge Bracket	#PGHSTSUB	#PGHSTSUW
• Dual Edge Bracket	#PGHSTDUB	#PGHSTDUW
• Rock Bracket	#PGHSTRLK	

Single Edge Mount Bracket



Permanent Mount



3M Adhesive Mount



Dual Edge Mount Bracket



TECHNICAL SPECIFICATIONS

FLASH PATTERNS	33 flash patterns
LIGHT SYNC	Yes
TECHNOLOGY	6 Gen3 LEDs
INPUT VOLTAGE	10 - 16 Vdc or 10 - 30 Vdc
CURRENT DRAW	< 0.75 amps per module @ 12.8 Vdc
OPERATING TEMPERATURE	-40° to +65° C / -40° to +149° F
LENGTH/DIMENSION	Multi: 4" (10 cm) L x 0.9" (2.3 cm) H x 1.8" (4.6 cm) D Rock: 4.8" (12 cm) L x 2" (5.1 cm) H x 1.6" (4.1 cm) D
WARRANTY	Five-year
MOUNTS	Multi: Permanent, Edge and Adhesive, Stop Tail: Permanent and Adhesive



Deck/Grille Mounts

1.800.338.7337

DECK/GRILLE MOUNTS



Single Deck/Grille Mount

- Single Light, Solid Color #EP2SGS1(x)
- Single Light, Split Color #EP2SGS2(x)



Dual Deck/Grille Mount

- Dual Light #EP2DGS1(x)

Features


- Brackets allow 120° of light head adjustment to angle the light
- Flash pattern recall remembers last flash pattern used
- Convenient side wire exit for easier installation
- Includes 18" of 3-wire shielded cable

REPLACE (x) IN ORDER NUMBER FOR COLOR SELECTION

Solid Colors =



Dual/Split Colors =

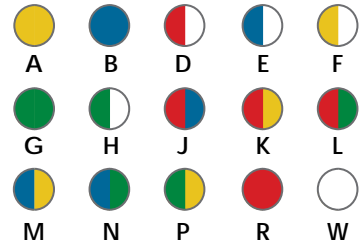

Two Single Dash/Deck/Grille lights mounted to the rear headliner in an SUV



TECHNICAL

SPECIFICATIONS

FLASH PATTERNS	33 flash patterns
LIGHT SYNC	Yes
TECHNOLOGY	Single: 8 Gen3 LEDs, Dual: 16 Gen3 LEDs
INPUT VOLTAGE	10 - 30 Vdc
CURRENT DRAW	Single: 1.1 amps maximum, Dual: 2 amps maximum (flash pattern dependent)
OPERATING TEMPERATURE	-40° to +65° C / -40° to +149° F
LENGTH/DIMENSION	Single: 4.3" (11 cm) L, Dual: 8.5" (22 cm) L x 2.4" (7 cm) H x 1.75" (4.4 cm) D
WARRANTY	Five-year
MOUNT	Surface Mount on 2.77" (7.0 cm) centers

www.soundoffsignal.com



Deck/Grille Mount








Bracket shown at lowest height

Surface Mount
















- **10-16 Vdc** #EL6GD(x)
- **10-30 Vdc** #EL6GD30(x)

REPLACE (x) IN ORDER NUMBER FOR COLOR SELECTION

Solid Colors =

				
A	B	G	R	W

Dual Colors =

				
A	B	D	E	F
				
G	H	J	K	L
				
M	N	P	R	W

Features

- Brilliant Gen3 LEDs packed into a small and aerodynamic shape with adjustable bracket that can tilt the light head down 10 degrees or up 20 degrees to angle the output where you need it
- Adjustable stainless steel bracket allows a maximum height of 3.4" or a minimum height of 3"



TECHNICAL SPECIFICATIONS

FLASH PATTERNS	16 flash patterns
LIGHT SYNC	Yes
TECHNOLOGY	6 Gen3 LEDs
INPUT VOLTAGE	10 - 16 Vdc or 10 - 30 Vdc
CURRENT DRAW	Less than 1 amp @ 12.8 Vdc (flash pattern dependent)
OPERATING TEMPERATURE	-40° to +65° C / -40° to +149° F
LENGTH/DIMENSION	5" (13 cm) W x 2.6" (6.6 cm) D x H 3.1" (7.9 cm) Minimum / 3.4" (8.6 cm) Maximum
WARRANTY	Five-year
MOUNT	Deck/Grille Mount

1.800.338.7337

DECK/GRILLE MOUNTS

www.soundoffsignal.com

LED3™

Warning Trunk Light

CARGO WARNING TRUNK LIGHT



Ford Crown Victoria

#ETLKCØ2CV(x)

Chevrolet Impala or
Dodge Charger


#ETLKCØ6U(x)

LED3 Cargo Warning Trunk light features 2-LED3 Mini Warning lights with attached white LED Interior light

Features

- Offers bright trunk illumination with a distinct safety advantage - when the trunk is open powerful LED3 Mini Lights provide a critical rear warning signal
- Vehicle specific brackets available for Ford Crown Victoria, Chevrolet Impala or Dodge Chargers
- Integrated Interior LED cargo light with 3 bright white Gen3 LEDs that clearly illuminate dark cargo/trunk areas - no more fumbling around in the dark
- LED lights feature a low amp draw that won't burden your electrical system
- Interior cargo light is easy to install with a simple 2-wire connection - light has a 20" wire length
- Each LED3 end module has 18" of shielded cable

REPLACE (x) IN ORDER NUMBER
FOR COLOR SELECTION =



A, B, R & W color codes =
both lights are the same color

H, J, M & K color codes =
1 light of each color

1.800.338.7337

WARNING TRUNK LIGHT



TECHNICAL SPECIFICATIONS

FLASH PATTERNS	33 flash patterns
LIGHT SYNC	Yes
TECHNOLOGY	LED3 modules: 3 Gen3 LEDs (each) Interior Light: 3 Gen3 LEDs
INPUT VOLTAGE	10 - 16 Vdc
CURRENT DRAW	LED3 modules: 0.5 amp (each) Interior Light: less than 500mA
LENGTH/DIMENSION	20" (51 cm) L x 5.8" (15 cm) H x 1.4" (3.6 cm) D
WARRANTY	Five-year
MOUNT	Surface Mount with supplied brackets

www.soundoffsignal.com

Recess Mount

**THINK
NEW**



~Patent Pending~

Features

- New vehicle design Integration
- Single, Split, Dual and Tri-Color capability
- 6, 9, 12 and 18 LED counts
- Steady-burn white capability

Black Housing

- 6 LED, Solid or Split Color ENFSRS1(x)
- 9 LED, Solid Color ENFSRS2(x)
- 12 LED, Solid or Dual Color ENFSRS3(x)
- 18 LED, Tri Color - Blue/Red/Amber ENFSRS4BRA
- 18 LED, Tri Color - Blue/Red/White ENFSRS4BRW

STANDARD COLORS AVAILABLE

For Module LED Color Patterns, see chart on page 46. Replace the (x) in part number for color selection.

Single Solid Colors (x) =

A = amber, B = blue, R = red, W = white

Single Light, 6 LED Split Colors (x) =

J = red/blue

Single Light, 12 LED Dual Colors (x) =

J = red/blue

Tri Colors =

BRW = blue/red/white, BRA = blue/red/amber

9 LED available only in Solid Colors (x) =

A = amber, B = blue, R = red, W = white

CUSTOM ORDER

nForce is the only Perimeter Lighting product line on the market that can be specifically tailored to your unique requirements.

Visit our Website for an order form when ordering any of these custom options.

- 10-30 Vdc
- Xylex lens (improved chemical resistance)
- White grommet
- Solid green LED color or combined with other available colors
- Amber LED color combined with red, blue and white LED colors
- White LED color combined with red or blue LED colors
- EMC compliant models can only be specified with 9 LEDs and solid color



TECHNICAL SPECIFICATIONS

DIMENSIONS	5.0" (12.7 cm) L x 1.88" (4.8 cm) H x 1.82 (4.6 cm) D
CURRENT DRAW PER MODULE	6 LED Single Color: < 1.0A @ 12.8Vdc, 6 LED Split Color: < 0.5A @ 12.8Vdc, 9 LED Single Color: < 1.5A @ 12.8Vdc, 12 LED Single Color: < 2.0A @ 12.8Vdc, 12 LED Split Color: < 1.0A @ 12.8Vdc, 18 LED Tri-Color: < 1.0A @ 12.8Vdc
FLASH PATTERNS	12 Single color patterns, 24 Dual and Tri-color patterns
INPUT VOLTAGE	10 - 16 Vdc (standard) or 10-30 Vdc
OPERATING TEMPERATURE	-40°C to +65°C / -40° to +149°F
TECHNOLOGY	Gen3 LEDs
WARRANTY	Five-year

1.800.338.7337

RECESS MOUNTS

www.soundoffsignal.com

GHOST[®]

Recess Mount by SoundOff Signal

Recess Mount



1.800.338.7337

RECESS MOUNTS






Recess Mount	10-30 Vdc	10-16 Vdc	ECE R65/EMC 10-30 Vdc
• Black housing	#EGHST5(x)B	#EGHST5(x)B-12	EGHSTE5(x)B-EU
• Chrome housing	#EGHST5(x)C	#EGHST5(x)C-12	EGHSTE5(x)C-EU
• White housing	#EGHST5(x)W	#EGHST5(x)W-12	EGHSTE5(x)W-EU

Features
















- Just 0.3 inches (0.8 cm) from the body of the vehicle when installed
- Housing is made from die cast aluminum
- Black and white housings are powder coated while chrome housing is a high luster, nickel plated finish
- Same power and intensity as the original GHOST mini light with 6 bright Gen3 LEDs
- Light includes Santoprene rubber gasket and 38 inch (97 cm) wire length for hardwire installation

REPLACE (x) IN ORDER NUMBER FOR COLOR SELECTION

Solid Colors =

				
A	B	G	R	W

Dual/Split Colors =

				
A	B	D	E	F
				
G	H	J	K	L
				
M	N	P	R	W



TECHNICAL

SPECIFICATIONS

FLASH PATTERNS	33 flash patterns
LIGHT SYNC	Yes
TECHNOLOGY	6 Gen3 LEDs
INPUT VOLTAGE	10 - 16 Vdc or 10 - 30 Vdc
CURRENT DRAW	0.75 amps/module @ 12.8 Vdc (flash pattern dependent)
OPERATING TEMPERATURE	-40°C to +65°C / -40° to +149°F
LENGTH/DIMENSION	4.7" (11.9 cm) W x 1.6" (4.1 cm) H x 1" (2.5 cm) D
WARRANTY	Five-year
MOUNT	Recess Mount

www.soundoffsignal.com

R4 Series

by SoundOff Signal



Recess Mounts 4" Round Warning Lights








Gen3 Light with Grommet




- Clear Lens #ERDREBZ3(x)C
- Color Lens #ERDREBZ3(xx)

REPLACE (x) IN ORDER NUMBER FOR COLOR SELECTION

Clear Lens =

 A	 B	 G	 R	 W
---	---	---	---	---

Color Lens =

 AA	 BB	 RR
--	--	--

1.800.338.7337

RECESS MOUNTS

www.soundoffsignal.com

Features

- Offers unmatched power and brightness in a 4" round light
- Durable, UV resistant polycarbonate lens prevents yellowing or fading of the lens
- Flash pattern recall remembers last flash pattern used
- Light sync technology to synchronize your lights
- Includes black rubber grommet and 18" of 3-wire shielded cable for hard wire installation

Chrome Dress Ring
Mounts over rubber grommet
(optional)



#ECVR4CHRM



Dodge Charger Fog Lamp Kit (2010 and older)

(includes one light and one fog lamp bracket)

- Clear Lens #EKDCFLG3(x)C
- Color Lens #EKDCFLG3(xx)

Dodge Charger Fog Lamp Bracket (2010 and older)

Mounts as a recess mount into 45" round cutouts (optional)

- #ERDREBZBKDC (each)



TECHNICAL SPECIFICATIONS

FLASH PATTERNS	16 flash patterns
LIGHT SYNC	Yes
TECHNOLOGY	6 Gen3 LEDs
INPUT VOLTAGE	10 - 16 Vdc
CURRENT DRAW	1 amp @ 12.8 Vdc
OPERATING TEMPERATURE	-40° to +65° C / -40° to +149° F
DIMENSIONS	Light: 4" (10 cm) Diameter x 1.25" (3 cm) D, Grommet: 5.2" (13 cm) Diam. x 1.25" (3 cm) D, Chrome Dress Ring: 5.75" (14 cm) Diam. x 0.44" (1 cm) D
WARRANTY	Five-year
MOUNT	Recess Mount

**THINK
NEW**



Features

- New vehicle design integration
- Single, Split, Dual and Tri-Color capability
- 6, 9, 12 and 18 LED counts
- Steady-burn white capability
- Lights can be synchronized

Single Permanent Mount

(includes shroud and bare wires)

- 6 LED, Solid or Split Color ENFSWP1(x)
- 9 LED, Solid Color ENFSWP2(x)
- 12 LED, Solid or Dual Color ENFSWP3(x)
- 18 LED, Tri Color - Blue/Red/Amber ENFSWP4BRA
- 18 LED, Tri Color - Blue/Red/White ENFSWP4BRW

Single Suction Cup Mount

(includes shroud and 12v Cig plug with 11.5 foot cord)

- 6 LED, Solid or Split Color ENFSWS1(x)
- 9 LED, Solid Color ENFSWS2(x)
- 12 LED, Solid or Dual Color ENFSWS3(x)
- 18 LED, Tri Color - Blue/Red/Amber ENFSWS4BRA
- 18 LED, Tri Color - Blue/Red/White ENFSWS4BRW

STANDARD COLORS AVAILABLE

For Module LED Color Patterns, see chart on next page. Replace the (x) or (xx) in part number for color selection.

Single Solid Colors (x) =

- A = amber
- B = blue
- R = red
- W = white

Single Light, 6 LED Split Colors (x) =

- J = red/blue

Single Light, 12 LED Dual Colors (x) =

- J = red/blue

Dual Light, Solid Colors (xx) =

- AA = amber/amber
- AW = amber/white
- BA = blue/amber
- BB = blue/blue
- BW = blue/white
- RA = red/amber
- RB = red/blue
- RR = red/red
- RW = red/white

Dual Light, 6 LED Split Colors (xx) =

- JJ = red/blue

Dual Light, 12 LED Dual Colors (xx) =

- JJ = red/blue

Tri Colors =

- BRA = blue/red/amber
- BRW = blue/red/white

9 LED available only in Solid Colors (x) =

- A = amber
- B = blue
- R = red
- W = white







CUSTOM ORDER

nForce is the only Perimeter Lighting product line on the market that can be specifically tailored to your unique requirements.

Visit our Website for an order form when ordering any of these custom options.

- 10-30 Vdc
- Xylex lens (improved chemical resistance)
- Solid green LED color or combined with other available colors
- Amber LED color combined with red, blue and white LED colors
- White LED color combined with red or blue LED colors

Module LED Color Patterns

6 LED	Solid:	
	Split:	
9 LED	Solid:	
12 LED	Solid:	
	Dual:	
18 LED	Tri-Color:	



TECHNICAL SPECIFICATIONS

DIMENSIONS	6.80 (17.3 cm) L x 1.43" (3.6 cm) H x 5.00" (12.7 cm) D
CURRENT DRAW PER MODULE	
6 LED Single Color	< 1.0A @ 12.8Vdc
6 LED Split Color	< 0.5A @ 12.8Vdc
9 LED Single Color	< 1.5A @ 12.8Vdc
12 LED Single Color	< 2.0A @ 12.8Vdc
12 LED Split Color	< 1.0A @ 12.8Vdc
18 LED Tri-Color	< 1.0A @ 12.8Vdc
FLASH PATTERNS	12 Single color patterns, 24 Dual and Tri-color patterns
INPUT VOLTAGE	10 - 16 Vdc (standard) or 10 - 30 Vdc
OPERATING TEMPERATURE	-40°C to +65°C / -40° to +149°F
TECHNOLOGY	Gen3 LEDs
WARRANTY	Five-year

1.800.338.7337

WINDSHIELD LIGHTS

www.soundoffsignal.com

**THINK
NEW**



Features

- New vehicle design integration
- Single, Split, Dual and Tri-Color capability
- 6, 9, 12 and 18 LED counts
- Steady-burn white capability
- Lights can be synchronized

Dual Side-by-Side Permanent Cup Mount

(includes shroud and bare wires)

- 6 LED, Solid or Split Color ENFDWP1(xx)
- 9 LED, Solid Color ENFDWP2(xx)
- 12 LED, Solid or Dual Color ENFDWP3(xx)
- 18 LED, Tri Color - Blue/Red/Amber ENFDWP4BRA
- 18 LED, Tri Color - Blue/Red/White ENFDWP4BRW

Dual Side-by-Side Suction Mount

(includes shroud and 12v Cig plug with 11.5 foot cord)

- 6 LED, Solid or Split Color ENFDWS1(xx)
- 9 LED, Solid Color ENFDWS2(xx)
- 12 LED, Solid or Dual Color ENFDWS3(xx)
- 18 LED, Tri Color - Blue/Red/Amber ENFDWS4BRA
- 18 LED, Tri Color - Blue/Red/White ENFDWS4BRW

STANDARD COLORS AVAILABLE

For Module LED Color Patterns, see chart on next page. Replace the (x) or (xx) in part number for color selection.

Single Solid Colors (x) =

- A** = amber
- B** = blue
- R** = red
- W** = white

Single Light, 6 LED Split Colors (x) =

- J** = red/blue

Single Light, 12 LED Dual Colors (x) =

- J** = red/blue

Dual Light, Solid Colors (xx) =

- AA** = amber/amber
- AW** = amber/white
- BA** = blue/amber
- BB** = blue/blue
- BW** = blue/white
- RA** = red/amber
- RB** = red/blue
- RR** = red/red
- RW** = red/white

Dual Light, 6 LED Split Colors (xx) =

- JJ** = red/blue

Dual Light, 12 LED Dual Colors (xx) =

- JJ** = red/blue

Tri Colors =

- BRA** = blue/red/amber
- BRW** = blue/red/white

9 LED available only in Solid Colors (x) =

- A** = amber
- B** = blue
- R** = red
- W** = white







CUSTOM ORDER

nForce is the only Perimeter Lighting product line on the market that can be specifically tailored to your unique requirements.

Visit our Website for an order form when ordering any of these custom options.

- 10-30 Vdc
- Xylex lens (improved chemical resistance)
- Solid green LED or color combined with other available colors
- Amber LED color combined with red, blue and white LED colors
- White LED color combined with red or blue LED colors
- Dual Module: choose alternative LED colors and/or combined color configurations

Module LED Color Patterns

6 LED	Solid:	
	Split:	
9 LED	Solid:	
12 LED	Solid:	
	Dual:	
18 LED	Tri-Color:	



TECHNICAL SPECIFICATIONS

DIMENSIONS	11.35 (28.8 cm) L x 1.43" (3.6 cm) H x 5.00" (12.7 cm) D
CURRENT DRAW PER MODULE	
6 LED Single Color	< 1.0A @ 12.8Vdc
6 LED Split Color	< 0.5A @ 12.8Vdc
9 LED Single Color	< 1.5A @ 12.8Vdc
12 LED Single Color	< 2.0A @ 12.8Vdc
12 LED Split Color	< 1.0A @ 12.8Vdc
18 LED Tri-Color	< 1.0A @ 12.8Vdc
FLASH PATTERNS	12 Single color patterns, 24 Dual and Tri-color patterns
INPUT VOLTAGE	10 - 16 Vdc (standard) or 10 - 30 Vdc
OPERATING TEMPERATURE	-40°C to +65°C / -40° to +149°F
TECHNOLOGY	Gen3 LEDs
WARRANTY	Five-year

1.800.338.7337

WINDSHIELD LIGHTS

www.soundoffsignal.com



Interior Windshield Lights

1.800.338.7337



Single Light

- Permanent Mount #EP2SWSA+(x)
- Suction Cup Mount #EP2SWS+(x)



Dual Light

- Permanent Mount #EP2DWSA+(x)
- Suction Cup Mount #EP2DWS+(x)

Features


- Narrow, low profile which can be mounted above or below the rear view mirror or installed in rear windows
- Customizable shroud is pre-scored so you can easily cut it to fit your windshield angle to reduce flashback
- Lexan polycarbonate lens is engineered for maximum light output with UV resistant properties to prevent fading
- Includes Universal Shroud and 12v DC Plug with 11.5' cord length
- CA Title 13 compliant models available (refer to website for part numbers and pricing)

REPLACE (x) IN ORDER NUMBER FOR COLOR SELECTION

Solid Colors =



Dual/Split Colors =

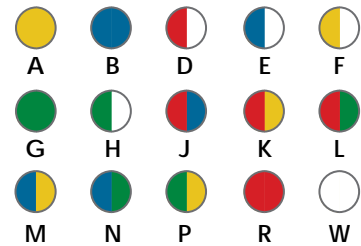

WINDSHIELD LIGHTS



Dual Light with Permanent Headliner Mount mounted above the rear view mirror in the windshield

www.soundoffsignal.com



Single Windshield light mounted with optional Prisoner Screen Bracket (windshield shroud removed)



Predator Lights mounted to the rear headliner in the back window of a Ford Explorer



TECHNICAL SPECIFICATIONS

FLASH PATTERNS	33 flash patterns
LIGHT SYNC	No
TECHNOLOGY	Single: 8 Gen3 LEDs, Dual: 16 Gen3 LEDs
INPUT VOLTAGE	10 - 30 Vdc
CURRENT DRAW	Single: 1.1 amps maximum, Dual: 2 amps maximum (flash pattern dependent)
OPERATING TEMPERATURE	-20° to +65° C / -29° to +149° F
LENGTH/DIMENSION	Single: 3.8" (10 cm) L, Dual: 7.3" (1.9 cm) L, x 1.9" (4.8 cm) H x 6.9" (18 cm) D
WARRANTY	Five-year
MOUNT	Surface Mounts on 2.77" (7.0 cm) centers

1.800.338.7337

WINDSHIELD LIGHTS

www.soundoffsignal.com

UltraLITE



Interior Windshield Warning Bar

Interior Windshield Lights

1.800.338.7337



Suction Cup Mount

- 2 Module #EL3HØ2AØ+(x)
- 4 Module #EL3HØ4AØ+(x)

Bars include Shroud, Suction Cup Mount, 12 volt Cigar Plug with 11.5 feet of cord and a pair of Universal Brackets for optional permanent headliner mount



Cigar Plug

WINDSHIELD LIGHTS

Features


- Bright 3-LED modules line these versatile warning bars for maximum output and impact
- Single warning tips available on the 8 module bar
- 12 module bar available with optional single or dual warning tips in your choice of color

REPLACE (x) IN ORDER NUMBER FOR COLOR SELECTION

Solid Colors =



Dual/Split Colors =

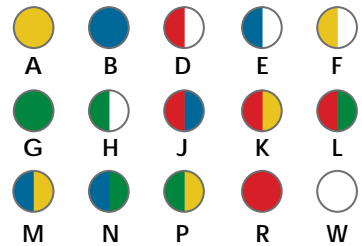

12 Module Bar mounted in the rear window of a 2011 Dodge Charger (no shroud)



4 Module Suction Cup Mount mounted in the rear window of a Ford Mustang

www.soundoffsignal.com



Permanent Headliner Mount

- 8 Module #EL3Z08A00(x)
- 12 Module #EL3Z12A00(x)

Bars include Shrouds (1 shroud per 4 module length), a pair of Universal Permanent Headliner Mount Brackets with 14' of shielded cable for hard wire installation



Permanent Mount



TECHNICAL SPECIFICATIONS

FLASH PATTERNS	2 Module: 33 flash patterns, 4 Module: 21 flash patterns, 8 or 12 Module: Solid Color - 20 Arrow and 12 Warning, Split Color - 19 Warning
LIGHT SYNC	No
TECHNOLOGY	2 Module: 6 Gen3 LEDs, 4 Module: 12 Gen3 LEDs, 8 Module: 24 Gen3 LEDs, 12 Module: 36 Gen3 LEDs
INPUT VOLTAGE	10 - 16 Vdc
CURRENT DRAW	< 1 amp for every 2 modules (flash pattern dependent) & 12.8 Vdc
OPERATING TEMPERATURE	-40° to +60° C / -40° to +140° F
LENGTH/DIMENSION	2 Module: 7" (18 cm) L, 4 Module: 13.25" (34 cm) L, 8 Module: 26" (66 cm) L, 12 Module: 38.75" (98 cm) L x 1.5" (3.8 cm) H x 3.6" (9.1 cm) D
WARRANTY	Five-year
MOUNTS	Surface mounts on 2.77" (70 mm) centers or Suction Cup



Interior Windshield Lights

1.800.338.7337



Single Light

- Suction Cup Mount #EPLTSWS+(x)

Dual Light

- Suction Cup Mount #EPLDWS+(x)

Features

- Low cost, high power windshield lights designed for volunteer, security and first responders
- "Split" Single light flashes 4 diodes at a time on each side of the light in a variety of eye-catching patterns
- Dual light has unique "x-patterns" which flash the upper 3 diodes of one quadrant against lower 3 diodes of the opposite quadrant, rotating through an "x-pattern" sequence
- Adjustable height and tilt allows for a tight fit against any windshield
- Conveniently located rear switch allows easy on/off and pattern switching
- Flash pattern recall remembers last flash pattern used
- Includes suction cup mount, shroud and 12 volt DC plug with 11.5' cord length




REPLACE (x) IN ORDER NUMBER FOR COLOR SELECTION

Solid Colors =



Dual/Split Colors =

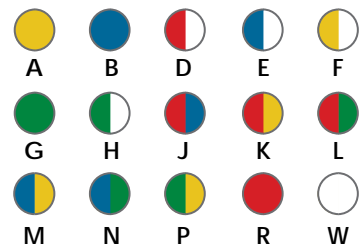

WINDSHIELD LIGHTS

www.soundoffsignal.com

TECHNICAL SPECIFICATIONS

FLASH PATTERNS	16 flash patterns
LIGHT SYNC	No
TECHNOLOGY	Single: 8 Gen3 LEDs, Dual: 12 Gen3 LEDs
INPUT VOLTAGE	10 - 16 Vdc
CURRENT DRAW	Single: 0.6 amps, Dual: 1 amp & 12.8 Vdc
OPERATING TEMPERATURE	-40° to +65° C / -40° to +149° F
LENGTH/DIMENSION	Single: 4.2" (11 cm) L, Dual: 7.2" (18 cm) x 2.2" (5.6 cm) H x 5.2" (13 cm) D
WARRANTY	Two-year
MOUNTING	Suction Cup Mount

Strobe Power Supplies

Nebula #ETN660-P

- Single pattern select wire for easier pattern selection and low power mode with lower amp draw
- Features high/low intensity control, selective switching, RF/RFM filtration and reverse polarity protection
- 7 Flash patterns: quad, double, quint, warp, inter-cycle, triple and single
- 6 amp draw @ 12 volts
- 10 - 30 Vdc
- 6 outputs / 60 watts
- Two-year warranty



Galileo #ETG690-P

- Single pattern select wire for easier pattern selection and low power mode with lower amp draw
- Features high/low intensity control, selective switching, RF/RFM filtration and reverse polarity protection
- 7 Flash patterns: quad, double, quint, warp, inter-cycle, triple and single
- 9 amp draw @ 12 volts
- 10 - 30 Vdc
- 6 outputs / 90 watts
- Two-year warranty

Aurora #ETA225-P

- 4 flash patterns: WarpFlash, Double, Quad and Quint
- Features high/low intensity control, selective switching, RF/RFM filtration and reverse polarity protected
- 4 amp draw at 12 volts
- 10 - 14 Vdc
- 2 outputs / 25 watts
- Potted style housing
- One-year warranty



Photon #ETPN475

- 5 flash patterns: InterCycle, WarpFlash™, Double, Quad and Quint
- Features high/low intensity control, selective switching, RF/RFM filtration and reverse polarity protected
- 7.5 amp draw @ 12 volts
- 8 - 30 Vdc

1.800.338.7337

POWER SUPPLIES

www.soundoffsignal.com

premium Gen3 LED Visor Light

1.800.338.7337

VISOR LIGHT

www.soundoffsignal.com



Standard

- #ELV3BVS+(x)

California Title 13 Steady Patterns


- #ELV3BVC+J Red/Blue
- #ELV3BVC+R Red/Red

Features


- Ideal for undercover vehicles
- Smaller and more powerful with 8 Gen3 LEDs per module
- Flash Pattern Recall remembers last flash pattern used
- Easy to install - simply wrap velcro strap light around visor and plug into 12 vdc outlet (11.5' cord length)

REPLACE (x) IN ORDER NUMBER FOR COLOR SELECTION

Solid Colors =



Dual/Split Colors =



Red/Blue and Red/Red only

TECHNICAL

SPECIFICATIONS

FLASH PATTERNS	16 flash patterns
TECHNOLOGY	8 Gen3 LEDs per module (16 total)
INPUT VOLTAGE	10 - 30 Vdc
CURRENT DRAW	0.75 Amps @ 12.8 Vdc, 0.35 Amps @ 25.6 Vdc
OPERATING TEMPERATURE	-40° to +65° C / -40° to +149° F
LENGTH/DIMENSION	11" (28 cm) L x 2.6" (6.6 cm) H x 0.9" (2.3 cm) D
WARRANTY	Five-year



Push-In Strobe Insert

- Black Base/Amber Tube #ETUPØA-P
- Black Base/Clear Tube (white) #ETUPØC-P

Push-In Strobe Insert

- 15' Cable with AMP Connector
- Black Base/Clear Tube (white) #EUPNSNDC

Screw-In Strobe Inserts

- Black Base/Amber Tube #ETUCØA-P
- Black Base/Blue Tube #ETUCØB-P
- Black Base/Green Tube #ETUCØG-P
- Black Base/Red Tube #ETUCØR-P
- Black Base/Clear Tube (white) #ETUCØC-P



Features

- Traditional strobe head inserts powered by a 35 watt dual Helix strobe tube
- Screw-in style has a flange base that is attached to the vehicle by using supplied screws
- Push-in style has a grommet base and is installed by simply pushing the base through a pre-drilled hole
- Inserts include 5.5" wire length with attached connector and mounting screws for installation

TECHNICAL SPECIFICATIONS

FLASH PATTERNS	Power supply dependent (refer to Strobe Power Supplies)
ANODE VOLTAGE RANGE	225 - 500 volts
MAXIMUM ENERGY	20 joules
MAXIMUM POWER	35 watts
CURRENT DRAW	Power supply dependent
TRIGGER ENERGY	4.4mJ typical @ 200 Volts
OPERATING TEMPERATURE	-20° to +65° C / -28° to +149° F
DIMENSIONS	Screw-In: 1.7" (4.3 cm) H x 1.6" (4.1 cm) Flange Diameter, Push-In: 1.6" (4.1 cm) H x 1.3" (3.3 cm) Flange Diameter
WARRANTY	One-year

UNIVERSAL UNDERCOVER™

LED Inserts and Bezels



10 - 16 Vdc LED Inserts

- 10' Cable Length #ELUC2S010(x)
- 25' Cable Length #ELUC2S025(x)

10-30 Vdc LED Inserts

- 10' Cable Length #ELUC2H010(x)

Includes extreme angle lense, in-line flasher and cable for hardwire installation



Bezels

- Black #PLUC2HSB
- Chrome #PLUC2HSC
- White #PLUC2HSW

Includes mounting gasket and hardware

Bezel with Insert

- Black #ELUC2SB10(x)
- Chrome #ELUC2SC10(x)
- White #ELUC2SW10(x)

Includes 10-16 Vdc insert with extreme angle lense and 10' cable, inline flasher with bezel, mounting gasket and hardware

Features


- LED 'hide away' insert elevates safety lighting with interchangeable lenses that tailor the light output to complement your mounting application
- 2 additional lenses available for customized light output
- Retrofits with existing 1" strobe tube cutouts in headlight, taillight or corner lights in all types of commercial vehicles
- Optional cruise mode reduces light output to 20% brightness
- Use with optional bezels to surface mount to any flat area on the vehicle body for additional lighting anywhere

REPLACE (x) IN ORDER NUMBER FOR COLOR SELECTION

Solid Colors =



Dual/Split Colors =

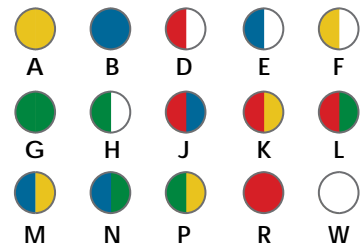

Accessories: Lens

- Extreme Angle #PLUC2LN1E
- Vertical/Forward Impact #PLUC2LN1V
- Horizontal/Side Impact #PLUC2LN1H

TECHNICAL SPECIFICATIONS

FLASH PATTERNS	30 flash patterns
LIGHT SYNC	Yes
TECHNOLOGY	6 Gen3 LEDs
INPUT VOLTAGE	10 - 16 Vdc or 10 - 30 Vdc
CURRENT DRAW	Less than 1 amp (flash pattern dependent) at 12.8 Vdc
OPERATING TEMPERATURE	-40° to +65° C / -40° to +149° F
DIMENSIONS	Insert: 1.5" (3.8 cm) Diameter x 0.9" (2.3 cm) H, Bezel: 2.2" (5.6 cm) L x 1.65" (4.2 cm) H x 0.63" (1.6 cm) D
WARRANTY	Five-year
MOUNTING	Headlight/Taillight Mount into 1" Diameter cutouts or Surface Mount with optional bezel. Bezel mounts on 1.89" (4.8 cm) centers

1.800.338.7337

LED INSERTS/BEZELS

www.soundoffsignal.com



Sirens

nERGY 400 SERIES	69
200 SERIES	71

Speakers

420 SERIES	72
100 SERIES NEODYMIUM	73
100 SERIES PROFESSIONAL	74



nERGY 400 Series Sirens

Visit www.soundoffsignal.com to hear the tones!

THINK
NEW



Knob Console

- #ETSA481CSR (100 Watt)
- #ETSA482CSR (200 Watt)

THINK
NEW




Button Console

- #ETSA481CSP (100 Watt)
- #ETSA482CSP (200 Watt)

Note: 2 speakers required with the 200 Watt version

Features

- Console Sirens feature eight auxiliary buttons for one-touch programming and a three-position slide switch to allow convenient switching for the most frequently used warning modes
- Features an eight-second buzzer alert to notify users that the level or auxiliary buttons are activated
- Horn ring scroll provides ability to quickly change tones with the tap of the horn
- Provides up to nine 10 amp and three 20 amp outputs with internal fuses for powering solenoids (i.e. gunlock) or supplying power and signaling to other onboard peripherals (printer, radar, GPS, etc.)
- Built-in protection against over/under voltage, short circuit and reverse polarity
- New switch panel graphics integrate with the interiors of newly designed vehicles
- Cabling setup is the same as 380R Siren Series allowing for easy swap-in
- Dimmable red LED backlighting

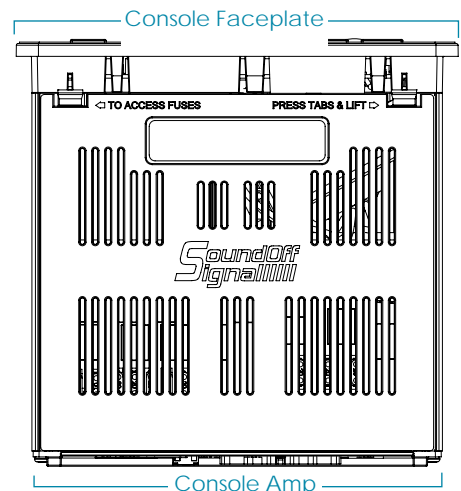

TECHNICAL SPECIFICATIONS

WATTS	100 and 200 watt
VDC	10 - 16 Vdc
DIMENSIONS	Console Faceplate: 3.17" (8.5 cm) H x 7.54" (19.15 cm) W Console Amp: 2.64" (6.73 cm) H x 7.02" (17.84 cm) W Cut-out: 2.72" (6.9088 cm) H x 7.10" (18.034 cm) W
WARRANTY	Three-year

1.800.338.7337

SIRENS

www.soundoffsignal.com

**THINK
NEW**



Handheld Siren

- #ETSA461HPP (100 Watt)
- #ETSA462HPP (200 Watt)

Handheld Sirens provide unique competitive advantages including: LED, Alley and Arrow handheld switch indicators for convenient viewing, extensive programmability and a 200 watt dual-tone option

**THINK
NEW**



Remote Siren

- #ETSA481RSP (100 Watt)
- #ETSA482RSP (200 Watt)

Remote Sirens feature eight auxiliary buttons for one-touch programming and a three-position slide switch to allow convenient switching for the most frequently used warning modes. New switch panel graphics integrate with the interiors of newly designed vehicles. Remote switch panel may be console mounted or attached with included universal bail bracket (amplifier can be mounted in a remote location such as the trunk)

Note: 2 speakers required with the 200 Watt version

Features

- Features an eight-second buzzer alert to notify users that the level or auxiliary buttons are activated
- Horn ring scroll provides ability to quickly change tones with the tap of the horn
- Provides up to seven 10 amp and three 20 amp outputs with internal fuses for powering solenoids (i.e. gunlock) or supplying power and signaling to other onboard peripherals (printer, radar, GPS, etc.)
- Built-in protection against over/under voltage, short circuit and reverse polarity
- Cabling setup is the same as 380R Siren Series allowing for easy swap-in
- Dimmable green LED backlighting



TECHNICAL SPECIFICATIONS


WATTS	100 and 200 watt
VDC	10 - 16 Vdc
WARRANTY	Three-year

200 SERIES Compact Siren


1.800.338.7337



- #ETSA200R Molex Connector and Mating Harness
- #ETSA200RA Delphi Connector and Mating Harness
- #ETSA200RW

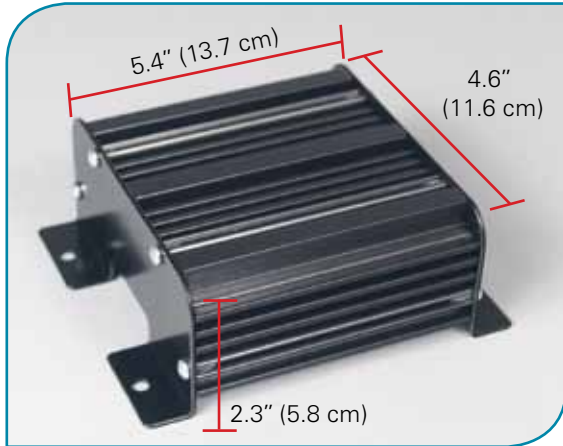

Remote amplifier has a small, compact size perfect for motorcycles and undercover vehicles

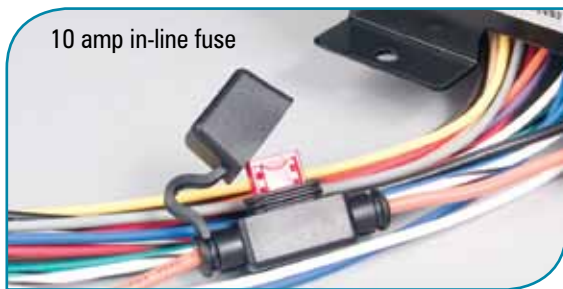

Install as a single 100 watt output or use with 2 - 58 watt outputs

Features

- Compact siren has a small size and remote amplifier for tight spaces for undercover vehicles or motorcycles
- Class D Technology with high speed digital switching provides higher efficiency, less current draw and better reliability
- Operates a single 100 watt speaker or dual 58 watt speakers
- 5 popular warning tones (up to 3 tones can be activated): wail, yelp, piercer, hi-lo and super hi-lo, plus 4 additional air horn tones available
- Horn Ring (hands free operation) controls the tones and can be programmed to play warning or air horn tones. When driver presses the vehicle's horn it will activate or de-activate the siren in programmed tone
- Volume programming capability on Public Address (PA) and Radio Rebroadcast sets the volume at a desired level during installation so when the driver selects either option, volume is automatically set
- Park/Kill feature disables the siren when the vehicle is placed in Park
- Built-in protection against over/under voltage, over temperature, short circuit and reverse polarity
- Hermetically sealed, providing protection in wet areas



TECHNICAL SPECIFICATIONS

WATTS	100 watt or dual 58 watt
VDC	10 - 30 Vdc
WARRANTY	Two-year

SIRENS

www.soundoffsignal.com

Speakers

Visit www.soundoffsignal.com for speaker/bracket photos and installation sheets.

420 Series Neodymium Continuous Duty Speaker

Includes Vehicle Specific Brackets

- Chevrolet Impala '05+ #ETSS4221B
- Chevrolet Impala '05+ #ETSS4202B
- Chevrolet Tahoe and GMC Yukon 0 2+ #ETSS4208B
- Dodge Charger 0 6+ #ETSS4220B
- Ford Crown Vic 0 2+ #ETSS4214B
- Ford Crown Vic 0 0+ #ETSS4204B
- Ford Excursion and F-250 0 1+ #ETSS4219B
- Ford Expedition 0 0-0 2 #ETSS4207B
- Universal "L"-bracket, short #ETSS4206B
- Universal "L"-bracket, long #ETSS4201B
- Universal Bail Bracket #ETSS4209B



#ETSS4209 with Universal Bail Bracket

Features

- Made with the most reliable and cost efficient 100 watt compression driver on the market
- Finished in black powder coat baked on epoxy
- Compression driver is the lightest (56% less) and lowest profile (31% less) of the conventional alnico based compression drivers
- Perfect choice for tight fitting locations where space or weight is a premium consideration
- The 11 ohm, 2.75" high temperature voice coil is oven baked at a high temperature and sealed with a special coating to withstand extreme temperatures and environmental conditions. Voice coil is further protected with a special magnetic cooling liquid that fills the voice gap and provides a thermal path. Produces 10 - 15% more magnetic flux density in the voice coil gap
- 100 watt
- Three-year warranty

1.800.338.7337

SPEAKERS

www.soundoffsignal.com

Speakers

1.800.338.7337

SPEAKERS

www.soundoffsignal.com

100C Series Neodymium Professional Speaker



#ETSS100C

Features

- Compact design with clear, powerful output using Neodymium magnet
- Weatherproof and corrosion resistant cast aluminum housing
- Perfect for public address and other high intelligibility communication and signaling applications
- Includes universal bail bracket
- 100 watt
- Three-year warranty

Vehicle Specific Brackets (speaker sold separately)

- Chevrolet Caprice, Driver Side 1 1 #ETSS100BKCP-D
- Chevrolet Caprice, Passenger Side 1 1 #ETSS100BKCP-P
- Chevrolet Impala '06+ #ETSS100BKPALA
- Chevrolet Tahoe 0 6 and older #ETSS100CBKTH
- Dodge Charger 1 1 #ETSS100CBKDC11
- Dodge Charger 0 6 - 1 0 #ETSS100CBKDC
- Dodge Charger 0 6 - 1 0 #ETSS100BKDC
- Ford Crown Vic Police Interceptor 0 5+ #ETSS100BKCV
- Ford PI Sedan/Utility Frame Mount 1 3 #ETSS100CBKFD-FR
- Ford PI Sedan Bumper Mount 1 3 #ETSS100CBKFS-BP
- Ford PI Utility Bumper Mount 1 3 #ETSS100CBKFV-BP



100H Series Neodymium Professional Speaker



#ETSS100H

Features

- Compact design with clear, powerful output using Neodymium magnet
- Dynamic sound for high intelligibility communication and signaling applications for emergency vehicles
- Tested rigorously for dust, high pressure water, corrosion and vibration
- Aluminum housing with a black powder coat finish resists corrosion
- Includes universal bail bracket
- 100 watt
- Three-year warranty

Vehicle Specific Brackets (speaker sold separately)

- Chevrolet Caprice, Driver Side 1 1 #ETSS100BKCP-D
- Chevrolet Caprice, Passenger Side 1 1 #ETSS100BKCP-P
- Chevrolet Impala '06+ #ETSS100HPALA
- Chevrolet Tahoe 0 6 and older #ETSS100HBKTH
- Dodge Charger 1 1 #ETSS100CBKDC11
- Dodge Charger 0 6 - 1 0 #ETSS100CBKDC
- Ford Crown Vic Police Interceptor 0 5+ #ETSS100HBKCV
- Ford PI Sedan/Utility Frame Mount 1 3 #ETSS100CBKFD-FR
- Ford PI Sedan Bumper Mount 1 3 #ETSS100CBKFS-BP
- Ford PI Utility Bumper Mount 1 3 #ETSS100CBKFV-BP

100D Series Professional Speaker



#ETSS100D

Vehicle Specific Brackets (speaker sold separately)

- Chevrolet Caprice, Driver Side 1 1 #ETSS100BKCP-D
- Chevrolet Caprice, Passenger Side 1 1 #ETSS100BKCP-P
- Chevrolet Impala 0 6+ #ETSS100DBKPALA
- Chevrolet Tahoe 0 6+ #ETSS100DBKCT
- Dodge Charger 1 1 #ETSS100CBKDC11
- Dodge Charger 0 6 - 1 0 #ETSS100BKDC
- Dodge Charger 0 6 - 1 0 #ETSS100CBKDC
- Ford Crown Vic Police Interceptor 0 5+ #ETSS100DBKCV
- Ford PI Sedan/Utility Frame Mount 1 3 #ETSS100CBKFD-FR
- Ford PI Sedan Bumper Mount 1 3 #ETSS100CBKFS-BP
- Ford PI Utility Bumper Mount 1 3 #ETSS100CBKFV-BP

Features

- Rugged speaker has undergone and outperformed a series of grueling tests for dust, high and low temperature, water, salt and vibration - this long-lasting speaker will stand up to all kinds of environmental conditions
- Dynamic sound for high intelligibility communication and signaling applications for emergency vehicles
- Can be mounted horizontally or vertically and designed for narrow spaces
- Aluminum housing with a black powder coat finish resists corrosion
- Includes universal bail bracket
- 100 watt
- Three-year warranty

100E Series Professional Speaker

Vehicle Specific Brackets (speaker sold separately)

- Chevrolet Impala '06+ #ETSS100BKPALA
- Dodge Charger 0 6+ #ETSS100CBKDC
- Ford Crown Vic Police Interceptor 0 5+ #ETSS100BKCV



#ETSS100E

Features

- Deep sound with 100 watt power for high intelligibility and sound penetration
- Larger size for larger vehicles w/ a rugged and weatherproof construction
- Suitable for installation within engine compartments, front of the radiator or exterior mount on the bumper
- 100 watt
- Three-year warranty



Speakers

1.800.338.7337

SPEAKERS

www.soundoffsignal.com

100L Series Professional Compact Speaker

Vehicle Specific Brackets (speaker sold separately)

- Chevrolet Caprice, Driver Side 1 1 #ETSS100BKCP-D
- Chevrolet Caprice, Passenger Side 1 1 #ETSS100BKCP-P
- Chevrolet Impala '06+ #ETSS100HPALA
- Chevrolet Tahoe 0 6 and older #ETSS100HBKTH
- Dodge Charger 1 1 #ETSS100CBKDC11
- Dodge Charger 0 6 - 1 0 #ETSS100CBKDC
- Ford Crown Vic Police Interceptor 0 5+ #ETSS100HBKCV



#ETSS100L

Features

- Compact design with powerful 100 watt output
- Dynamic sound for high intelligibility communication and signaling applications
- Designed for all kinds of emergency vehicles
- Aluminum housing with black powder coat finish
- Tough and durable with high resistance to vibration and heat
- Includes universal bail bracket
- 100 watt
- Two-year warranty



Slim, narrow design is easier to install in tight spaces in all kinds of emergency vehicles



Switches	
INTELLISWITCH	77
900 SERIES	78
600 SERIES	78
DIRECTIONAL ARROW	78
Flashers	79
LED Flashers	88
LED Modules	89
Ignition Security Systems	90
Preemption Module	
Opticom	91



Intelliswitch Professional Use

1.800.338.7337

SWITCHES

www.soundoffsignal.com

2 Hidden Membrane Switches
behind the logo

3 Power Pursuit Buttons can control any
combination of the switches below



INTELLISwitch 993

Digital Switch with Power Pursuit Buttons #ETSP993



INTELLISwitch 990

60 Amp Digital Switch

#ETSP990



Kit includes switch panel, button legends with 60 titles
and swivel style mounting bracket

Features

- INTELLISwitch993 model offers 11 programmable buttons: 9 total Ryno-Tuf push buttons (3 Power Pursuit buttons) with 2 hidden "discreet" membrane buttons located behind the SoundOff logo. You can configure the Power Pursuit buttons to operate any combination of the 6 remaining push buttons automatically, eliminating hours of tedious wiring. The 2 hidden membrane switches can be programmed for discreet functions of your choice such as timed gun lock.
- INTELLISwitch990 model offers 6 Ryno-Tuf durable push buttons that are fully programmable with 60 amps maximum output. One push button can be set as an 8 second timed momentary if needed
- Models offer high speed action, low current draw and increased reliability with efficient digital technology. Both models feature Ryno-Tuf push buttons, 60 title legend sheets and optional bracket with mounting hardware. Switches can be console mounted if desired.
- Compact, slim design with self performing diagnostics at power-up to ensure optimum performance.

SPECIFICATIONS

- 12 Vdc
- Current Draw:
Intelliswitch993: 60 amps maximum
Intelliswitch990: 12 amps maximum
- Dimensions: 6.5" (16.5 cm) L x 2.5" (6.4 cm) H x 2" (5.1 cm) D
- Five-year warranty
- Mounting: 2-piece swivel style bracket included or can be console mounted

Switches



900 Series Function Switch

#ETSP9F

Features

- 9 functions: 3-position slide switch with 6 mini rocker switches
- Slide switch features 20 amps/output with LED indicator on lights
- Includes switch box with universal bracket, mounting hardware, switch labels and 18" pigtail with insulated quick connects for termination

SPECIFICATIONS

- 12 Vdc
- Dimensions: 6.2" (16 cm) W x 2.2" (5.6 cm) H x 5.2" (13 cm) D
- One-year warranty



600 Series 6 Function Switch

#ETSP6F

Features

- 6 mini rocker switches with red LED indicator ON lights
- Features a single 40 amp relay/circuit breaker with 5-20 amp fused switch output
- Includes Switch box with universal bracket, mounting hardware, switch labels and 18" pigtail with insulated quick connects for termination

SPECIFICATIONS

- 12 Vdc
- Dimensions: 6.2" (16 cm) W x 2.2" (5.6 cm) H x 5.2" (13 cm) D
- One-year warranty

Directional Arrow Switch

#ETSWDASØ1

Features

- 7 programmable warning modes with a fully illuminated display to show pattern activated and input selected
- Control multiple directional arrow products with 6-low current (0.25 amps) output
- Compatible with APEX, Pinnacle (EPL9000), Magnum full sized LED lightbars, Pinnacle (EPL8000) LED interior bars and UltraLITE LED directional/warning bars
- Built-in Smart Sensor detects inputs from another switching source so it may be used with other manufacturers directional arrow products
- For use with LED lights only



SPECIFICATIONS

- 10-30 Vdc
- Dimensions: 6.5" (17 cm) W x 3.5" (89 mm) H x 1.2" (30 mm) D
- One-year warranty

1.800.338.7337

SWITCHES

www.soundoffsignal.com

Flashers

Flash Pattern Overview

Q-Switch Cycles through 3 flash patterns:

1. Double flash alternating
2. Fast simultaneous
3. Pulse and fast alternating at 1.9 to 3.0 f.p.s., pattern repeats every 5.4 seconds

Cycle Flash Multi-pattern cycles through three double alternating and 2-simultaneous patterns

Double Flash Fast double flash alternating at 3.0 f.p.s.

ETM Fast simultaneous flash at 3.6 f.p.s.

Flashback Alternates lower brake lights against reverse lights @ 2.6 f.p.s.

PowerPulse Fast alternating pattern at 3.0 f.p.s.

RoadRunner Slow alternating pattern at 1.9 f.p.s.

Single Flash Slow alternating flash pattern at 55 f.p.m.

Visit www.soundoffsignal.com, Sales and Support/Technical Services for the Vehicle Compatibility Chart
Refer to the price guide or website for additional flasher models and additional information

Chevrolet Police Plug-in Caprice Headlight Flasher, 2011 and Newer

#ETHFSS-CP

Features

- Easy installation with plug-in connectors for police package models
- Single flash pattern, PowerPulse
- Mounting bracket designed for easier installation in tight spaces
- Features high beam override to disengage flasher for normal high beam function
- Built-in shutdown protection against loss of ground and under voltage
- Durable and non-corrosive ABS plastic housing
- 100% Solid State, potted design for long-lasting, reliable performance
- 18" (46 cm) wire for power, ground and control



SPECIFICATIONS

- 9-16 Vdc
- 2-110 watt
- Dimensions: 4.7" (12 cm) L x 2" (5.1 cm) H x 0.7" (1.8 cm) D
- Five-year warranty
- Mounts on 4" (10 cm) centers

1.800.338.7337

FLASHERS

www.soundoffsignal.com

Chevrolet Police Plug-in, Solid State ETHIMPØ-Ø6+ Impala Headlight Flasher, 2006 and Newer

Features

- Easy installation with plug-in connectors for police package models
- Single flash pattern, PowerPulse
- Mounting bracket designed for easier installation in tight spaces
- Features high beam override to disengage flasher for normal high beam function
- Built-in shutdown protection against loss of ground and under voltage
- Durable and non-corrosive ABS plastic housing
- 100% Solid State, potted design for long-lasting, reliable performance
- 8" (20 cm) wires

SPECIFICATIONS

- 9-16 Vdc
- 2-110 watt
- Dimensions: 4.7" (12 cm) L x 2" (5.1 cm) H x 0.7" (1.8 cm) D
- Five-year warranty
- Mounts on 4" (10 cm) centers



Chevrolet Police Plug-in, Solid State #ETHTAHØ-Ø7+ Tahoe Headlight Flasher, 2007 and Newer

Features

- Easy installation with plug-in connectors for police package models
- Single flash pattern, PowerPulse
- Features high beam override
- Built-in shutdown protection against loss of ground, short circuit, under voltage, brown out and transient protection
- Durable and non-corrosive ABS plastic housing
- 100% solid state, potted design for long-lasting, reliable performance



SPECIFICATIONS

- 9-16 Vdc
- 2-110 watt
- Dimensions: 4.7" (12 cm) L x 2" (5.1 cm) H x 0.7" (1.8 cm) D
- Five-year warranty
- Mounts on 4" (10 cm) centers

1.800.338.7337

FLASHERS

www.soundoffsignal.com

Flashers

1.800.338.7337

FLASHERS

www.soundoffsignal.com

Ford Police Plug-in, Solid State #ETHFSS-CV Crown Victoria Headlight Flasher 2006 and Newer

Features

- Easy installation with plug-in connectors for police package models
- Select-A-Pattern Technology with 7 user selectable flash patterns: PowerPulse, RoadRunner, ETM, Q-Switch, Cycle Flash, Single Flash or Double Flash
- Features high beam override & Nighttime cutoff
- 100% Solid State, potted design for long-lasting, reliable performance
- 18" (46 cm) wire for power, ground and control

SPECIFICATIONS

- 10-16 Vdc
- 2-110 watt
- Dimensions: 4.7" (12 cm) L x 2" (5.1 cm) H x 0.7" (1.8 cm) D
- Five-year warranty
- Mounts on 4" (10 cm) centers



Ford Police Plug-in, Solid State #ETHIFP0-06+ 25" wire leads Crown Victoria Headlight Flasher 2006 and Newer

Features

- Easy installation w/ plug-in connectors for police package models
- 3 user selectable Flash Patterns: PowerPulse, RoadRunner or Q-Switch
- Features high beam override and nighttime cutoff
- Built-in shutdown protection against loss of ground, short circuit, under voltage, brown out and transient protection
- 100% Solid State, potted design for long-lasting, reliable performance

SPECIFICATIONS

- 10-16 Vdc
- 2-110 watt
- Dimensions: 2.25" (5.7 cm) W x 1.8" (4.6 cm) H x 0.7" (1.8 cm) D
- Five-year warranty
- Mounts on 1.8" (4.6 cm) centers



Ford Police Plug-in, Solid State 25" wire leads

#ETHIFPØ-Ø6+

Crown Victoria Headlight Flasher 2006 and Newer

Features

- Easy installation with plug-in connectors for police package models
- 3 user selectable Flash Patterns: PowerPulse, RoadRunner or Q-Switch
- Built-in shutdown protection against: short circuit, loss of ground, over temperature and reverse polarity
- Protected with 10 amp in-line mini fuse
- Features high beam override to disengage flasher for normal high beam function
- 100% solid state, potted design for long-lasting, reliable performance
- 25" (64 cm) wires



SPECIFICATIONS

- 10-16 Vdc
- 2-110 watt
- Dimensions: 2.25" (5.7 cm) W x 1.82" (4.6 cm) H x 0.7" (1.8 cm) D
- Five-year warranty
- Mounts on 1.8" (4.6 cm) centers

Ford Police Plug-in, Relay or Solid State (DRL Compatible)

Solid State: #ETHIFPSC-Ø6+

Relay: #ETHIFPØC-Ø6+

Crown Victoria Headlight Flasher 2006 and Newer

Features

- Easy installation w/ plug-in connectors for police package models
- 3 user selectable Flash Patterns: PowerPulse, RoadRunner or Q-Switch
- Designed for Canadian Crown Vics with factory integrated daytime running lights (DRLs)
- Flasher automatically deactivates DRLs when flasher is activated
- Features high beam override
- When used at night low beams remain on while high beams flash
- 8" (20 cm) wires



SPECIFICATIONS

- 10-16 Vdc
- 2-110 watt
- Dimensions: 4.9" (12 cm) L x 3.5" (8.9 cm) H x 1.2" (3.1 cm) D
- Five-year warranty: **ETHIFPSC-Ø6+** One-year warranty: **ETHIFPØC-Ø6+**
- Mounts on 3" (7.6 cm) centers

1.800.338.7337

FLASHERS

www.soundoffsignal.com

Flashers

1.800.338.7337

FLASHERS

www.soundoffsignal.com



Taillight Flasher, Solid State

Flashback Alternating

#ETFBSN-P

With Fleet Harness

#ETFBSANFL

Features

- 12 wire module with isolating diodes for the brake and reverse wire that are required for many new cars and trucks
- For use with vehicles that have the negative post of the battery connected to the chassis of the vehicle
- Provides an additional output for deck lights
- Alternating red and white light creates an effective rear warning signal to greatly reduce rear end collisions
- 100% Solid State, potted design for long-lasting, reliable performance
- 18" (46 cm) wires
- Flash Patterns: Flashback

SPECIFICATIONS

- 10-16 Vdc
- Positive switching
- Dimensions: 4.7" (12 cm) L x 2" (5.1 cm) H x 0.7" (1.8 cm) D
- Five-year warranty
- Mounts on 4" (10 cm) centers, 18" (46 cm) wires



Taillight Flasher, Relay

Flashback Alternating

#ETFBØØ-P

With Amp Connector and Fleet Harness

#ETFBFLEE

Features

- Flashes taillights at 2.4 f.p.s.
- Alternately flashes the brake lights and the reverse lights at 2.4 f.p.s. (flashback pattern)
- Built-in diodes provide isolation protection for vehicle's electrical system

SPECIFICATIONS

- 10-16 Vdc
- Positive switching
- Dimensions: 3.2" (8.1 cm) L x 2.2" (5.6 cm) H x 2.8" (7.1 cm) W
- One-year warranty
- Mounts on 1.4" (36 mm) centers, 16" (41 cm) wires

Headlight Flasher, Solid State

18" wire leads

#ETHFSS-SP

Weather seal connector

#ETHFSS-SPWS

18" wire leads, single pattern

#ETHFSS-CHP

AMP connector

#ETHFSS-SPA

Heavy duty model (14 amp)

#ETHDSS-SP

Amp connector and Harness (14 amp)

#ETHFSS-SPFL

DRL compatible model (12v)

#ETHFSS-SP-CMP

Isolation model (12v)

#ETHFSS-SP-ISO



Features

- Ideal for most "big 3" car models - designed for 2 to 4 headlight positive side switched headlight systems
- Great for motorcycles with positive side switched headlight systems
- Select-a-Pattern Technology w/ 7 user selectable flash patterns: PowerPulse, RoadRunner, ETM, Cycle Flash, Q-Switch, Single Flash or Double Flash Alternating
- Built-in shutdown features include protection against short circuit, over current, over voltage, under voltage, over temperature and reverse polarity
- Durable and non-corrosive ABS plastic housing
- 100% solid state output, potted design for long-lasting, reliable performance

SPECIFICATIONS

- 8-30 Vdc
- 2-110 watt (Heavy duty model, 14 amp, #ETHDSS-SP: 2-150 watt)
- Positive switching
- Dimensions: 4.7" (12 cm) L x 2" (5.1 cm) H x 0.7" (1.8 cm) D
- Five-year warranty
- Mounts on 4" (10 cm) centers, 18" (46 cm) wires

Flashers

1.800.338.7337

FLASHERS

www.soundoffsignal.com

SELECT-A-PATTERN TECHNOLOGY



Headlight Flasher, Relay

#ETHF00-SP

Features

- Operates a 2 or 4 headlight system on positive or ground side switched vehicles
- 3 user selectable Flash Patterns: RoadRunner, PowerPulse and Double
- When used at night, the low beam headlights remain ON for proper illumination while the high beams flash
- Built-in high beam override interrupts the flasher sequence to allow normal high beam function and flasher automatically resumes when the dimmer switch is activated

SPECIFICATIONS

- 10-16 Vdc
- 2 -110 watt
- Positive and negative switching
- Dimensions: 3.2" (8.1 cm) L x 2.2" (5.6 cm) H x 2.8" (7.1 cm) W
- One-year warranty
- Mounts on 1.4" (3.6 cm) centers, 16" (41 cm) wires



Headlight Flasher, Relay

#ETRR00-P

Features

- Installs into 2 or 4 headlight positive side switched systems
- When used at night, the low beam headlights remain ON for proper illumination while the high beams flash
- Built-in high beam override interrupts the flasher sequence to allow normal high beam function and flasher automatically resumes when the dimmer switch is activated

SPECIFICATIONS

- 10-16 Vdc
- 2 -110 watt
- Positive switching
- 3.2" (8 cm) L x 2.8" (7.1 cm) W x 2.2" (5.6 cm) D
- One-year warranty
- Mounts on 1.4" (3.6 cm) centers, 16" (40 cm) wires



Deck/Grille Light Flasher, Solid State For Halogen or LED Lights

#ETDGSS-P

Features

- Works with positive switched vehicles
- Alternates auxiliary deck/grille lights @ 2.4 f.p.s.
- Rated "Heavy Duty" at 100 watts (8 amps) per output
- May also be used for a pair of halogen or LED deck/grille lights
- 100% Solid State flasher

SPECIFICATIONS

- 9-16 Vdc
- 2-96 watt
- Positive and negative switching
- 2" (5.1 cm) L x 3.5" (8.9 cm) W x 1.2" (3.0 cm) D
- Five-year warranty
- Mounts on 3" (7.6 cm) centers, 16" (41 cm) wires



Heavy Duty Flasher, Solid State Positive Side Switched, Alternating

#ETHDF1-P

Features

- Installs into positive side switched headlight systems
- RoadRunner flash pattern (slow alternating @ 1.9 f.p.s.)
- Rated "Heavy Duty" at 100 watts (8 amps) per output
- Great for railroad, wrecker and emergency vehicles

SPECIFICATIONS

- 9-16 Vdc
- 2-110 watt
- Positive switching
- 5" (13 cm) L x 3.5" (8.9 cm) W x 1.2" (3.1 cm) H
- Five-year warranty
- Mounts on 3" (8 cm) centers, 8" (20 cm) wires

1.800.338.7337

FLASHERS

www.soundoffsignal.com

Flashers

1.800.338.7337

FLASHERS

www.soundoffsignal.com



15 Amp Extra Duty Flasher, Solid State Positive Side Switched

#ETAF15-P

Features

- Installs into positive side switched headlight systems
- RoadRunner flash pattern (slow alternating @ 1.9 f.p.s.)
- Rated "Extra Duty" at 190 watts (15 amps) per output

SPECIFICATIONS

- 9-16 Vdc
- 2-190 watt outputs
- Positive switching
- Dimensions: 5" (13 cm) L x 3.5" (8.9 cm) W x 1.2" (3.1 cm) H
- Five-year warranty
- Mounts on 3" (8 cm) centers, 8" (20 cm) wires



Alt Alert, Solid State with Deutsch Connector #EAA000-P2

Features

- Designed to warn the vehicle operator if the electrical systems voltage range is out of its safe operating range; if the vehicle's voltage fall below 11.80 volts for more than 7 seconds or if it exceeds 15.50 volts, Alt Alert will show an indicator light or a warning buzz
- Automatic Reset - resumes monitoring when electrical system returns to normal operating range
- 60 cycle pulse rated @ 1 amp maximum

SPECIFICATIONS

- 12 Vdc
- Dimensions: 3" (7.6 cm) L x 1.5" (3.8 cm) W x 1" (2.5 cm) H
- Five-year warranty
- Mounts on 4" (10 cm) centers, 8" (20 cm) wires

LED Flashers

LED Flasher Flash Pattern Overview

- ETM** Fast Simultaneous flash pattern @ 3.6 f.p.s.
- Inter-Cycle** Cycles continuously through 2 - Quint patterns and 4 - WarpFlash patterns
- PowerPulse** Alternating (wig wag) flash pattern @ 3.0 f.p.s.
- Quad** Four consecutive flashes @ 235 f.p.m.
- Quint** Five consecutive flashes @ 140 f.p.m.
- Q-Switch** Cycles through 3 flash patterns: Double Flash Alternating, Fast Simultaneous Pulse and Fast Alternating @ 1.9 to 3.0 f.p.s. - pattern repeats every 5.4 seconds
- WarpFlash** Alternating (wig wag) flash pattern @ 700 f.p.m.



LED Light Flashers

2 Output with 8 Flash Pattern

#ETFFC02LED

6 Output with 8 Flash Patterns

#ETFFC06LED

12 Output with 9 Flash Patterns (shown)

#ETFFC12LED

Features

- Synchronizes all LED warning lights - overrides all SoundOff Signal LED warning lights to take over pattern control
- 2 and 6 Output LED Flashers offer 8 user selectable flash patterns: Double, PowerPulse, Quint, ETM, Q-Switch, WarpFlash, Inter-Cycle and Quad
- 12 Output LED Flasher offers 9 user selectable flash patterns: Double, PowerPulse, Quad, ETM, RoadRunner, Quint, Inter-Cycle, Q-Switch and WarpFlash
- For use with LED lights only

SPECIFICATIONS

- 10-16 Vdc
- 3 amps per output maximum
- Dimensions: 2 Output: 3.2" (8.1 cm) L x 0.8" (2.0 cm) W x 0.8" (2.0 cm) D
6 Output: 5.5" (14 cm) L x 3.3" (8.4 cm) W x 1" (2.5 cm) D
12 Output: 6" (15 cm) L x 3.4" (8.6 cm) W x 1" (2.5 cm) D
- Five-year warranty
- Mounts: 2 Output: on 2.8" (7.1 cm) centers, 12" (31 cm) wires
6 Output: on 5" (13 cm) centers, 12" (31 cm) wires
12 Output: on 5.5" (14 cm) centers, 12" (31 cm) wires

1.800.338.7337

LED FLASHERS

www.soundoffsignal.com

LED Strobe Pulse and LED Load Module

1.800.338.7337

LED MODULES

www.soundoffsignal.com



LED Strobe Pulse Module
(for use with LED Lights only)

#ETLEDFC1

Features

- Converts non self-contained LED warning lights into a "Strobe Pulse" flash effect
- Flashes any 12 volt LED light up to 3 amps
- For use with LED lights only

SPECIFICATIONS

- 10-16 Vdc
- Dimensions: 3" (7.6 cm) W x 1" (2.5 cm) H x 1.5" (3.8 cm) D
- One-year warranty
- Mounts on 2.5" (6.4 cm) centers, 16" (41 cm) wires



LED Load Module
(for use with LED lights only)

#ECVLDMDL01

Features

- Solution for erratic flash patterns
- Adds 10 watt load across LED lamps restoring flash rate of mechanical, turn signal and hazard flashers
- For use with LED lights only

SPECIFICATIONS

- 10-16 Vdc
- Dimensions: 3" (7.6 cm) W x 2.43" (6.2 cm) H x 0.75" (1.9 cm) D
- One-year warranty
- Mounts on 2.4" (6.1 cm) centers, 5.5" (14 cm) wires

Ignition Security Systems



SPECIFICATIONS

- 10-16 Vdc
- 4-10 amp outputs
- Dimensions: 6" (15 cm) L x 3.4" (8.6 cm) H x 0.8" (2.0 cm) D
- One-year warranty
- Mounts behind the dash and within the wire length of the steering column, on 5.6" (14 cm) centers, 24" (61 cm) wires



SPECIFICATIONS

- 10-16 Vdc
- 8 outputs, 130 amps total
- Dimensions: 6" (15 cm) L x 3.5" (8.9 cm) H x 1.5" (3.8 cm) D
- One-year warranty
- Mounts behind the dash and within the wire length of the steering column, on 5.6" (14 cm) centers, 16" (41 cm) wires

Standard Model

#ETISSO-Ø7+

Features

- Easy to install and designed to be compatible with different vehicles
- Quick installation by use of quick connect "T-tap" connectors
- Connectors allow for quick replacement/removal of the ignition security system
- Allows the vehicle to stay running when the key is removed from the ignition switch
- Brake pedal and shift lever movement disables the ignition security system and stops the engine (sounds horn if connected)
- Over-ride simply deactivates by turning the key to the run position and depressing brake
- Automatic low voltage detection will activate the horn to provide notification of vehicle problems
- Additional universal output provides normally open or normally closed contact for starter disable, gun lock disable, camera record, etc.
- Includes illuminated remote switch
- Optional horn or siren alarm

Heavy Duty Model

#ETISSO-Ø6+

- Designed to be compatible with many different types of vehicles including police package vehicles, trucks and buses
- For older heavy duty vehicles that require higher current draw through the ignition switch
- Allows the vehicle to stay running when the key is removed from the ignition switch
- Brake pedal and shift lever movement disables the ignition security system and stops the engine (sounds horn if connected)
- Over-ride simply deactivates by turning the key to the run position and depressing brake
- Additional relay output provides normally open or normally closed contact for starter disable, gun lock disable, camera record, etc.
- Optional horn or siren alarm

1.800.338.7337

IGNITION SECURITY

www.soundoffsignal.com

Opticom Preemption LED Module

1.800.338.7337



Opticom LED Infrared High Priority Preemption Module
#EGTTE794H

Opticom™ is a registered trademark of Global Traffic Technologies, LLC.

PREEMPTION MODULE

Features

- Provides emergency vehicle preemption to all intersections equipped with Opticom Infrared systems. Module generates a series of pulses in the infrared wavelength to allow preemption for emergency vehicles
- High efficiency LEDs require up to 90% less electrical power than conventional emitters, conserving power for other onboard emergency equipment. LED technology provides a higher level of consistent performance over the life of the emitter
- Built-in power supply simplifies installation
- Coded signal transmissions allow traffic officials to manage, track and control usage of the Opticom system and to block unauthorized vehicles from using it
- Visible indicator lights provide operational status and advanced diagnostic information
- Designed to replace Opticom 792H emitters - no need to rewire or change mounting



TECHNICAL SPECIFICATIONS

RANGE	Up to 2,500 feet (0.76 km)
BASE FREQUENCY	14Hz
PRIORITY	High
SELF-DIAGNOSTICS	Yes
INPUT VOLTAGE RANGE	10 - 32 Vdc
CURRENT DRAW	Less than 1 amp
OPERATING TEMPERATURE	-30° to +165° F / -34° to +74° C
DIMENSION	4.5" (11.5 cm) W x 3.16" (8.0 cm) H x 2.23" (5.7 cm) D
WARRANTY	Five-year

www.soundoffsignal.com



Dome LED Lights 93

Strip LED Lights
Gen3 95

INTERIOR LIGHTING



Dome LED Interior Lights

1.800.338.7337

DOME LED LIGHTS

www.soundoffsignal.com



Universal LED Dome Lights

- Slimmer dome with an overall depth (height) of 0.9"
- On/Off switch located on the outer lens

Original Universal LED Dome Lights

- Larger dome with an overall depth (height) of 1.5"
- Brighter light with a greater number of LEDs



Prevent eye fatigue and increase officer safety with our exclusive Red LED Night Light available on all models

Chevrolet Impala with Red Night Light

- LED White Dome, 10-30v #ECVDMLTALIMP
- LED White Dome, 10-16v (original) #ECVDMLTØLMP
- Incandescent, White Dome, 10-16v (original) #ECVDMLTIMP

Dodge Charger with Red Night Light

- LED White Dome, 10-30v #ECVDMLTALDC
- Incandescent, White Dome, 10-16v #ECVDMLDC1

Dodge Magnum with Red Night Light

- Incandescent, White Dome, 10-16v #ECVDMLDC1

Ford Crown Victoria with Red Night Light

- LED White Dome, 10-30v #ECVDMLTALCV
- LED White Dome, 10-16v (original) #ECVDMLTØLCV
- Incandescent, White Dome, 10-16v (original) #ECVDMLTCV

Universal with Red Night Light

- LED White Dome, 10-16v #ECVDMLTALØØ
- LED White Dome, 10-16v (original) #ECVDMLTØLMP
- LED White Dome, 10-16v (original) #ECVDMLTØØ
- LED Clear Dome, 10-16v (original) #ECVDMLT2ALØØ



Universal models are installed as a surface mount with pre-drilled holes for 2 or 4 screws

TECHNICAL SPECIFICATIONS

TECHNOLOGY	New Design	Original Design
TECHNOLOGY	1 White Gen3 LED, 8 Red Gen2 LEDs	21 White Gen2 LEDs, 12 Red Gen2 LEDs
CURRENT DRAW	Less than 0.2 amps for LED	112-180 mA for LED, 740 mA for Incandescent
DIMENSIONS	New Design 5.9" (15 cm) Diameter x 0.9" (2.3 cm) D	Original Design 6.2" (16 cm) Diameter x 1.5" (3.8 cm) D
OPERATING TEMPERATURE	-40° to +65° C / -104° to +149° F	
WARRANTY	One-year: Incandescent, Five-year: LED	
MOUNT	Surface Mount	

Reduce officer targeting and eye fatigue with Red LED Night Light Dome Lights



Features

- Officer safety is our primary concern - we have designed an interior Dome Light with an optional Red LED night light to reduce officer targeting - officer can see clearly inside & outside the vehicle when the Red LED night light is turned on
- Available for police package vehicles with plug-in connector for quick and easy installation
- LED Dome Lights offer a low amp draw, superior efficiency and hours of long-lasting reliability
- Great lights for drivers working night shifts - red LED night light is gentle on the eyes reducing eye fatigue

Features

- Great for interior light for overhead lighting
- Includes 2-wire lead with 5" length/mounting screws for installation

Universal Dome Light, Gen3 LED, 7" x 32.5" #ECVDMLTST2

- Exclusive lens design disperses the maximum amount of light
- Easy on the electrical system - draws less than 0.65 amps
- Durable polycarbonate lens & base is a simple surface mount
- Five-year warranty



7" x 3.25"

Universal Dome Light, Gen2 LED, 6" x 3" #ECVDMLTST4

- New LED for increased light intensity
- Easy on the electrical system - draws less than 0.3 amps
- Easy surface mount with a simple 2-wire electrical connection
- Two-year warranty



6" x 3"

Universal Dome Light, Oval, 5" (not shown) #ECVMLDP2W

1.800.338.7337

DOME LED LIGHTS

www.soundoffsignal.com

Strip Gen3 LED Interior Lights

1.800.338.7337

STRIP LED LIGHTS

www.soundoffsignal.com



LED Strip Light

10-30 Vdc

• #ETULT12W-24

10-16 Vdc

#ETULT12W

Features

- Light has a white steel base with a scratch resistant polycarbonate lens
- Specially engineered Fresnel lens to boost light output and brightness
- Includes 2-wire lead w/ a 18" length



LED 90° Corner Mount Strip Light

Length

- 10" Length
- 21" Length
- 32" Length
- 43" Length

TECHNICAL

VOLTAGE
CURRENT DRAW
TECHNOLOGY
WARRANTY

SPECIFICATIONS

VOLTAGE	10 - 16 Vdc or 10 - 30 Vdc
CURRENT DRAW	0.4 Amps
TECHNOLOGY	Gen3 LEDs
WARRANTY	Five-year

Features

- Streamlined, low amp draw LED lighting
- Housing design allows for clean wire management behind light
- Easy installation - make a simple 2-wire electrical connection
- Glossy white powder coated aluminum housing with a polycarbonate lens
- Includes 2-wire lead with a 18" length

TECHNICAL

VOLTAGE
CURRENT DRAW
TECHNOLOGY
WARRANTY

SPECIFICATIONS

VOLTAGE	10 - 16 Vdc or 10 - 30 Vdc
CURRENT DRAW	0.4 Amps per 12" length
TECHNOLOGY	Gen3 LEDs
WARRANTY	Five-year



LED Flush Mount Strip Light

Length

- 12" Length
- 24" Length
- 36" Length
- 42" Length

10-16 Vdc

#ECVCLLED12
#ECVCLLED24
#ECVCLLED36
#ECVCLLED42

Features


- Specially engineered lens optic directs light away from viewer's eye
- Glossy white powder coated aluminum housing with a polycarbonate lens
- Includes 2-wire lead with a 18" length and end/trim caps

TECHNICAL

VOLTAGE
CURRENT DRAW
TECHNOLOGY
WARRANTY

SPECIFICATIONS

VOLTAGE	10 - 16 Vdc
CURRENT DRAW	0.4 Amps per 12" length
TECHNOLOGY	Gen3 LEDs
WARRANTY	Five-year

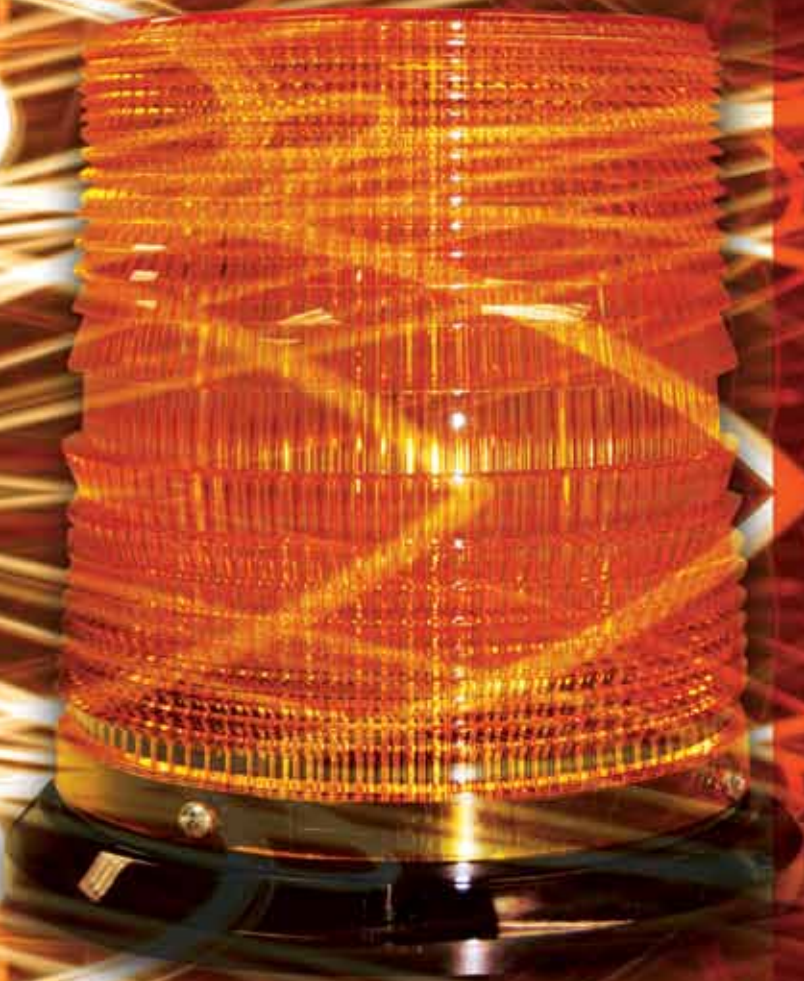

LED

4800 SERIES	97
4500/4200 SERIES	98
4700 SERIES	99
4400 SERIES	100
1500 SERIES	101

Strobe

5000 SERIES	102
4100 SERIES	103
4000 SERIES	104
3000 SERIES	105

Strobe Mini

2000 AND 1000 SERIES	106
----------------------	-----

Accessories

BRANCH GUARDS	107
DUST COVER	107



Beacons 4800 Series LED

1.800.338.7337

BEACONS



4800 Series LED 6" Dome - Magnetic Mount

- Amber Lens #ELB48BMH+AA
- Blue Lens #ELB48BMH+BB

4800 Series LED 6" Dome - Flat/Pipe Mount

- Amber Lens #ELB48BCHØAA
- Blue Lens #ELB48BCHØBB

4800 Series LED 4" Dome - Magnetic Mount

- Amber Lens #ELB48BML+AA
- Blue Lens #ELB48BML+BB

4800 Series LED 4" Dome - Flat/Pipe Mount

- Amber Lens #ELB48BCLØAA
- Blue Lens #ELB48BCLØBB

Features

- Lens with UV inhibitor prevents sun fade
- Rated to last 20,000+ hours
- Heavy duty cast aluminum base
- Same footprint as our 3000 and 4000



TECHNICAL SPECIFICATIONS

FLASH PATTERNS	8 flash patterns
TECHNOLOGY	16 Gen3 LEDs
OPERATING TEMPERATURE	-40° to 65° C
INPUT VOLTAGE	10 - 30 Vdc
CURRENT DRAW	1.5 amp @ 12 Vdc, 0.75 amps @ 24 Vdc
DIMENSIONS	4" Dome w/ base: 5" (12 cm) H 6" Dome w/ base: 6.8" (17 cm) H 6.3" (16 cm) Base Diameter
WARRANTY	Five-year
MOUNTS	Magnetic or Flat/Pipe mount
OPTIONS	Branch Guard 4" Height: #PESB41BG4, 6" Height: #PESB41BG6 Dust Cover (CA Title 13 compliance) 6" Height: #E36ØDC6

www.soundoffsignal.com

Beacons 4500/4200 Series LED



Features

- Lens with UV inhibitor prevents sun fade
- Rated to last 20,000+ hours
- Heavy duty cast aluminum base
- Same footprint as our 3000 and 4000 Series Beacons

REPLACE (x) IN ORDER NUMBER FOR PERSONALIZED SELECTION

Order No: ELB (xx) B (x) (xx) (xx)

- (xx) = CLASS** 45 = Class 1
42 = Class 2
- (x) = MOUNT** C = Flat/Pipe
M = Magnetic
- (xx) = HEIGHT** **Magnetic Mount**
L+ = Low, 4" Dome
H+ = High, 6" Dome
Flat/Pipe
LØ = Low, 4" dome
HØ = High, 6" dome
- (xx) = COLOR** **LED Color/Dome Color**
- AA = Amber/Amber
 - AC = Amber/Clear
 - WA = White/Amber
 - BB = Blue/Blue
 - GG = Green/Green
 - RR = Red/Red
 - WC = White/Clear
 - J = Red/Blue Split
(J in low dome only)



4500 Series 4200 Series

TECHNICAL SPECIFICATIONS

FLASH PATTERNS	8 flash patterns
TECHNOLOGY	12 Gen3 LEDs
OPERATING TEMPERATURE	-40° to 65° C
INPUT VOLTAGE	10 - 30 Vdc
CURRENT DRAW	1 amp @ 12 Vdc, 0.5 amps @ 24 Vdc
DIMENSIONS	4" Dome w/ base: 5" (12 cm) H 6" Dome w/ base: 6.8" (17 cm) H 6.3" (16 cm) Base Diameter
WARRANTY	Five-year
MOUNTS	Magnetic or Flat/Pipe mount
OPTIONS	Branch Guard 4" Height: #PESB41BG4, 6" Height: #PESB41BG6 Dust Cover (CA Title 13 compliance) 6" Height: #E36ØDC6

1.800.338.7337

BEACONS

www.soundoffsignal.com

Beacons 4700 Series LED

1.800.338.7337

BEACONS

THINK
NEW



COMING *soon!*

4700 Series LED

- Flat/Pole Mount #ELB47BCLØ(x)
- Magnetic Mount #ELB47BML+(x)

REPLACE (x) IN ORDER NUMBER
FOR COLOR SELECTION

Solid Colors =



Features

- 36 Powerful LEDs provide 360 degrees of advanced optimal light distribution
- Waterproof IP67 and PC Lens to combat dust build-up
- Rugged polycarbonate base



TECHNICAL SPECIFICATIONS

FLASH PATTERNS	8 flash patterns
TECHNOLOGY	36 LEDs
OPERATING TEMPERATURE	-40° to 65° C
INPUT VOLTAGE	10 - 30 Vdc
CURRENT DRAW	13W average (low current)
DIMENSIONS	5" Dome w/base: (12.7 cm) H, 7.37" (18.72 cm) Base Diameter
WARRANTY	Three-year
MOUNTS	Flat/Pole or Magnetic



www.soundoffsignal.com

Beacons 4400 Series LED

THINK
NEW



4400 Series LED

-  Flat/Pole Mount #ELB44BCHØAA
-  Magnetic Mount #ELB44BMH+AA

Features

- Synchronizing ability for up to 8 beacons
- 12 extremely bright LEDs allow for advanced optimal light distribution
- Waterproof IP65
- Rugged polycarbonate base



TECHNICAL SPECIFICATIONS

FLASH PATTERNS	20 flash patterns
TECHNOLOGY	12 LEDs
OPERATING TEMPERATURE	-30° C to 50° C
INPUT VOLTAGE	10 - 15 Vdc
CURRENT DRAW	2 amps maximum
DIMENSIONS	7" Dome w/base: (17.78 cm) H, 7.37" (18.72 cm) Base Diameter
WARRANTY	Three-year
MOUNTS	Flat/Pole with 24" cable wire or Magnetic

1.800.338.7337

BEACONS

www.soundoffsignal.com

Beacons 1500 Series LED

1.800.338.7337

BEACONS



1500 Series LED Mini

-  Amber Lens #ELB15BC0AA

Features

- UL safety tested
- CE Mark for European markets - product conforms to legal requirements with respect to safety, health, environment and consumer protection

TECHNICAL SPECIFICATIONS

FLASH PATTERNS	1 flash pattern @ 60 f.p.m.s
TECHNOLOGY	6 Gen1 LEDs
OPERATING TEMPERATURE	-40° C to 50° C
INPUT VOLTAGE	10 - 80 Vdc
CURRENT DRAW	250mA @ 12 Vdc or 40mA @ 80 Vdc
DIMENSIONS	5.2" (13 cm) H, 3.8" (10 cm) Base Diameter
WARRANTY	Two-year
MOUNT	Permanent Mount

www.soundoffsignal.com

Beacons 5000 Series Strobe



5000 Series Strobe Beacon

- ● Amber Dome #5157LFA
- ○ Clear Dome #5157LFC

Features

- Heavy duty cast aluminum base
- Advanced circuitry designed to tolerate high vibration applications



TECHNICAL

- FLASH PATTERNS
- TECHNOLOGY
- OPERATING TEMPERATURE
- INPUT VOLTAGE
- CURRENT DRAW
- DIMENSIONS
- WARRANTY
- MOUNT
- OPTIONS

SPECIFICATIONS

2 User Selectable Flash Patterns: double and quad

Xenon "U" Strobe Tube

-40° C to 50° C

10 - 30 Vdc

1.5 amp @ 12 Vdc or 0.75 amp @ 24 Vdc

5" Dome w/base: 5.2" (13.25 cm) H, 3.8" (9.652 cm) Base Diameter

Two-year (strobe tube one-year)

Permanent

Branch Guard 6" Height: #PESB41BG6

Dust Cover (CA Title 13 compliance) 6" Height: #E36ØDC6

1.800.338.7337

BEACONS

www.soundoffsignal.com



Beacons 4100 Series Strobe

1.800.338.7337

THINK
NEW



4100 Series Strobe Beacon

-  Magnetic Mount #ESB41BMH+A
-  Permanent Mount #ESB41BCHØA

Features

- Bright strobe technology
- Quad flash pattern (4 consecutive flashes @ 70 f.p.m.)
- Rugged aluminum base
- Magnetic mount includes 12 volt DC plug with on/off rocker switch and gaskets - easy installation
- Magnetic mount features extra strong magnets to prevent the bar from slipping or moving
- Permanent mount includes mounting hardware and gaskets with bare wires for installation

BEACONS



TECHNICAL SPECIFICATIONS

FLASH PATTERNS	Quad @ 70+/-10 f.p.m.
TECHNOLOGY	Strobe
OPERATING TEMPERATURE	-40° C to 50° C
INPUT VOLTAGE	12 -24 Vdc
OUTPUT	18 watts
CURRENT DRAW	2.6 amps @ 12 .8 Vdc, 1.8 amps @ 24 Vdc
DIMENSIONS	6" Dome w/base: 6.8" (17.25 cm) H, 6.75" (17 cm) Diameter
WARRANTY	Two-year (strobe tube one-year)
MOUNTS	Magnetic or Permanent
OPTIONS	Branch Guard 4" Height: #PESB41BG4, 6" Height: #PESB41BG6 Dust Cover (CA Title 13 compliance) 6" Height: #E36ØDC6

www.soundoffsignal.com

Beacons 4000 Series Strobe



REPLACE (x) IN ORDER NUMBER FOR PERSONALIZED SELECTION

Order No: 4227 (x)(x)(x)

(x) = **HEIGHT** L = Low, 4" Dome
H = High, 6" Dome

(x) = **MOUNT** C = Flat/Pipe
M = Magnetic

(x) = **COLOR**

-  A = Amber Lens
-  B = Blue Lens
-  C = Clear Lens/White
-  G = Green Lens
-  R = Red Lens
-  J = Red/Blue Split
(J in low dome only)

Features

- Lens with UV inhibitor prevents sun fade
- Rated to last 20,000+ hours
- Heavy duty cast aluminum base
- Advanced circuitry designed tolerate high vibration applications



(with Dust Cover option)

TECHNICAL SPECIFICATIONS

FLASH PATTERNS	2 flash patterns - double or quad (user selectable)
TECHNOLOGY	Xenon Helix Strobe Tube
OPERATING TEMPERATURE	-40° C to 50° C
INPUT VOLTAGE	10 - 30 Vdc
OUTPUT	20 watt
CURRENT DRAW	20 watt: 2 amps @ 12.8 Vdc, 1 amp @ 24 Vdc
DIMENSIONS	4" Dome w/base: 4.75" (12 cm) H or 6" Dome w/base: 6.7" (17 cm) H, 6.3" (16 cm) Base Diameter
WARRANTY	Two-year (strobe tube one-year)
MOUNTS	Permanent or Magnetic (polycarbonate lens and aluminum base)
OPTIONS	Branch Guard 4" Height: #PESB41BG4, 6" Height: #PESB41BG6 Dust Cover (CA Title 13 compliance) 6" Height: #E36ØDC6

1.800.338.7337

BEACONS

www.soundoffsignal.com

Beacons 3000 Series Strobe

1.800.338.7337

BEACONS



Features

- Lens with UV inhibitor prevents sun fade
- Rugged polycarbonate base
- Rated to last 20,000+ hours
- Heavy duty cast aluminum base
- Advanced circuitry designed tolerate high vibration applications

REPLACE (x) IN ORDER NUMBER FOR PERSONALIZED SELECTION

Order No: 3 (xx) (x) (x) (x) (x)

- (xx) = WATTS ØØ = Remote
 1Ø = 10 Watt
 2Ø = 20 Watt
- (x) = FLASH Ø = Remote
 7 = Double & Quad
- (x) = HEIGHT L = Low, 4" Dome
 H = High, 6" Dome
- (x) = MOUNT C = Flat/Pipe
 M = Magnetic
- (x) = COLOR
- A = Amber Lens
 - B = Blue Lens
 - C = Clear Lens/White
 - G = Green Lens
 - R = Red Lens
 - J = Red/Blue Split
(J in low dome only)



(with Dust Cover Option)

TECHNICAL SPECIFICATIONS

FLASH PATTERNS	2 flash patterns - double or quad (user selectable)
TECHNOLOGY	Xenon Helix Strobe Tube
OPERATING TEMPERATURE	-40° to 50° C
INPUT VOLTAGE	10 - 30 Vdc
CURRENT DRAW	10 watt: 1 amp @ 12 Vdc, 0.5 amp @ 24 Vdc or 20 watt: 2 amps @ 12 Vdc, 1 amp @ 24 Vdc
DIMENSIONS	4" Dome w/base: 4.75" (12 cm) H or 6" Dome w/base: 6.7" (17 cm) H x 6.3" (16 cm) Base Diameter
WARRANTY	Two-year (strobe tube one-year)
MOUNT	Permanent or Magnetic mount (polycarbonate lens and aluminum base)
OPTIONS	Branch Guard 4" Height: #PESB41BG4, 6" Height: #PESB41BG6 Dust Cover (CA Title 13 compliance) 6" Height: #E36ØDC6



www.soundoffsignal.com

Beacons 2000 and 1000 Series Strobe Mini

Features

- 2000 and 1000 Series Strobe Mini are compact sized and are perfect for smaller equipment like fork lifts and bobcats
- Superior input voltage range allows use in multiple applications
- Self contained, potted power supplies are protected from moisture and vibration

2000 Series Strobe Mini

-  Permanent Mount #2Ø51FA
-  Magnetic Mount #2Ø51MA



TECHNICAL SPECIFICATIONS

FLASH PATTERNS	1 flash pattern @ 60 - 80 f.p.m.
TECHNOLOGY	Linear Strobe Tube
OPERATING TEMPERATURE	-40° to 50° C
INPUT VOLTAGE	10 - 72 Vdc
CURRENT DRAW	0.3 amps @ 12 Vdc
DIMENSIONS	3.6" (9.14 cm) H, 5.1" (12.95 cm) Base Diameter
WARRANTY	One-year
MOUNT	Permanent mount

1000 Series Strobe Mini

-  Amber Lens #1Ø51FA



TECHNICAL SPECIFICATIONS

FLASH PATTERNS	1 flash pattern @ 60 - 80 f.p.m.
TECHNOLOGY	Linear Strobe Tube
OPERATING TEMPERATURE	-40° to 50° C
INPUT VOLTAGE	12 - 72 Vdc
CURRENT DRAW	0.3 amps @ 12 Vdc
DIMENSIONS	5.2" (13 cm) H, 3.8" (10 cm) Base Diameter
WARRANTY	One-year
MOUNT	Permanent mount

1.800.338.7337

BEACONS

www.soundoffsignal.com

Beacons

Branch Guard and Dust Cover Accessories

Compatible with 4800, 4500 Series LED and 4100, 4000, 3000 Strobe Series Beacons

1.800.338.7337

ACCESSORIES



Branch Guards

- 4" Height #PESB41BG4
- 6" Height #PESB41BG6



4" Height Beacons



6" Height Beacons

6" Dust Cover #E360DC6



www.soundoffsignal.com



Work Lights

Round

PAR 36 109

Square

1400 111

1000 112

900 and 500 113

Oval and Round

700 and 500 114

LED Scene Lights

4000, 3000 and 2200 115

Spot Lights

MIGHTY NIGHT LIGHT 116

LED 3 MINI 117

GHOST 119



PAR36 Work Lights

10-50 Vdc

1.800.338.7337

WORK LIGHTS



Spot Lens



Flood/Trapezoid Lens

PAR 36, 1000 Lumen Work Light

- Spot Pattern #EWLA1000DBDS0W
- Flood Pattern #EWLA1000DBDF0W
- Trapezoid Pattern #EWLA1000DBDT0W

PAR 36, 500 Lumen Work Light

- Spot Pattern #EWLA0500DBDS0W
- Flood Pattern #EWLA0500DBDF0W
- Trapezoid Pattern #EWLA0500DBDT0W

Features

- Intense and bright, built for demanding environments
- Certified to IP67 specifications for rigorous dust and water immersion testing
- Rated to last 30,000+ hours for long-lasting and reliable, bright white light sources
- Low maintenance and reduced operating costs
- Adjustable mounting bracket with 180° of tilt forward or backward to aim the light as needed



TECHNICAL

SPECIFICATIONS

ILLUMINATION PATTERNS	Flood: 40° H x 25° V, Spot 10° or Trapezoid: 40° H. x 15° V
TECHNOLOGY	6 Gen3 LEDs
OPERATING TEMPERATURE	-40° to +65° C / -40° to +149° F
INPUT VOLTAGE	10 - 50 Vdc for worldwide use
COLOR TEMPERATURE	5700k
CURRENT DRAW	1000 Lumen: 2 amps @ 12.8 Vdc, 1.1 amps @ 25.6 Vdc, 0.6 amps @ 51.2 Vdc 500 Lumen: 1.3 amps @ 12.8 Vdc, 0.6 amps @ 25.6 Vdc, 0.3 amps @ 51.2 Vdc
DIMENSIONS	4.5" (10 cm) D x 2.8" (6.4 cm) D Overall Height: 5.7" (14 cm) (includes bracket)
WARRANTY	Three-year
MOUNT	Surface mount with U-bracket (included)

www.soundoffsignal.com

PAR 36 Work Lights

10-16Vdc



Spot Lens



Flood/Trapezoid Lens

PAR 36 LED Work Lights

#EWLB(yyyy)DBD(x)ØW

Replace "(yyyy)" with desired lumen output:

Ø35Ø
Ø50Ø
100ØØ or
140ØØ

Replace "(x)" with desired output pattern:

S = Spot
F = Flood
T = Trapezoid

Features

- Protection against reverse polarity and load dump
- LEDs offer better energy efficiency - uses 75% less energy than sealed beams
- Visual clarity - crystal clear polycarbonate lenses with extremely bright, white LEDs illuminate the darkest work areas
- Lasts for years with 50 times the lifespan of sealed beam halogens and 10 times that of HID bulbs (30,000+ hours of use)
- Includes U-bracket with 20" wire length



TECHNICAL

ILLUMINATION PATTERNS
TECHNOLOGY
OPERATING TEMPERATURE
INPUT VOLTAGE
COLOR TEMPERATURE
CURRENT DRAW
DIMENSIONS
WARRANTY
MOUNT

SPECIFICATIONS

ILLUMINATION PATTERNS	Flood: 40° H x 25° V, Spot 10° or Trapezoid: 40° H. x 15° V
TECHNOLOGY	350: 3 LEDs, 500: 6 LEDs, 1000: 6 LEDs, 1400: 9 LEDs
OPERATING TEMPERATURE	-40° to +65° C / -40° to +149° F
INPUT VOLTAGE	10 - 16 Vdc
COLOR TEMPERATURE	5700k
CURRENT DRAW	350: 0.61A, 500: 1A, 1000: 1.66A, 1400: 2.5A (Amps @ 12.8 Vdc)
DIMENSIONS	4.5" (10 cm) D x 2.8" (6.4 cm) D Overall Height: 5.7" (14 cm) (includes bracket)
WARRANTY	Three-year
MOUNT	Surface mount with U-bracket (included)

1.800.338.7337

WORK LIGHTS

www.soundoffsignal.com

1400 Lumen LED Work Lights

10 - 50 Vdc

1.800.338.7337

WORK LIGHTS

www.soundoffsignal.com



Spot Lens

5" Rectangle Lumen LED Work Lights

- Spot Pattern #EWLC1400TBDS0W
- Flood Pattern #EWLC1400TBDF0W
- Trapezoid Pattern #EWLC1400TBDT0W



Flood/Trapezoid Lens

Features

- Corrosive resistant materials including high tech plastics, aluminum housing and stainless steel bracket
- Certified to IP67 specifications for rigorous dust and water immersion testing - heavy duty design withstands and outlasts harsh environmental conditions
- Premium optics maximize the LED light output
- Rated to last 30,000+ hours for a long-lasting and reliable, bright white light source to illuminate your work/play areas
- Adjustable mounting bracket with 180° tilt forward or backward to aim the light as needed



TECHNICAL SPECIFICATIONS

ILLUMINATION PATTERNS	Flood: 40° H x 25° V, Spot 10° or Trapezoid: 40° H x 15° V
TECHNOLOGY	10 Gen3 LEDs
OPERATING TEMPERATURE	-40° to +65° C / -40° to +149° F
INPUT VOLTAGE	10 - 50 Vdc for worldwide use
COLOR TEMPERATURE	5700k
CURRENT DRAW	2.7 amps @ 12.8 Vdc, 1.0 amps @ 25.6 Vdc, 0.5 amps @ 51.2 Vdc
DIMENSIONS	5.2" (13 cm) W x 5.6" (14 cm) H x 2.6" (7 mm) D, x 5.5" (14 cm) H (includes bracket)
WARRANTY	Three-year
MOUNT	Adjustable mounting bracket (included)

1000 Lumen LED Work Lights

10-50 Vdc



Spot Lens

4" Square Lumen LED Work Lights

- Spot Pattern #EWLC1000SBDS0W
- Flood Pattern #EWLC1000SBDF0W
- Trapezoid Pattern #EWLC1000SBDT0W



Flood/Trapezoid Lens

Features

- Corrosive resistant materials including high tech plastics, aluminum housing and stainless steel bracket
- Certified to IP67 specifications for rigorous dust and water immersion testing - heavy duty design
- Premium optics maximize the LED output
- Rated to last 30,000+ hours for a long-lasting and reliable, bright white light source to illuminate your work/play areas
- Adjustable mounting bracket with 180° tilt forward or backward to aim the light as needed



TECHNICAL SPECIFICATIONS

ILLUMINATION PATTERNS	Flood: 40° H x 25° V, Spot 10° or Trapezoid: 40° H x 15° V
TECHNOLOGY	8 Gen3 LEDs
OPERATING TEMPERATURE	-40° to +65° C / -40° to +149° F
INPUT VOLTAGE	10 - 50 Vdc for worldwide use
COLOR TEMPERATURE	5700k
CURRENT DRAW	2 amps @ 12.8 Vdc, 0.8 amps @ 25.6 Vdc, 0.4 amps @ 51.2 Vdc
DIMENSIONS	4" (10 cm) W x 5.5" (14 cm) H x 2.7" (7 mm) D (includes bracket)
WARRANTY	Three-year
MOUNT	Surface mount with U-bracket (included)

1.800.338.7337

WORK LIGHTS

www.soundoffsignal.com

1.800.338.7337

WORK LIGHTS

900
500

Lumen LED Work Lights

10 - 30 Vdc

THINK
NEW



4.6" Square 900 Lumen LED Work Light

#EWLF0900SBDF0W

THINK
NEW



4.3" Square 500 Lumen LED Work Light

#EWLF0500SBDF0W

Features

- Die cast aluminum housing with a black powder coat finish
- PC vacuum coated reflector is weatherproof and intensifies light output
- Offered in a wide flood pattern
- Low current draw and efficient heat dispersion
- Prewired double insulated cable
- Reverse polarity protected

TECHNICAL

SPECIFICATIONS

ILLUMINATION PATTERNS	Flood pattern
TECHNOLOGY	900 Lumen: 9 Gen3 LEDs, 500 Lumen: 5 Gen3 LEDs
OPERATING TEMPERATURE	-40° to +65° C / -104° to +149° F
INPUT VOLTAGE	10 - 30 Vdc
COLOR TEMPERATURE	5700k
CURRENT DRAW	900 Lumen: 2.25 amps @ 12 Vdc, 1.13 amps @ 24 Vdc 500 Lumen: 1.25 amps @ 12 Vdc, 0.63 amps @ 24 Vdc
DIMENSIONS	900 Lumen: 4.6" (12 cm) W x 1.9" (4.9 cm) D, Height: 5" (13 cm) 500 Lumen: 4.3" (11 cm) W x 1.6" (4.1 cm) D, Height: 5" (13 cm) (includes bracket on all)
WARRANTY	One-year
MOUNT	Surface mount with U-bracket (included)

www.soundoffsignal.com

700
500

Lumen LED Work Lights

10 - 30 Vdc



5.6" Oval 700 Lumen LED Work Light
#EWLF0700DBDF0W



3.3" Round 500 Lumen LED Work Light
#EWLF0500DBDF0W

Features

- Die cast aluminum housing with a black powder coat finish
- PC vacuum coated reflector is weatherproof and intensifies light output
- Offered in a wide flood pattern
- Low current draw and efficient heat dispersion
- Prewired double insulated cable
- Reverse polarity protected



TECHNICAL

ILLUMINATION PATTERNS
TECHNOLOGY
OPERATING TEMPERATURE
INPUT VOLTAGE
COLOR TEMPERATURE
CURRENT DRAW
DIMENSIONS
WARRANTY
MOUNT

SPECIFICATIONS

ILLUMINATION PATTERNS	Flood pattern
TECHNOLOGY	700 Lumen: 8 Gen3 LEDs, 500 Lumen: 4 Gen3 LEDs
OPERATING TEMPERATURE	-40° to +65° C / -40° to +149° F
INPUT VOLTAGE	10 - 30 Vdc
COLOR TEMPERATURE	5700k
CURRENT DRAW	700 Lumen: 2 amps @ 12 Vdc, 1 amp @ 24 Vdc 500 Lumen: 1 amp @ 12 Vdc, 0.5 amp @ 24 Vdc
DIMENSIONS	700 Lumen: 5.6" (14 cm) D x 2.5" (6.4 cm) Depth, Overall Height: 4.7" (12 cm) 500 Lumen: 3.3" (8 cm) D x 2.5" (6.4 cm) Depth, Overall Height: 4.4" (11 cm) (includes bracket on all)
WARRANTY	Three-year
MOUNT	Surface mount with U-bracket (included)

1.800.338.7337

WORK LIGHTS

www.soundoffsignal.com

4000
3000
2200

Lumen LED Scene Lights

10 - 30 Vdc

**THINK
NEW**



5 Module 4000 Lumen LED Scene Light
#EWLS4000TBDF0W

**THINK
NEW**



4 Module 3000 Lumen LED Scene Light
#EWLS3000TBDF0W

**THINK
NEW**



3 Module 2200 Lumen LED Scene Light
#EWLS2200TBDF0W

Features

- Die cast aluminum housing with a black powder coat finish
- PC vacuum coated reflector is weather proof and intensifies light output
- Low current draw and efficient heat dispersion
- Heavy duty stainless steel adjustable mounting bracket included



TECHNICAL SPECIFICATIONS

ILLUMINATION PATTERNS	Flood
TECHNOLOGY	5 Module: 30 Gen3 LEDs, 4 Module: 24 Gen3 LEDs, 3 Module: 18 Gen3 LEDs
OPERATING TEMPERATURE	-40° to +65° C / -40° to +149° F
INPUT VOLTAGE	10 - 30 Vdc
COLOR TEMPERATURE	5700k
CURRENT DRAW	5 Module: 60 watts, 4 Module: 48 watts, 3 Module: 36 watts
DIMENSIONS	5 Module: 17.5" (45 cm) L x 6" (16 cm) H x 3.5" (9 cm) D 4 Module: 14.4" (37 cm) L x 6" (16 cm) H x 3.5" (9 cm) D 3 Module: 11.2" (29 cm) L x 6" (16 cm) H x 3.5" (9 cm) D (includes bracket on all)
WARRANTY	Three-year
MOUNT	Adjustable mounting bracket (included)

MIGHTY Night Light

Lumen Spot Lights 10 - 30 Vdc



Standard Lens Lumen Spot Light
#EAUSSMBØSWC



45° Flood Lens Lumen Spot Light
#EAUSSMBØFWC

15° Forward Facing Lens Lumen Spot Light
#EAUSSMBØAWC

Features

- High powered white LED spot light with a compact size that allows you to use it anywhere you have restricted space such as push bumpers, around the license plate
- Powerful and bright 400 lumen output
- Can be mounted vertically or horizontally

TECHNICAL SPECIFICATIONS

FLASH PATTERN	None, steady burn only
TECHNOLOGY	4 diode multi-chip Gen3 LED
OPERATING TEMPERATURE	-40° to +65° C / -40° to +149° F
INPUT VOLTAGE	10 - 30 Vdc
CURRENT DRAW	0.45 amps to 0.65 @ 12.8 Vdc
DIMENSIONS	2.8" (7.1 cm) L x 4.1" (1.0 cm) H x 1.3" (3.3 cm) D
WARRANTY	Three-year
MOUNT	Surface mount on 3.5" (89 mm) centers

1.800.338.7337

SPOT LIGHTS

www.soundoffsignal.com

LED3™

MINI WHITE SPOT LIGHT

Spot Light

1.800.338.7337

SPOT LIGHTS



Mini White Spot Light

- 10-16 Vdc #EL3SSCW
- 10-30 Vdc #EL3SS3ØCW

Optional Bracket/Bezel Order Numbers
(refer to order numbers and images on next page)



Features

- Bright white 100 lumen output
- Compact size - our smallest light
- High quality, high bin LEDs for consistent and pure color with reliable output
- Weatherproof design with superior reliability and performance regardless of weather conditions
- Includes rubber mounting gasket, mounting hardware and 18" of 3-wire cable

TECHNICAL SPECIFICATIONS

FLASH PATTERN	None, steady burn only
TECHNOLOGY	3 Gen3 LEDs
OPERATING TEMPERATURE	-40° to +65° C / -40° to +149° F
INPUT VOLTAGE	10 - 16 Vdc or 10 - 30 Vdc
CURRENT DRAW	Less than 0.4 amps @ 12.8 Vdc
DIMENSIONS	2.5" (6.4 cm) L x 1.4" (3.5 cm) H x 1.2" (3.2 cm) D
WARRANTY	Three-year
MOUNT	Surface mount on 2.2" (5.6 cm) centers

www.soundoffsignal.com

Optional Bracket and Bezel Options

Universal Grille bracket
#EL3SNBRK1GRU



90° bracket
#EL3SNBRK19Ø



Stacked 90° bracket
horizontal #EL3SNBRK29ØH



Single bezel
#PEL3BZSG(x)



Replace (x) for these available housing colors:
Black=B, Chrome=C, White=W



45° bracket
horizontal # EL3SNHBRK145
vertical #EL3SNBRK145



Side-by-Side 90° bracket
#EL3SNBRK29ØH



Stacked 90° bracket
vertical #EL3SNBRK29ØV



Dual Stacked bezel
#PEL3BDS(x)

Dual Side-by-Side bezel
#PEL3BZSS(x)



1.800.338.7337

SPOT LIGHTS

www.soundoffsignal.com



Spot Lights

1.800.338.7337



Multi Mount Spot Light

- Black Housing #EGHSTS1W
- White Housing #EGHSTS1WW

Recess Mount Spot Light

- Black Housing #EGHSTS5WB
- White Housing #EGHSTS5WW
- Chrome Housing #EGHSTS5WC



Surface Mount Spot Light

- Black Housing #EGHSTS2W
- White Housing #EGHSTS2WW
- Chrome Housing #EGHSTS2WC

Rock Spot Light

- Black Housing #EGHSTS3W
- Rock Bracket (only) #PGHSTRLK



Features

- Weatherproof design is moisture and vibration resistant for heavy duty and exterior applications
- Includes 18" of 3-wire cable for installation
- Bright white 200 Lumen output

Multi-Mount Spot Lights Three Options

Permanent Mount - screw mount

- Adhesive Mount - super duty automotive grade 3M tape holds light securely in place without drilling holes
- Single or Dual Edge Mount - bracket slips onto the edge of the hood, grille or trunk edges without requiring drill holes into the body of the vehicle

TECHNICAL SPECIFICATIONS

FLASH PATTERN	None, steady burn only
TECHNOLOGY	6 Gen3 LEDs
OPERATING TEMPERATURE	-40° to +65° C / -40° to +149° F
INPUT VOLTAGE	10 - 30 Vdc
CURRENT DRAW	0.45 amps max @ 12.8 Vdc, 0.23 amps max @ 25.6 Vdc
DIMENSIONS	Single and Rock: 4.05" (10.3 cm) L x 1" (2.4 cm) W x 1.2" (3.0 cm) D Dual Stacked: 5.4" (13.7 cm) L x 2.5" (6.3 cm) W x 1" (2.5 cm) D Recess: 4.375" (11.1 cm) L x 1.25" (3.2 cm) W x 1" (2.5 cm) D Surface: 5.3" (13.5 cm) L x 1.5" (3.7 cm) W x 1" (2.5 cm) D
WARRANTY	Three-year
MOUNTS	Multi-Mount options: Permanent, Adhesive or Single/Dual Edge mounts Recess, Surface or Rock Bracket mounts

SPOT LIGHTS

www.soundoffsignal.com

Grab Immediate Customer Attention...

...intriguing interaction and additional sales with your new SoundOff Signal emergency product display!

Simply order the product display, part **#ETDSPEV00 (display board, no product)** and then specify the available products and brackets below.



- A 100H Series Professional Speaker with Universal Bail Bracket**
#ETDSPTSS100H
(2 speakers required with the 200 Watt Siren)
- B GHOST Single Multi-Mount Light**
#ETDSPGHST1(x)
Colors: A, B, D, E, J, M, R, W
GHOST Edge Mount Bracket: #ETDSPBK03
- C nForce™ Single Surface Mount Light, 12 LED**
#ETDSPNFSS3(x)
Dual Colors: A, B, J, R, W
nFORCE Surface Mount Bracket: #ETDSPBK09





- E Universal UnderCover LED Insert**
#ETDSPLUC2S010(x)
Colors: A, B, D, E, F, J, K, M, R, W
Universal UnderCover Bracket: #ETDSPBK02
- F nForce™ Single Deck/Grille Mount Light, 18 LED**
#ETDSPNFSGS4BRW
Solid Tri Color: Blue/Red/White
nForce™ Single Deck/Grille Mount Light, 12 LED
#ETDSPNFSGS3(x)
Colors: A, B, F, R, W
nFORCE Deck/Grille Bracket: #ETDSPBK08

- D Intersector Under Mirror**
#ETDSPNT2B3(x)
Colors: A, B, R, W
Intersector Bracket: #ETDSPBK01











- G nERGY 400 Series Remote Siren**
#ETDSPTSA482RSP

REPLACE (x) IN ORDER NUMBER FOR COLOR SELECTION

Solid Colors =

			
A	B	R	W

Dual/Split Colors =

									
A	B	D	E	F	J	K	M	R	W

Note: Display products, brackets and wiring lengths have each been designed to specifically attach to the designated locations shown and can not be interchanged with one another.





SUPERIOR CUSTOMER RELATIONSHIPS.



SMARTLY DESIGNED LIGHTING AND ELECTRONIC SOLUTIONS.



PO Box 206 | Hudsonville, MI 49426
toll free 1.800.338.7337 | office direct 616.896.7100 | order fax 616.896.1286
www.soundoffsignal.com

© 2013 SoundOff Signal | Printed in the USA | All Rights Reserved | ISO-9001 Company
Specifications and availability are subject to change without notice