

LPR36


36 INCH HIGH-LOW ACTUATOR



ADA
COMPLIANT



PRIMARY APPLICATIONS

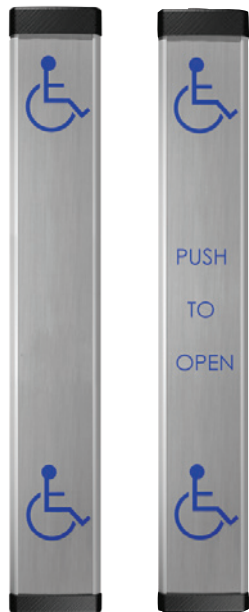

DESCRIPTION

BEA's LPR36 is a 36 inch actuator that exceeds all local ADA building codes requiring high and low actuators, eliminating the need to install two separate devices.

This stainless steel plate utilizes four highly-sensitive membrane switches that require very little force and ensure actuation across the entire surface.

Available in wireless and hard wire versions, the LPR36 can be conveniently mounted in a variety of locations.

FEATURES & BENEFITS



- Low profile (1 inch deep) design helps prevent accidental damage in high traffic areas
- Exceeds California Building Code 2013, Page 559, 11B-404.2.9, Exception 2c
- Easy installs on either walls or bollards for maximum mounting flexibility
- Available with convenient, built-in wireless transmitter (300, 433 or 900 MHz frequencies) for wireless activation applications



BEA, Inc.
RIDC Park West
100 Enterprise Drive
Pittsburgh, PA 15275-1213

Customer Service: 800.523.2462
Technical Support: 800.407.4545
www.BEAinc.com


APPLICATIONS

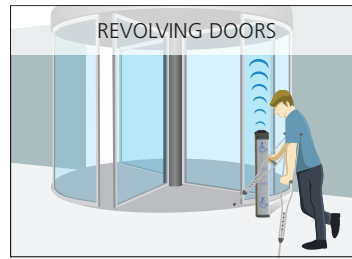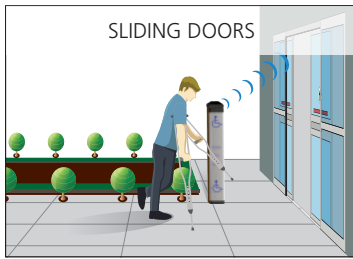

TECHNICAL SPECIFICATIONS

Contact Configuration	SPST N.O.
Switching Voltage	0.1 to 50 VDC
Switching Capacity	1 Watt
Switching Current	0.005 to 100 mA DC
Operation Temperature	-32° F to +212° F -35° C to +100° C
Compliance	California Building Code 2013, Page 559, 11B-404.2.9, Exception 2c

DIMENSIONAL DRAWINGS

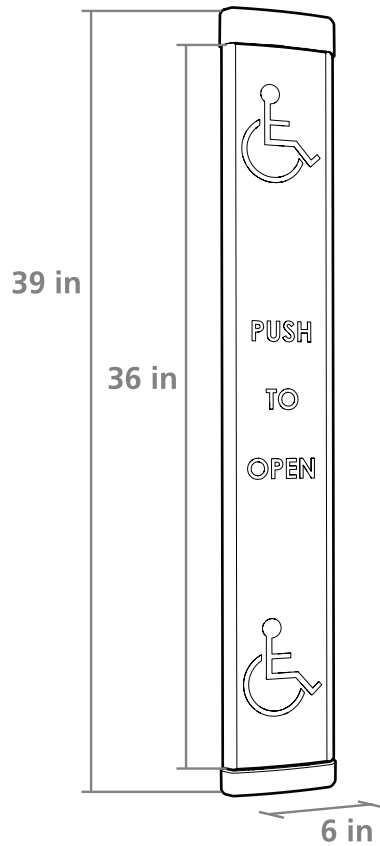

RELATED PRODUCTS



10LPR36L-300
300 MHZ
TEXT & LOGOS



10LPR36L-300
300 MHZ
LOGOS ONLY



10LPR36-433
433 MHZ
TEXT & LOGOS



10LPR36L-433
433 MHZ
LOGOS ONLY



10LPR36-900
900 MHZ
TEXT & LOGOS



10LPR36L-900
900 MHZ
LOGOS ONLY



10LPR36-HW
HARDWIRED
TEXT & LOGOS




10LPR36L-HW
HARDWIRED
LOGOS ONLY



10BOLLARDSLVWOH
SILVER BOLLARD
NON-DRILLED



10BOLLARDBLKWOH
BLACK BOLLARD
NON-DRILLED



10BOLLARDBRZWOH
BRONZE BOLLARD
NON-DRILLED



10R300
300 MHZ
ANALOG RECEIVER



10RD433
433 MHZ
RECEIVER



10RD433EH
EXTENDED HOLD
TIME RECEIVER



10RD900
900 MHZ
RECEIVER

www.BEAinc.com

© 2017 BEA, Inc. All rights reserved.

LPR36

36 INCH HIGH-LOW ACTUATOR

BEA, Inc.
RIDC Park West
100 Enterprise Drive
Pittsburgh, PA 15275-1213

Customer Service: 800.523.2462
Technical Support: 800.407.4545

