

# Improving Classifier Training Efficiency for Automatic Cyberbullying Detection with Feature Density

Juuso Eronen<sup>†</sup>, Michal Ptaszynski<sup>†</sup>, Fumito Masui<sup>†</sup>, Aleksander Smywiński-Pohl<sup>‡</sup>,  
Gniewosz Leliwa<sup>§</sup>, Michal Wroczynski<sup>§</sup>

<sup>†</sup> *Kitami Institute of Technology, Japan*

<sup>‡</sup> *AGH University of Science and Technology, Poland*

<sup>§</sup> *Samurailabs, Poland*

---

## Abstract

We study the effectiveness of Feature Density (FD) using different linguistically-backed feature preprocessing methods in order to estimate dataset complexity, which in turn is used to comparatively estimate the potential performance of machine learning (ML) classifiers prior to any training. We hypothesise that estimating dataset complexity allows for the reduction of the number of required experiments iterations. This way we can optimize the resource-intensive training of ML models which is becoming a serious issue due to the increases in available dataset sizes and the ever rising popularity of models based on Deep Neural Networks (DNN). The problem of constantly increasing needs for more powerful computational resources is also affecting the environment due to alarmingly-growing amount of CO<sub>2</sub> emissions caused by training of large-scale ML models. The research was conducted on multiple datasets, including popular datasets, such as Yelp business review dataset used for training typical sentiment analysis models, as well as more recent datasets trying to tackle the problem of cyberbullying, which, being a serious social problem, is also a much more sophisticated problem from the point of view of linguistic representation. We use cyberbullying datasets collected for multiple languages, namely English, Japanese and Polish. The difference in linguistic complexity of datasets allows us to additionally discuss the efficacy of linguistically-backed word preprocessing.

*Keywords:* feature density, dataset complexity, linguistics, cyberbullying, document classification, preprocessing

## 1. Introduction

Performance estimation of different classification algorithms with a given dataset has always been one of the difficulties in Machine Learning (ML) [1]. While there are classifiers that appear to be extremely successful on a number of different topics, they may easily be outperformed by others on a dataset-specific scale, as it is difficult to find a classifier that would have the greatest performance for any dataset [1]. So it is up to the individual (researcher, or ML practitioner) to decide experimentally which classifier might be suitable for the task they are trying to solve, based on their field experience and accumulated theoretical knowledge.

A typical method of estimating the performance of various classifiers is to pick a number of potential classifiers to experiment on and train the chosen classifiers with cross-validation in order to achieve the best possible average estimation of their performance. Although getting accurate estimations of the classifier performance is possible this way, it becomes very costly and time-inefficient.

In the past, several attempts have been made to estimate the output of the ML model. One of the suggestions for this issue was to extrapolate the results from training small datasets to model the performance when utilizing larger datasets [2]. Another strategy was the usage of meta-learning and training a model using dataset characteristics to predict the output of the classifier [3].

The importance of addressing this issue derives not only from the increased demands in computational power, but also from its environmental consequences. This is mainly attributed to the growing success of the fields of Artificial Intelligence (AI) and ML. Training classifiers on massive datasets are both time consuming and computationally expensive while leaving behind a noticeable carbon footprint [4]. In order to take a step forward towards greener AI [5], the core methods of ML strategies must be assessed and future areas of development identified. It would be helpful to theoretically estimate, even if roughly, the efficacy of the classifier prior to training, in order to conserve computing resources and reduce pollution.

The ability to estimate the performance of a classifier prior to training will also have significant functional consequences. One of the areas where this is urgently required

is the monitoring of negative and abusive behaviour encountered online, known as cyberbullying (CB), defined as the exploitation of open online means of communication, such as Internet forum boards, or social network services (SNS) to convey harmful and disturbing information about private individuals, often children and students [6]. Users' realization of the anonymity of online communications is one of the factors that make this activity attractive for bullies since they rarely face consequences of their improper behavior. The problem was further exacerbated by the popularization of smartphones and tablet computers that enable almost continuous usage of SNS anywhere, at home, work/school or in motion [7].

Messages that can be identified as cyberbullying usually ridicule someone's personality, body type or appearance, or include slandering or spreading rumors about the individual. This may drive its victims to even as far as self-mutilation or suicide, or, on the contrary, to a retaliation assault on their perpetrators [8]. Global spike in cyberbullying cases<sup>1</sup> opened a world wide discussion about whether such messages should be identified early to deter harm, and on freedom of speech on the Internet.

In certain nations, such as in Japan, the issue has been severe enough to be seen at ministerial level [9]. As one of the ways to solve the issue, Internet Patrol (IP) consisting of school workers has begun to track online forum pages and SNS featuring cyberbullying content. Unfortunately, as IP is carried out manually, reading through vast numbers of websites and SNS content makes it an uphill battle. To aid in this struggle, some research have started to develop methods for automatic detection of CB [10, 11, 12, 13].

Even with numerous improvements, the findings have unfortunately remained only slightly satisfactory. This is due to the plethora of language and vocabulary ambiguities and styles used in CB. Solving the problem of CB has become even more crucial after introducing global policies such as General Data Protection Regulation (GDPR) in EU<sup>2</sup>, which put the weight of spotting and weeding out online harassment on the platforms themselves. Therefore the process of efficient implementing of automatic cyberbullying

---

<sup>1</sup><https://cyberbullying.org/summary-of-our-cyberbullying-research>

<sup>2</sup>[https://edps.europa.eu/data-protection/data-protection/reference-library/anti-harassment-procedures\\_en](https://edps.europa.eu/data-protection/data-protection/reference-library/anti-harassment-procedures_en)

detection for different languages and social networking sites is one of the current most burning problems, which could greatly benefit from a method allowing to loosely approximate which classifier configurations can be rejected without the experimental process.

In order to contribute more to solving this problem, we are performing an in-depth study of the efficacy of the notion of Feature Density (FD) previously proposed by Ptaszynski et al. [14] to comparatively estimate the efficiency of various ML classifiers prior to training. Additionally we evaluate the usefulness of numerous linguistically-backed feature preprocessing approaches, including lemmas, Named Entity Recognition (NER) and dependency information-based features, in an application for automated cyberbullying detection.

To optimize the use of resources when dealing with NLP problems, it would be useful to be able to have information about the complexity of different datasets, meaning how difficult are the datasets for a classifier to learn and generalize upon. This problem has been recognized in other fields such as image recognition [15]. Even though natural language complexity has been studied through lexical [16, 17, 18, 19] and syntactic complexity [20, 21, 22, 23], mostly within the second language education field, there have been very few or no applications to use this kind of measures in estimating dataset complexity in ML tasks.

This research uses a total of four datasets, three of which are about cyberbullying and one verification dataset from a different field. All of the three CB datasets are in different languages, namely Japanese, English and Polish, to additionally study dataset complexity across different languages. We chose those three languages for two main reasons. Primarily, because they were some of the best prepared datasets for cyberbullying detection, but also because each of those languages represents different family of languages (English - Germanic; Polish - Slavic; Japanese - Koreano-Japonic language family) and different type of language (English - isolating/analytic language; Polish - fusional language, Japanese - agglutinative language).

The size of the CB datasets range from about 2,000 entries to 20,000. The Japanese dataset was created originally by Ptaszynski et al. [10] based on the definition by the Japanese Ministry of Education [9]. This dataset was also used in the first experiments

with Feature Density [14]. The English dataset is a reannotated [24] version of the Formspring Dataset for Cyberbullying Detection [25]. The reannotation was necessary to ensure quality of expert annotations, as the original dataset was annotated by laypeople using Amazon Mechanical Turk. The verification dataset, which is a subset of the Yelp reviews<sup>3</sup> is substantially larger, as the subset used in this research holds 500,000 entries.

The various sizes of datasets were chosen to study the effect of Feature Density (FD) and verify its potential to comparatively estimate the performance of classifiers. The preprocessing methods applied here were extended from previous research with Japanese data [14]. For traditional classifiers we applied TF-IDF weighting on a Bag-of-Features language model. Additionally to applying a language complexity measure of a dataset (FD) to estimate performance of various traditional ML classifiers, we also specifically propose and test different linguistically-backed embeddings trained as neural language models used in neural networks (CNN). In order to perform the most thorough analysis, we are applying the methods to multiple languages and topics. This also allows us to study the effect of linguistic and cultural differences in classifier performance when the same classification methods are used.

The paper outline is as follows. In Section 2 we describe previous research in all areas that are addressed in this paper, namely, automatic estimation of classifier performance, dataset complexity estimation, feature density, linguistically-backed preprocessings, and cyberbullying detection. In Section 3 we describe all the datasets applied to this research and present their features. In Section 4 we go through the feature engineering and classification methods used in this research. In Section 5 we go through all the results from the conducted experiments. In Section 6 we discuss the results in general and bring out the most interesting findings in relation to the research goals.

---

<sup>3</sup><http://www.yelp.com/dataset>

## 2. Research Background

### 2.1. Classifier Performance Estimation

The first research that studied automatic estimation of ML classifier performance was based on extrapolating results from a smaller dataset to simulate the performance of a larger dataset. Basavanhally et al. [2] applied this method to estimating classifier performance in the field of computer aided medical diagnostics, where the available data is in many cases limited in quantity. Their research showed that using a repeated random sampling method on small datasets to estimate the performance on a larger set often had high error rates and should not be generalized as holding true when higher quantities of data become available. Later, a cross-validation sampling strategy was added, which improved the method and resulted in lower error rates [26].

However, they only used three different classifiers, two of which are widely regarded as low-performance baseline classifiers (Naive Bayes, k-Nearest Neighbor) and Support Vector Machines. Their results suggested that the ranking of the classifiers would not change as the dataset size increases but considering the classifiers used, the results seem very predictable and match the average rankings of these classifiers [27]. Also, they did not consider any deep learning -based approaches. This increases the questionability of the results.

In the field of NLP, Johnson et al. [28] used the fastText classifier [29] and applied the extrapolation method to document classification. They discovered that biased power law model with binomial weights could be used as a good baseline extrapolation model for NLP tasks. As the authors suggested, the method needs to be studied further using different classifiers and extrapolation models. Even though the extrapolation method would aid in estimating the classifier performance, at least some training is still required.

Gama et al. [3] proposed another method, in which classifier performance could be estimated by training a regression model based on meta-level characteristics of a dataset. The characteristics used included simple measures like number of instances and number of attributes, statistical measures like standard deviation ratio and various information based measures like class entropy. These measures are defined in the STATLOG project [30].

This meta-learning based method was adopted and further developed by introducing the Landmarking process [31], which uses the learners themselves to characterize the datasets. This involves using computationally non-demanding classifiers, such as Naive Bayes (NB), to gain valuable insights into datasets. The system outperformed the previous characterization approach and had modest results in the ranking of learners.

Later, Blachnik et al. [32] enhanced the Landmarking method. He proposed that the information from instance selection methods could be used as landmarks. These instance selection methods are usually used for cleaning the dataset, reducing its size by removing redundant information. They found out that it is possible to use the relation between the initial and reduced datasets as a landmark in order to predict classifier performance with lower error rates.

A more recent method focused on generalizing meta information of the dataset to quantify an overall dataset complexity measure and use it to find correlations between this measure and classifier performance without any training [15]. We describe this research in detail in the following Section 2.2.

In our research, instead of concentrating on training an additional classifier on meta information extracted from the dataset or performance simulation and extrapolation, we directly focused on feature engineering and the relation between the available feature space and classifier performance. This is a novel method that can be utilized together with the existing methods to better estimate the performance of different classifiers.

## *2.2. Dataset Complexity Estimation*

In the field of image recognition, Rahane et al. [15] proposed a method to estimate dataset complexity using various entropy-based information measures on image grayscale values. All of the used measures correlated with the known performance metrics of the applied datasets. They managed to properly rank their datasets using these metrics, which showed that there is a potential in ranking classifiers using these metrics. In the future, a similar method based on word similarity could be applied in NLP.

It has been widely known in linguistics that various languages have different complexity. Therefore language complexity in general is a topic that has been studied

throughout the years in linguistics [33]. Especially, attempts to estimate a general lexical complexity of a language [16, 17, 18, 19] or a general syntactic complexity of a language [20, 21, 22, 23] are well documented within the fields of language education. It has been used especially in second language learning, to estimate the level of difficulty to certain first language speakers to learn a specific second language (e.g., how hard it is for native speakers of English to learn Polish or Japanese, which have completely different syntactic complexity). However, to the best of our knowledge, there has not been relevant research in applying this to locally estimate linguistic dataset complexity. One of the measures used for estimating linguistic complexity in general has been Lexical Density (LD) [20]. It is a score representing an estimated measure of content per lexical units for a given corpus, calculated as the number of all distinct words, or vocabulary size, divided by the number of all words in the corpus:  $LD = V/N$ . This notation means that the corpus is the more complex (or “dense”), the more distinct words it contains. In this research we take a look at an extension of Lexical Density, namely, Feature Density [14], and study its uses in estimating the complexity of different natural language datasets, depending on the kinds of feature sets were used to represent the dataset.

Also, information criterion based methods, like Akaike Information Criterion (AIC) [34] and Bayesian Information Criterion (BIC) [35], have been proposed for model selection since the same time as lexical density was introduced. However using these metrics requires training all of the models which is exactly what we are trying to avoid as feature density can be calculated from the dataset directly without any training.

### 2.3. Feature Density

The concept of Feature Density (FD) was introduced by Ptaszynski et al. [14] based on the notion of LD [20] from linguistics. The score is called Feature Density as it includes not only lexemes (words/tokens) but also other features, like parts-of-speech, dependency information, or any other applied feature set, in addition or instead of words/tokens

$$FD = \frac{V_x}{N_x}, \quad (1)$$

where  $V_x$  is the number of distinct features in the corpus and  $N_x$  is the total number of features in the corpus. By feature we mean preprocessed (lemmatized, added POS, dependency information etc.) words/tokens. The preprocessing types used are introduced in section 4.1. In this research we applied this notation to estimate dataset complexity, by defining it as the complexity of the language dataset itself.

Furthermore, in this research, after calculating FD for all applied datasets and all preprocessing methods, we calculated Pearson’s correlation coefficient ( $\rho$ -value) between dataset generalization (FD) and classifier results (macro F-scores). If FD has a clear positive or negative correlation with classifier performance, it could be useful in comparatively estimating the performance of various classifiers within a dataset. Using the Japanese CB dataset, Ptaszynski et al. [14] showed that CNNs work well with higher FD while other classifiers’ scores were usually higher with the lower FD datasets. This shows that it might be possible to improve the performance of CNNs by increasing the FD of the dataset in question, whereas other classifiers could score higher if FD was reduced [14].

We also compare different datasets in terms of comparative complexity. Using Feature Density and the experiment results, we study the usefulness of estimating dataset complexity in optimizing classifier performance or even estimating it prior to experimentation. In this research, the concept of Feature Density is applied to multiple languages in the field of cyberbullying as well as Sentiment Analysis.

#### *2.4. Linguistically-backed Preprocessing*

In almost all cases, word embeddings are learned only from pure tokens (words) or in some cases, lemmas (unconjugated forms of words). This also applies to the recently popularized pre-trained language models like BERT [36]. Although word embeddings have been used to help predict parts of speech [37], named entity recognition [38], or dependency parsing [39], utilizing such linguistic information in the process of training the embeddings themselves have not yet been researched extensively, with only a few related introductory studies being proposed so far [40, 41, 42].

To conduct further investigation on the potential of capturing deeper relations between lexical items and structures and to filter out redundant information, we propose

to preserve the morphological, syntactic and other types of linguistic information by combining them with the pure tokens or lemmas. This means, for example, including parts-of-speech or dependency information within the used lexical features. The word embeddings can then be trained using these features instead of just plain tokens. It is also possible to later apply this method to the pre-training of huge language models and possibly enhance their performance. The linguistically-backed preprocessing methods used in this research are described in-depth in section 4.1.

### 2.5. *Cyberbullying Detection*

Even though the issue of CB has been researched in social sciences and child psychology for over ten years [6, 43], only a small number of significant attempts have been made so far to use information technology to help solve the problem. Here we introduce the most relevant studies up to the day.

For the first time, [10, 11] in 2010 performed affect analysis on a small CB dataset and discovered that the use of vulgar words were the distinctive features for CB. They trained an SVM classifier using a lexicon of such words and with multiple optimizations, they managed to detect CB with an F-score of 88.2%. However, as the amount of data increased, it caused a decrease in results, which caused the authors to abandon SVM as not ideal for language ambiguities typical for CB.

In other research, Sood et al. [44] focused on detecting personal insults and negative influence which could at most cause the Internet community to fall into recession, meaning if the harmful content would be left uncontrolled, people would start to leave the community. Their study used single words and bigrams as features, and weighted them using Boolean weighting (1/0), term frequency and tf-idf. These were used to train an SVM classifier. Their dataset was a corpus collected from multiple online fora, totaling at six thousand entries. They used a crowd-sourcing approach (Mechanical Turk) with non-professional laypersons hired for the classification task to annotate the data.

Later, Dinakar et al. [12] introduced their method to detect and mitigate cyberbullying. Their paper had a wider perspective, as they did not focus only on the detection of cyberbullying, but also included methods for mitigating the problem. This was an

improvement compared to previous research. Their classifiers scored up to 58-77% of F-score in an English dataset. The results varied depending on the type of harassment they were attempting to classify. The best classifier they proposed was again SVM, which further confirms the effectiveness of SVMs for detecting cyberbullying, similarly to the research done in 2010 using a Japanese dataset [10].

An interesting work was done by Kontostathis et al. [45], who performed a thorough analysis of cyberbullying entries on Formspring.me. They identified usual cyberbullying patterns and used a machine learning method based on Essential Dimensions of Latent Semantic Indexing (EDLSI) to apply them in classification.

Cano et al. [46] introduced a Violence Detection Model (VDM), a weakly supervised Bayesian model. However, their focus was not strictly restricted on cyberbullying, but consisted of a more widened scope of generally understood "violence". This simplified the problem and made it more feasible for untrained annotators to work with. The datasets were extracted from violence-related topics on Twitter and DBPedia.

Nitta et al. [47] proposed a method extending Turney's SO-PMI-IR score [48] to automatically detect harmful entries. They used the score to calculate the relevance of a document with harmful contents. The seed words were grouped into three categories (abusive, violent, obscene) and the relevance of categories was maximized. The method was evaluated comparatively high as the best achieved Precision was around 91% (although with Recall less than 10%).

A re-evaluation of their method two years later unfortunately suggested that the method lost a major amount of its Precision (over 30 percentage-point drop) over the span of two years [13]. They hypothesized that this could be the cause of external factors like Web page re-ranking, or changes in SNS user policies, etc. The method was improved by acquiring and filtering new harmful seed words automatically with some success ( $P=76\%$ ), but they were unable to achieve results close to the original performance. Later an automatic method for the seed word acquisition [49] was developed with positive results. However, this method was deemed inefficient and impractical compared to a more direct machine learning based approach with a properly annotated dataset.

Sarna et al. [50] based their method on a set of features like "bad words", positive/negative sentiment words, and other common features like pronouns, etc., to

estimate user credibility. These features were applied to commonly used classifiers (Naive Bayes, kNN, Decision Trees, SVM). The obtained classification results were further used in User Behavior Analysis model (BAU), and User Credibility Analysis (CAU) model. Even though their approach included the use of phenomena such as irony, or rumors, in practice they unfortunately only focused on messages containing “bad words.” Moreover, neither the words themselves, the dataset, nor its annotation schema were sufficiently described in the paper.

Ptaszynski et al. [51] suggested a pattern-based language modeling system. The patterns, identified as ordered combinations of sentence elements, were extracted with the use of a Brute-Force search-inspired algorithm and used for classification. They reported promising initial findings and further developed the system by adding several data pre-processing techniques [52].

Finally, Ptaszynski et al. [14] proposed a method of using Linguistically-backed preprocessing methods and increased Feature Density to find an optimal way to preprocess the data in order to achieve higher performance, particularly with Convolutional Neural Networks. The experiments performed on actual cyberbullying data showed a major advantage of this approach to all previous methods, including the best performing method so far based on Brute Force Search algorithm.

The later research in cyberbullying detection has mainly concentrated on using recurrent neural networks and pretrained language models with plain tokens to train embeddings [53, 54, 55]. The exceptions being Balakrishnan et al. [56] and Rosa et al. [57], who used psychological features, like personalities, sentiments and emotions to improve automatic cyberbullying detection. However, these were done using simple models. Using linguistic preprocessing and linguistic embeddings to improve classifier performance has not been studied further even though its potential was confirmed earlier [14].

## *2.6. Contributions of This Study*

This research aims to answer the need of developing greener AI by ultimately reducing the CO<sub>2</sub> emissions caused by model training by proposing a method to estimate dataset complexity, and thus to comparatively estimate the potential performance of

machine learning (ML) classifiers on a particular dataset prior to any training. The problem of constantly increasing needs for more powerful computational resources is affecting the environment due to alarmingly-growing amount of CO<sub>2</sub> emissions caused by training of large-scale ML models. Our approach to this problem is to find a way to train classifiers faster and more efficiently by decreasing the training load, which could be possible by looking at some general characteristics of a dataset, in this case, its complexity. This would allow for the reduction of the number of required experiments iterations.

The problem with a meta-learning based approach is that we would need a lot of datasets and features in order to produce a proper model to estimate classifier performance. The example meta dataset used by Gama et al. [3] was considerably small, consisting of around 20 datasets, which makes its statistical reliability very weak as the error rates get high [58, 59, 60]. The later experiments [31] used around 200 datasets, which is still very underwhelming considering the dataset sizes used today, leading the results with meta-learning being modest at best. Similar problems apply to extrapolation as the subset will get too small to represent the whole dataset and the algorithm is unable to thoroughly capture the characteristics and variations associated with each class. This particularly hurts models like CNNs that rely on larger quantities of data [60]. Also, extrapolation loses vocabulary in the field of NLP, which hinders the applicability of results [61].

This research takes a somewhat similar approach as Rahane et al. [15] did for image recognition by directly using a characteristic of the dataset in order to estimate complexity. In the case of our research, this characteristic is Feature Density, based on the notation of Lexical Density [20] that has been used to estimate language complexity. This characteristic was chosen as in previous research [14] where it was shown that there could be a correlation between Feature Density and classifier performance. The research also studies the possibility of preserving linguistic information as parts of used word embeddings in order to improve performance.

The research is conducted by studying the effectiveness of FD using different linguistically-backed feature preprocessing methods in order estimate dataset complexity, which in turn is used to comparatively estimate the potential performance of ML

classifiers prior to any training. We hypothesise that FD will show correlations between various preprocessings and results, and by estimating dataset complexity, allows for the reduction of the number of required experiments iterations. This way we can optimize the resource-intensive training of ML models which is becoming a serious issue due to the increases in available dataset sizes and the ever rising popularity of models based on Deep Neural Networks.

Another goal is trying to aid in tackling the issue of cyberbullying, which, being a serious social problem, is also a much more sophisticated problem from the point of view of linguistic representation. The difference in linguistic complexity of datasets allows us to additionally discuss the efficacy of novel linguistically-backed word embeddings. As the recent trends in NLP mostly focus on using words, like with BERT [36], there could be potential in preserving deeper relations between lexical items and structures, by for example including linguistic information like parts-of-speech or dependency information. In order to explore this potential, we propose to preserve the morphological, syntactic and other types of linguistic information by combining them with the pure tokens or lemmas.

There are many classifiers and different ways to produce features that need to be considered when developing harmful and abusive behavior detection methods which is both time consuming and computationally intensive. Also, there are vast amounts of SNS platforms each of which are operating in one or multiple languages. It is practically impossible to develop a one-size-fits-all system for these platforms because of, for example, different user policies, like the definition of harmful content. It is difficult to deal with all languages at once due to the limitations of multilingual models still being widely unknown [62] and machine translation having its own issues with for example language specific semantics.

Our approach concentrates on the classifiers and feature engineering. In practice, we try to estimate what kind of feature engineering methods would work best for different classifiers in different languages. This would allow us to ignore feature engineering methods not viable for a particular classifier or language and only keep those that we believe could yield the highest performance without doing any actual training.

Table 1: Statistics of the applied cyberbullying datasets.

	<b>English</b>	<b>Japanese</b>	<b>Polish</b>
Number of samples	12,772	2,998	11,041
Number of CB samples	913	1,490	985
Number of non-CB samples	11,859	1,508	10,056
Number of all tokens	308,939	39,283	142,811
Number of distinct tokens	25,106	6,947	27,444
Avg. length (chars) of a sample	125.5	35.2	95.5
Avg. length (words) of a sample	28.7	13.3	14.3
Avg. length (chars) of a CB sample	115.4	33.5	105.1
Avg. length (words) of a CB sample	26.8	12.6	15.0
Avg. length (chars) of a non-CB sample	126.3	37.0	94.5
Avg. length (words) of a non-CB sample	26.8	14.1	14.2

### 3. Applied Datasets

To achieve a thorough and validated analysis, we applied our proposed methods to multiple languages, namely, Japanese, English and Polish. This also allowed us to study the effect of linguistic and cultural differences in classifier performance when the same classification methods are used for different languages. The research uses a total of four datasets, three from the field of automatic cyberbullying detection and one verification set from sentiment analysis. Key statistics of the applied cyberbullying datasets are shown in Table 1.

#### 3.1. English Cyberbullying Dataset

The first dataset for our experiments was the Kaggle Formspring Dataset for Cyberbullying Detection [25]. There was one major problem with the original dataset however, as the original annotations for the data were carried out by untrained laypeople. It has been proven before that the annotations for topics like online harassment and cyberbullying should be done by experts [63]. Therefore, the dataset was re-annotated with the help of experts with sufficient psychological background to assure high quality annotations [24]. In our research we applied the re-annotated version for more accurate results.

Table 1 reports some key statistics of the improved annotation of the dataset. The dataset contains approximately 300 thousand of tokens. There was no visible difference in length between the posted questions and answers, both being approximately 12 words long on average. On the contrary, the harmful (CB) entries were usually slightly but insignificantly shorter compared to the non-harmful (non-CB) samples (approx. 23 vs. 25 words). The amount of harmful samples was also substantially smaller compared to the amount of non-harmful samples, around 7% of the whole dataset, which is approximately the same as the real-life amount of profanity encountered on SNS [63].

### 3.2. Japanese Cyberbullying Dataset

The Japanese dataset we used for experiments was originally created by Ptaszynski et al. [10], and also widely used by others [47, 51, 52, 13, 14]. It contains 1,490 harmful and 1,508 non-harmful entries in Japanese collected from unofficial school websites and fora. The original data was provided by the Human Rights Research Institute Against All Forms for Discrimination and Racism in Mie Prefecture, Japan. The entries were collected and labeled by Internet Patrol members (expert annotators) with the help of the government supplied manual [9]. The instructions given by the manual are briefly described below.

The definition given by MEXT suggests that cyberbullying occurs when a person is directly offended on the Internet. This includes publication of the person’s identity, personal information and other aspects of privacy. Thus, as the first distinguishable features for cyberbullying, MEXT identifies private names (also initials and nicknames), names of organisations and affiliations and private information (address, phone numbers, personal information disclosure, etc.)

In addition, cyberbullying literature reveals vulgarities as one of the most distinguishing characteristics of cyberbullying [6, 64]. Also according to MEXT, vulgar language and cyberbullying can be distinguished from each other as cyberbullying conveys offenses against real individuals. In the prepared dataset, all entries containing at least one of the above characteristics is listed as harmful.

### 3.3. Polish Cyberbullying Dataset

The Polish dataset originates from PolEval workshop from 2019 [65], collected from Twitter discussions. As feature selection and feature engineering have been proven to be integral parts of cyberbullying detection [14, 66], the tweets are provided as such, without additional preprocessing to allow researchers apply their own preprocessing methods. The only preprocessing applied to the dataset was done only to mask private information, such as personal information of individuals (Twitter users).

The dataset contains 11,041 entries in total, with 10,041 included in the training set and 1000 in the test set. The dataset was initially annotated by laypeople, but was later corrected by an expert in the case of disagreements. The laypeople agreed on majority of the annotations at 91.38%. The number seems very high, but it is mostly due to the fact that the annotators mostly agreed upon non-harmful tweets, which take up most of the dataset at 89.76%. When considering the harmful class, the annotators only agreed upon 1.62% of the entries. Moreover, some of the fully-agreed tweets needed to be corrected to the opposite class in the end by the expert annotator, which shows that using laypeople does not provide accurate enough annotations in the field of cyberbullying. It could be said that layperson annotators can tell with a decent level of confidence that an entry is not harmful (even if it contains some vulgar words), and they can spot, to some extent, if the entry is somehow harmful. Though in most cases they are unable to provide a reasoning for their choice. This provides further proof that for specific problems such as cyberbullying, an expert annotation is required [63]. Comparing the training and test sets, it can be noted that the latter contained a slightly higher ratio of harmful tweets (8.48% for training set vs. 13.40% for test set), which might end up showing in the classifier evaluations.

There was also a reasonably high number of retweets that have slipped into both the data processing phase and the annotation (709 or 6.42%). All of these tweets were not official retweets made using the retweet function, but tweet quotes beginning with a brief "RT" statement, which differentiates them from normal replies and comments. This needs to be taken into account in the future.

#### 3.4. *Verification Dataset: Yelp User Reviews Sentiment Dataset*

As a dataset for verification of the claims posed in this study, we applied a subset of Yelp’s user reviews data. It contains business reviews about restaurants, shops, etc. from North American metropolises with a rating from one to five stars along with other information. The dataset was originally assembled for Yelp’s dataset challenge in order to promote innovation.

The ratings were binarized for our experiment by assigning one star reviews to negative class and five star reviews to positive class. Other reviews were discarded. Also, reviews containing less than three words or more than two standard deviations from the mean were filtered out to avoid over-lengthy review samples differing too much with average sample length in other datasets. We took a random subset of 250,000 positive and 250,000 negative reviews. This way we could study the influence of the change in size of a dataset by a roughly over one magnitude but no more than two magnitudes. With these constraints, we had a large binary dataset of a different topic that is also much simpler than the cyberbullying datasets. Although the whole dataset was much larger and had multiple classes, difference of more than two magnitudes between other datasets and inclusion of more classes might introduce uncontrollable and untraceable variations in dataset statistics influencing the measurements. Therefore, applying these limitations would allow us study our proposed methods with sufficient control. The subset was split into training and test datasets containing 80% and 20% of the data respectively with even number of positive and negative samples in each part.

We also chose the dataset deliberately from a different field in order to verify the general potential of the performance of the proposed method and its universal applicability. The dataset was also considerably larger, more specifically, almost fifty times that of the Polish or English datasets. This allowed us to study how the proposed methods perform with a larger amount of data. The dataset was binarized to provide comparability with the performance metrics between all of the datasets.

## 4. Proposed Methods

### 4.1. Preprocessing and Feature Density

In order to train the linguistically-backed embeddings, we first preprocessed the dataset in various ways, similarly to previous research [14]. This was done for three reasons. Firstly, to see how traditional classifiers managed the data from similar domain (cyberbullying), but in different languages. Secondly, to later verify the correlation between the classification results and Feature Density (FD) [14]. Finally, to verify the performance of various versions of the proposed linguistically-backed embeddings. Also, because we were trying to make the proposed method entirely systemic and automated, we did not focus on any hand-made features, such as offensive word lexicons, etc., used in previous research [10]. The preprocessing was done using spaCy NLP toolkit [67]. After assembling combinations from the listed preprocessing types, we ended up with a total of 68 possible preprocessing methods for the experiments. All types of preprocessing we applied to generate preprocessing type combinations were listed below. The FDs for all preprocessing types used in this research are shown in Tables 2, 3, 4 and 5.

- **Tokenization:** includes words, punctuation marks, etc. separated by spaces (later: TOK).
- **Lemmatization:** like the above but with generic (dictionary) forms of words (“lemmas”) (later: LEM).
- **Parts of speech (separate):** parts of speech information is added in the form of separate features (later: POSS).
- **Parts of speech (combined):** parts of speech information is merged with other applied features (later: POS).
- **Named Entity Recognition (without replacement):** information on what named entities (private name of a person, organization, numericals, etc.) appear in the sentence are added to the applied word (later: NER).
- **Named Entity Recognition (with replacement):** same as above but information replaces the applied word (later: NERR).

- **Dependency structure:** noun- and verb-phrases with syntactic relations between them (later: DEP).
- **Chunking:** like above but without dependency relations (“chunks”, later: CHNK).
- **Stopword filtering:** redundant words are filtered out using spaCy’s stopword lists (later: STOP)
- **Filtering of non-alphabetic:** non-alphabetic characters are filtered out for English and Polish. For Japanese, *kanji* and *kana* characters are also retained (later: ALPHA)

#### 4.2. Feature Extraction

For classifiers other than those based on neural networks, we generated a Bag-of-Features language model from each of the 68 processed dataset versions, producing a separate model for each of the preprocessing types (Bag-of-Words, Bag-of-Lemmas, Bag-of-POS, etc.). This was done for all of the four datasets. The language models generated from the entries of the datasets were used later in the input layer of classification. We also applied a traditional weight calculation scheme, namely term frequency with inverse document frequency  $tf * idf$ , where term frequency  $tf(t, d)$  refers to raw frequency (number of times a term  $t$  (word, token) occurs in a document  $d$ ), and inverse document frequency  $idf(t, D)$  is the logarithm of the total number of documents  $|D|$  in the corpus divided by the number of documents containing the term  $n_t$ . Finally,  $tf * idf$  refers to term frequency multiplied by inverse document frequency as in equation 2.

$$idf(t, D) = \log\left(\frac{|D|}{n_t}\right) \quad (2)$$

With the Neural Network models, MLP and CNNs, we trained the embeddings as a part of the network using the previously-described preprocessed datasets. Similarly to other classifiers, we trained a separate model for each of the 68 datasets (Word/token Embeddings, Lemmas Embeddings, POS Embeddings, Chunks Embeddings, etc.). The embeddings were fully trained on the datasets themselves as part of the network using Keras’ [68] embedding layer with random initial weights, meaning no pretraining was used.

Table2: English Cyberbullying Dataset: Feature Density of preprocessing types.

Preprocessing type	Uniq.1grams	All1grams	FD
POS	18	357616	.0001
POSALPHA	18	357616	.0001
POSTOP	18	194606	.0001
POSTOPALPHA	17	129076	.0001
LEMPOSSALPHA	17875	579664	.0308
LEMPOSS	21238	660653	.0321
TOKPOSSALPHA	21737	579624	.0375
TOKPOSS	25122	660612	.038
LEMNERALPHA	14815	289868	.0511
LEMNERR	17327	309124	.0561
CHNKNERALPHA	12293	215096	.0572
LEMNERRALPHA	17877	305481	.0585
CHNKNERALPHA	14007	228146	.0614
LEMALPHA	17860	289868	.0616
LEMPOSSSTOP	20948	334870	.0626
TOKNERALPHA	18595	289828	.0642
CHNKALPHA	13991	215096	.065
LEMNER	21239	325173	.0653
LEMPOSSSTOPALPHA	17554	258103	.068
TOKNER	21119	309084	.0683
LEM	21222	308434	.0688
TOKNERALPHA	21737	305441	.0712
TOKPOSSSTOP	24472	334869	.0731
LEMPOS	26232	357657	.0733
TOKALPHA	21722	289828	.0749
LEMPOSSALPHA	22206	289868	.0766
TOKNER	25121	325132	.0773
TOK	25106	308393	.0814
TOKPOSSSTOPALPHA	21037	258103	.0815
TOKPOS	31121	357616	.087
TOKPOSALPHA	27013	289828	.0932
LEMNERSTOPALPHA	14509	129076	.1124
LEMNERSTOP	17047	146549	.1163
LEMNERSTOPALPHA	17557	142289	.1234
CHNKNERR	33025	262529	.1258
LEMNERSTOPALPHA	20950	160269	.1307
LEMPOSSSTOP	25669	194674	.1319
LEMSTOPALPHA	17540	129076	.1359
TOKNERSTOPALPHA	17911	129076	.1387
CHNKNER	38044	272581	.1396
TOKNERSTOP	20480	146549	.1397
LEMSTOP	20933	145866	.1435
CHNKNERSTOPALPHA	13356	92782	.144
CHNKNERSTOPALPHA	11656	80896	.1441
CHNK	38029	261990	.1452
TOKNERSTOPALPHA	21037	142289	.1478
TOKNERSTOP	24471	160268	.1527
TOKPOSSSTOP	30040	194673	.1543
TOKSTOPALPHA	21022	129076	.1629
CHNKSTOPALPHA	13340	80896	.1649
LEMPOSSSTOPALPHA	21626	129076	.1675
TOKSTOP	24456	145865	.1677
TOKPOSSSTOPALPHA	25925	129076	.2009
CHNKNERSTOP	32452	126357	.2568
CHNKNERSTOP	37462	135357	.2768
CHNKSTOP	37447	125824	.2976
DEPNERALPHA	95404	240302	.397
DEPNERRALPHA	94928	215096	.4413
DEPALPHA	95386	215096	.4435
DEPNER	143197	321835	.4449
DEPNERSTOPALPHA	47159	104940	.4494
DEPNERR	141479	308704	.4583
DEP	143179	308704	.4638
DEPNERSTOP	94539	184130	.5134
DEPNERRSTOP	92730	172086	.5389
DEPSTOP	94521	172086	.5493
DEPNERRSTOPALPHA	46552	80896	.5755
DEPSTOPALPHA	47141	80896	.5827

Table 3: Japanese Cyberbullying Dataset: Feature Density of preprocessing types.

Preprocessing type	Uniq.1grams	All1grams	FD
POS	19	40015	0.0005
POSALPHA	19	40015	0.0005
POSTOP	19	25777	0.0007
POSTOPALPHA	16	18444	0.0009
LEMPOSS	6495	78685	0.0825
TOKPOSS	6964	79226	0.0879
LEMPOSSALPHA	6152	65314	0.0942
TOKPOSSALPHA	6579	65314	0.1007
LEMPOSSSTOP	6392	50203	0.1273
LEMNERR	5065	39024	0.1298
TOKPOSSSTOP	6818	50742	0.1344
TOKNERR	5474	39380	0.1390
LEMNER	6607	44046	0.1500
LEMNERRALPHA	4918	32665	0.1506
TOKNER	7078	44509	0.1590
TOKNERRALPHA	5329	32665	0.1631
LEMPOSSSTOPALPHA	6049	36846	0.1642
LEM	6478	38955	0.1663
LEMNERALPHA	6266	36835	0.1701
LEMPOS	6870	40017	0.1717
TOKPOSSSTOPALPHA	6433	36846	0.1746
TOK	6947	39283	0.1768
CHKNERR	5911	32935	0.1795
TOKNERALPHA	6694	36835	0.1817
TOKPOS	7505	40018	0.1875
LEMALPHA	6138	32665	0.1879
CHKNERRALPHA	5289	26694	0.1981
LEMPOSALPHA	6520	32665	0.1996
LEMNERRSTOP	4961	24791	0.2001
TOKALPHA	6564	32665	0.2009
TOKNERRSTOP	5328	25143	0.2119
CHKNER	7797	36061	0.2162
TOKPOSALPHA	7109	32665	0.2176
LEMNERSTOP	6504	29641	0.2194
CHKNERALPHA	6659	29873	0.2229
TOKNERSTOP	6932	30102	0.2303
CHNK	7672	32877	0.2334
CHNKALPHA	6534	26694	0.2448
LEMSTOP	6375	24722	0.2579
LEMPOSTOP	6700	25779	0.2599
LEMNERRSTOPALPHA	4814	18444	0.2610
TOKSTOP	6801	25046	0.2715
LEMNERSTOPALPHA	6163	22444	0.2746
TOKPOSTOP	7237	25780	0.2807
TOKNERRSTOPALPHA	5183	18444	0.2810
CHKNERRSTOP	5774	20190	0.2860
TOKNERSTOPALPHA	6548	22444	0.2917
LEMSTOPALPHA	6035	18444	0.3272
CHKNERSTOP	7659	23285	0.3290
LEMPOSTOPALPHA	6350	18444	0.3443
TOKSTOPALPHA	6418	18444	0.3480
CHKNERRSTOPALPHA	5152	14003	0.3679
TOKPOSTOPALPHA	6841	18444	0.3709
CHNKSTOP	7534	20132	0.3742
CHKNERSTOPALPHA	6521	17132	0.3806
CHNKSTOPALPHA	6396	14003	0.4568
DEPNERSTOPALPHA	12078	19727	0.6123
DEPNERALPHA	21542	32541	0.6620
DEPNERSTOP	16800	23802	0.7058
DEPNER	26264	36581	0.7180
DEPNERR	26089	33357	0.7821
DEP	26139	33357	0.7836
DEPNERRALPHA	21354	26694	0.8000
DEPALPHA	21417	26694	0.8023
DEPNERRSTOP	16619	20611	0.8063
DEPSTOP	16675	20611	0.8090
DEPNERRSTOPALPHA	11884	14003	0.8487
DEPSTOPALPHA	11953	14003	0.8536

Table4: Polish Cyberbullying Dataset: Feature Density of preprocessing types.

Preprocessing type	Uniq.1grams	All1grams	FD
POS	15	157137	0.0001
POSALPHA	15	157137	0.0001
POSTOP	15	104715	0.0001
POSTOPALPHA	15	63004	0.0002
LEMPOSS	16403	294706	0.0557
LEMPOSSALPHA	14952	230795	0.0648
LEMPOSSSTOP	16246	189900	0.0856
TOKPOSS	27458	294717	0.0932
LEMNERR	14509	142929	0.1015
LEMPOS	17217	157137	0.1096
LEMNER	16393	147531	0.1111
TOKPOSSALPHA	26067	230795	0.1129
LEMNERRALPHA	13167	115398	0.1141
LEM	16388	142800	0.1148
LEMPOSSSTOPALPHA	14756	125979	0.1171
LEMNERALPHA	14943	121392	0.1231
LEMALPHA	14938	115398	0.1294
LEMPOSSALPHA	15479	115398	0.1341
TOKPOSSSTOP	26839	189911	0.1413
LEMNERRSTOP	14350	90569	0.1584
LEMPOSSSTOP	16923	104722	0.1616
LEMNERSTOP	16236	95020	0.1709
TOKNERR	24922	142940	0.1744
CHKNERR	24922	142940	0.1744
LEMSTOP	16231	90441	0.1795
TOKPOS	28521	157137	0.1815
TOKNER	27450	147542	0.1860
CHKNER	27450	147542	0.1860
TOK	27444	142811	0.1922
CHNK	27444	142811	0.1922
TOKPOSSSTOPALPHA	25379	125979	0.2015
TOKNERRALPHA	23630	115398	0.2048
CHKNERRALPHA	23630	115398	0.2048
LEMNERRSTOPALPHA	12972	63004	0.2059
CHKNERRALPHA	26060	121997	0.2136
LEMNERSTOPALPHA	14747	68845	0.2142
TOKNERALPHA	26060	121392	0.2147
TOKALPHA	26054	115398	0.2258
CHNKALPHA	26054	115398	0.2258
TOKPOSALPHA	26784	115398	0.2321
LEMSTOPALPHA	14742	63004	0.2340
LEMPOSSSTOPALPHA	15173	63004	0.2408
TOKPOSSSTOP	27683	104722	0.2643
TOKNERRSTOP	24303	90580	0.2683
CHKNERRSTOP	24303	90580	0.2683
TOKNERSTOP	26831	95031	0.2823
CHKNERSTOP	26831	95031	0.2823
TOKSTOP	26825	90452	0.2966
CHNKSTOP	26825	90452	0.2966
TOKNERRSTOPALPHA	22946	63004	0.3642
CHKNERRSTOPALPHA	22946	63004	0.3642
CHKNERSTOPALPHA	25372	69449	0.3653
TOKNERSTOPALPHA	25372	68845	0.3685
TOKSTOPALPHA	25366	63004	0.4026
CHNKSTOPALPHA	25366	63004	0.4026
TOKPOSSSTOPALPHA	25930	63004	0.4116
DEPNERSTOP	68279	111161	0.6142
DEPNER	102460	163736	0.6258
DEPNERRSTOP	67378	104715	0.6434
DEPNERR	101554	157137	0.6463
DEPNERSTOPALPHA	51860	80173	0.6469
DEPNERALPHA	86044	132723	0.6483
DEPSTOP	68273	104715	0.6520
DEP	102454	157137	0.6520
DEPNERRALPHA	85138	115398	0.7378
DEPALPHA	86038	115398	0.7456
DEPNERRSTOPALPHA	50959	63004	0.8088
DEPSTOPALPHA	51854	63004	0.8230

Table5: Verification Dataset (English Yelp Reviews): Feature Density of preprocessing types.

Preprocessing type	Uniq.1grams	All1grams	FD
POS	18	22123101	0.0000
POSALPHA	18	22123101	0.0000
POSTOP	17	10976927	0.0000
POSTOPALPHA	17	7913333	0.0000
LEMPOSSALPHA	108272	37473399	0.0029
LEMPOSS	124750	41602171	0.0030
TOKPOSSALPHA	125796	37473386	0.0034
TOKPOSS	142140	41602328	0.0034
LEMNERALPHA	81750	18736707	0.0044
LEMNERR	92299	19691797	0.0047
TOKNERRALPHA	100174	18736694	0.0053
CHKNERRALPHA	67433	12588242	0.0054
LEMNERRALPHA	108270	19681446	0.0055
TOKNERR	110454	19691940	0.0056
LEMALPHA	108260	18736707	0.0058
LEMNER	124748	20691409	0.0060
CHKNNERALPHA	82630	13295729	0.0062
LEM	124828	19686486	0.0063
TOKNERALPHA	125792	19681433	0.0064
LEMPOSSSTOP	124382	19312556	0.0064
CHNKALPHA	82619	12588242	0.0066
TOKALPHA	125783	18736694	0.0067
LEMPOSSSTOPALPHA	107695	15826663	0.0068
TOKNER	142136	20691566	0.0069
LEMPOS	157276	22126373	0.0071
TOK	142145	19686629	0.0072
LEMPOSALPHA	136041	18736707	0.0073
TOKPOSSSTOP	141540	19312673	0.0073
TOKPOSSSTOPALPHA	124822	15826663	0.0079
TOKPOS	191314	22126347	0.0086
TOKPOSALPHA	169800	18736694	0.0091
LEMNERRSTOPALPHA	81202	7913333	0.0103
LEMNERRSTOP	91950	8548830	0.0108
LEMNERSTOPALPHA	107692	8613858	0.0125
TOKNERRSTOPALPHA	99226	7913333	0.0125
TOKNERSTOP	109868	8548956	0.0129
LEMNERSTOP	124379	9302597	0.0134
LEMSTOPALPHA	107682	7913333	0.0136
LEMPOSSSTOP	156259	10980340	0.0142
TOKNERSTOPALPHA	124817	8613858	0.0145
LEMSTOP	124369	8517231	0.0146
TOKNERSTOP	141535	9302714	0.0152
TOKSTOPALPHA	124808	7913333	0.0158
CHKNERRSTOPALPHA	66524	4096850	0.0162
TOKSTOP	141526	8517348	0.0166
LEMPOSSSTOPALPHA	134752	7913333	0.0170
TOKPOSSSTOP	189338	10980327	0.0172
CHKNNERSTOPALPHA	81699	4699728	0.0174
CHNKSTOPALPHA	81688	4096850	0.0199
TOKPOSSSTOPALPHA	167504	7913333	0.0212
CHKNNER	764785	15908671	0.0481
CHKNNER	861736	16452253	0.0524
CHNK	861725	15890287	0.0542
CHKNERRSTOP	764246	7115714	0.1074
CHKNNERSTOP	861185	7556935	0.1140
CHNKSTOP	861174	7097343	0.1213
DEPNERRALPHA	2240284	13497593	0.1660
DEPNERRALPHA	2184827	12588242	0.1736
DEPALPHA	2240266	12588242	0.1780
DEPNERR	3758037	18251727	0.2059
DEPNERR	3933231	18959225	0.2075
DEP	3933213	18251727	0.2155
DEPNERRSTOPALPHA	1300041	4901505	0.2652
DEPNERRSTOP	2972316	10059025	0.2955
DEPNERRSTOP	2795319	9456061	0.2956
DEPNERRSTOPALPHA	1241849	4096850	0.3031
DEPSTOP	2972298	9456061	0.3143
DEPSTOPALPHA	1300023	4096850	0.3173

### 4.3. Classification

In the experiment we applied the following classification algorithms. The assumption was that each classifier presents different correlation with FD, and characteristics of this correlation can be further exploited to minimize the time required for training optimal solutions by choosing a small number of feature sets which usually perform best, or at least eliminating feature sets which always perform below an acceptable performance threshold.

**SVM** or Support-vector machines [69] are a set of classifiers well established in AI and NLP. They represent data, belonging to specified categories, as points in space (vectors), and find an optimal hyperplane to separate the examples from each category. SVM has been very successful in previous cyberbullying research [10, 12, 14]. In this research, we used two SVM functions, the **linear SVM**, as it had the greatest performance out of all of the SVM kernel functions that were used in previous research [14] and a linear SVM function supported with Stochastic Gradient Descent optimizer (**SGD**).

**Naïve Bayes** (NB) classifier is a supervised learning algorithm applying Bayes' theorem that has a strong (naïve) assumption of independence between pairs of features. It is traditionally used as a baseline in different text classification tasks and is known for working well with smaller datasets. Also, it is considerably fast to train compared to some other popular classifiers e.g. Random Forest.

**kNN** or the k-Nearest Neighbors classifier takes as input k-closest training samples with assigned classes and classifies the input sample by a majority vote. It is often applied as a baseline alongside Naïve Bayes. The classifier is fast and simple to train but on the contrary, it is very susceptible to outliers and overfitting. In this research, we used k=1 setting in which the input sample is simply assigned to the class of the first nearest neighbor.

**Random Forest** (RF) in training phase creates multiple decision trees to output the optimal class (mode of classes) in classification phase [70]. An improvement of RF when comparing to standard decision trees is the ability to correct overfitting to the training set, which is very common in decision trees [71]. In practice, Random Forest starts by taking a random bootstrap sample with replacement from the dataset. It then selects a random subset of features in order to reduce the dimensionality of the sample.

Next, an unpruned decision tree is trained on this bootstrap sample. This process is repeated for the desired ensemble size. The predicted value of an unknown instance is obtained by taking a majority vote over the entire ensemble of trees [70].

**Logistic Regression (LR)** is a statistical model that calculates class probabilities using a logistic function (sigmoid) instead of a straight line (linear regression) or a hyperplane. Logistic regression models are usually fit using Maximum Likelihood Estimation [71]. The model assigns a probability value between  $[0,1]$  for each input, which is used to determine the class it belongs. The experiments in this research are conducted using two different solvers, **Newton's method** and **l-bfgs**, which is a quasi-Newton method that uses approximations and memory saving features in order to improve performance with the cost of possible minor convergence problems.

**Boosting** includes algorithms such as **AdaBoost** [72] and Extreme Gradient Boosting (**XGBoost**) [73], which is a more generalized and optimized version. In boosting, the weak learners, which are usually decision trees, evolve over time as they are trained sequentially to perform better on the residuals of the previous learner. The members cast a weighted vote instead of generating random predictors (RF) and averaging their result [71].

**MLP** (Multilayer Perceptron) is a type of feed-forward artificial neural network consisting of an input layer, an output layer and one or more hidden layers. In this experiment MLP refers to a neural network using regular dense layers. We applied an MLP implementation with Rectified Linear Units (ReLU) as a neuron activation function [74] and one hidden layer with dropout regularization to reduce overfitting and improve generalization by randomly dropping out some of the hidden neurons during training [74].

**CNN** or Convolutional Neural Networks are a type of feed-forward artificial neural network utilizing convolutional and pooling layers. Although originally designed for image recognition, the effectiveness of CNNs has been shown in multiple other tasks, including NLP [75] and sentence classification [76]. We implemented CNNs with Rectified Linear Units (ReLU) as a neuron activation function, and max pooling [77], which applies a max filter to non-overlapping sub-parts of the input to reduce dimensionality and as a result, helps to prevent overfitting. We also applied dropout

regularization on penultimate layer for the same reason. We applied two versions of CNNs. First, with only one hidden convolutional layer containing 128 units. The second network consisted of two hidden convolutional layers with 128 feature maps each, 4x4 size of patch and 2x2 max-pooling. We used Adaptive Moment Estimation (Adam), a variant of Stochastic Gradient Descent [78] as the optimization function.

## 5. Experiments

### 5.1. Setup

The four preprocessed datasets were additionally preprocessed according to methodology described in Section 4.1, which resulted in the creation of 68 separate training sets for each original dataset. The experiment was performed once for every preprocessing type for every dataset. Each of the classifiers (sect. 4.3) were tested on all of the versions of the datasets in a 10-fold cross validation procedure for the English and Japanese Cyberbullying datasets and with predetermined train-test set splits for the Polish and verification datasets, to retain the originally proposed method of evaluation for each dataset. This gave us an opportunity to evaluate how effective different preprocessing methods were for each classifier and for each language, also with comparison to previous methods. As some of the datasets were not balanced, we oversampled the minority class using Synthetic Minority Over-sampling Technique (SMOTE) [79] in order to balance out the classes. The preprocessing methods represent a wide range of Feature Densities, which can be used to evaluate the correlation with classifier performance. This gave us nearly eighteen thousand experiment runs<sup>4</sup> which we use as a basis for our discussions on the results and applicability of FD. The hardware used for the experiments included Intel i9 7920X, running at stock 2.90 GHz, for non-neural classifiers and Nvidia GTX 1080ti for neural classifiers. The power consumptions were calculated expecting 100% power usage for the device in question.

Table 6: Runtimes and approximate power usage of the training processes. Non-neural classifiers: Intel i9 7920X@2.90 GHz, 163W. Neural classifiers: Nvidia GTX 1080ti, 250W. Expecting 100% power usage.

	English		Japanese	
Classifier	Runtime (s)	Power usage (Wh)	Runtime (s)	Power usage (Wh)
Logistic Regression	321.6	145.61	82.75	37.47
CGD Logistic Regression	249.74	113.08	76.74	34.75
SGD SVM	176.26	79.81	11.35	5.14
Linear SVM	1543.06	698.67	41.41	18.75
KNN	556.44	251.94	43.22	19.57
Naive Bayes	97.54	44.16	36.36	16.46
Random Forest	3982.49	1803.18	420.19	190.25
AdaBoost	10425.4	4720.39	611.21	276.74
XGBoost	17917.74	8112.76	47093.99	21323.11
MLP	53845.89	37392.98	18235.85	12663.78
CNN1	62361.45	43306.56	21288.6	14783.75
CNN2	62054.46	43093.37	16116.72	11192.17

	Polish		Yelp	
Classifier	Runtime (s)	Power usage (Wh)	Runtime (s)	Power usage (Wh)
Logistic Regression	56.66	25.65	3429.78	1552.93
CGD Logistic Regression	45.42	20.56	3592.51	1626.61
SGD SVM	160.06	72.47	2876.84	1302.57
Linear SVM	36.82	16.67	28365.17	12843.12
KNN	56.75	25.69	2687.75	1216.95
Naive Bayes	33.77	15.29	35976.27	16289.26
Random Forest	118.39	53.61	5420.16	2454.13
AdaBoost	136.26	61.7	3429.78	1552.93
XGBoost	2042.64	924.86	3592.51	1626.61
MLP	7095.01	4927.09	121782.6	84571.25
CNN1	9939.68	6902.56	144275.23	100191.13
CNN2	9418.16	6540.39	156572.35	108730.8

## 5.2. Effect of Feature Density

### 5.2.1. English Cyberbullying Dataset

We trained each of the classifiers using the proposed preprocessing methods. The classification results are presented in Table 7. As the results for using only parts-of-speech tags, which had the lowest FD by far, were extremely low (close to a coinflip). Thus, we can say that POS tags alone do not contain enough information to successfully classify the entries. We also analyzed the correlation between Feature Density and classifier F-score, which is shown in Table 8.

After excluding the preprocessing methods that only used POS tags, we can see that all classifiers, except CNNs have a strong negative correlation with Feature Density. So these classifiers seem to have a weaker performance if a lot of linguistic information is

<sup>4</sup>2 datasets x 10 fold x 68 preprocessings x 12 classifiers (16,320 runs) + 2 datasets x 1 train-test x 68 preprocessings x 12 classifiers (1,632) = 17,952 experiment runs.

added, and the best results being usually within the range of .05 to .15 of FD depending on the classifier. This range includes 38 of the 68 preprocessing methods (Table 2). The sweetspot for performance can be seen from, for example, the highest performing classifier, SVM with SGD optimizer (Figure 1), where the maximum classifier performance starts high at around .05 of FD and slowly falls until .14 after which there is a noticeable drop. The performance only falls further as the FD rises. If the weaker feature sets were to be left out, the power savings are approximately 35Wh calculated from Table 6 for training the SGD SVM classifier, which is not very much. But the classifier was very power efficient to train to begin.

For CNNs however, there was a very weak positive or no correlation between FD and the classifier performance, with the higher FD datasets performing equally or even slightly better when comparing to the low FD datasets. Taking a look at one layer CNN's performance, which was better than the CNN with two layers, we can see from Figure 1 that the maximum performance starts at a moderate level and stays stable throughout the whole range of feature densities. The best results can be found between .05 to .1 and after around .45 FD. From Table 2 we can see that around half of the preprocessing types fall into these ranges. We can calculate from Table 6 that the power savings for the CNN are approximately 21kWh, which is huge compared to the SVM's power savings.

The results suggest that for non-CNN classifiers there is no need to consider preprocessings with a high FD, such as chunking or dependencies, as they had a considerably lower performance. The performance seems to start falling rapidly at around .15 FD with most of the classifiers. For CNNs, as there was almost no correlation between FD and F-score, we are unable to estimate an ideal range for Feature Density. However, this means that there is a potential in the higher FD preprocessing types, namely, dependencies for CNNs.

The reason for CNNs relatively low performance could be explained by the relatively small size of the dataset, especially when considering the amount of actual cyberbullying entries, as adding even a second layer to the network already caused a loss of the most valuable features and ended up degrading the performance. With such small amount of data, it does not seem useful to train deep learning models to solve the classification problem. Still, the dependency based features are showing some potential with CNNs.

With a considerably larger dataset it could be possible to outperform other classifiers and especially the traditional approach to word embeddings, namely, using plain tokens, and supplementing them with dependency based features when using deep learning, as was previously proposed by [40].

The experiments show that changing Feature Density in moderate amount can yield good results when using other classifiers than CNNs. However, excessive changes to either too low or too high always showed diminishing results. The threshold was in all cases approximately between 50% and 200% of the original density (TOK), most optimal FDs only slightly varying with each classifier. The exception being Random Forest, which showed a clear spike at around .12 FD. As the usage of high Feature Density datasets showed potential with CNNs, their usage needs to be confirmed with a larger dataset. Also, more exact ideal feature densities need to be confirmed for each classifier using datasets of different sizes and fields to make as accurate ranking of classifiers by FD as possible.


### 5.2.2. Japanese Cyberbullying Dataset

Similarly to the English dataset, we trained all of the classifiers and analyzed the correlation of Feature Density with each of the classifiers using the proposed preprocessing methods. All classification results are represented in Table 9 and correlations in Table 10. We also excluded preprocessing types that only use POS-tags for the same reason as with the English dataset.

From Table 10 we can see that all classifiers have a strong negative correlation with Feature Density, meaning that adding too much linguistic information, such as dependency relations, push the score down. The best results are usually within the range of .08 to .30 FD depending on the classifier. This applies to, for example, the highest performing classifier, one-layer CNN (Figure 2), where the maximum classifier performance starts high at around .08 of FD and slightly increases until .30 after which there is a noticeable drop. The performance only falls further as the FD rises, stabilizing after .40 FD. This range includes 43 of the 68 preprocessing methods (Table 3). If the weaker feature sets were to be left out, the power savings are approximately 5.4kWh for the one-layer CNN, when calculated from Table 6.

Table 7: English Dataset: F1 for all preprocessing types & classifiers; best classifier for each dataset in **bold**; best preprocessing type for each underlined

	LBFGS LR	Newton LR	Linear SVM	SGD SVM	KNN	Naive Bayes	Random Forest	AdaBoost	XGBoost	MLP	CNN1	CNN2
CHNK	0.727	0.726	0.718	<b>0.736</b>	0.57	0.674	0.613	0.649	0.667	0.724	0.657	0.666
CHNKNERR	0.688	0.695	0.702	0.699	0.58	0.653	0.603	0.608	0.642	<b>0.704</b>	0.645	0.662
CHNKNERRALPHA	0.66	0.663	0.651	0.657	0.603	0.626	0.616	0.599	0.653	<b>0.674</b>	0.566	0.6
CHNKNERRSTOP	0.686	0.684	0.684	<b>0.694</b>	0.577	0.629	0.635	0.621	0.652	0.693	0.402	0.344
CHNKNERRSTOPALPHA	0.618	0.617	0.591	0.607	0.404	0.598	0.62	0.582	<b>0.648</b>	0.623	0.451	0.34
CHNKNER	0.718	0.723	0.721	<b>0.737</b>	0.582	0.669	0.603	0.63	0.673	0.722	0.654	0.642
CHNKNERALPHA	0.675	0.676	0.663	0.663	0.599	0.641	0.618	0.609	0.649	<b>0.684</b>	0.557	0.614
CHNKNERSTOP	<b>0.724</b>	<b>0.724</b>	0.715	<b>0.724</b>	0.582	0.663	0.635	0.652	0.679	0.72	0.501	0.298
CHNKNERSTOPALPHA	0.666	0.661	0.644	<b>0.668</b>	0.386	0.615	0.659	0.625	0.656	0.647	0.431	0.406
CHNKALPHA	0.684	0.681	0.669	0.683	0.607	0.643	0.647	0.616	0.676	<b>0.695</b>	0.587	0.583
CHNKSTOP	0.722	0.721	0.711	<b>0.723</b>	0.577	0.67	0.667	0.648	0.679	0.715	0.386	0.342
CHNKSTOPALPHA	0.639	0.637	0.606	0.619	0.395	0.608	0.649	0.654	<b>0.664</b>	0.628	0.455	0.374
DEP	0.617	0.619	0.568	0.587	0.243	0.617	0.536	0.566	0.598	0.594	0.682	<b>0.694</b>
DEPNERR	0.61	0.614	0.571	0.587	0.241	0.611	0.533	0.562	0.596	0.595	0.67	<b>0.695</b>
DEPNERRALPHA	0.606	0.605	0.589	0.602	0.312	0.596	0.537	0.556	0.595	0.593	0.585	<b>0.622</b>
DEPNERRSTOP	0.602	0.599	0.564	0.568	0.273	0.615	0.543	0.572	0.6	0.578	<b>0.726</b>	0.702
DEPNERRSTOPALPHA	0.584	0.584	0.56	0.581	0.386	0.599	0.544	0.561	0.595	0.574	0.583	<b>0.619</b>
DEPNER	0.624	0.621	0.574	0.585	0.242	0.611	0.528	0.564	0.595	0.592	0.686	<b>0.692</b>
DEPNERRALPHA	0.585	0.589	0.561	0.579	0.213	0.607	0.578	0.497	0.593	0.603	0.606	<b>0.623</b>
DEPNERSTOP	0.611	0.602	0.564	0.576	0.274	0.604	0.527	0.563	0.604	0.577	<b>0.725</b>	0.708
DEPNERSTOPALPHA	0.535	0.531	0.523	0.523	0.297	0.543	0.563	0.422	0.576	0.564	0.63	<b>0.632</b>
DEPALPHA	0.609	0.612	0.588	0.601	0.314	0.6	0.545	0.552	0.604	0.598	0.606	<b>0.62</b>
DEPSTOP	0.606	0.595	0.562	0.571	0.276	0.616	0.544	0.576	0.603	0.584	<b>0.741</b>	0.648
DEPSTOPALPHA	0.586	0.587	0.564	0.588	0.388	0.594	0.539	0.568	0.595	0.578	<b>0.629</b>	0.625
LEM	0.781	0.786	0.784	<b>0.79</b>	0.634	0.715	0.724	0.72	0.744	0.786	0.67	0.665
LEMNERR	0.74	0.737	0.742	0.74	0.601	0.692	0.697	0.683	0.724	<b>0.749</b>	0.658	0.663
LEMNERRALPHA	0.729	0.728	0.725	0.725	0.614	0.685	0.699	0.68	0.71	<b>0.74</b>	0.645	0.652
LEMNERRSTOP	0.737	0.734	0.726	0.732	0.609	0.682	0.727	0.69	0.72	<b>0.741</b>	0.371	0.364
LEMNERRSTOPALPHA	0.732	0.732	0.714	0.727	0.624	0.674	0.723	0.682	0.704	<b>0.737</b>	0.372	0.348
LEMPASS	0.764	0.765	0.769	0.767	0.564	0.713	0.658	0.679	0.717	<b>0.773</b>	0.662	<b>0.736</b>
LEMPASSALPHA	<b>0.76</b>	0.758	0.753	0.758	0.406	0.705	0.669	0.674	0.712	0.756	0.603	0.715
LEMPASSSTOP	0.763	0.766	0.767	<b>0.774</b>	0.566	0.709	0.706	0.691	0.72	0.773	0.683	0.725
LEMPASSSTOPALPHA	0.762	<b>0.766</b>	0.748	0.765	0.49	0.702	0.713	0.681	0.714	0.757	0.593	0.716
LEMNER	0.784	0.782	0.787	<b>0.792</b>	0.631	0.71	0.716	0.72	0.742	0.78	0.68	0.613
LEMNERALPHA	0.763	0.764	0.765	0.767	0.637	0.699	0.71	0.707	0.742	<b>0.768</b>	0.662	0.671
LEMNERSTOP	0.782	0.783	0.782	<b>0.792</b>	0.634	0.706	0.745	0.725	0.742	0.78	0.429	0.378
LEMNERSTOPALPHA	<b>0.77</b>	0.767	0.752	0.767	0.64	0.693	0.739	0.716	0.738	0.768	0.46	0.414
LEMPOS	0.778	0.778	0.788	<b>0.79</b>	0.517	0.711	0.663	0.727	0.741	0.783	0.665	0.64
LEMPOSALPHA	0.768	0.772	0.772	0.768	0.522	0.7	0.654	0.713	0.727	<b>0.775</b>	0.664	0.695
LEMPOSSTOP	0.78	0.781	<b>0.788</b>	<b>0.788</b>	0.642	0.708	0.708	0.721	0.735	0.783	0.715	0.707
LEMPOSSTOPALPHA	0.77	0.769	0.766	0.768	0.669	0.696	0.718	0.722	0.73	<b>0.778</b>	0.669	0.698
LEMALPHA	0.755	0.764	0.745	<b>0.765</b>	0.294	0.703	0.718	0.705	0.748	0.754	0.61	0.651
LEMSTOP	0.787	0.786	0.784	<b>0.791</b>	0.641	0.713	0.754	0.732	<b>0.752</b>	0.789	0.403	0.327
LEMSTOPALPHA	0.772	0.766	0.766	<b>0.773</b>	0.357	0.702	0.747	0.712	0.745	0.764	0.377	0.329
POSS	0.487	0.487	0.488	0.491	0.522	0.498	<b>0.556</b>	0.509	0.555	0.488	0.54	0.536
POSSALPHA	0.488	0.486	0.488	0.498	0.526	0.498	<b>0.552</b>	0.518	0.549	0.493	0.538	0.534
POSSSTOP	0.477	0.477	0.471	0.467	0.518	0.486	<b>0.54</b>	0.496	0.533	0.484	0.431	0.434
POSSSTOPALPHA	0.469	0.47	0.471	0.465	0.517	0.478	<b>0.525</b>	0.484	0.511	0.491	0.428	0.484
TOK	0.793	0.788	0.793	<b>0.796</b>	0.632	0.716	0.711	0.728	0.748	<b>0.796</b>	0.659	0.661
TOKNERR	0.741	0.744	0.737	0.743	0.6	0.696	0.688	0.671	0.719	<b>0.749</b>	0.655	0.631
TOKNERRALPHA	0.734	0.735	0.735	0.73	0.624	0.683	0.681	0.674	0.704	<b>0.748</b>	0.626	0.655
TOKNERRSTOP	0.736	0.736	0.728	0.732	0.609	0.68	0.73	0.678	0.71	<b>0.751</b>	0.406	0.317
TOKNERRSTOPALPHA	0.728	0.731	0.727	0.723	0.623	0.675	0.721	0.68	0.698	<b>0.744</b>	0.412	0.394
TOKPOSS	0.766	0.768	0.767	<b>0.783</b>	0.549	0.715	0.648	0.671	0.715	0.773	0.686	0.729
TOKPOSSALPHA	0.765	0.761	0.763	0.767	0.378	0.709	0.662	0.656	0.709	<b>0.769</b>	0.643	0.658
TOKPOSSSTOP	0.763	0.765	0.767	<b>0.773</b>	0.563	0.704	0.703	0.684	0.724	0.771	0.675	0.722
TOKPOSSSTOPALPHA	0.774	0.773	0.774	0.771	0.671	0.694	0.722	0.713	0.73	<b>0.779</b>	0.68	0.698
TOKNER	<b>0.789</b>	0.785	0.788	<b>0.789</b>	0.609	0.708	0.703	0.722	0.745	0.784	0.684	0.68
TOKNERALPHA	0.768	0.771	0.763	<b>0.776</b>	0.628	0.696	0.701	0.705	0.746	0.775	0.649	0.648
TOKNERSTOP	0.785	<b>0.791</b>	0.79	0.79	0.635	0.703	0.732	0.721	0.743	0.79	0.444	0.367
TOKNERSTOPALPHA	0.773	0.771	0.762	<b>0.774</b>	0.646	0.691	0.737	0.704	0.74	0.771	0.371	0.379
TOKPOS	0.781	0.783	0.791	<b>0.798</b>	0.565	0.713	0.656	0.72	0.739	0.787	0.626	0.705
TOKPOSALPHA	0.775	0.775	0.778	<b>0.784</b>	0.576	0.699	0.653	0.705	0.731	0.783	0.633	0.698
TOKPOSSTOP	0.786	0.783	<b>0.794</b>	0.792	0.645	0.7	0.711	0.733	0.739	0.789	0.706	0.691
TOKPOSSTOPALPHA	0.759	<b>0.766</b>	0.756	0.762	0.458	0.696	0.706	0.679	0.674	0.601	0.734	0.718
TOKALPHA	0.768	0.768	0.757	<b>0.773</b>	0.271	0.705	0.721	0.705	0.742	0.756	0.643	0.652
TOKSTOP	<b>0.793</b>	0.79	0.784	<b>0.794</b>	0.644	0.708	<b>0.758</b>	<b>0.736</b>	0.749	0.787	0.355	0.321
TOKSTOPALPHA	0.775	<b>0.776</b>	0.766	<b>0.776</b>	0.342	0.7	0.745	0.714	0.744	0.765	0.452	0.425

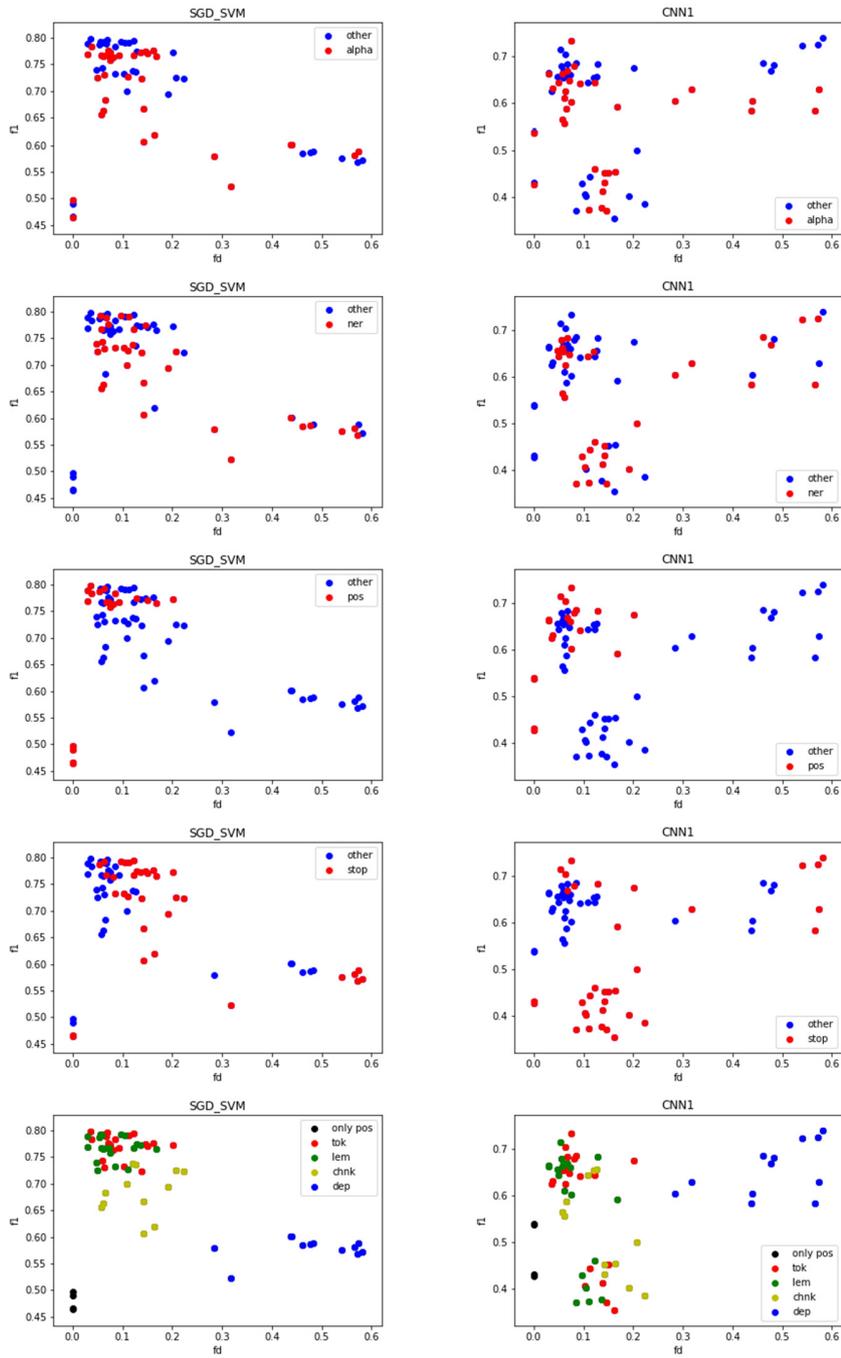

(i) Comparison of TOK (red), LEM (green), CHNK (yellow) and DEP (blue)

(j) Comparison of TOK (red), LEM (green), CHNK (yellow) and DEP (blue)

Figure 1: English dataset: FD & F1 score for SGD SVM (left) and CNN1 (right)

Table 8: English Dataset: Classifiers with best F1, preprocessing type and Pearson’s correlation coefficient for FD and F1.

Classifier	Best F1	Best PP type	$\rho(\text{F1, FD})$
SGDSVM	0.798	TOKPOS	-0.8239
MLP	0.7958	TOK	-0.8599
Linear SVM	0.7941	TOKPOSTOP	-0.834
L-BFGS LR	0.7932	TOKSTOP	-0.8024
Newton LR	0.7915	TOKNERSTOP	-0.8097
RandomForest	0.7582	TOKSTOP	-0.7873
XGBoost	0.7523	LEMSTOP	-0.8303
CNN1	0.7406	DEPSTOP	0.1633
CNN2	0.7357	LEMPOSS	0.0951
AdaBoost	0.7356	TOKSTOP	-0.7362
NaiveBayes	0.7165	TOK	-0.7531
KNN	0.6711	TOKPOSSSTOPALPHA	-0.7116

These results differ from the previous research [14], where CNN had a positive correlation with FD and the highest FD preprocessing methods, namely dependency relations, got the best results. The reason most likely lies in the parser differences (SpaCy used in our research vs. MeCAB<sup>5</sup> used in previous research [14]) and some differences in the network architecture, namely, previous research applied a simple BoW as a language model in CNNs, while we applied a more advanced word embeddings-based language model. The difference is very noticeable as the previous research achieved a score of .927 on the same dataset using CNNs with dependency relations, whereas we only managed to reach 0.802. This suggests two insights. Firstly, it is important to choose the the right and matured intermediary tools for handling the data (MeCab is a well established morphological parser, while the support for Japanese language in SpaCy was added only recently). Secondly, more advanced language models, even if achieving high results in many tasks, might be an overshoot for handling small-sized datasets, like the one used here.

The experiments show that changing Feature Density in moderate amounts could be useful for slightly increasing the F-score. However, excessive changes always showed diminishing results. The threshold was again in all cases approximately between 50% and 200% of the original density (TOK), most optimal FDs varying with each classifier in this range. Also, as the higher FD preprocessings performed quite poorly compared to previous research, we were unable to confirm the positive correlation between classifier

<sup>5</sup><https://taku910.github.io/mecab/>

performance and FD for the Japanese dataset.

### 5.2.3. Polish Cyberbullying Dataset

Like with the previous two datasets, we analyzed the correlation of Feature Density with each of the classifiers using the proposed preprocessing methods. The classification results are represented in Table 12 and correlations in 13. Again, we excluded the preprocessing methods that only used POS tags due to poor performance caused by information loss.

From Table 13 we can see that most classifiers have a strong negative correlation with Feature Density, meaning that adding too much linguistic information, such as dependency relations, push the score down. The best results are within the range of .08 to .37 of FD depending on the classifier. This range includes 47 of the 68 feature sets (Table 4). If the weaker feature sets were to be left out, the power savings are approximately 2.1kWh for training the most expensive classifier, one-layer CNN, calculated from Table 6. This result is lower compared to English as cross-validation was not used.

One of the highest performing classifiers, SVM with SGD optimizer (Figure 3), indicates that the classifier performance decreases slightly as FD increases within this range. On the other hand, one-layer CNN shows that the maximum classifier performance first increases, peaks at around .20 and then decreases, which shows slight variance between classifiers.

Surprisingly, the performance of Neural Network-based classifiers was poor compared to other datasets. Their F1-score only reached the baseline classifier KNN. The reason behind this could be that Polish is grammatically a lot more complex language compared to, for example, English. The base Feature Density (TOK) of Polish is over double compared to English, which demonstrates this complexity. The linguistic complexity would most likely require more data to make the use of neural networks viable. The effect of FD with neural networks in Polish needs to be explored further using a larger dataset in the future.

The realization of cyberbullying in the Polish dataset had some differences to English as can be seen from Table 11. Polish tended to contain more indirect bullying as the amount of innuendos was almost three times higher than in the English dataset. The

Table 9: Japanese Cyberbullying Dataset: F1 for all preprocessing types & classifiers; best classifier for each dataset in **bold**; best preprocessing type for each underlined

	<u>LBFGS LR</u>	<u>Newton LR</u>	<u>Linear SVM</u>	<u>SGDSVM</u>	<u>KNN</u>	<u>NaiveBayes</u>	<u>RandomForest</u>	<u>AdaBoost</u>	<u>XGBoost</u>	<u>MLP</u>	<u>CNN1</u>	<u>CNN2</u>
CHNK	0.710	0.708	0.718	0.715	0.495	0.753	0.677	0.592	0.632	0.761	<b>0.771</b>	0.635
CHNKNERR	0.752	0.751	0.756	0.745	0.517	0.757	0.727	0.690	0.713	0.780	<b>0.786</b>	0.699
CHNKNERRALPHA	0.733	0.736	0.744	0.737	0.529	0.745	0.712	0.679	0.703	0.747	<b>0.770</b>	0.669
CHNKNERRSTOP	0.745	0.744	0.753	0.737	0.524	0.739	0.729	0.694	0.700	0.775	<b>0.778</b>	0.665
CHNKNERRSTOPALPHA	0.731	0.730	<b>0.741</b>	0.723	0.539	0.730	0.718	0.676	0.690	0.736	0.727	0.657
CHNKNER	0.758	0.758	0.769	0.763	0.523	0.772	0.738	0.696	0.714	<b>0.796</b>	0.789	0.735
CHNKNERALPHA	0.751	0.755	0.757	0.751	0.555	0.767	0.725	0.686	0.712	0.758	<b>0.768</b>	0.717
CHNKNERSTOP	0.754	0.755	0.764	0.776	0.543	0.767	0.738	0.696	0.709	0.784	<b>0.791</b>	0.768
CHNKNERSTOPALPHA	0.758	0.755	0.760	<b>0.761</b>	0.528	0.750	0.721	0.692	0.707	0.745	0.752	0.684
CHNKALPHA	0.714	0.719	0.709	0.702	0.510	0.740	0.684	0.590	0.622	0.738	<b>0.747</b>	0.629
CHNKSTOP	0.712	0.714	0.724	0.716	0.506	0.728	0.675	0.580	0.629	<b>0.753</b>	0.746	0.688
CHNKSTOPALPHA	0.695	0.701	0.714	0.700	0.518	0.721	0.666	0.572	0.628	0.702	<b>0.722</b>	0.604
DEP	0.678	0.681	0.685	0.680	0.495	0.682	0.608	0.534	0.583	0.764	<b>0.765</b>	0.573
DEPNERR	0.677	0.684	0.681	0.686	0.479	0.676	0.608	0.520	0.578	<b>0.791</b>	0.773	0.590
DEPNERRALPHA	0.667	0.671	0.675	0.674	0.461	0.670	0.585	0.524	0.576	<b>0.767</b>	0.762	0.587
DEPNERRSTOP	0.659	0.652	0.659	0.649	0.509	0.645	0.571	0.514	0.549	<b>0.783</b>	0.761	0.479
DEPNERRSTOPALPHA	0.617	0.617	0.619	0.618	0.493	0.627	0.534	0.504	0.523	<b>0.755</b>	0.738	0.592
DEPNER	0.727	0.727	0.742	0.746	0.502	0.724	0.708	0.690	0.707	<b>0.792</b>	0.748	0.547
DEPNERALPHA	0.730	0.731	0.741	0.748	0.427	0.718	0.707	0.689	0.703	<b>0.782</b>	0.756	0.575
DEPNERSTOP	0.717	0.716	0.728	0.723	0.544	0.701	0.693	0.681	0.690	<b>0.802</b>	0.750	0.654
DEPNERSTOPALPHA	0.715	0.711	0.722	0.713	0.448	0.731	0.695	0.683	0.685	<b>0.779</b>	0.739	0.671
DEPALPHA	0.669	0.668	0.681	0.674	0.464	0.674	0.593	0.529	0.571	<b>0.756</b>	0.705	0.621
DEPSTOP	0.655	0.658	0.658	0.653	0.507	0.647	0.575	0.523	0.556	<b>0.776</b>	0.731	0.659
DEPSTOPALPHA	0.627	0.623	0.622	0.622	0.499	0.628	0.537	0.516	0.535	<b>0.746</b>	0.743	0.608
LEM	0.803	0.799	0.817	0.806	0.592	0.823	0.771	0.669	0.723	0.863	<b>0.868</b>	0.721
LEMNERR	0.794	0.790	0.796	0.791	0.585	0.808	0.778	0.744	0.763	<b>0.843</b>	0.811	0.654
LEMNERRALPHA	0.797	0.796	0.805	0.793	0.585	0.811	0.781	0.748	0.768	<b>0.845</b>	0.828	0.708
LEMNERRSTOP	0.787	0.784	0.793	0.793	0.590	0.794	0.796	0.740	0.756	<b>0.839</b>	0.836	0.807
LEMNERRSTOPALPHA	0.790	0.791	0.798	0.793	0.587	0.796	0.788	0.743	0.764	0.810	<b>0.814</b>	0.776
LEMPOSS	0.815	0.817	<b>0.851</b>	0.842	0.711	<b>0.855</b>	0.785	0.718	<b>0.780</b>	0.866	<b>0.877</b>	0.768
LEMPOSSALPHA	<b>0.825</b>	<b>0.823</b>	0.848	0.837	<b>0.734</b>	0.847	0.770	0.690	0.759	0.856	<b>0.867</b>	0.572
LEMPOSSSTOP	0.816	0.818	0.850	0.846	0.529	0.851	0.774	0.718	0.764	0.868	<b>0.876</b>	0.820
LEMPOSSSTOPALPHA	0.819	0.817	0.841	0.829	0.722	0.844	0.779	0.686	0.743	0.850	<b>0.851</b>	0.688
LEMNER	0.806	0.801	0.818	0.816	0.633	0.823	0.790	0.747	0.775	<b>0.870</b>	0.865	0.616
LEMNERALPHA	0.809	0.807	0.827	0.823	0.612	0.827	0.797	0.744	0.776	0.857	<b>0.860</b>	0.772
LEMNERSTOP	0.799	0.798	0.819	0.823	0.632	0.831	0.802	0.742	0.767	<b>0.875</b>	0.870	0.807
LEMNERSTOPALPHA	0.805	0.808	0.830	0.826	0.643	0.834	<b>0.802</b>	0.744	0.769	0.848	<b>0.849</b>	0.741
LEMPOS	0.806	0.808	0.845	0.850	0.716	0.830	0.786	0.742	0.768	0.868	<b>0.870</b>	0.619
LEMPOSSALPHA	0.807	0.803	0.838	0.846	0.704	0.828	0.778	0.728	0.772	0.856	<b>0.860</b>	0.663
LEMPOSSSTOP	0.802	0.795	0.841	0.847	0.567	0.836	0.770	0.730	0.769	0.868	<b>0.877</b>	0.808
LEMPOSSSTOPALPHA	0.791	0.789	0.830	0.836	0.700	0.837	0.768	0.707	0.754	0.835	<b>0.860</b>	0.783
LEMALPHA	0.800	0.808	0.824	0.807	0.587	0.815	0.758	0.666	0.727	<b>0.854</b>	0.853	0.805
LEMSTOP	0.799	0.801	0.813	0.802	0.614	0.812	0.785	0.659	0.723	0.858	<b>0.862</b>	0.809
LEMSTOPALPHA	0.803	0.804	0.813	0.807	0.619	0.821	0.776	0.665	0.727	0.842	<b>0.844</b>	0.801
POSS	0.645	0.646	0.634	0.627	0.558	0.620	0.645	0.643	0.632	0.645	<b>0.670</b>	0.490
POSSALPHA	0.646	0.650	0.635	0.619	0.557	0.618	0.644	0.646	0.640	0.649	<b>0.658</b>	0.567
POSSSTOP	0.641	0.643	0.634	0.637	0.553	0.626	0.638	<b>0.643</b>	0.630	0.635	0.623	0.492
POSSSTOPALPHA	0.615	<b>0.616</b>	0.603	0.610	0.506	0.614	0.610	0.609	0.595	0.614	0.587	0.508
TOK	0.801	0.797	0.813	0.802	0.592	0.817	0.766	0.647	0.724	<b>0.864</b>	0.857	0.792
TOKNERR	0.789	0.785	0.797	0.799	0.589	0.798	0.783	0.729	0.756	0.838	<b>0.844</b>	0.793
TOKNERRALPHA	0.791	0.792	0.802	0.792	0.567	0.797	0.778	0.737	0.759	<b>0.836</b>	0.821	0.722
TOKNERRSTOP	0.776	0.778	0.795	0.783	0.582	0.788	0.776	0.727	0.756	0.835	<b>0.843</b>	0.709
TOKNERRSTOPALPHA	0.785	0.787	0.796	0.795	0.571	0.783	0.778	0.736	0.761	<b>0.818</b>	0.817	0.742
TOKPOSS	0.815	0.812	0.843	0.835	0.695	0.849	0.775	0.719	0.756	0.876	<b>0.876</b>	0.683
TOKPOSSALPHA	0.788	0.789	0.829	0.833	0.716	0.823	0.752	0.715	0.748	0.864	<b>0.865</b>	0.646
TOKPOSSSTOP	0.823	0.814	0.834	0.828	0.713	0.848	0.767	0.701	0.760	<b>0.855</b>	0.821	0.643
TOKPOSSSTOPALPHA	0.817	0.822	0.837	0.835	0.518	0.846	0.764	0.703	0.764	0.876	<b>0.883</b>	0.759
TOKNER	0.814	0.812	0.830	0.828	0.718	0.835	0.763	0.667	0.731	0.846	<b>0.847</b>	0.686
TOKNERALPHA	0.798	0.800	0.816	0.820	0.610	0.825	0.790	0.734	0.762	<b>0.870</b>	0.864	0.834
TOKNERSTOP	0.803	0.805	0.825	0.824	0.608	0.822	0.790	0.745	0.768	0.842	<b>0.857</b>	0.811
TOKNERSTOPALPHA	0.794	0.794	0.819	0.820	0.616	0.820	0.797	0.735	0.759	0.878	0.875	<b>0.849</b>
TOKPOS	0.799	0.796	0.822	0.828	0.630	0.826	0.794	0.730	0.763	0.846	<b>0.847</b>	0.773
TOKPOSALPHA	0.808	0.807	0.844	<b>0.852</b>	0.706	0.828	0.777	0.724	0.770	<b>0.870</b>	0.865	0.674
TOKPOSSSTOP	0.802	0.800	0.839	0.840	0.691	0.823	0.771	0.715	0.763	0.839	<b>0.857</b>	0.615
TOKPOSSSTOPALPHA	0.795	0.794	0.834	0.844	0.560	0.832	0.766	0.720	0.762	0.863	<b>0.873</b>	0.661
TOKALPHA	0.801	0.799	0.807	0.804	0.584	0.817	0.761	0.655	0.712	0.847	<b>0.848</b>	0.798
TOKSTOP	0.803	0.801	0.815	0.803	0.584	0.809	0.778	0.646	0.717	0.857	<b>0.861</b>	0.782
TOKSTOPALPHA	0.800	0.800	0.811	0.813	0.591	0.821	0.779	0.650	0.717	<b>0.827</b>	0.818	0.710

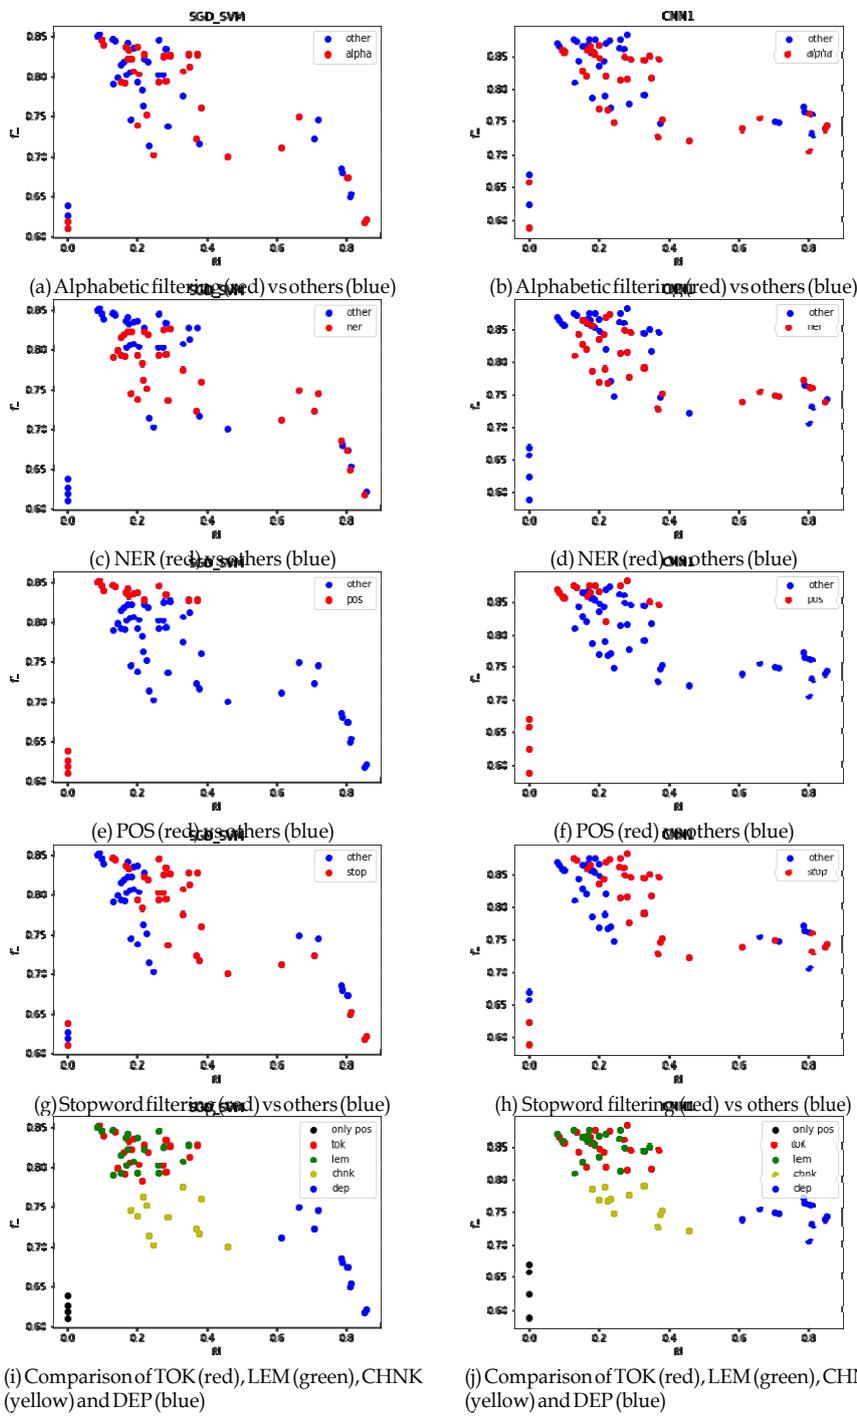


Figure 2: Japanese Dataset: FD & F1 score for SGD SVM (left) and CNN1 (right)

Table 10: Japanese Dataset: Classifiers with best F1, preprocessing type and Pearson’s correlation coefficient for FD and F1.

Classifier	Best F1	Best PP type	$\rho(F1, FD)$
CNN1	0.8829	TOKPOSTOP	-0.7356
MLP	0.8776	TOKNERSTOP	-0.6107
NaiveBayes	0.8552	LEMPOS	-0.8675
SGDSVM	0.8523	TOKPOSS	-0.8270
Linear SVM	0.8508	LEMPOS	-0.8415
CNN2	0.8488	TOKNERRSTOP	-0.5637
L-BFGSLR	0.8251	LEMPOSALPHA	-0.8506
Newton LR	0.8227	LEMPOSALPHA	-0.8511
RandomForest	0.8022	LEMNERSTOPALPHA	-0.8711
XGBoost	0.7801	LEMPOS	-0.8461
AdaBoost	0.7484	LEMNERRALPHA	-0.7902
KNN	0.7339	LEMPOSALPHA	-0.6320

Table 11: Categories of cyberbullying in English and Polish datasets

CB category	English #	Polish #	English %	Polish %
Threat	29	25	3.2	2.5
Innuendo	24	68	2.6	6.9
Sexual harassment	92	N/A	10	N/A
Insult	198	459	21.6	46.6
Blackmail	5	0	0.5	0
Mockery	338	471	36.9	42.3
Phishing, revealing private information	0	23	0	2.3
Vulgarism	135	129	14.7	13.1


Polish dataset also contained some revealing of personal information while the English dataset had none. Also, Polish contained more personal insults than the English dataset. On the other hand, the English dataset contained some blackmailing, while Polish did not have any. The fact that Polish had more indirect bullying in the form of innuendos compared to English and that Polish language is more complex than English could be the reasons for the overall lower performance of the classifiers on the Polish dataset.

#### 5.2.4. Verification Dataset


Also for the verification dataset, we analyzed the correlation of Feature Density with each of the classifiers using the proposed preprocessing methods. The classification scores are shown in Table 14 and correlations in Table 15. After excluding the preprocessing methods that only used POS tags, we can see that Logistic Regression and SVMs have a strong negative correlation with Feature Density. So these classifiers seem to have a weaker performance if a lot of linguistic information is added, and the best results being usually within the range of .002 to .015 FD depending on the classifier.

Table 12: Polish Dataset: F1 for all preprocessing types & classifiers; best classifier for each dataset in **bold**; best preprocessing type for each underlined


	<u>LBFGS LR</u>	<u>Newton LR</u>	<u>Linear SVM</u>	<u>SGDSVM</u>	<u>KNN</u>	<u>NaiveBayes</u>	<u>RandomForest</u>	<u>AdaBoost</u>	<u>XGBoost</u>	<u>MLP</u>	<u>CNN1</u>	<u>CNN2</u>
CHNK	0.437	0.419	0.424	0.443	0.163	<b>0.455</b>	0.124	0.308	0.278	0.245	0.213	0.270
CHNKNERR	0.448	0.433	0.455	<b>0.462</b>	0.175	0.446	0.099	0.272	0.183	0.234	0.249	0.292
CHNKNERRALPHA	0.444	0.440	0.446	<b>0.469</b>	0.201	0.468	0.085	0.291	0.205	0.224	0.228	0.211
CHNKNERRSTOP	<b>0.447</b>	0.414	0.408	0.421	0.231	0.400	0.187	0.333	0.299	0.223	0.250	0.312
CHNKNERRSTOPALPHA	0.425	0.427	0.425	<b>0.452</b>	0.241	0.401	0.212	0.283	0.246	0.276	0.262	0.187
CHNKNER	0.439	0.435	0.416	0.445	0.170	<b>0.459</b>	0.113	0.304	0.205	0.271	0.155	0.192
CHNKNERALPHA	0.444	0.437	0.424	0.419	0.182	<b>0.459</b>	0.086	0.265	0.236	0.290	0.189	0.183
CHNKNERSTOP	0.417	0.414	0.396	<b>0.430</b>	0.225	0.413	0.176	0.308	0.295	0.254	0.194	0.307
CHNKNERSTOPALPHA	0.459	<b>0.462</b>	0.436	0.431	0.213	0.441	0.174	0.325	0.309	0.265	0.231	0.260
CHNKALPHA	0.435	0.452	0.412	0.435	0.180	<b>0.457</b>	0.085	0.256	0.192	0.259	0.228	0.268
CHNKSTOP	0.448	<b>0.453</b>	0.394	0.433	0.199	0.403	0.188	0.388	0.331	0.267	0.298	0.307
CHNKSTOPALPHA	0.450	<b>0.459</b>	0.441	0.459	0.225	0.438	0.208	0.330	0.266	0.279	0.264	0.309
DEP	0.316	0.316	0.204	0.199	0.235	<b>0.346</b>	0.029	0.250	0.070	0.125	0.200	0.123
DEPNERR	0.322	0.312	0.214	0.211	0.243	<b>0.340</b>	0.029	0.242	0.057	0.128	0.197	0.057
DEPNERRALPHA	0.261	0.251	0.200	0.233	0.263	<b>0.335</b>	0.043	0.260	0.071	0.176	0.115	0.213
DEPNERRSTOP	0.276	0.290	0.195	0.182	0.250	<b>0.301</b>	0.029	0.195	0.043	0.122	0.260	0.055
DEPNERRSTOPALPHA	0.159	0.158	0.154	0.165	0.260	<b>0.264</b>	0.058	0.119	0.057	0.158	0.171	0.027
DEPNER	0.345	0.339	0.191	0.210	0.224	<b>0.345</b>	0.043	0.269	0.068	0.140	0.201	0.044
DEPNERALPHA	0.250	0.240	0.201	0.222	0.193	<b>0.329</b>	0.044	0.230	0.043	0.111	0.044	0.000
DEPNERSTOP	<b>0.303</b>	0.299	0.173	0.160	0.221	0.289	0.044	0.178	0.042	0.077	0.206	0.146
DEPNERSTOPALPHA	0.172	0.181	0.166	0.167	0.175	<b>0.239</b>	0.058	0.093	0.056	0.201	0.177	0.168
DEPALPHA	0.230	0.251	0.200	0.210	0.260	<b>0.358</b>	0.043	0.234	0.071	0.197	0.263	0.133
DEPSTOP	0.273	0.289	0.184	0.193	0.240	<b>0.304</b>	0.043	0.215	0.070	0.111	0.134	0.014
DEPSTOPALPHA	0.155	0.168	0.176	0.152	0.256	<b>0.276</b>	0.071	0.105	0.044	0.106	0.049	0.135
LEM	<b>0.481</b>	0.473	0.428	0.444	0.281	0.460	0.125	0.361	0.317	0.285	0.281	0.275
LEMNERR	0.466	0.456	0.462	<b>0.471</b>	0.273	0.452	0.113	0.309	0.244	0.277	0.308	0.307
LEMNERRALPHA	0.455	0.449	0.452	0.464	0.239	<b>0.478</b>	0.112	0.341	0.214	0.324	0.262	0.233
LEMNERRSTOP	0.484	0.484	<b>0.494</b>	0.479	0.302	0.417	0.221	0.347	0.310	0.306	0.263	0.283
LEMNERRSTOPALPHA	0.482	0.484	0.471	<b>0.496</b>	0.272	0.439	0.211	0.364	0.287	0.296	0.333	0.312
LEMPOSS	<b>0.494</b>	0.483	0.444	0.456	0.265	0.459	0.112	0.390	0.214	0.287	0.313	0.190
LEMPOSSALPHA	<b>0.467</b>	0.462	0.421	0.438	0.287	0.444	0.125	0.354	0.221	0.279	0.260	0.187
LEMPOSSSTOP	0.467	0.451	0.457	<b>0.483</b>	0.322	0.437	0.237	<b>0.448</b>	0.345	0.297	0.338	0.241
LEMPOSSSTOPALPHA	0.490	<b>0.498</b>	0.448	0.474	0.352	0.426	<b>0.255</b>	0.421	<b>0.385</b>	0.312	0.258	0.288
LEMNER	<b>0.466</b>	0.465	0.419	0.450	0.281	0.464	0.125	0.381	0.241	0.267	0.239	0.237
LEMNERALPHA	<b>0.487</b>	0.464	0.414	0.431	0.225	<b>0.482</b>	0.099	0.386	0.232	0.275	0.245	0.265
LEMNERSTOP	0.461	<b>0.494</b>	0.467	0.490	0.301	0.430	0.224	0.391	0.378	<b>0.348</b>	0.310	0.334
LEMNERSTOPALPHA	<b>0.486</b>	0.473	0.477	0.467	0.235	0.461	0.232	0.391	0.343	0.346	<b>0.354</b>	0.315
LEMPOS	0.447	0.457	<b>0.472</b>	0.465	0.271	0.440	0.099	0.427	0.219	0.266	<b>0.271</b>	0.120
LEMPOSALPHA	<b>0.484</b>	0.473	0.420	0.469	0.286	0.462	0.110	0.361	0.186	0.275	0.258	0.193
LEMPOSTOP	0.461	0.457	0.491	<b>0.498</b>	0.341	0.422	0.174	0.438	0.259	0.305	0.232	0.164
LEMPOSTOPALPHA	0.449	<b>0.498</b>	0.466	0.481	<b>0.357</b>	0.419	0.192	0.438	0.256	0.325	0.307	0.246
LEMALPHA	0.491	<b>0.493</b>	0.440	0.436	0.225	0.462	0.112	0.381	0.220	0.315	0.254	0.250
LEMSTOP	0.490	<b>0.500</b>	0.469	0.500	0.281	0.430	0.231	0.408	0.383	0.305	0.299	0.264
LEMSTOPALPHA	0.494	<b>0.502</b>	0.452	0.465	0.242	0.453	0.231	0.425	0.371	0.330	0.292	0.319
POSS	0.313	0.314	0.298	<b>0.315</b>	0.184	0.301	0.141	0.293	0.172	0.293	0.204	0.198
POSSALPHA	0.310	<b>0.316</b>	0.297	0.301	0.180	0.301	0.113	0.298	0.179	0.282	0.235	0.170
POSSSTOP	0.295	<b>0.297</b>	0.288	0.266	0.188	0.251	0.193	0.282	0.223	0.257	0.258	0.230
POSSSTOPALPHA	0.256	0.246	0.247	0.229	0.078	0.239	0.203	0.264	0.240	0.246	0.240	<b>0.267</b>
TOK	0.437	0.444	0.422	<b>0.456</b>	0.166	0.455	0.099	0.303	0.171	0.278	0.229	0.248
TOKNERR	0.440	0.444	0.432	<b>0.465</b>	0.178	0.455	0.072	0.266	0.194	0.245	0.203	0.212
TOKNERRALPHA	0.424	0.432	0.443	<b>0.472</b>	0.190	0.451	0.099	0.275	0.181	0.266	0.230	0.262
TOKNERRSTOP	0.425	<b>0.430</b>	0.406	0.424	0.244	0.384	0.150	0.314	0.267	0.226	0.262	0.288
TOKNERRSTOPALPHA	0.434	0.432	0.425	<b>0.458</b>	0.229	0.408	0.151	0.284	0.267	0.242	0.265	0.236
TOKPOSS	0.443	0.441	0.450	<b>0.464</b>	0.264	0.461	0.071	0.321	0.205	0.201	0.258	0.056
TOKPOSSALPHA	0.393	0.400	0.403	<b>0.427</b>	0.317	0.411	0.185	0.317	0.251	0.208	0.208	0.040
TOKPOSSSTOP	0.443	0.449	0.424	0.427	0.273	<b>0.457</b>	0.086	0.246	0.160	0.253	0.174	0.173
TOKPOSSSTOPALPHA	<b>0.430</b>	0.420	0.400	0.404	0.306	0.416	0.137	0.345	0.277	0.190	0.251	0.212
TOKNER	0.429	<b>0.442</b>	0.425	0.429	0.327	0.432	0.197	0.297	0.263	0.284	0.227	0.257
TOKNERALPHA	0.444	0.439	0.416	0.448	0.170	<b>0.453</b>	0.085	0.314	0.191	0.309	0.210	0.188
TOKNERSTOP	0.447	0.435	0.428	0.435	0.176	<b>0.461</b>	0.085	0.282	0.192	0.267	0.220	0.162
TOKNERSTOPALPHA	0.429	0.427	0.398	<b>0.430</b>	0.242	0.405	0.174	0.335	0.291	0.271	0.221	0.281
TOKPOS	0.451	<b>0.473</b>	0.445	0.471	0.225	0.438	0.199	0.316	0.298	0.272	0.257	0.259
TOKPOSALPHA	0.422	0.434	0.421	<b>0.459</b>	0.255	0.450	0.058	0.302	0.171	0.271	0.212	0.071
TOKPOSTOP	0.434	0.436	0.429	<b>0.447</b>	0.266	0.442	0.043	0.259	0.168	0.213	0.214	0.129
TOKPOSTOPALPHA	0.388	0.393	0.404	<b>0.428</b>	0.286	0.398	0.138	0.300	0.264	0.208	0.208	0.040
TOKALPHA	0.442	0.446	0.414	<b>0.456</b>	0.176	0.448	0.112	0.303	0.215	0.261	0.232	0.286
TOKSTOP	0.438	<b>0.440</b>	0.392	0.429	0.220	0.423	0.188	0.387	0.287	0.234	0.288	<b>0.352</b>
TOKSTOPALPHA	<b>0.463</b>	0.448	0.434	0.423	0.217	0.451	0.172	0.335	0.271	0.344	0.283	0.276

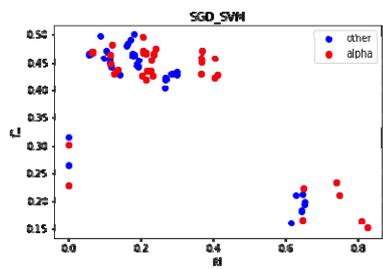


(a) Alphabetic filtering (red) vs others (blue)

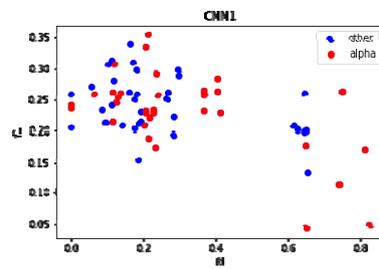


(b) Alphabetic filtering (red) vs others (blue)

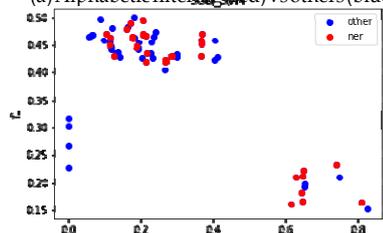


(c) NER (red) vs others (blue)

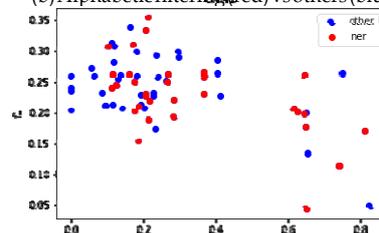


(d) NER (red) vs others (blue)

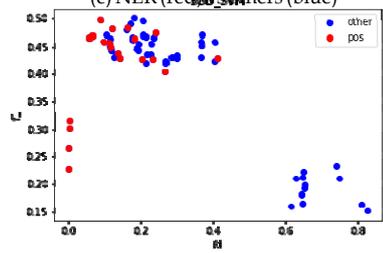


(e) POS (red) vs others (blue)

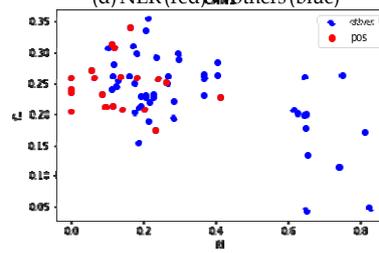


(f) POS (red) vs others (blue)

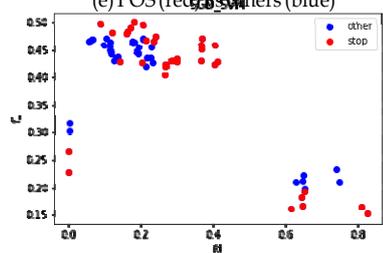


(g) Stopword filtering (red) vs others (blue)

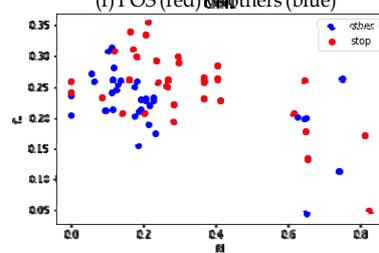

(h) Stopword filtering (red) vs others (blue)

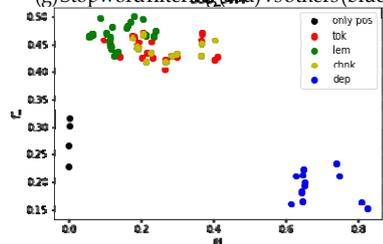

(i) Comparison of TOK (red), LEM (green), CHNK (yellow) and DEP (blue)

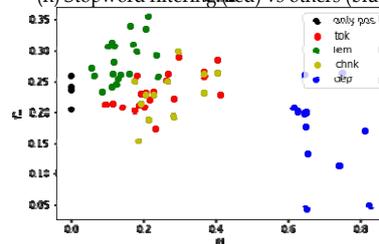

(j) Comparison of TOK (red), LEM (green), CHNK (yellow) and DEP (blue)

Figure 3: Polish Dataset: FD & F1 score for SGDSVM (left) and CNN1 (right)

Table 13: Polish Dataset: Classifiers with best F1, preprocessing type and Pearson’s correlation coefficient for FD and F1.

Classifier	Best F1	Best PP type	$\rho(\text{F1, FD})$
Newton LR	0.5021	LEMstopalpha	-0.8824
SGDSVM	0.5000	LEMstop	-0.9154
L-BFGS LR	0.4944	LEMPOS	-0.8869
Linear SVM	0.4936	LEMNERRSTOP	-0.9117
NaiveBayes	0.4819	LEMNERALPHA	-0.8719
AdaBoost	0.4480	LEMPOSSTOP	-0.7298
XGBoost	0.3846	LEMPOSSTOPALPHA	-0.6749
KNN	0.3571	LEMPOSSTOPALPHA	-0.1470
CNN1	0.3535	LEMNERSTOPALPHA	-0.5461
CNN2	0.3517	TOKSTOP	-0.4314
MLP	0.3483	LEMNERSTOP	-0.7447
RandomForest	0.2548	LEMPOSSTOPALPHA	-0.4224

This range includes 37 of the 68 preprocessing methods (Table 5). This can be seen from, for example, the highest performing classifier, SVM with SGD optimizer (Figure 4), where the maximum classifier performance increases until peaking at .007 after which there is a noticeable drop. The performance only falls further as the FD rises. If the feature sets outside this range would be left out, the power savings are approximately 400Wh for the SGD SVM, when calculated from Table 6.

For CNNs however, there was no correlation between FD and the classifier performance, with the higher FD datasets performing almost equally when comparing to the low FD dataset, similarly as it was for English Cyberbullying Dataset, suggesting this could be a more general characteristics of the language itself. Taking a look at one layer CNN’s performance, which was better than the CNN with two layers, we can see from Figure 4 that the performance stays quite stable throughout the whole range of feature densities. The scores are also generally much higher due to the classification problem (sentiment analysis of 1- and 5-start reviews) being much simpler compared to cyberbullying. All of the classifiers got considerably high results across feature densities without extreme changes, unlike other datasets. In other words, all of the classifiers seem to have reached their maximum performance for the data and there is no more score to gain without overfitting. Due to this, we are unable to estimate the possible time save by feature density in this case, meaning that for simple tasks such as this one it does not matter that much which classifier or which preprocessing is used, as it will still reach a considerably high performance.

Table 14: Verification Dataset: F1 for all preprocessing types & classifiers; best classifier for each dataset in **bold**; best preprocessing type for each underlined

	<u>LBFGS LR</u>	<u>SGD SVM</u>	KNN	NaiveBayes	RandomForest	XGBoost	MLP	CNN1	CNN2
CHNK	0.958	0.948	<u>0.791</u>	0.924	0.909	0.918	0.968	<b>0.975</b>	0.971
CHNKNERR	0.956	0.947	0.785	0.925	0.908	0.922	0.967	<b>0.975</b>	<u>0.972</u>
CHNKNERRALPHA	0.945	0.939	0.783	0.928	0.899	0.916	0.950	<b>0.962</b>	0.958
CHNKNERRSTOP	0.949	0.940	0.759	0.935	0.923	0.901	<b>0.967</b>	0.965	0.965
CHNKNERRSTOPALPHA	0.933	0.926	0.609	0.921	0.905	0.891	<b>0.943</b>	0.939	0.942
CHNKNERR	0.957	0.948	0.783	0.923	0.909	0.922	0.967	<u>0.977</u>	0.972
CHNKNERRALPHA	0.947	0.940	0.781	0.929	0.904	0.918	0.953	<b>0.964</b>	0.960
CHNKNERRSTOP	0.950	0.939	0.767	0.933	0.923	0.902	<b>0.968</b>	0.965	0.965
CHNKNERRSTOPALPHA	0.935	0.927	0.611	0.923	0.909	0.893	<b>0.945</b>	0.941	0.943
CHNKALPHA	0.947	0.940	0.786	0.930	0.902	0.916	0.953	<b>0.962</b>	0.959
CHNKSTOP	0.951	0.942	0.769	0.934	0.925	0.898	0.969	0.966	0.964
CHNKSTOPALPHA	0.935	0.927	0.609	0.924	0.908	0.893	0.944	0.939	<b>0.944</b>
DEP	<b>0.948</b>	0.927	0.777	0.940	0.900	0.878	0.920	0.933	0.933
DEPNERR	<b>0.949</b>	0.928	0.777	0.941	0.901	0.881	0.921	0.934	0.934
DEPNERRALPHA	<b>0.945</b>	0.926	0.773	0.941	0.899	0.869	0.924	0.934	0.934
DEPNERRSTOP	0.928	0.898	0.726	<u>0.946</u>	0.891	0.846	0.946	<b>0.948</b>	0.947
DEPNERRSTOPALPHA	0.916	0.887	0.732	0.935	0.885	0.824	0.943	<b>0.945</b>	0.942
DEPNER	<b>0.946</b>	0.922	0.774	0.940	0.898	0.881	0.923	0.935	0.933
DEPNERALPHA	<b>0.943</b>	0.921	0.032	0.940	0.897	0.876	0.926	0.935	0.934
DEPNERSTOP	0.924	0.889	0.729	0.945	0.893	0.847	0.944	<b>0.950</b>	0.945
DEPNERSTOPALPHA	0.914	0.881	0.155	0.934	0.884	0.831	0.944	<b>0.945</b>	0.944
DEPALPHA	<b>0.944</b>	0.926	0.773	0.940	0.898	0.869	0.926	0.935	0.935
DEPSTOP	0.927	0.895	0.726	0.945	0.889	0.842	0.947	<b>0.949</b>	0.944
DEPSTOPALPHA	0.915	0.888	0.735	0.934	0.885	0.815	0.945	<b>0.946</b>	0.942
LEM	0.968	0.963	0.768	0.924	0.934	0.948	0.966	<b>0.974</b>	0.970
LEMNERR	0.967	0.962	0.772	0.925	0.934	0.948	0.963	<b>0.972</b>	0.970
LEMNERRALPHA	0.966	0.961	0.774	0.924	0.934	0.947	0.964	<b>0.973</b>	0.969
LEMNERRSTOP	0.960	0.954	0.766	0.920	0.939	0.936	<b>0.965</b>	0.962	0.963
LEMNERRSTOPALPHA	0.961	0.955	0.766	0.920	0.939	0.936	<b>0.964</b>	0.963	0.963
LEMPOSS	<b>0.968</b>	0.962	0.744	0.925	0.932	0.947	0.944	0.958	0.958
LEMPOSSALPHA	<b>0.967</b>	0.962	0.764	0.925	0.932	0.946	0.948	0.958	0.956
LEMPOSSSTOP	<b>0.962</b>	0.955	0.740	0.921	0.938	0.933	0.962	0.962	0.958
LEMPOSSSTOPALPHA	0.962	0.955	0.760	0.920	0.940	0.932	0.962	<b>0.963</b>	0.960
LEMNER	0.968	0.963	0.765	0.922	0.935	0.948	0.963	<b>0.973</b>	0.971
LEMNERALPHA	0.967	0.962	0.763	0.922	0.934	0.947	0.964	<b>0.973</b>	0.969
LEMNERSTOP	0.961	0.955	0.763	0.918	0.939	0.938	<b>0.967</b>	0.962	0.963
LEMNERSTOPALPHA	0.962	0.956	0.761	0.918	0.938	0.937	<b>0.965</b>	0.963	0.963
LEMPOS	<b>0.967</b>	0.958	0.741	0.923	0.927	0.949	0.806	0.895	0.891
LEMPOSALPHA	<b>0.966</b>	0.959	0.737	0.923	0.928	0.948	0.818	0.898	0.894
LEMPOSSTOP	<b>0.961</b>	0.953	0.765	0.919	0.935	0.937	0.912	0.930	0.930
LEMPOSSTOPALPHA	<b>0.961</b>	0.954	0.769	0.919	0.938	0.936	0.940	0.944	0.948
LEMALPHA	0.967	0.963	0.765	0.923	0.935	0.947	0.966	<b>0.972</b>	0.968
LEMSTOP	0.962	0.956	0.763	0.919	0.940	0.937	<b>0.967</b>	0.963	0.964
LEMSTOPALPHA	0.962	0.956	0.762	0.918	0.941	0.936	<b>0.965</b>	0.963	0.963
POSS	0.744	0.742	0.658	0.690	0.747	0.750	0.668	0.836	<b>0.841</b>
POSSALPHA	0.744	0.749	0.658	0.690	0.746	0.750	0.668	0.838	<b>0.843</b>
POSSSTOP	0.723	0.729	0.613	0.691	0.715	0.728	0.666	0.777	<b>0.778</b>
POSSSTOPALPHA	0.712	0.713	0.504	0.675	0.695	0.718	0.600	0.755	<b>0.764</b>
TOK	0.970	<u>0.965</u>	0.791	0.928	0.934	0.949	0.967	<b>0.974</b>	0.971
TOKNERR	0.969	0.964	0.787	0.929	0.931	0.948	0.967	<b>0.975</b>	0.971
TOKNERRALPHA	0.969	0.964	0.787	0.928	0.935	0.948	0.966	<b>0.974</b>	0.970
TOKNERRSTOP	0.962	0.957	0.763	0.924	0.941	0.935	<b>0.967</b>	0.964	0.965
TOKNERRSTOPALPHA	0.962	0.957	0.763	0.923	0.940	0.936	<b>0.968</b>	0.964	0.965
TOKPOSS	<u>0.970</u>	0.965	0.755	0.930	0.931	0.946	0.947	0.960	0.960
TOKPOSSALPHA	<b>0.963</b>	0.955	0.771	0.924	0.939	0.939	0.916	0.931	0.933
TOKPOSSSTOP	<b>0.970</b>	0.965	0.783	0.929	0.933	0.946	0.951	0.961	0.957
TOKPOSSSTOPALPHA	0.963	0.957	0.730	0.927	0.941	0.933	0.963	<b>0.965</b>	0.959
TOKNER	0.964	0.958	0.760	0.927	0.942	0.933	<b>0.967</b>	0.964	0.962
TOKNERALPHA	0.970	0.965	0.783	0.926	0.935	0.950	0.966	<b>0.974</b>	0.972
TOKNERSTOP	0.970	0.965	0.781	0.925	0.936	0.949	0.966	<b>0.974</b>	0.971
TOKNERSTOPALPHA	0.963	0.957	0.765	0.923	0.941	0.937	<b>0.968</b>	0.963	0.965
TOKPOS	0.962	0.957	0.762	0.923	0.942	0.937	<b>0.968</b>	0.964	0.966
TOKPOSALPHA	<b>0.969</b>	0.962	0.752	0.927	0.929	<u>0.951</u>	0.806	0.893	0.892
TOKPOSSTOP	<b>0.969</b>	0.962	0.753	0.926	0.930	0.950	0.825	0.897	0.895
TOKPOSSTOPALPHA	<b>0.963</b>	0.956	0.761	0.925	0.938	0.938	0.916	0.931	0.933
TOKALPHA	0.969	0.964	0.787	0.927	0.937	0.949	0.968	<b>0.974</b>	0.971
TOKSTOP	0.964	0.958	0.765	0.923	0.943	0.936	<b>0.968</b>	0.963	0.966
TOKSTOPALPHA	0.963	0.958	0.764	0.923	<u>0.944</u>	0.937	<b>0.968</b>	0.964	0.965

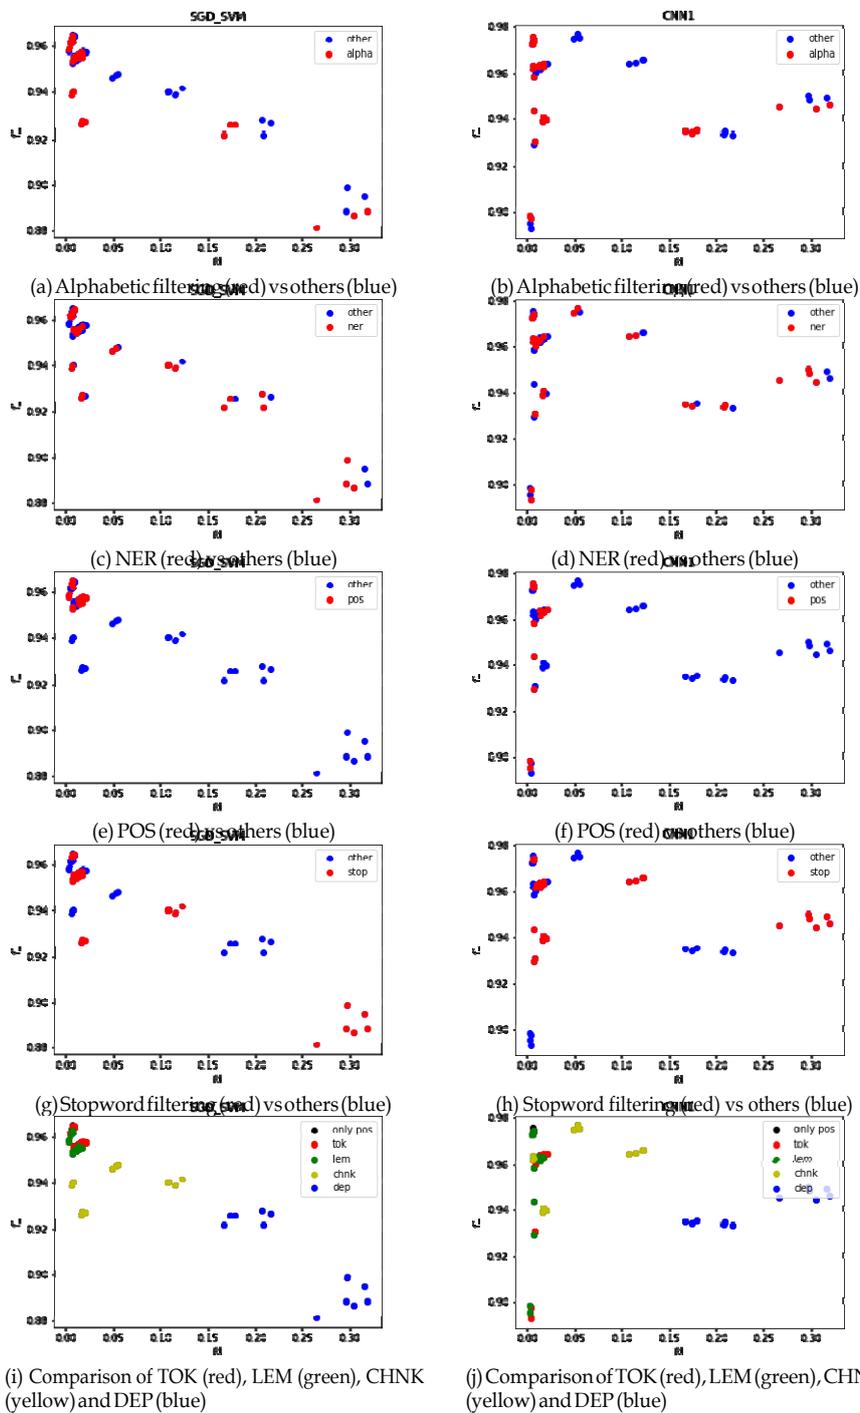


Figure 4: Verification Dataset: FD & F1 score for SGD SVM (left) and CNN1 (right)

Table 15: Verification Dataset: Classifiers with best F1, preprocessing type and Pearson’s correlation coefficient for FD and F1.

Classifier	Best F1	Best PP type	$\rho(\text{F1}, \text{FD})$
CNN1	0.9766	CHKNER	-0.2131
CNN2	0.9723	CHKNERR	-0.2365
L-BFGS LR	0.9704	TOKPOS	-0.8243
MLP	0.9689	CHNKSTOP	-0.0410
SGDSVM	0.9650	TOK	-0.9127
XGBoost	0.9506	TOKPOSS	-0.9345
NaiveBayes	0.9456	DEPNERSTOP	0.8452
RandomForest	0.9435	TOKSTOPALPHA	-0.8041
KNN	0.7911	CHNK	-0.3000

### 5.3. Analysis of Linguistically-backed Preprocessing

#### 5.3.1. English Cyberbullying Dataset

From the results it can be seen that most of the classifiers scored highest or close to highest on pure tokens. CNNs also performed quite well on tokens, but also on dependency-based preprocessings. Using lemmas generally got slightly lower scores than tokens presumably due to information loss. Chunking got low performance overall and was clearly outperformed by dependency-based features in CNNs. Using only parts-of-speech tags achieved very low performance and thus it should be only used as a supplement to other preprocessing methods. However, as we can see that the simplest preprocessing, namely, tokens were usually among the highest scoring preprocessing type, this provides the first known empirical proof for using simple words as a default resource for embeddings in practically all previous research on word embeddings. However, it was still possible to outperform simple tokens by a number of preprocessing combinations.

Stopword filtering seemed to be the one of the most effective preprocessing techniques for traditional classifiers, which can be seen from Table 8 as it was used in the majority of the highest scores. The problem with stopword filtering was that the scores fluctuated a lot, having both low and very high scores and scoring high mostly with Logistic Regression and all of the tree based classifiers. An important thing to note is that the preprocessing method had extremely polarized performance with CNNs, scoring either very high or low. Overall, stopword filtering yielded the most top scores of any preprocessing method considering all the classifiers.

Another very effective preprocessing method was Parts of Speech merging (POS),

which achieved high performance overall when added to TOK or LEM. The method also got the highest scores with multiple classifiers, especially SVMs. Adding parts-of-speech information to the respective words usually achieved a higher score than using them as a separate feature. This keeps the information directly connected to the word itself, which seems a better option from the point of view of information preservation.

Using Named Entity Recognition information reduced the classifier performance most of the time, only achieving a high score with one classifier, Newton-LR. The performance of using NER seemed clearly inferior compared to stopword filtering or parts-of-speech information. Replacing words with their NER information seems to cause too much information loss and reduces the performance when comparing to plain tokens. Attaching NER information to the respective words did not improve the performance in most cases but still performed better than replacement.

These results contradict the results obtained in previous research [14], which noticed that NER helped most of the times for cyberbullying (CB) detection in Japanese. This could come from the fact that CB is differently realized in English and Japanese. In Japan, revealing victim's personal information, or "doxxing" is known to be one of the most often used forms of bullying, thus NER, which can pin-point information such as address or phone number often help in classification, while this is not the case for English.

Filtering out non-alphabetic characters also reduced the classifier performance most of the time and also got a high score with only one classifier, kNN, which was the weakest classifier overall. Non-alphabetic tokens, which include e.g., punctuation marks, ellipsis, question- of exclamation marks, seem to carry useful information, at least in the context of cyberbullying detection, as removing them reduced the performance comparing to plain tokens due to information loss.

Trying to generalize the feature set ended up lowering the results in most cases with the exception of the very high scores of stopword filtering using traditional classifiers. This would mean that the stopword filtering sometimes succeeded in removing noise and outliers from the dataset while other generalization methods ended up cutting useful information. Adding information to tokens could be useful in some scenarios as was shown with parts-of-speech tags and using dependency information with CNNs,

although using NER was not so successful. Any kind of generalization attempt resulted in a lower performance with CNNs, which shows their ability to assemble more complex patterns from tokens and relations that are unusable by other classifiers.

### 5.3.2. Japanese Cyberbullying Dataset

With the Japanese dataset, most classifiers scored the highest using lemmas, with tokens being not far behind. MLP and CNNs also performed decently on the dependency-based preprocessings. Again, chunking got low performance overall and got outperformed by dependency-based features in MLP and CNNs. The results further confirm that parts-of-speech tags alone are not viable features.

Using POS information as a supplement showed the highest positive impact on the results, increasing the performance most of the time, which can be seen from Table 10. Majority of the classifiers had their best result include POS. Adding POS information to the word itself seemed slightly more effective than using separate POS tags also with this dataset.

The rest of the preprocessing types showed mixed results depending on the classifier. Most notably, NER seemed to generally slightly increase the performance of Neural Network and tree based models while struggling with other models like Logistic Regression or SVM. These results are in line with previous research [14]. The effect of stopword filtering and alphabetic filtering was minor, usually only changing the results very little for better or worse depending on the preprocessing type.

Comparing to the English Cyberbullying Dataset, lemmas performed slightly better than tokens and the effectiveness of POS and NER were higher in the Japanese dataset. Whereas stopword filtering performed worse. What makes lemmas slightly better for Japanese could be due to Japanese being an agglutinative language. This increases the base token count, and thus feature density, in comparison to English. Slightly decreasing the number of distinct tokens by lemmatizing could be the key to achieving the optimal amount of information for classification of cyberbullying in Japanese.

The use of stopwords has been questioned with the Japanese language and even though some lists exist [67], it is much a more difficult preprocessing technique to use when comparing to English, where the use of stopwords is well established. This is

because in Japanese each word/morpheme tends to contain useful information, whether syntactic or semantic, unlike in English, where it is easier to filter out words that do not affect the overall meaning of a sentence. The effect of alphabetic filtering was slightly better, yet it still performed average at best. Again, generalizing the dataset seemed to have an adverse effect on the performance most of the time.

### 5.3.3. Polish Cyberbullying Dataset

Pure lemmas worked the best for Polish almost without exception. The performance was clearly superior compared to using tokens. This is completely different from the other datasets where tokens and lemmas only had slight differences in scores. Dependency based features performed very poorly for Polish language, even with Neural Networks.

What makes lemmas significantly better for Polish is most likely due to linguistic differences. Polish is a complex declinative language with a sophisticated morphology and grammar. This increases the base distinct token count and thus feature density. The base feature density for tokens is too high for classifiers to correctly generalize on the dataset of this size. Lemmatizing, which puts all variously declensed and conjugated words back into their dictionary forms, cuts the base feature density by about half, decreasing the complexity of the dataset, and thus greatly increasing the achieved score.

Similarly to the English dataset, stopword filtering performed well compared to other preprocessing techniques, which can be seen from Table 13 as it was used in the almost all of the highest scores. The difference being, that the scores were not fluctuating, and the plots (Figure 3) for stopwords look similar to the Japanese POS performance. Stopword filtering was clearly the most effective preprocessing method here and clearly increased the scores overall.

Other preprocessing methods had mixed results, slightly increasing or decreasing the results depending on the classifier and preprocessing type. This also includes POS, which clearly had a positive impact in both previous datasets. The performance of NER and alphabetic filtering were similar to the English dataset.

#### 5.3.4. *Verification Dataset*

Similarly to the English cyberbullying dataset, it can be seen that most of the traditional classifiers scored highest on pure tokens. The difference being that Neural Network based classifiers performed exceptionally well on chunks, as seen in Table 15. This might have something to do with the dataset size, as it is around twenty times larger compared to the others. Using lemmas generally got slightly lower scores than tokens, similarly to the English CB dataset. Also, dependency based preprocessings performed rather poorly and we were unable to confirm their effectiveness with CNNs given the larger dataset. However, the supplementary preprocessing methods were shown to be very ineffective and had next to no impact on the results. This is completely contrary to the other datasets as there was at least one supplementary preprocessing method that clearly increased the performance for all other datasets. The reason for this could be the simplicity of the learning problem. Most of the classifiers already scored very high, probably close to the maximum achievable score and thus the effects of extra preprocessing were mostly diminished. The effects could be more visible given a more difficult learning problem.

#### 5.4. *Classifier Stability*

In order to find the best feature sets, we calculated the standard deviations of all cross-validation folds for the English and Japanese datasets. Our aim is to find the high performing classifier-preprocessing pairs that are also stable, meaning their performance should have as low variance as possible within the cross-validation folds. We hypothesise that the well performing, stable classifier-preprocessing pairs would be similar across the datasets and could allow even more efficient model training. F-scores and standard errors for each pair are shown in Tables A.18 and A.19 in Appendix A.

We calculated the stability scores for Japanese and English datasets by subtracting the standard error from the F-scores for each classifier-preprocessing pair. The results are shown in Tables 16 and 17. For the English dataset, the classifier-preprocessing pairs that got the highest stability scores are Logistic Regressions and SVMs with tokens and lemmas with parts of speech and their derivatives, highest being tokens with parts of speech and stopword filtering (TOKPOSSTOP).

Table 16: English dataset: Stability score for classifier-preprocessing pairs

	LBFGS LR	Newton LR	Linear SVM	SGD SVM	KNN	NaïveBayes	Randomforest	AdaBoost	XGBoost	MLP	CNN1	CNN2	Avg for PP
CHNK	0.493	0.484	0.461	0.499	0.18	0.427	0.247	0.351	0.378	0.414	0.401	0.388	0.394
CHNKALPHA	0.422	0.422	0.403	0.42	0.268	0.38	0.323	0.314	0.385	0.31	0.25	0.154	0.338
CHNKNER	0.48	0.487	0.473	0.503	0.197	0.421	0.224	0.331	0.381	0.404	0.458	0.355	0.393
CHNKNERALPHA	0.413	0.416	0.392	0.396	0.258	0.379	0.282	0.308	0.345	0.294	0.275	0.188	0.329
CHNKNERR	0.431	0.437	0.437	0.442	0.2	0.398	0.235	0.298	0.337	0.384	0.383	0.374	0.363
CHNKNERRALPHA	0.391	0.395	0.374	0.381	0.268	0.359	0.273	0.287	0.351	0.262	0.278	0.163	0.315
CHNKNERRSTOP	0.421	0.417	0.41	0.43	0.199	0.37	0.31	0.313	0.352	0.328	0.138	0.121	0.317
CHNKNERRSTOPALPHA	0.338	0.335	0.303	0.32	0.171	0.322	0.316	0.27	0.35	0.178	0.137	-0.03	0.251
CHNKNERSTOP	0.483	0.483	0.461	0.483	0.193	0.412	0.296	0.361	0.394	0.424	0.301	0.103	0.366
CHNKNERSTOPALPHA	0.405	0.396	0.365	0.408	0.168	0.347	0.358	0.324	0.365	0.204	0.091	0.12	0.296
CHNKSTOP	0.481	0.482	0.455	0.484	0.198	0.423	0.359	0.358	0.4	0.437	0.129	0.146	0.363
CHNKSTOPALPHA	0.352	0.363	0.32	0.342	0.169	0.337	0.344	0.364	0.379	0.197	0.178	0.057	0.284
DEP	0.263	0.27	0.17	0.206	0.149	0.337	0.101	0.222	0.249	0.275	0.468	0.445	0.263
DEPALPHA	0.26	0.266	0.216	0.245	0.158	0.312	0.129	0.2	0.258	0.206	0.21	0.202	0.222
DEPNER	0.285	0.28	0.183	0.206	0.15	0.332	0.085	0.214	0.239	0.267	0.475	0.429	0.262
DEPNERALPHA	0.277	0.278	0.244	0.262	0.144	0.325	0.194	0.21	0.265	0.171	0.255	0.216	0.237
DEPNERR	0.26	0.273	0.182	0.206	0.147	0.328	0.107	0.212	0.239	0.261	0.443	0.396	0.255
DEPNERRALPHA	0.254	0.25	0.222	0.243	0.156	0.303	0.119	0.207	0.241	0.153	0.274	0.207	0.219
DEPNERRSTOP	0.244	0.239	0.169	0.175	0.148	0.324	0.122	0.222	0.246	-	0.501	0.453	0.258
DEPNERRSTOPALPHA	0.218	0.219	0.174	0.205	0.163	0.286	0.123	0.204	0.234	0.125	0.255	0.175	0.198
DEPNERSTOP	0.263	0.25	0.167	0.19	0.155	0.32	0.089	0.203	0.244	0.236	0.506	0.46	0.257
DEPNERSTOPALPHA	0.222	0.217	0.204	0.213	0.146	0.256	0.191	0.183	0.23	0.099	0.309	0.223	0.208
DEPSTOP	0.241	0.228	0.162	0.172	0.154	0.328	0.118	0.227	0.245	0.254	0.532	0.377	0.253
DEPSTOPALPHA	0.215	0.222	0.178	0.201	0.167	0.285	0.124	0.205	0.23	0.132	0.277	0.239	0.206
LEM	0.601	0.599	0.594	0.608	0.308	0.494	0.471	0.498	0.519	0.528	0.477	0.4	0.508
LEMALPHA	0.56	0.566	0.541	0.567	0.115	0.478	0.474	0.463	0.526	0.468	0.402	0.368	0.461
LEMNER	0.597	0.599	0.605	0.616	0.301	0.486	0.455	0.483	0.515	0.506	0.49	0.345	0.5
LEMNERALPHA	0.566	0.568	0.562	0.573	0.322	0.472	0.455	0.46	0.504	0.469	0.459	0.387	0.483
LEMNERR	0.523	0.518	0.525	0.526	0.266	0.458	0.417	0.423	0.478	0.463	0.455	0.432	0.457
LEMNERRALPHA	0.507	0.506	0.498	0.503	0.293	0.448	0.417	0.42	0.466	0.473	0.368	0.363	0.439
LEMNERRSTOP	0.517	0.513	0.498	0.512	0.28	0.447	0.482	0.432	0.478	0.398	0.065	0.15	0.398
LEMNERRSTOPALPHA	0.51	0.507	0.478	0.5	0.301	0.435	0.474	0.427	0.457	0.427	0.158	0.081	0.396
LEMNERSTOP	0.597	0.596	0.596	0.613	0.304	0.481	0.515	0.494	0.52	0.482	0.231	0.163	0.466
LEMNERSTOPALPHA	0.575	0.572	0.551	0.567	0.336	0.467	0.508	0.479	0.505	0.425	0.25	0.198	0.453
LEMPOS	0.574	0.58	0.586	0.588	0.152	0.489	0.353	0.463	0.497	0.532	0.471	0.376	0.472
LEMPOSALPHA	0.564	0.562	0.561	0.559	0.312	0.472	0.356	0.441	0.475	0.435	0.451	0.445	0.469
LEMPOSS	0.562	0.558	0.564	0.565	0.205	0.486	0.388	0.428	0.468	0.438	0.4	0.465	0.461
LEMPOSSALPHA	0.56	0.554	0.54	0.549	0.152	0.475	0.41	0.408	0.463	0.45	0.386	0.402	0.446
LEMPOSSSTOP	0.574	0.579	0.581	0.597	0.27	0.49	0.379	0.466	0.49	0.482	0.462	0.491	0.488
LEMPOSSSTOPALPHA	0.564	0.573	0.554	0.575	0.193	0.475	0.399	0.445	0.476	0.461	0.33	0.396	0.453
LEMPOSTOP	0.593	0.59	0.605	0.602	0.357	0.486	0.447	0.489	0.504	0.43	0.455	0.437	0.5
LEMPOSTOPALPHA	0.577	0.574	0.564	0.577	0.387	0.469	0.462	0.481	0.491	0.484	0.404	0.471	0.495
LEMSTOP	0.604	0.601	0.592	0.61	0.321	0.492	0.525	0.504	0.533	0.468	0.206	0.122	0.465
LEMSTOPALPHA	0.582	0.574	0.57	0.58	0.154	0.475	0.527	0.476	0.525	0.437	0.165	0.119	0.432
POSS	0.196	0.197	0.195	0.199	0.154	0.192	0.164	0.179	0.176	0.007	0.059	0.055	0.148
POSSALPHA	0.198	0.196	0.194	0.208	0.169	0.192	0.156	0.187	0.168	0.012	0.057	0.053	0.149
POSSSTOP	0.19	0.19	0.189	0.184	0.129	0.189	0.152	0.179	0.164	0.003	-0.05	-0.047	0.123
POSSSTOPALPHA	0.186	0.186	0.183	0.185	0.11	0.181	0.149	0.181	0.157	0.01	-0.053	0.003	0.123
TOK	0.611	0.606	0.611	0.623	0.295	0.495	0.439	0.494	0.525	0.498	0.468	0.403	0.506
TOKALPHA	0.571	0.575	0.555	0.582	0.096	0.481	0.46	0.459	0.518	0.474	0.447	0.342	0.463
TOKNER	0.604	0.606	0.606	0.606	0.265	0.483	0.432	0.483	0.519	0.496	0.489	0.44	0.502
TOKNERALPHA	0.574	0.577	0.563	0.587	0.303	0.466	0.431	0.467	0.517	0.466	0.447	0.391	0.482
TOKNERR	0.526	0.526	0.518	0.527	0.263	0.465	0.407	0.408	0.473	0.458	0.455	0.356	0.449
TOKNERRALPHA	0.519	0.515	0.507	0.513	0.304	0.448	0.401	0.41	0.447	0.441	0.411	0.385	0.442
TOKNERRSTOP	0.516	0.514	0.504	0.509	0.276	0.441	0.486	0.418	0.457	0.448	0.194	0.092	0.405
TOKNERRSTOPALPHA	0.503	0.509	0.49	0.494	0.304	0.432	0.472	0.42	0.444	0.387	0.19	0.164	0.401
TOKNERSTOP	0.599	0.605	0.604	0.609	0.311	0.475	0.502	0.491	0.521	0.465	0.239	0.158	0.465
TOKNERSTOPALPHA	0.576	0.58	0.554	0.581	0.337	0.458	0.501	0.463	0.514	0.441	0.109	0.162	0.44
TOKPOS	0.582	0.584	0.588	0.605	0.187	0.491	0.343	0.45	0.484	0.443	0.425	0.478	0.472
TOKPOSALPHA	0.572	0.569	0.564	0.576	0.385	0.476	0.349	0.428	0.469	0.455	0.365	0.448	0.471
TOKPOSS	0.563	0.568	0.566	0.588	0.177	0.491	0.38	0.417	0.466	0.441	0.482	0.498	0.47
TOKPOSSALPHA	0.57	0.565	0.567	0.575	0.101	0.481	0.404	0.415	0.468	0.351	0.374	0.383	0.438
TOKPOSSSTOP	0.579	0.581	0.585	0.599	0.256	0.481	0.386	0.44	0.495	0.417	0.47	0.495	0.482
TOKPOSSSTOPALPHA	0.582	0.58	0.585	0.585	0.369	0.471	0.404	0.471	0.497	0.451	0.415	0.46	0.489
TOKPOSSTOP	0.599	0.597	0.612	0.613	0.359	0.475	0.449	0.503	0.507	0.451	0.506	0.465	0.511
TOKPOSSTOPALPHA	-	-	-	-	-	-	-	-	-	-	-	-	-
TOKSTOP	0.613	0.608	0.596	0.614	0.317	0.486	0.542	0.509	0.531	0.419	0.156	0.114	0.459
TOKSTOPALPHA	0.587	0.586	0.567	0.584	0.148	0.472	0.528	0.483	0.529	0.428	0.237	0.215	0.447
Avgforclf	0.463	0.463	0.445	0.459	0.228	0.411	0.342	0.372	0.407	0.36	0.321	0.285	

Table 17: Japanese dataset: Stability score for classifier-preprocessing pairs

	LBFGS LR	Newton LR	Linear SVM	SGD SVM	KNN	NaïveBayes	Randomforest	AdaBoost	XGBoost	MLP	CNN1	CNN2	Avg for pp
CHNK	0.67	0.663	0.677	0.668	0.289	0.72	0.623	0.47	0.541	0.732	0.745	0.609	0.617
CHNKALPHA	0.686	0.69	0.678	0.662	0.331	0.713	0.641	0.47	0.533	0.715	0.718	0.6	0.62
CHNKNER	0.716	0.721	0.735	0.732	0.349	0.741	0.699	0.639	0.673	0.777	0.75	-	0.685
CHNKNERALPHA	0.72	0.725	0.726	0.717	0.396	0.738	0.685	0.627	0.669	0.738	0.743	-	0.68
CHNKNERR	0.722	0.721	0.724	0.707	0.366	0.727	0.683	0.631	0.667	0.752	0.766	0.667	0.678
CHNKNERRALPHA	0.687	0.696	0.709	0.7	0.366	0.722	0.678	0.615	0.649	0.717	0.743	0.632	0.66
CHNKNERRSTOP	0.709	0.704	0.727	0.699	0.359	0.699	0.687	0.637	0.651	0.758	0.749	0.642	0.668
CHNKNERRSTOPALPHA	0.689	0.682	0.705	0.686	0.379	0.704	0.665	0.607	0.628	0.708	0.695	0.63	0.648
CHNKNERSTOP	0.714	0.715	0.731	0.752	0.383	0.738	0.699	0.643	0.662	0.757	0.766	-	0.687
CHNKNERSTOPALPHA	0.721	0.723	0.728	0.734	0.357	0.728	0.676	0.639	0.659	0.715	0.733	-	0.674
CHNKSTOP	0.661	0.661	0.674	0.671	0.306	0.682	0.608	0.457	0.537	0.73	0.716	0.667	0.614
CHNKSTOPALPHA	0.646	0.651	0.666	0.651	0.327	0.687	0.595	0.439	0.539	0.674	0.699	0.571	0.595
DEP	0.609	0.611	0.619	0.625	0.307	0.621	0.484	0.358	0.456	0.737	0.736	0.546	0.559
DEPALPHA	0.595	0.594	0.614	0.609	0.27	0.613	0.456	0.35	0.444	0.723	0.686	0.588	0.545
DEPNER	0.674	0.682	0.707	0.713	0.331	0.684	0.649	0.625	0.658	0.765	0.727	-	0.656
DEPNERALPHA	0.684	0.683	0.709	0.712	0.179	0.675	0.642	0.631	0.658	0.766	0.73	-	0.643
DEPNERR	0.612	0.617	0.615	0.625	0.279	0.616	0.486	0.336	0.45	0.756	0.747	0.553	0.558
DEPNERRALPHA	0.593	0.594	0.609	0.604	0.274	0.615	0.448	0.342	0.448	0.735	0.735	0.553	0.546
DEPNERRSTOP	0.575	0.569	0.573	0.567	0.343	0.57	0.419	0.324	0.397	0.765	0.736	0.445	0.524
DEPNERRSTOPALPHA	0.509	0.508	0.51	0.516	0.326	0.528	0.354	0.309	0.348	0.73	0.698	0.572	0.492
DEPNERSTOP	0.662	0.663	0.681	0.689	0.414	0.66	0.631	0.611	0.628	0.776	0.727	-	0.649
DEPNERSTOPALPHA	0.665	0.661	0.683	0.672	0.211	0.699	0.632	0.617	0.639	0.757	0.719	-	0.632
DEPSTOP	0.572	0.579	0.576	0.577	0.341	0.573	0.427	0.34	0.405	0.748	0.703	0.619	0.538
DEPSTOPALPHA	0.518	0.518	0.522	0.528	0.33	0.535	0.369	0.327	0.363	0.718	0.716	0.579	0.502
LEM	0.783	0.777	0.8	0.776	0.477	0.803	0.739	0.589	0.683	0.846	0.837	0.692	0.734
LEMALPHA	0.779	0.776	0.8	0.785	0.472	0.793	0.728	0.586	0.682	0.839	0.831	0.784	0.738
LEMNER	0.778	0.769	0.795	0.794	0.523	0.794	0.768	0.705	0.74	0.853	0.845	0.595	0.747
LEMNERALPHA	0.781	0.785	0.807	0.809	0.51	0.798	0.771	0.697	0.746	0.838	0.829	0.744	0.76
LEMNERR	0.765	0.758	0.777	0.767	0.468	0.786	0.752	0.7	0.726	0.825	0.79	0.632	0.729
LEMNERRALPHA	0.77	0.775	0.778	0.772	0.471	0.787	0.749	0.708	0.741	0.816	0.81	0.686	0.739
LEMNERRSTOP	0.763	0.756	0.77	0.769	0.469	0.769	0.772	0.703	0.717	0.82	0.82	0.791	0.743
LEMNERRSTOPALPHA	0.766	0.764	0.772	0.768	0.457	0.769	0.757	0.702	0.735	0.788	0.8	0.75	0.736
LEMNERSTOP	0.769	0.773	0.791	0.802	0.533	0.805	0.774	0.71	0.731	0.856	0.858	0.784	0.766
LEMNERSTOPALPHA	0.78	0.779	0.806	0.806	0.543	0.82	0.783	0.706	0.729	0.826	0.815	0.71	0.759
LEMPOS	0.785	0.786	0.83	0.827	0.677	0.816	0.762	0.691	0.742	0.847	0.845	0.595	0.767
LEMPOSALPHA	0.781	0.768	0.821	0.827	0.674	0.802	0.741	0.675	0.739	0.839	0.845	0.647	0.763
LEMPOSS	0.792	0.8	0.83	0.825	0.533	0.83	0.752	0.671	0.747	0.847	-	0.755	0.762
LEMPOSSALPHA	0.805	0.793	0.83	0.818	0.699	0.827	0.731	0.626	0.718	0.832	0.843	0.544	0.756
LEMPOSSSTOP	0.791	0.79	0.832	0.829	0.491	0.833	0.743	0.688	0.742	0.845	0.856	0.796	0.77
LEMPOSSSTOPALPHA	0.783	0.792	0.816	0.813	0.685	0.822	0.745	0.661	0.713	0.835	0.822	0.673	0.763
LEMPOSTOP	0.779	0.766	0.826	0.824	0.423	0.815	0.74	0.696	0.751	0.846	0.85	0.783	0.758
LEMPOSTOPALPHA	0.774	0.765	0.804	0.817	0.672	0.815	0.733	0.664	0.733	0.817	0.832	0.752	0.765
LEMSTOP	0.771	0.775	0.794	0.778	0.482	0.78	0.755	0.577	0.669	0.84	0.847	0.792	0.738
LEMSTOPALPHA	0.772	0.774	0.788	0.776	0.487	0.796	0.744	0.587	0.668	0.817	0.823	0.774	0.734
POSS	0.607	0.616	0.595	0.581	0.507	0.585	0.604	0.614	0.608	0.621	0.638	0.458	0.586
POSSALPHA	0.61	0.611	0.584	0.552	0.502	0.586	0.606	0.616	0.611	0.613	0.624	0.537	0.588
POSSSTOP	0.607	0.627	0.604	0.587	0.47	0.588	0.616	0.615	0.599	0.607	0.599	0.462	0.582
POSSSTOPALPHA	0.581	0.582	0.54	0.558	0.381	0.569	0.575	0.576	0.562	0.567	0.537	0.455	0.54
TOK	0.777	0.775	0.79	0.785	0.448	0.795	0.737	0.573	0.673	0.845	0.833	0.779	0.734
TOKALPHA	0.781	0.774	0.788	0.784	0.449	0.798	0.73	0.578	0.66	0.827	0.834	0.78	0.732
TOKNER	0.786	0.785	0.812	0.808	0.6	0.817	0.732	0.63	0.699	0.828	0.825	0.662	0.749
TOKNERALPHA	0.773	0.779	0.801	0.794	0.493	0.807	0.762	0.702	0.724	0.846	0.842	0.804	0.761
TOKNERR	0.758	0.756	0.78	0.783	0.463	0.778	0.762	0.692	0.716	0.81	0.828	0.771	0.741
TOKNERRALPHA	0.769	0.765	0.778	0.768	0.441	0.778	0.749	0.703	0.725	0.815	0.803	0.696	0.733
TOKNERRSTOP	0.744	0.746	0.767	0.762	0.453	0.764	0.751	0.688	0.722	0.815	0.829	0.682	0.727
TOKNERRSTOPALPHA	0.761	0.752	0.774	0.77	0.444	0.751	0.749	0.696	0.732	0.802	0.794	0.723	0.729
TOKNERSTOP	0.777	0.774	0.803	0.798	0.494	0.808	0.759	0.7	0.735	0.827	0.83	0.792	0.758
TOKNERSTOPALPHA	0.764	0.763	0.784	0.805	0.5	0.801	0.766	0.696	0.726	0.85	0.848	0.808	0.759
TOKPOS	0.779	0.777	0.801	0.812	0.607	0.813	0.767	0.688	0.727	0.821	0.825	0.742	0.763
TOKPOSALPHA	0.793	0.785	0.819	0.83	0.665	0.81	0.737	0.668	0.74	0.855	0.846	0.655	0.767
TOKPOSS	0.79	0.798	0.821	0.812	0.504	0.831	0.75	0.662	0.725	0.845	-	0.662	0.745
TOKPOSSALPHA	0.756	0.761	0.807	0.819	0.694	0.808	0.707	0.647	0.7	0.845	0.845	0.632	0.752
TOKPOSSSTOP	0.798	0.79	0.807	0.814	0.677	0.826	0.738	0.676	0.739	0.833	0.8	0.621	0.76
TOKPOSSSTOPALPHA	0.794	0.803	0.816	0.822	0.477	0.826	0.728	0.674	0.743	0.845	0.863	0.74	0.761
TOKPOSTOP	0.764	0.773	0.82	0.821	0.557	0.803	0.739	0.685	0.738	0.825	0.835	0.601	0.747
TOKPOSTOPALPHA	-	0.765	0.813	0.821	0.527	0.817	0.732	0.676	0.73	-	-	-	0.735
TOKSTOP	0.776	0.774	0.787	0.778	0.451	0.786	0.737	0.568	0.662	0.844	0.848	0.759	0.731
TOKSTOPALPHA	0.774	0.768	0.787	0.794	0.459	0.802	0.752	0.57	0.659	0.811	0.797	0.66	0.719
Avgforch	0.721	0.721	0.739	0.736	0.453	0.741	0.68	0.603	0.653	0.785	0.779	0.665	

The same preprocessing types, tokens and lemmas with parts of speech and their derivatives, also had high scores for Japanese with logistic regressions and SVMs, although the actual highest performing classifiers were Neural Networks (CNN1, MLP) instead. Tokens and lemmas with named entity recognition also scored high. Based on these results we can say that parts of speech information added to tokens or lemmas should be the preferred feature sets when training as they increase the performance of the most effective classifiers compared to plain tokens or lemmas.

## 6. General Discussion

Overall, the highest performing classifiers were one-layer CNN for Japanese and Verification datasets, SVM for English and Logistic Regression for the Polish dataset. The baseline classifiers, KNN and Naive Bayes, and tree based methods, Random forest, AdaBoost, XGBoost, had mediocre results at best. Using only POS tags as features had extremely low performance with all of the datasets, so they were excluded from the analysis.

An interesting discovery is that using plain tokens rarely had the best performance out of the proposed feature sets as can be seen from Tables 8, 10, 13 and 15. This proves the effectiveness of linguistics-based feature engineering instead of using just words as features. For example, the one-layer CNN's performance with English increased from 0.659 (TOK) F-score to 0.741 (DEPSTOP), indicating that information about structure seems important.

The fact that feature sets with linguistic information managed to outperform the use of tokens clearly shows their potential in feature engineering. For some models, like the one-layer CNN with the English dataset, the increase was truly significant, almost 0.1 F-score using linguistic embeddings. We also discovered that adding parts of speech information to tokens or lemmas produces the most stable and high performance feature sets and they should be preferred over plain tokens or lemmas. This discovery also raises a question: how would linguistic preprocessing affect state-of-the-art pretrained models? For example, RoBERTa [80] fine tuned on the English dataset shows an F-score of 0.797, which is similar to the highest scores by other models. Actually, the best score

by SGD SVM is 0.798 which is slightly higher.

It is interesting that a simple method like SVM can outperform a complex modern text classifier when using the right feature set. This shows that they should not be underestimated as with correct preparations, they can reach similar performance to state-of-the-art models with much less computational power required. Perhaps the performance of RoBERTa could also be increased by feature engineering and applying embeddings with linguistic information. This needs to be explored further in future research as there is clearly a potential point of improvement.

### *6.1. Feature Density*

In general, most of the classifier performances, with the exception of CNNs, had a strong negative correlation with FD. So these classifiers seem to have a weaker performance if a lot of linguistic information is added. These results suggest that for non-CNN classifiers there is no need to consider preprocessings with a high FD, such as chunking or dependencies, as they had a considerably lower performance. The best performance was in most cases between 50-200% of the base FD (TOK) depending on the dataset and classifier.

For CNNs we were expecting a positive correlation with FD, at least with the Japanese dataset, considering the results of the previous research [14]. However, the results were different and we were unable to confirm the positive correlation between classifier performance and FD for the Japanese dataset. Still, in some cases such as the English dataset, there was a very weak positive or no correlation between FD and the classifier performance, with the higher FD datasets performing equally or even slightly better. This could mean that there is potential in the higher FD preprocessing types, namely, dependencies for CNNs. As the FD that had the best performance varied slightly throughout the classifiers and language, more exact ideal feature densities need to be confirmed for each classifier using datasets of different sizes and fields to make as accurate ranking of classifiers by FD as possible.

For the English dataset, the best results were usually obtained by slightly increasing the base FD, while for the Japanese and Polish dataset decreasing the base density tended to work better. This could be because Japanese and especially Polish are a lot

more complex languages compared to English. This is also indicated by the fact that the LD of Japanese and Polish were higher than English.

The clearly visible optimal range of Feature Densities usually held between 50 to 70% of the proposed feature sets, which means that by ignoring the redundant preprocessings, the total training time could be reduced. Preprocessings using Chunking and Dependencies were usually left outside of the range which means that they add too much information for the classifiers to handle. Neural Networks make an exception here with some of the datasets.

We found out that the optimal feature densities tend to lie in specific ranges for all of the datasets. Even though the ranges were different for each classifier, we can still use this information to further decrease the required amount of work. Instead of running all of the experiments at once, we propose first discarding the FD ranges where the overall weakest feature sets according to the characteristics of the classifiers, POS, CHNK for all, and DEP for other than neural classifiers. Then running a subset of the experiments using the generally most effective feature sets, TOK/LEM+POS and variants and also DEP for neural classifiers. Afterwards, we can run more experiments with similar feature densities as the current peak to find the maximum performance.

We can take the Polish dataset with SGDSVM classifier as an example. First, we discard the feature sets that we assume to have a weak performance (POS, CHNK, DEP). Then train the classifier on the datasets that we found the most effective with English and Japanese datasets (TOK/LEM+POS and variants). At this point we have run 16 of the 68 total experiments and gotten an F-score of 0.498 (LEMPOSSTOP), which is already considerably higher than TOK (0.456). If we are not satisfied with the current high score here, we could start running more experiments with similar FD to LEMPOSSTOP. This way we could find a slightly higher score of 0.500 (LEMSTOP), but this would require eight additional experiments if starting from the FDs closest to LEMPOSSTOP. So, we managed to considerably improve the classifier's performance with less than a quarter of the original amount of experiments. We assume that the method could be also applied to other classifiers than those experimented with in this study, including modern models.

## 6.2. Dataset Complexity

From the classification results it can be seen that the dataset with the lowest Lexical Density, the verification dataset, was the easiest to classify. While the highest Lexical Density dataset (Polish) was the hardest. However, the Japanese dataset got higher F-scores compared to English even though it had a higher Lexical Density. This means that natural language dataset complexity cannot be measured by using Lexical Density alone, even if it could be used to measure the complexity of the language itself.

There are some interesting points to note however when considering Feature Density. The relative change in Feature Density when lemmatizing each dataset matches the ranking of the dataset scores. This also applies to dependency patterns, except in the case of the Japanese dataset, which actually becomes the most dense, despite achieving the highest scores. From the results we can see that there are huge differences in classification results even when given datasets of a similar size and topic. This means it is not enough to develop the tools and models with just English in mind. Even though most of the research in NLP is done in English, it is a much less complex language when compared to other more morphologically rich languages, thus state of the art results achieved for English are not representative globally for the task in question, but rather locally, for the task done in this particular language. Additionally, even if it cannot be perfectly quantified by a simple measure like Feature Density, the complexity of languages affects the dataset complexity which in return impact the results of the classifiers applied. Even if a model has a high score in English it does not mean it excels with other languages.

## 6.3. Linguistic Preprocessing

Using token-based preprocessings worked slightly better when classifying the English and Verification datasets. For the Japanese dataset, lemmas performed slightly better compared to tokens and for the Polish dataset, lemmas were clearly superior when compared to using tokens. What causes lemmas to work better for Japanese and Polish is most likely due to linguistic differences. Japanese and Polish are more complex languages than English, which can also be seen as an increase in the base distinct token count and thus feature density. The base feature density for tokens is too high for

classifiers to correctly generalize on the dataset of this size. Lemmatizing, which puts all variously declined and conjugated words back into their dictionary forms, cuts the base feature density, decreasing the complexity of the dataset, and thus increasing the achieved score. This can be seen especially well the case of Polish when the base FD is cut almost in half by lemmatizing, which greatly increases the score.

Chunking and dependency based preprocessings did not perform well compared to tokens or lemmas overall. They showed poor performance with all classifiers and datasets. Only exceptions being with English and Japanese datasets, where dependency based preprocessings showed some potential with the Neural Networks, although still outperformed by tokens or lemmas.

Stopword filtering was to be the one of the most effective preprocessing techniques for both English and Polish. Although for English, the results sometimes fluctuated. For Japanese, stopwords were not effective. This is because in Japanese each word/morpheme tends to contain useful information. This is different from English, where it is easier to filter out words that do not affect the overall meaning of a sentence.

Using parts-of-speech tags was shown to be very effective with both English and especially with Japanese, where it was clearly the most effective preprocessing method.

Merging parts-of-speech information to the words themselves usually achieved a higher score than using them separately as features. This keeps the information directly connected to the word itself, which seems a better option from the point of view of information preservation.

Using Named Entity Recognition information had mixed results, reducing or only slightly increasing the classifier performance with English and Polish datasets. Only giving generally positive results with Japanese dataset. Overall, the performance of using NER seemed clearly inferior compared to stopword filtering or parts-of-speech information. Replacing words with their NER information seems to cause too much information loss and reduces the performance, while attaching NER information to the respective words performed somewhat better.

Filtering out non-alphabetic characters had the poorest performance of all the supplementary preprocessing types and reduced the classifier performance most of the time. Non-alphabetic tokens, which include e.g., punctuation marks, ellipsis, question-

of exclamation marks, seem to carry useful information, at least in the context of cyberbullying detection, as removing them reduced the performance comparing to plain tokens due to information loss, which should be taken into account in future research.

In most cases, preprocessing had a considerable positive effect on the scores. We were able to find preprocessing methods that outperformed the base method of using pure tokens most of the time, which shows the potential of using linguistic information as a method for increasing classifier performance. Based on the experiments, we suggest omitting pure POS based and CHNK based feature sets for all classifiers due to their overall poor performance. Also, dependency based feature sets should be omitted for non-neural classifiers.

Only in the case of the verification dataset, which was found to be most likely too simple of a learning problem, the preprocessing methods were shown to be ineffective and had next to no impact on the results. The reason for this could be the simplicity of the learning problem. Most of the classifiers probably scored close to the maximum achievable score and thus the effects of extra preprocessing vanished. In the future, the effects of linguistic preprocessing should be also confirmed with state-of-the-art pretrained language models.

#### *6.4. Effect on Cyberbullying Detection*

Leaving out the weaker feature sets and classifiers can be used to reduce time and effort when creating cyberbullying detection systems. The savings brought by the method do not only help to protect the environment but also allow quicker and more efficient development of CB detection systems. This is crucial as each day countless number of people become the victims of cyberbullies.

According to our experiments, although there were differences with F-scores for individual preprocessing types, the highest stability score datasets, tokens and lemmas with parts of speech information and their derivatives, were similar for both English and Japanese. The difference being the effectiveness of named entity recognition for Japanese. Also, we can say that from the applied classifiers, only SVMs, logistic regression and neural network models should be considered when dealing with CB.

The fact that the CNN's performance increased drastically when using dependency

information instead of plain tokens with the English dataset could hint that structure and syntactic relations between words could be important when classifying CB entries. This needs to be explored further in the future.

Also, SVM (max F1=0.798), MLP (max F1=0.796) and Logistic Regression (max F1=0.793) achieved similar scores to RoBERTa (F1=0.797) on the English dataset, with SGD SVM actually slightly outperforming it with one of the feature sets (TOKPOS). This shows that the method can not only be used to save resources and time, but also to increase the performance of cyberbullying detection models.

### 6.5. *Environmental Effect*

To see the concrete environmental effect of the method, we take a look at the English dataset, where the savings in power when training CNN were around 21 kWh. According to European Environmental Agency (EEA) <sup>6</sup>, the average greenhouse gas emissions from generating electricity was at 275 g CO<sub>2</sub>e/kWh in 2019. This means the emissions generated by the training of CNN could be estimated at around 5.8 kg CO<sub>2</sub>e. For comparison, the average new passenger car in the European Union in 2019, according to EEA, emits around 122 g CO<sub>2</sub>e per kilometer driven. This means that leaving out the weaker feature sets by utilizing FD could save as much as driving a new car for almost 50 kilometers in greenhouse gas emissions when training a simple CNN model.

Although the effect does not seem that overwhelming, one has to take into account that the models tested here were quite simple. Assuming our hypothesis, if the method would be applied to more resource intensive modern classifiers, the savings would become considerably more significant.

### 6.6. *Future Research*

The usage of high Feature Density preprocessings, namely dependency parsing, showed potential with CNNs with English and Japanese datasets and needs to be confirmed with larger datasets in the future. Also, more exact ideal feature densities need to be confirmed for each classifier and language by using datasets of different sizes to make the ranking of classifiers by FD as accurate as possible.

---

<sup>6</sup><https://www.eea.europa.eu/>

Due to the linguistic complexity of the Polish language, we would most likely require more data to make the use of neural networks viable. The effect of FD with neural networks in Polish needs to be explored further using a larger dataset in the future.

In order to use FD as a measure to estimate the complexity of a dataset, a more in depth study with more datasets of different sizes, topics and languages is required. Even if the complexity of languages cannot be perfectly quantified by a simple measure like Feature Density, there could be other measures or a combination of them that might be useful in better ranking datasets in terms of complexity.

Linguistic preprocessings had a positive effect on the scores, which shows their potential as a method for increasing classifier performance. In the future, we have to pretrain the linguistic embeddings on a larger corpus instead of relying on a small dataset. The effects of linguistic preprocessing should be also confirmed with other models, such as recurrent neural networks and the state-of-the-art pretrained language models like BERT.

## **7. Conclusions**

In this paper we presented our research on Feature Density and linguistically-backed preprocessing methods, applied in cyberbullying detection. Both concepts are relatively novel to the field. We studied the effectiveness of Feature Density using a variety of linguistically-backed feature preprocessing methods to estimate dataset complexity and classifier performance.

From the results we concluded that most of the classifier performances, excluding CNNs, had a strong negative correlation with FD, which means weaker performance if a lot of linguistic information is added. Depending on the dataset and classifier, the best performance was in most cases between 50-200% of the base FD (TOK). For CNNs, we were unable confirm the positive correlation between classifier performance and FD for the Japanese dataset as there was usually only a very weak positive or no correlation between FD and the classifier performance. Still, there could be potential in the higher FD preprocessing types for CNNs. We also discovered that the best results for English

were usually obtained by slightly increasing the base feature density, while for the Japanese and Polish dataset it was the opposite. The reason behind this is probably due to the difference in language complexity of English compared to Japanese and Polish.

The results indicated that natural language dataset complexity cannot be measured by using Lexical Density or Feature Density alone, even if it could be used to measure the complexity of the language itself. However, we found out that the relative change in Feature Density when lemmatizing each dataset matches the ranking of the dataset scores. We also noticed that even with datasets of similar sizes and topics, but with different languages, there can be huge differences in classification results. This means it is not enough to develop the tools and models with just English in mind, as it is a much less complex language when compared to others like Japanese or Polish. Which means state-of-the-art results achieved for English are not representative globally for the task in question, but rather locally, for the task done in this particular language.

Using tokens worked slightly better for English while lemmas were better for Japanese and especially Polish. The reason being most likely related to the complexity of the language, as the base feature density for tokens is too high in Japanese and Polish for classifiers to correctly generalize on the dataset of this size and thus lowering the complexity by lemmatizing resulted in an increased performance. Chunking and dependencies generally had a poor performance but dependencies still showed some potential with neural networks. From the supplementary preprocessing methods, stopwords and POS tagging generally resulted in positive results, except for the questionable use of stopwords with the Japanese dataset. NER showed mixed results, being usable mainly with Japanese while alphabetic filtering had poor results with all of the datasets due to non-alphabetic tokens also carrying useful information, at least in the context of cyberbullying detection. In general, the preprocessing had a positive effect on the scores which proves that using linguistically-backed preprocessing can be used to increase classifier performance, at least in the context of cyberbullying. We also discovered that parts of speech information can be used with tokens or lemmas to produce the most stable and high performance feature sets.

We proposed that the method can be applied by first discarding the FD ranges where the overall weakest feature sets are (POS, CHNK, etc.). Then running a small subset

of the experiments with a set interval between preprocessing type feature densities and iterate around the most probable peak to find the maximum performance. We concluded that the method could save as much as driving a new car for almost 50 kilometers in greenhouse gas emissions when training a simple CNN model with the English dataset by discarding the weakest feature sets. We assume that the method could also be applied to more modern models than those used in this study.

In the future, the usage of high FD preprocessings and the potential of neural networks needs to be confirmed with larger datasets. We also need to find more exact ideal feature densities for each classifier and language by using datasets of different sizes to make the performance estimation as accurate as possible. The effectiveness of FD as a measure for estimating dataset complexity needs to be further explored with datasets of different sizes, topics and languages and even if the complexity cannot be perfectly quantified by a simple measure like Feature Density, there could be other measures for ranking the datasets. Lastly, the positive effects of linguistic preprocessing need to be confirmed in other fields and with state-of-the-art models.

## References

- [1] D. Michie, D. J. Spiegelhalter, C. C. Taylor, J. Campbell (Eds.), *Machine Learning, Neural and Statistical Classification*, Ellis Horwood, USA, 1994.
- [2] A. Basavanhally, S. Doyle, A. Madabhushi, Predicting classifier performance with a small training set: Applications to computer-aided diagnosis and prognosis, in: *2010 IEEE International Symposium on Biomedical Imaging: From Nano to Macro*, 2010, pp. 229–232.
- [3] J. Gama, P. Brazdil, Characterization of classification algorithms, in: C. Pinto-Ferreira, N. J. Mamede (Eds.), *Progress in Artificial Intelligence*, Springer Berlin Heidelberg, Berlin, Heidelberg, 1995, pp. 189–200.
- [4] E. Strubell, A. Ganesh, A. McCallum, Energy and policy considerations for deep learning in NLP, in: *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, Association for Computational Linguistics, Florence,

- Italy, 2019, pp. 3645–3650. doi:10.18653/v1/P19-1355.  
URL <https://www.aclweb.org/anthology/P19-1355>
- [5] R. Schwartz, J. Dodge, N. A. Smith, O. Etzioni, Green AI, CoRR abs/1907.10597.  
arXiv:1907.10597.  
URL <http://arxiv.org/abs/1907.10597>
- [6] J. W. Patchin, S. Hinduja, Bullies move beyond the schoolyard: A preliminary look at cyberbullying, *Youth Violence and Juvenile Justice* 4 (2) (2006) 148–169. arXiv:<https://doi.org/10.1177/1541204006286288>, doi:10.1177/1541204006286288.  
URL <https://doi.org/10.1177/1541204006286288>
- [7] G. Bull, The always-connected generation, *Learning and Leading with Technology* 38 (2010) 28–29.
- [8] S. Hinduja, J. Patchin, Bullying, cyberbullying, and suicide, *Archives of suicide research : official journal of the International Academy for Suicide Research* 14 (2010) 206–21. doi:10.1080/13811118.2010.494133.
- [9] MEXT, ‘netto-jō no ijime’ ni kansuru taiō manyuaru jirei shū (gakkō, kyōin muke) [“bullying on the net” manual for handling and collection of cases (for schools and teachers)] (in japanese), Ministry of Education, Culture, Sports, Science and Technology (MEXT).  
URL [http://www.mext.go.jp/b\\_menu/houdou/20/11/08111701/001.pdf](http://www.mext.go.jp/b_menu/houdou/20/11/08111701/001.pdf)
- [10] M. Ptaszynski, P. Dybala, T. Matsuba, F. Masui, R. Rzepka, K. Araki, Machine learning and affect analysis against cyber-bullying, in: *Linguistic And Cognitive Approaches To Dialog Agents Symposium*, 2010.
- [11] M. Ptaszynski, P. Dybala, T. Matsuba, F. Masui, R. Rzepka, K. Araki, Y. Momouchi, In the service of online order: Tackling cyber-bullying with machine learning and affect analysis, *International Journal of Computational Linguistics Research* 1 (3) (2010) 135–154.

- [12] K. Dinakar, B. Jones, C. Havasi, H. Lieberman, R. Picard, Common sense reasoning for detection, prevention, and mitigation of cyberbullying, *ACM Transactions on Interactive Intelligent Systems* 2. doi:10.1145/2362394.2362400.
- [13] M. Ptaszynski, F. Masui, T. Nitta, S. Hatakeyama, Y. Kimura, R. Rzepka, K. Araki, Sustainable cyberbullying detection with category-maximized relevance of harmful phrases and double-filtered automatic optimization, *International Journal of Child-Computer Interaction* 8. doi:10.1016/j.ijcci.2016.07.002.
- [14] M. Ptaszynski, J. K. K. Eronen, F. Masui, Learning deep on cyberbullying is always better than brute force, in: *LaCATODA2017 CEUR Workshop Proceedings, 2017*, p.3-10.  
URL <http://ceur-ws.org/Vol-1926/paper1.pdf>
- [15] A. A. Rahane, A. Subramanian, Measures of complexity for large scale image datasets, 2020 International Conference on Artificial Intelligence in Information and Communication (ICAIIIC)doi:10.1109/icaaiic48513.2020.9065274.  
URL <http://dx.doi.org/10.1109/ICAIIIC48513.2020.9065274>
- [16] A. Cutler, Lexical complexity and sentence processing, in: G. B. Flores d'Arcais, R. J. Jarvella (Eds.), *The Process of Language Understanding*, Chichester: Wiley, 1983, Ch. 2, pp. 43-79.
- [17] K. Rayner, S. A. Duffy, Lexical complexity and fixation times in reading: Effects of word frequency, verb complexity, and lexical ambiguity, *Memory & cognition* 14 (3) (1986) 191-201.
- [18] T. Fellner, M. Apple, Developing writing fluency and lexical complexity with blogs, *The jalt call Journal* 2 (1) (2006) 15-26.
- [19] M. D. Johnson, L. Mercado, A. Acevedo, The effect of planning sub-processes on L2 writing fluency, grammatical complexity, and lexical complexity, *Journal of Second Language Writing* 21 (3) (2012) 264-282.

- [20] J. Ure, Lexical density and register differentiation, *Applications of Linguistics* (1971) 443–452.
- [21] F. Ferreira, Effects of length and syntactic complexity on initiation times for prepared utterances, *Journal of Memory and Language* 30 (2) (1991) 210–233.
- [22] S. M. Sotillo, Discourse functions and syntactic complexity in synchronous and asynchronous communication, *Language learning & technology* 4 (1) (2000) 77–110.
- [23] X. Lu, Automatic analysis of syntactic complexity in second language writing, *International journal of corpus linguistics* 15 (4) (2010) 474–496.
- [24] M. Ptaszynski, G. Leliwa, M. Piech, A. Smywiński-Pohl, Cyberbullying detection – technical report 2/2018, department of computer science agh, university of science and technology (2018). [arXiv:1808.00926](https://arxiv.org/abs/1808.00926).
- [25] K. Reynolds, A. Edwards, L. Edwards, Using machine learning to detect cyberbullying, *Proceedings - 10th International Conference on Machine Learning and Applications, ICMLA 2011* 2. doi:10.1109/ICMLA.2011.152.
- [26] A. Basavanthally, S. Viswanath, A. Madabhushi, Predicting classifier performance with limited training data: Applications to computer-aided diagnosis in breast and prostate cancer, *PLOS ONE* 10 (5) (2015) 1–18. doi:10.1371/journal.pone.0117900.  
URL <https://doi.org/10.1371/journal.pone.0117900>
- [27] M. Fernández-Delgado, E. Cernadas, S. Barro, D. Amorim, Do we need hundreds of classifiers to solve real world classification problems?, *The journal of machine learning research* 15 (1) (2014) 3133–3181.
- [28] M. Johnson, P. Anderson, M. Dras, M. Steedman, Predicting accuracy on large datasets from smaller pilot data, in: *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, Association for Computational Linguistics, Melbourne, Australia, 2018, pp. 450–455. doi:

10.18653/v1/P18-2072.

URL <https://www.aclweb.org/anthology/P18-2072>

[29] A. Joulin, E. Grave, P. Bojanowski, T. Mikolov, Bag of tricks for efficient text classification, *CoRR abs/1607.01759*. arXiv:1607.01759.

URL <http://arxiv.org/abs/1607.01759>

[30] R. D. King, C. Feng, A. Sutherland, Statlog: Comparison of classification algorithms on large real-world problems, *Applied Artificial Intelligence* 9 (3) (1995) 289–333. arXiv:<https://doi.org/10.1080/08839519508945477>, doi:10.1080/08839519508945477.

URL <https://doi.org/10.1080/08839519508945477>

[31] H. Bensusan, A. Kalousis, Estimating the predictive accuracy of a classifier, in: L. De Raedt, P. Flach (Eds.), *Machine Learning: ECML 2001*, Springer Berlin Heidelberg, Berlin, Heidelberg, 2001, pp. 25–36.

[32] M. Blachnik, Instance selection for classifier performance estimation in meta learning, *Entropy* 19 (2017) 583. doi:10.3390/e19110583.

[33] W. Kusters, *Linguistic complexity*, Netherlands Graduate School of Linguistics, 2003.

[34] H. Akaike, A new look at statistical model identification, *IEEE Transactions on Automatic Control* 19 (1974) 716–723.

[35] G. Schwarz, Estimating the dimension of a model, *Annals of Statistics* 6 (1978) 461–464.

[36] J. Devlin, M.-W. Chang, K. Lee, K. Toutanova, Bert: Pre-training of deep bidirectional transformers for language understanding (2018). arXiv:1810.04805.

[37] P. Wang, Y. Qian, F. K. Soong, L. He, H. Zhao, Part-of-speech tagging with bidirectional long short-term memory recurrent neural network, arXiv preprint arXiv:1510.06168.

- [38] H. Demir, A. Özgür, Improving named entity recognition for morphologically rich languages using word embeddings, in: 2014 13th International Conference on Machine Learning and Applications, IEEE, 2014, pp. 117-122.
- [39] T. Schuster, O. Ram, R. Barzilay, A. Globerson, Cross-lingual alignment of contextual word embeddings, with applications to zero-shot dependency parsing, arXiv preprint arXiv:1902.09492.
- [40] O. Levy, Y. Goldberg, Dependency-based word embeddings, in: ACL, 2014.
- [41] A. Komninos, S. Manandhar, Dependency based embeddings for sentence classification tasks, in: Proceedings of the 2016 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Association for Computational Linguistics, San Diego, California, 2016, pp. 1490-1500. doi:10.18653/v1/N16-1175.  
URL <https://www.aclweb.org/anthology/N16-1175>
- [42] R. Cotterell, H. Schütze, Morphological word embeddings, CoRR abs/1907.02423. arXiv:1907.02423.  
URL <http://arxiv.org/abs/1907.02423>
- [43] J. Pyżalski, From cyberbullying to electronic aggression: typology of the phenomenon, *Emotional and Behavioural Difficulties* 17 (3-4) (2012) 305-317. arXiv:<https://www.tandfonline.com/doi/pdf/10.1080/13632752.2012.704319>, doi:10.1080/13632752.2012.704319.  
URL <https://www.tandfonline.com/doi/abs/10.1080/13632752.2012.704319>
- [44] S. O. Sood, E. F. Churchill, J. Antin, Automatic identification of personal insults on social news sites, *J. Am. Soc. Inf. Sci. Technol.* 63 (2) (2012) 270-285. doi:10.1002/asi.21690.  
URL <https://doi.org/10.1002/asi.21690>
- [45] A. Kontostathis, K. Reynolds, A. Garron, L. Edwards, Detecting cyberbullying: Query terms and techniques, in: Proceedings of the 5th Annual ACM Web Science

Conference, WebSci'13, Association for Computing Machinery, New York, NY, USA, 2013, p. 195–204. doi : 10.1145/2464464.2464499.

URL <https://doi.org/10.1145/2464464.2464499>

[46] A. Cano Basave, K. Liu, J. Zhao, A weakly supervised bayesian model for violence detection in social media., in: 6th International Joint Conference on Natural Language Processing (IJCNLP), 2013.

[47] T. Nitta, F. Masui, M. Ptaszynski, Y. Kimura, R. Rzepka, K. Araki, Detecting cyberbullying entries on informal school websites based on category relevance maximization, in: Proceedings of the Sixth International Joint Conference on Natural Language Processing, Asian Federation of Natural Language Processing, Nagoya, Japan, 2013, pp. 579–586.

URL <https://www.aclweb.org/anthology/I13-1066>

[48] P.D. Turney, M. L. Littman, Unsupervised learning of semantic orientation from a hundred-billion-word corpus, CoRR cs.LG/0212012.

URL <http://arxiv.org/abs/cs/0212012>

[49] S. Hatakeyama, F. Masui, M. Ptaszynski, K. Yamamoto, Statistical analysis of automatic seed word acquisition to improve harmful expression extraction in cyberbullying detection, International Journal of Engineering and Technology Innovation 6(2) (2016) 165–172.

[50] G. Sarna, M. Bhatia, Content based approach to find the credibility of user in social networks: an application of cyberbullying, Int. J. Mach. Learn. and Cyber 8 (2015) 677–689. doi : 10.1007/s13042-015-0463-1.

[51] M. Ptaszynski, F. Masui, Y. Kimura, R. Rzepka, K. Araki, Brute force works best against bullying, in: Proceedings of the 2015 International Conference on Constraints and Preferences for Configuration and Recommendation and Intelligent Techniques for Web Personalization - Volume 1440, CPCR+ITWP'15, CEUR-WS.org, Aachen, DEU, 2015, p. 28–29.

- [52] M. Ptaszynski, F. Masui, Y. Kimura, R. Rzepka, K. Araki, Extracting patterns of harmful expressions for cyberbullying detection, in: 7th Language and Technology Conference (LTC'15), The First Workshop on Processing Emotions, 2015.
- [53] S. Agrawal, A. Awekar, Deep learning for detecting cyberbullying across multiple social media platforms, CoRR abs/1801.06482. arXiv:1801.06482.  
URL <http://arxiv.org/abs/1801.06482>
- [54] M. Dadvar, K. Eckert, Cyberbullying detection in social networks using deep learning based models, in: International Conference on Big Data Analytics and Knowledge Discovery, Springer, 2020, pp. 245-255.
- [55] J. Yadav, D. Kumar, D. Chauhan, Cyberbullying detection using pre-trained bert model, in: 2020 International Conference on Electronics and Sustainable Communication Systems (ICESC), 2020, pp. 1096-1100. doi:10.1109/ICESC48915.2020.9155700.
- [56] V. Balakrishnan, S. Khan, H. R. Arabnia, Improving cyberbullying detection using twitter users' psychological features and machine learning, *Computers & Security* 90, Article 101710. doi:<https://doi.org/10.1016/j.cose.2019.101710>.  
URL <https://www.sciencedirect.com/science/article/pii/S0167404819302470>
- [57] H. Rosa, N. Pereira, R. Ribeiro, P. C. Ferreira, J. P. Carvalho, S. Oliveira, L. Coheur, P. Paulino, A. V. Simão, I. Trancoso, Automatic cyberbullying detection: A systematic review, *Computers in Human Behavior* 93 (2019) 333-345. doi:<https://doi.org/10.1016/j.chb.2018.12.021>.  
URL <https://www.sciencedirect.com/science/article/pii/S0747563218306071>
- [58] P. P. Roy, J. T. Leonard, K. Roy, Exploring the impact of size of training sets for the development of predictive qsar models, *Chemo-metrics and Intelligent Laboratory Systems* 90 (1) (2008) 31 - 42.

doi:<https://doi.org/10.1016/j.chemolab.2007.07.004>.

URL <http://www.sciencedirect.com/science/article/pii/S0169743907001529>

- [59] C. Catal, B. Diri, Investigating the effect of dataset size, metrics sets, and feature selection techniques on software fault prediction problem, *Information Sciences* 179 (8) (2009) 1040 – 1058. doi:<https://doi.org/10.1016/j.ins.2008.12.001>.  
URL <http://www.sciencedirect.com/science/article/pii/S0020025508005173>
- [60] J. G. A. Barbedo, Impact of dataset size and variety on the effectiveness of deep learning and transfer learning for plant disease classification, *Computers and Electronics in Agriculture* 153 (2018) 46 – 53. doi:<https://doi.org/10.1016/j.compag.2018.08.013>.  
URL <http://www.sciencedirect.com/science/article/pii/S0168169918304617>
- [61] W. Chen, Y. Su, Y. Shen, Z. Chen, X. Yan, W. Wang, How large a vocabulary does text classification need? a variational approach to vocabulary selection, arXiv preprint arXiv:1902.10339.
- [62] S. Ruder, I. Vulić, A. Søgaard, A survey of cross-lingual word embedding models, *Journal of Artificial Intelligence Research* 65 (2019) 569–631.
- [63] M. Ptaszynski, F. Masui, Automatic Cyberbullying Detection: Emerging Research and Opportunities, IGI Global, 2018.
- [64] S. Hinduja, J. W. Patchin, *Bullying beyond the schoolyard: Preventing and responding to cyberbullying*, Corwin Press, 2014.
- [65] M. Ptaszynski, A. Pieciukiewicz, P. Dybała, Results of the poleval 2019 shared task 6: First dataset and open shared task for automatic cyberbullying detection in polish twitter, in: *PolEval 2019 Workshop*, 2019, pp. 89–110.

- [66] M. Ptaszynski, P. Lempa, F. Masui, Y. Kimura, R. Rzepka, K. Araki, M. Wroczynski, G. Leliwa, Brute-force sentence pattern extortion from harmful messages for cyberbullying detection, *Journal of the Association for Information Systems* 20:8. doi:10.17705/1jais.00562.  
URL <https://aisel.aisnet.org/jais/vol20/iss8/4>
- [67] M. Honnibal, I. Montani, spaCy 2: Natural language understanding with Bloom embeddings, convolutional neural networks and incremental parsing, to appear (2017).
- [68] F. Chollet, et al., Keras, <https://keras.io> (2015).
- [69] C. Cortes, V. Vapnik, Support-vector networks, *Machine Learning* 20 (3) (1995) 273–297. doi:10.1007/BF00994018.  
URL <https://doi.org/10.1007/BF00994018>
- [70] L. Breiman, Random forests, *Machine Learning* 45 (1) (2001) 5–32. doi:10.1023/A:1010933404324.  
URL <https://doi.org/10.1023/A:1010933404324>
- [71] T. Hastie, R. Tibshirani, J. Friedman, *The Elements of Statistical Learning*, Springer, 2013.
- [72] Y. Freund, R. E. Schapire, A decision-theoretic generalization of on-line learning and an application to boosting, *Journal of Computer and System Sciences* 55 (1) (1997) 119 – 139. doi:<https://doi.org/10.1006/jcss.1997.1504>.  
URL <http://www.sciencedirect.com/science/article/pii/S002200009791504X>
- [73] T. Chen, C. Guestrin, Xgboost: A scalable tree boosting system, *CoRR* abs/1603.02754. arXiv:1603.02754.  
URL <http://arxiv.org/abs/1603.02754>
- [74] G. E. Hinton, N. Srivastava, A. Krizhevsky, I. Sutskever, R. Salakhutdinov, Improving neural networks by preventing co-adaptation of feature detectors, *CoRR*

abs/1207.0580. arXiv:1207.0580.

URL <http://arxiv.org/abs/1207.0580>

- [75] R. Collobert, J. Weston, A unified architecture for natural language processing: Deep neural networks with multitask learning, in: Proceedings of the 25th International Conference on Machine Learning, 2008, pp. 160–167. doi:10.1145/1390156.1390177.
- [76] Y. Kim, Convolutional neural networks for sentence classification, in: Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing (EMNLP), Association for Computational Linguistics, Doha, Qatar, 2014, pp. 1746–1751. doi:10.3115/v1/D14-1181.  
URL <https://www.aclweb.org/anthology/D14-1181>
- [77] D. Scherer, A. Müller, S. Behnke, Evaluation of pooling operations in convolutional architectures for object recognition, in: ICANN 2010 Proceedings, Part III, 2010, pp. 92–101. doi:10.1007/978-3-642-15825-4\_10.
- [78] Y. LeCun, L. Bottou, G. Orr., K.-R. Muller, Efficient BackProp, Springer Berlin Heidelberg, Berlin, Heidelberg, 2012, pp. 9–48. doi:10.1007/978-3-642-35289-8\_3.  
URL [https://doi.org/10.1007/978-3-642-35289-8\\_3](https://doi.org/10.1007/978-3-642-35289-8_3)
- [79] N. Chawla, K. Bowyer, L. Hall, P. Kegelmeyer, Smote: Synthetic minority oversampling technique, J. Artif. Int. Res. 16(1) (2002) 321–357.
- [80] Y. Liu, M. Ott, N. Goyal, J. Du, M. Joshi, D. Chen, O. Levy, M. Lewis, L. Zettlemoyer, V. Stoyanov, Roberta: A robustly optimized bert pretraining approach, arXiv preprint arXiv:1907.11692.

## Appendix A. F-score and Standard Error of Classifier-Preprocessing Pairs

Table A.18: English dataset: F-scores and average standard error for classifier-preprocessing pairs ( $F1 \pm \text{stderr}$ )

	LBFGS LR	Newton LR	Linear SVM	SGD SVM	KNN	NaiveBayes	RandomForest
CHNK	0.727±0.234	0.726±0.242	0.718±0.257	0.736±0.237	0.570±0.390	0.674±0.247	0.613±0.366
CHNKALPHA	0.684±0.262	0.681±0.259	0.669±0.266	0.683±0.263	0.607±0.339	0.643±0.263	0.647±0.324
CHNKNER	0.718±0.238	0.723±0.236	0.721±0.248	0.737±0.234	0.582±0.385	0.669±0.248	0.603±0.379
CHNKNERALPHA	0.675±0.262	0.676±0.260	0.663±0.271	0.663±0.267	0.599±0.341	0.641±0.262	0.618±0.336
CHNKNERR	0.688±0.257	0.695±0.258	0.702±0.265	0.699±0.257	0.580±0.380	0.653±0.255	0.603±0.368
CHNKNERRALPHA	0.660±0.269	0.663±0.268	0.651±0.277	0.657±0.276	0.603±0.335	0.626±0.267	0.616±0.343
CHNKNERRSTOP	0.686±0.265	0.684±0.267	0.684±0.274	0.694±0.264	0.577±0.378	0.629±0.259	0.635±0.325
CHNKNERRSTOPALPHA	0.618±0.280	0.617±0.282	0.591±0.288	0.607±0.287	0.404±0.233	0.598±0.276	0.620±0.304
CHNKNERSTOP	0.724±0.241	0.724±0.241	0.715±0.254	0.724±0.241	0.582±0.389	0.663±0.251	0.635±0.339
CHNKNERSTOPALPHA	0.666±0.261	0.661±0.265	0.644±0.279	0.668±0.260	0.386±0.218	0.615±0.268	0.659±0.301
CHNKSTOP	0.722±0.241	0.721±0.239	0.711±0.256	0.723±0.239	0.577±0.379	0.670±0.247	0.667±0.308
CHNKSTOPALPHA	0.629±0.277	0.637±0.274	0.606±0.286	0.619±0.277	0.395±0.226	0.608±0.271	0.649±0.305
DEP	0.617±0.354	0.619±0.349	0.568±0.398	0.587±0.381	0.243±0.094	0.617±0.280	0.536±0.435
DEPALPHA	0.609±0.349	0.612±0.346	0.588±0.372	0.601±0.356	0.314±0.156	0.600±0.288	0.545±0.416
DEPNER	0.624±0.339	0.621±0.341	0.574±0.391	0.585±0.379	0.242±0.092	0.611±0.279	0.528±0.443
DEPNERALPHA	0.585±0.308	0.589±0.311	0.561±0.317	0.579±0.317	0.213±0.069	0.607±0.282	0.578±0.384
DEPNERR	0.610±0.350	0.614±0.341	0.571±0.389	0.587±0.381	0.241±0.094	0.611±0.283	0.533±0.426
DEPNERRALPHA	0.606±0.352	0.605±0.355	0.589±0.367	0.602±0.359	0.312±0.156	0.596±0.293	0.537±0.418
DEPNERRSTOP	0.602±0.358	0.599±0.360	0.564±0.395	0.568±0.393	0.273±0.125	0.615±0.291	0.543±0.421
DEPNERRSTOPALPHA	0.584±0.366	0.584±0.365	0.560±0.386	0.581±0.376	0.386±0.223	0.599±0.313	0.544±0.421
DEPNERSTOP	0.611±0.348	0.602±0.352	0.564±0.397	0.576±0.386	0.274±0.119	0.604±0.284	0.527±0.438
DEPNERSTOPALPHA	0.535±0.313	0.531±0.314	0.523±0.319	0.523±0.310	0.297±0.151	0.543±0.287	0.563±0.372
DEPSTOP	0.606±0.365	0.595±0.367	0.562±0.400	0.571±0.399	0.276±0.122	0.616±0.288	0.544±0.426
DEPSTOPALPHA	0.586±0.371	0.587±0.365	0.564±0.386	0.588±0.387	0.388±0.221	0.594±0.309	0.539±0.415
LEM	0.781±0.180	0.786±0.187	0.784±0.190	0.790±0.182	0.634±0.326	0.715±0.221	0.724±0.253
LEMALPHA	0.755±0.195	0.764±0.198	0.745±0.204	0.765±0.198	0.294±0.179	0.703±0.225	0.718±0.244
LEMNER	0.784±0.187	0.782±0.183	0.787±0.182	0.792±0.176	0.631±0.330	0.710±0.224	0.716±0.261
LEMNERALPHA	0.763±0.197	0.764±0.196	0.765±0.203	0.767±0.194	0.637±0.315	0.699±0.227	0.710±0.255
LEMNERR	0.740±0.217	0.737±0.219	0.742±0.217	0.740±0.214	0.601±0.335	0.692±0.234	0.697±0.280
LEMNERRALPHA	0.729±0.222	0.728±0.222	0.725±0.227	0.725±0.222	0.614±0.321	0.685±0.227	0.699±0.282
LEMNERRSTOP	0.737±0.220	0.734±0.221	0.726±0.228	0.732±0.220	0.609±0.329	0.682±0.235	0.727±0.245
LEMNERRSTOPALPHA	0.732±0.222	0.732±0.225	0.714±0.236	0.727±0.227	0.624±0.323	0.674±0.239	0.723±0.249
LEMNERSTOP	0.782±0.185	0.783±0.187	0.782±0.186	0.792±0.179	0.634±0.330	0.706±0.225	0.745±0.230
LEMNERSTOPALPHA	0.770±0.195	0.767±0.195	0.752±0.201	0.767±0.200	0.640±0.304	0.693±0.226	0.739±0.231
LEMPOSS	0.778±0.204	0.778±0.198	0.788±0.202	0.790±0.202	0.517±0.365	0.711±0.222	0.663±0.310
LEMPOSSALPHA	0.768±0.204	0.772±0.210	0.772±0.211	0.768±0.209	0.522±0.210	0.700±0.228	0.654±0.298
LEMPOSSSTOP	0.764±0.202	0.765±0.207	0.769±0.205	0.767±0.202	0.564±0.359	0.713±0.227	0.658±0.270
LEMPOSSALPHA	0.760±0.200	0.758±0.204	0.753±0.213	0.758±0.209	0.406±0.254	0.705±0.230	0.669±0.259
LEMPOSSSTOP	0.763±0.189	0.766±0.187	0.767±0.186	0.774±0.177	0.566±0.296	0.709±0.219	0.630±0.327
LEMPOSSSTOPALPHA	0.762±0.198	0.766±0.193	0.748±0.194	0.765±0.190	0.490±0.297	0.702±0.227	0.713±0.314
LEMSTOP	0.780±0.187	0.781±0.191	0.788±0.183	0.788±0.186	0.642±0.285	0.708±0.222	0.708±0.261
LEMSTOPALPHA	0.770±0.193	0.769±0.195	0.766±0.202	0.768±0.191	0.669±0.282	0.696±0.227	0.718±0.256
LEMSTOP	0.787±0.183	0.786±0.185	0.784±0.192	0.791±0.181	0.641±0.320	0.713±0.221	0.754±0.229
LEMSTOPALPHA	0.772±0.190	0.766±0.192	0.766±0.196	0.773±0.193	0.357±0.203	0.702±0.227	0.747±0.220
POSS	0.487±0.291	0.487±0.290	0.488±0.293	0.491±0.292	0.522±0.368	0.498±0.306	0.556±0.392
POSSALPHA	0.488±0.290	0.486±0.290	0.488±0.294	0.498±0.290	0.526±0.357	0.498±0.306	0.552±0.396
POSSSTOP	0.477±0.287	0.477±0.287	0.471±0.282	0.467±0.283	0.518±0.389	0.486±0.297	0.540±0.388
POSSSTOPALPHA	0.469±0.283	0.470±0.284	0.471±0.288	0.465±0.280	0.517±0.407	0.478±0.297	0.525±0.376
TOK	0.793±0.182	0.788±0.182	0.793±0.182	0.796±0.173	0.632±0.337	0.716±0.221	0.711±0.272
TOKALPHA	0.768±0.197	0.768±0.193	0.757±0.202	0.773±0.191	0.271±0.175	0.705±0.224	0.721±0.261
TOKNER	0.789±0.185	0.785±0.179	0.788±0.182	0.789±0.183	0.609±0.344	0.708±0.225	0.703±0.271
TOKNERALPHA	0.768±0.194	0.771±0.194	0.763±0.200	0.776±0.189	0.628±0.325	0.696±0.230	0.701±0.270
TOKNERR	0.741±0.215	0.744±0.218	0.737±0.219	0.743±0.216	0.600±0.337	0.696±0.231	0.688±0.281
TOKNERRALPHA	0.734±0.215	0.735±0.220	0.735±0.228	0.730±0.217	0.624±0.320	0.683±0.235	0.683±0.280
TOKNERRSTOP	0.736±0.220	0.736±0.222	0.728±0.224	0.732±0.223	0.609±0.333	0.680±0.239	0.730±0.244
TOKNERRSTOPALPHA	0.728±0.225	0.731±0.222	0.727±0.237	0.723±0.229	0.623±0.319	0.675±0.243	0.721±0.249
TOKNERSTOP	0.785±0.186	0.791±0.186	0.790±0.186	0.790±0.181	0.635±0.324	0.703±0.228	0.732±0.230
TOKNERSTOPALPHA	0.773±0.197	0.771±0.191	0.762±0.208	0.774±0.193	0.646±0.309	0.691±0.233	0.737±0.236
TOKPOSS	0.781±0.199	0.783±0.199	0.791±0.203	0.798±0.193	0.565±0.378	0.713±0.222	0.653±0.313
TOKPOSSALPHA	0.775±0.203	0.775±0.206	0.778±0.214	0.784±0.208	0.576±0.191	0.699±0.223	0.653±0.304
TOKPOSSSTOP	0.766±0.203	0.768±0.200	0.767±0.201	0.783±0.195	0.549±0.372	0.715±0.224	0.648±0.268
TOKPOSSALPHA	0.765±0.195	0.761±0.196	0.763±0.196	0.767±0.192	0.378±0.277	0.709±0.228	0.662±0.258
TOKPOSSSTOP	0.763±0.184	0.765±0.184	0.767±0.182	0.773±0.174	0.563±0.307	0.704±0.223	0.703±0.317
TOKPOSSSTOPALPHA	0.774±0.192	0.773±0.193	0.774±0.189	0.771±0.186	0.671±0.302	0.694±0.223	0.722±0.318
TOKPOSSSTOP	0.786±0.187	0.783±0.186	0.794±0.182	0.792±0.179	0.645±0.286	0.700±0.225	0.711±0.262
TOKPOSSSTOPALPHA	-	-	-	-	-	-	-
TOKSTOP	0.793±0.180	0.790±0.182	0.784±0.188	0.794±0.180	0.644±0.327	0.708±0.222	0.758±0.216
TOKSTOPALPHA	0.775±0.188	0.776±0.190	0.766±0.199	0.776±0.192	0.342±0.194	0.700±0.228	0.745±0.217
Avg of F1	0.705	0.705	0.696	0.704	0.508	0.660	0.655
Avg of stderr	0.241	0.241	0.250	0.244	0.281	0.249	0.312

	AdaBoost	XGBoost	MLP	CNN1	CNN2	Avg pp F1	Avg pp stderr
CHNK	0.649±0.298	0.667±0.289	0.724±0.310	0.657±0.256	0.666±0.278	0.677	0.284
CHNKALPHA	0.616±0.302	0.676±0.291	0.695±0.385	0.587±0.337	0.583±0.429	0.648	0.310
CHNKNER	0.630±0.299	0.673±0.292	0.722±0.318	0.654±0.196	0.642±0.287	0.673	0.280
CHNKNERALPHA	0.609±0.301	0.649±0.304	0.684±0.390	0.557±0.282	0.614±0.426	0.637	0.308
CHNKNERR	0.608±0.310	0.642±0.305	0.704±0.320	0.645±0.262	0.662±0.288	0.657	0.294
CHNKNERRALPHA	0.599±0.312	0.653±0.302	0.674±0.412	0.566±0.288	0.600±0.437	0.631	0.315
CHNKNERRSTOP	0.621±0.308	0.652±0.300	0.693±0.365	0.402±0.264	0.344±0.223	0.608	0.291
CHNKNERRSTOPALPHA	0.582±0.312	0.648±0.298	0.623±0.445	0.451±0.314	0.340±0.370	0.558	0.308
CHNKNERSTOP	0.652±0.291	0.679±0.285	0.720±0.296	0.501±0.200	0.298±0.195	0.635	0.268
CHNKNERSTOPALPHA	0.625±0.301	0.656±0.291	0.647±0.443	0.431±0.340	0.406±0.286	0.589	0.293
CHNKSTOP	0.648±0.290	0.679±0.279	0.715±0.278	0.386±0.257	0.342±0.196	0.630	0.268
CHNKSTOPALPHA	0.654±0.290	0.664±0.285	0.628±0.431	0.455±0.277	0.374±0.317	0.577	0.293
DEP	0.566±0.344	0.598±0.349	0.594±0.319	0.682±0.214	0.694±0.249	0.577	0.314
DEPALPHA	0.552±0.352	0.604±0.346	0.598±0.392	0.606±0.396	0.62±0.418	0.571	0.349
DEPNER	0.564±0.350	0.595±0.356	0.592±0.325	0.686±0.211	0.692±0.263	0.576	0.314
DEPNERALPHA	0.497±0.287	0.593±0.328	0.603±0.432	0.606±0.351	0.623±0.407	0.553	0.316
DEPNERR	0.562±0.350	0.596±0.357	0.595±0.334	0.670±0.227	0.695±0.299	0.574	0.319
DEPNERRALPHA	0.556±0.349	0.595±0.354	0.593±0.440	0.585±0.311	0.622±0.415	0.567	0.347
DEPNERRSTOP	0.572±0.350	0.600±0.354	-	0.726±0.225	0.702±0.249	0.579	0.320
DEPNERRSTOPALPHA	0.561±0.357	0.595±0.361	0.574±0.449	0.583±0.328	0.619±0.444	0.564	0.366
DEPNERSTOP	0.563±0.360	0.604±0.360	0.577±0.341	0.725±0.219	0.708±0.248	0.578	0.321
DEPNERSTOPALPHA	0.422±0.239	0.576±0.346	0.564±0.465	0.630±0.321	0.632±0.409	0.528	0.321
DEPSTOP	0.576±0.349	0.603±0.358	0.584±0.330	0.741±0.209	0.648±0.271	0.577	0.324
DEPSTOPALPHA	0.568±0.363	0.595±0.365	0.578±0.446	0.629±0.352	0.625±0.386	0.570	0.364
LEM	0.720±0.222	0.744±0.225	0.786±0.258	0.670±0.193	0.665±0.265	0.733	0.225
LEMALPHA	0.705±0.242	0.748±0.222	0.754±0.286	0.610±0.208	0.651±0.283	0.684	0.224
LEMNER	0.720±0.237	0.742±0.227	0.780±0.274	0.680±0.190	0.613±0.268	0.728	0.228
LEMNERALPHA	0.707±0.247	0.742±0.238	0.768±0.299	0.662±0.203	0.671±0.284	0.721	0.228
LEMNERR	0.683±0.260	0.724±0.246	0.749±0.286	0.658±0.203	0.663±0.231	0.702	0.245
LEMNERRALPHA	0.680±0.260	0.710±0.264	0.740±0.267	0.645±0.277	0.652±0.289	0.694	0.256
LEMNERRSTOP	0.690±0.258	0.720±0.242	0.741±0.343	0.371±0.306	0.364±0.214	0.653	0.255
LEMNERRSTOPALPHA	0.682±0.255	0.704±0.247	0.737±0.310	0.372±0.214	0.348±0.267	0.647	0.251
LEMNERSTOP	0.725±0.231	0.742±0.222	0.780±0.298	0.429±0.198	0.378±0.215	0.690	0.224
LEMNERSTOPALPHA	0.716±0.237	0.738±0.233	0.768±0.343	0.460±0.210	0.414±0.216	0.685	0.233
LEMPOSS	0.727±0.264	0.741±0.244	0.783±0.251	0.665±0.194	0.640±0.264	0.715	0.243
LEMPOSALPHA	0.713±0.272	0.727±0.252	0.775±0.340	0.664±0.213	0.695±0.250	0.711	0.241
LEMPOSS	0.679±0.251	0.717±0.249	0.773±0.335	0.662±0.262	0.736±0.271	0.714	0.253
LEMPOSSALPHA	0.674±0.266	0.712±0.249	0.756±0.306	0.603±0.217	0.715±0.313	0.689	0.243
LEMPOSSSTOP	0.691±0.225	0.720±0.230	0.773±0.291	0.683±0.221	0.725±0.234	0.729	0.232
LEMPOSSSTOPALPHA	0.681±0.236	0.714±0.238	0.757±0.296	0.593±0.263	0.716±0.320	0.701	0.247
LEMSTOP	0.721±0.232	0.735±0.231	0.783±0.353	0.715±0.260	0.707±0.270	0.738	0.238
LEMSTOPALPHA	0.722±0.241	0.730±0.239	0.778±0.294	0.669±0.265	0.698±0.227	0.729	0.234
LEMSTOP	0.732±0.228	0.752±0.219	0.789±0.321	0.403±0.197	0.327±0.205	0.688	0.224
LEMSTOPALPHA	0.712±0.236	0.745±0.220	0.764±0.327	0.377±0.212	0.329±0.210	0.651	0.219
POSS	0.509±0.330	0.555±0.379	0.488±0.481	0.540±0.481	0.536±0.481	0.513	0.365
POSSALPHA	0.518±0.331	0.549±0.381	0.493±0.481	0.538±0.481	0.534±0.481	0.514	0.365
POSSSTOP	0.496±0.317	0.533±0.369	0.484±0.481	0.431±0.481	0.434±0.481	0.485	0.362
POSSSTOPALPHA	0.484±0.303	0.511±0.354	0.491±0.481	0.428±0.481	0.484±0.481	0.483	0.360
TOK	0.728±0.234	0.748±0.223	0.796±0.298	0.659±0.191	0.661±0.258	0.735	0.229
TOKALPHA	0.705±0.246	0.742±0.224	0.756±0.282	0.643±0.196	0.652±0.310	0.688	0.225
TOKNER	0.722±0.239	0.745±0.226	0.784±0.288	0.684±0.195	0.680±0.240	0.732	0.230
TOKNERALPHA	0.705±0.238	0.746±0.229	0.775±0.309	0.649±0.202	0.648±0.257	0.719	0.236
TOKNERR	0.671±0.263	0.719±0.246	0.749±0.291	0.655±0.200	0.631±0.275	0.698	0.249
TOKNERRALPHA	0.674±0.264	0.704±0.257	0.748±0.307	0.626±0.215	0.655±0.270	0.694	0.252
TOKNERSTOP	0.678±0.260	0.710±0.253	0.751±0.303	0.406±0.212	0.317±0.225	0.651	0.247
TOKNERSTOPALPHA	0.680±0.260	0.698±0.254	0.744±0.357	0.412±0.222	0.394±0.230	0.655	0.254
TOKNERSTOP	0.721±0.230	0.743±0.222	0.790±0.325	0.444±0.205	0.367±0.209	0.691	0.226
TOKNERSTOPALPHA	0.704±0.241	0.740±0.226	0.771±0.330	0.371±0.262	0.379±0.217	0.677	0.237
TOKPOS	0.720±0.270	0.739±0.255	0.787±0.344	0.626±0.201	0.705±0.227	0.722	0.250
TOKPOSALPHA	0.705±0.277	0.731±0.262	0.783±0.328	0.633±0.268	0.698±0.250	0.716	0.245
TOKPOSS	0.671±0.254	0.715±0.249	0.773±0.332	0.686±0.204	0.729±0.231	0.714	0.245
TOKPOSSALPHA	0.656±0.241	0.709±0.241	0.769±0.418	0.643±0.269	0.658±0.275	0.687	0.249
TOKPOSSSTOP	0.684±0.244	0.724±0.229	0.771±0.354	0.675±0.205	0.722±0.227	0.718	0.236
TOKPOSSSTOPALPHA	0.713±0.242	0.730±0.233	0.779±0.328	0.680±0.265	0.698±0.238	0.732	0.242
TOKPOSSSTOP	0.733±0.230	0.739±0.232	0.789±0.338	0.706±0.200	0.691±0.226	0.739	0.228
TOKPOSSSTOPALPHA	-	-	-	-	-	-	-
TOKSTOP	0.736±0.227	0.749±0.218	0.787±0.368	0.355±0.199	0.321±0.207	0.685	0.226
TOKSTOPALPHA	0.714±0.231	0.744±0.215	0.765±0.337	0.452±0.215	0.425±0.210	0.665	0.218
Avg of F1	0.649	0.682	0.703	0.580	0.576		
Avg of stderr	0.277	0.275	0.347	0.257	0.289		

Table A.19: Japanese dataset: F-scores and average standard error for classifier-preprocessing pairs (F1, stderr)

	LBFGS LR	Newton LR	Linear SVM	SGD SVM	KNN	NaiveBayes	RandomForest
CHNK	0.710±0.040	0.708±0.045	0.718±0.041	0.715±0.047	0.495±0.206	0.753±0.033	0.677±0.054
CHNKALPHA	0.714±0.028	0.719±0.029	0.709±0.031	0.702±0.040	0.510±0.179	0.740±0.027	0.684±0.043
CHNKNER	0.758±0.042	0.758±0.037	0.769±0.034	0.763±0.031	0.523±0.174	0.772±0.031	0.738±0.039
CHNKNERALPHA	0.751±0.031	0.755±0.030	0.757±0.031	0.751±0.034	0.555±0.159	0.767±0.029	0.725±0.040
CHNKNERR	0.752±0.030	0.751±0.030	0.756±0.032	0.745±0.038	0.517±0.151	0.757±0.030	0.727±0.044
CHKNERRALPHA	0.733±0.046	0.736±0.040	0.744±0.035	0.737±0.037	0.529±0.163	0.745±0.023	0.712±0.034
CHKNERRSTOP	0.745±0.036	0.744±0.040	0.753±0.026	0.737±0.038	0.524±0.165	0.739±0.040	0.729±0.042
CHKNERRSTOPALPHA	0.731±0.042	0.730±0.048	0.741±0.036	0.723±0.037	0.539±0.160	0.730±0.026	0.718±0.053
CHKNERSTOP	0.754±0.040	0.755±0.040	0.764±0.033	0.776±0.024	0.543±0.160	0.767±0.029	0.738±0.039
CHKNERSTOPALPHA	0.758±0.037	0.755±0.032	0.760±0.032	0.761±0.027	0.528±0.171	0.750±0.022	0.721±0.045
CHNKSTOP	0.712±0.051	0.714±0.053	0.724±0.050	0.716±0.045	0.506±0.200	0.728±0.046	0.675±0.067
CHNKSTOPALPHA	0.695±0.049	0.701±0.050	0.714±0.048	0.700±0.049	0.518±0.191	0.721±0.034	0.666±0.071
DEP	0.678±0.069	0.681±0.070	0.685±0.066	0.680±0.055	0.495±0.188	0.682±0.061	0.608±0.124
DEPALPHA	0.669±0.074	0.668±0.074	0.681±0.067	0.674±0.065	0.464±0.194	0.674±0.061	0.593±0.137
DEPNER	0.727±0.053	0.727±0.045	0.742±0.035	0.746±0.033	0.502±0.171	0.724±0.040	0.708±0.059
DEPNERALPHA	0.730±0.046	0.731±0.048	0.741±0.032	0.748±0.036	0.427±0.248	0.718±0.043	0.707±0.065
DEPNERR	0.677±0.065	0.684±0.067	0.681±0.066	0.686±0.061	0.479±0.200	0.676±0.060	0.608±0.122
DEPNERRALPHA	0.667±0.074	0.671±0.077	0.675±0.066	0.674±0.070	0.461±0.187	0.670±0.055	0.585±0.137
DEPNERRSTOP	0.659±0.084	0.652±0.083	0.659±0.086	0.649±0.082	0.509±0.166	0.645±0.075	0.571±0.152
DEPNERRSTOPALPHA	0.617±0.108	0.617±0.109	0.619±0.109	0.618±0.102	0.493±0.167	0.627±0.099	0.534±0.180
DEPNERSTOP	0.717±0.055	0.716±0.053	0.728±0.047	0.723±0.034	0.544±0.130	0.701±0.041	0.695±0.063
DEPNERSTOPALPHA	0.715±0.050	0.711±0.050	0.722±0.039	0.713±0.041	0.448±0.237	0.731±0.032	0.695±0.063
DEPSTOP	0.655±0.083	0.658±0.079	0.658±0.082	0.653±0.076	0.507±0.166	0.647±0.074	0.575±0.148
DEPSTOPALPHA	0.627±0.109	0.623±0.105	0.622±0.100	0.622±0.094	0.499±0.169	0.628±0.093	0.537±0.168
LEM	0.803±0.020	0.799±0.022	0.817±0.017	0.802±0.026	0.592±0.115	0.823±0.020	0.771±0.032
LEMALPHA	0.800±0.021	0.808±0.032	0.824±0.024	0.807±0.022	0.587±0.115	0.815±0.022	0.758±0.030
LEMNER	0.806±0.028	0.801±0.032	0.818±0.023	0.816±0.022	0.633±0.110	0.823±0.029	0.790±0.022
LEMNERALPHA	0.809±0.028	0.807±0.022	0.827±0.020	0.823±0.014	0.612±0.102	0.827±0.029	0.797±0.026
LEMNERR	0.794±0.029	0.790±0.032	0.796±0.019	0.791±0.024	0.585±0.117	0.808±0.022	0.778±0.026
LEMNERRALPHA	0.797±0.027	0.796±0.021	0.805±0.027	0.793±0.021	0.585±0.114	0.811±0.024	0.781±0.032
LEMNERRSTOP	0.787±0.024	0.784±0.028	0.793±0.023	0.793±0.024	0.590±0.121	0.794±0.025	0.796±0.024
LEMNERRSTOPALPHA	0.790±0.024	0.791±0.027	0.798±0.026	0.793±0.025	0.587±0.130	0.796±0.027	0.788±0.031
LEMNERSTOP	0.799±0.030	0.798±0.025	0.819±0.028	0.823±0.021	0.632±0.099	0.831±0.026	0.802±0.028
LEMNERSTOPALPHA	0.805±0.025	0.808±0.029	0.830±0.024	0.826±0.020	0.643±0.100	0.834±0.014	0.802±0.019
LEMPOSS	0.806±0.021	0.808±0.022	0.845±0.015	0.850±0.023	0.716±0.039	0.830±0.014	0.786±0.024
LEMPOSSALPHA	0.807±0.026	0.803±0.035	0.838±0.017	0.846±0.019	0.704±0.030	0.828±0.026	0.778±0.037
LEMPOSSSTOP	0.815±0.023	0.817±0.017	0.851±0.021	0.842±0.017	0.711±0.178	0.855±0.025	0.785±0.033
LEMPOSSALPHA	0.825±0.020	0.823±0.030	0.848±0.018	0.837±0.019	0.734±0.035	0.847±0.020	0.770±0.039
LEMPOSSSTOP	0.816±0.025	0.818±0.028	0.850±0.018	0.846±0.017	0.529±0.038	0.851±0.018	0.774±0.031
LEMPOSSSTOPALPHA	0.819±0.036	0.817±0.025	0.841±0.025	0.829±0.016	0.722±0.037	0.844±0.022	0.779±0.034
LEMSTOP	0.802±0.023	0.795±0.029	0.841±0.015	0.847±0.023	0.567±0.144	0.836±0.021	0.770±0.030
LEMSTOPALPHA	0.791±0.017	0.789±0.024	0.830±0.026	0.836±0.019	0.700±0.028	0.837±0.022	0.768±0.035
LEMSTOP	0.799±0.028	0.801±0.026	0.813±0.019	0.802±0.024	0.614±0.132	0.812±0.032	0.785±0.030
LEMSTOPALPHA	0.803±0.031	0.804±0.030	0.813±0.025	0.807±0.031	0.619±0.132	0.821±0.025	0.776±0.032
POSS	0.645±0.038	0.646±0.030	0.634±0.039	0.627±0.046	0.558±0.051	0.620±0.035	0.645±0.041
POSSALPHA	0.646±0.036	0.650±0.039	0.635±0.051	0.619±0.067	0.557±0.055	0.618±0.032	0.644±0.038
POSSSTOP	0.641±0.034	0.643±0.016	0.634±0.030	0.637±0.050	0.553±0.083	0.626±0.038	0.638±0.022
POSSSTOPALPHA	0.615±0.034	0.616±0.034	0.603±0.063	0.610±0.052	0.506±0.125	0.614±0.045	0.610±0.035
TOK	0.801±0.024	0.797±0.022	0.813±0.023	0.806±0.021	0.592±0.144	0.817±0.022	0.766±0.029
TOKALPHA	0.801±0.020	0.799±0.025	0.807±0.019	0.804±0.020	0.584±0.135	0.817±0.019	0.761±0.031
TOKNER	0.814±0.028	0.812±0.027	0.830±0.018	0.828±0.020	0.718±0.118	0.835±0.018	0.763±0.031
TOKNERALPHA	0.798±0.025	0.800±0.021	0.816±0.015	0.820±0.026	0.610±0.117	0.825±0.018	0.790±0.028
TOKNERR	0.789±0.031	0.785±0.029	0.797±0.017	0.799±0.016	0.589±0.126	0.798±0.020	0.783±0.021
TOKNERRALPHA	0.791±0.022	0.792±0.027	0.802±0.024	0.792±0.024	0.567±0.126	0.797±0.019	0.778±0.029
TOKNERRSTOP	0.776±0.032	0.778±0.032	0.795±0.028	0.783±0.021	0.582±0.129	0.788±0.024	0.776±0.025
TOKNERRSTOPALPHA	0.785±0.024	0.787±0.035	0.796±0.022	0.795±0.025	0.571±0.127	0.783±0.032	0.778±0.029
TOKNERSTOP	0.803±0.026	0.805±0.031	0.825±0.022	0.824±0.026	0.608±0.114	0.822±0.014	0.790±0.031
TOKNERSTOPALPHA	0.794±0.030	0.794±0.031	0.819±0.035	0.820±0.015	0.616±0.116	0.820±0.019	0.797±0.031
TOKPOS	0.799±0.020	0.796±0.019	0.822±0.021	0.828±0.016	0.630±0.023	0.826±0.013	0.794±0.027
TOKPOSALPHA	0.808±0.015	0.807±0.022	0.844±0.025	0.852±0.022	0.706±0.041	0.828±0.018	0.777±0.040
TOKPOSS	0.815±0.025	0.812±0.014	0.843±0.022	0.835±0.023	0.695±0.191	0.849±0.018	0.775±0.025
TOKPOSSALPHA	0.788±0.032	0.789±0.028	0.829±0.022	0.833±0.014	0.716±0.022	0.823±0.015	0.752±0.045
TOKPOSSSTOP	0.823±0.025	0.814±0.024	0.834±0.027	0.828±0.014	0.713±0.036	0.848±0.022	0.767±0.029
TOKPOSSSTOPALPHA	0.817±0.023	0.822±0.019	0.837±0.021	0.835±0.013	0.518±0.041	0.846±0.020	0.764±0.036
TOKSTOP	0.802±0.038	0.800±0.027	0.839±0.019	0.840±0.019	0.691±0.134	0.823±0.020	0.771±0.032
TOKSTOPALPHA	-	0.794±0.029	0.834±0.021	0.844±0.023	0.560±0.033	0.832±0.015	0.766±0.034
TOKSTOP	0.803±0.027	0.801±0.027	0.815±0.028	0.803±0.025	0.584±0.133	0.809±0.023	0.778±0.041
TOKSTOPALPHA	0.800±0.026	0.800±0.032	0.811±0.024	0.813±0.019	0.591±0.132	0.821±0.019	0.779±0.027
Avg of F1	0.758	0.758	0.773	0.769	0.579	0.772	0.729
Avg of stderr	0.037	0.037	0.034	0.033	0.126	0.031	0.054

	AdaBoost	XGBoost	MLP	CNN1	CNN2	Avg pp F1	Avg pp stderr
CHNK	0.592±0.122	0.632±0.091	0.761±0.029	0.771±0.026	0.635±0.026	0.681	0.063
CHNKALPHA	0.590±0.120	0.622±0.089	0.738±0.023	0.747±0.029	0.629±0.029	0.675	0.056
CHNKNER	0.696±0.057	0.714±0.041	0.796±0.019	0.789±0.039	-	0.734	0.049
CHNKNERALPHA	0.686±0.059	0.712±0.043	0.758±0.020	0.768±0.025	-	0.725	0.046
CHNKNERR	0.690±0.059	0.713±0.046	0.780±0.028	0.786±0.020	0.699±0.032	0.723	0.045
CHNKNERRALPHA	0.679±0.064	0.703±0.054	0.747±0.030	0.770±0.027	0.669±0.037	0.709	0.049
CHNKNERRSTOP	0.694±0.057	0.700±0.049	0.775±0.017	0.778±0.029	0.665±0.023	0.715	0.047
CHNKNERRSTOPALPHA	0.676±0.069	0.690±0.062	0.736±0.028	0.727±0.032	0.657±0.027	0.700	0.052
CHNKNERSTOP	0.696±0.053	0.709±0.047	0.784±0.027	0.791±0.025	-	0.737	0.047
CHNKNERSTOPALPHA	0.692±0.053	0.707±0.048	0.745±0.030	0.752±0.019	-	0.718	0.047
CHNKSTOP	0.580±0.123	0.629±0.092	0.753±0.023	0.746±0.030	0.688±0.021	0.681	0.067
CHNKSTOPALPHA	0.572±0.133	0.628±0.089	0.702±0.028	0.722±0.023	0.604±0.033	0.662	0.067
DEP	0.534±0.176	0.583±0.127	0.764±0.027	0.765±0.029	0.573±0.027	0.644	0.085
DEPALPHA	0.529±0.179	0.571±0.127	0.756±0.033	0.705±0.019	0.621±0.033	0.634	0.089
DEPNER	0.690±0.065	0.707±0.049	0.792±0.027	0.748±0.021	-	0.697	0.054
DEPNERALPHA	0.689±0.058	0.703±0.045	0.782±0.016	0.756±0.026	-	0.692	0.060
DEPNERR	0.520±0.184	0.578±0.128	0.791±0.035	0.773±0.026	0.590±0.037	0.645	0.087
DEPNERRALPHA	0.524±0.182	0.576±0.128	0.767±0.032	0.762±0.027	0.587±0.034	0.635	0.089
DEPNERRSTOP	0.514±0.190	0.549±0.152	0.783±0.018	0.761±0.025	0.479±0.034	0.619	0.095
DEPNERRSTOPALPHA	0.504±0.195	0.523±0.175	0.755±0.025	0.738±0.040	0.592±0.020	0.603	0.111
DEPNERSTOP	0.681±0.070	0.690±0.062	0.802±0.026	0.750±0.023	-	0.700	0.055
DEPNERSTOPALPHA	0.683±0.066	0.685±0.046	0.779±0.022	0.739±0.020	-	0.691	0.061
DEPSTOP	0.523±0.183	0.556±0.151	0.776±0.028	0.731±0.028	0.659±0.040	0.633	0.095
DEPSTOPALPHA	0.516±0.189	0.535±0.172	0.746±0.028	0.743±0.027	0.608±0.029	0.609	0.107
LEM	0.669±0.080	0.723±0.040	0.863±0.017	0.868±0.031	0.721±0.029	0.771	0.037
LEMALPHA	0.666±0.080	0.727±0.045	0.854±0.015	0.853±0.022	0.805±0.021	0.775	0.037
LEMNER	0.747±0.042	0.775±0.035	0.870±0.017	0.865±0.020	0.616±0.021	0.780	0.033
LEMNERALPHA	0.744±0.047	0.776±0.030	0.857±0.019	0.860±0.031	0.772±0.028	0.793	0.033
LEMNERR	0.744±0.044	0.763±0.037	0.843±0.018	0.811±0.021	0.654±0.022	0.763	0.034
LEMNERRALPHA	0.748±0.040	0.768±0.027	0.845±0.029	0.828±0.018	0.708±0.022	0.772	0.033
LEMNERRSTOP	0.740±0.037	0.756±0.039	0.839±0.019	0.836±0.016	0.807±0.016	0.776	0.033
LEMNERRSTOPALPHA	0.743±0.041	0.764±0.029	0.810±0.022	0.814±0.014	0.776±0.026	0.771	0.035
LEMNERSTOP	0.742±0.032	0.767±0.036	0.875±0.019	0.870±0.012	0.807±0.023	0.797	0.032
LEMNERSTOPALPHA	0.744±0.038	0.769±0.040	0.848±0.022	0.849±0.034	0.741±0.031	0.792	0.033
LEMPOS	0.742±0.051	0.768±0.026	0.868±0.021	0.870±0.025	0.619±0.024	0.792	0.025
LEMPOSALPHA	0.728±0.053	0.772±0.033	0.856±0.017	0.860±0.015	0.663±0.016	0.790	0.027
LEMPOSS	0.718±0.047	0.780±0.033	0.866±0.019	-	0.768±0.013	0.807	0.039
LEMPOSSALPHA	0.690±0.064	0.759±0.041	0.856±0.024	0.867±0.024	0.572±0.028	0.786	0.030
LEMPOSSSTOP	0.718±0.030	0.764±0.022	0.868±0.023	0.876±0.020	0.820±0.024	0.794	0.025
LEMPOSSSTOPALPHA	0.686±0.025	0.743±0.030	0.850±0.015	0.851±0.029	0.688±0.015	0.789	0.026
LEMOSTOP	0.730±0.034	0.769±0.018	0.868±0.022	0.877±0.027	0.808±0.025	0.793	0.034
LEMOSTOPALPHA	0.707±0.043	0.754±0.021	0.835±0.018	0.860±0.028	0.783±0.031	0.791	0.026
LEMSTOP	0.659±0.082	0.723±0.054	0.858±0.018	0.862±0.015	0.809±0.017	0.778	0.040
LEMSTOPALPHA	0.665±0.078	0.727±0.059	0.842±0.025	0.844±0.021	0.801±0.027	0.777	0.043
POSS	0.643±0.029	0.632±0.024	0.645±0.024	0.670±0.032	0.490±0.032	0.621	0.035
POSSALPHA	0.646±0.030	0.640±0.029	0.649±0.036	0.658±0.034	0.567±0.030	0.627	0.040
POSSSTOP	0.643±0.028	0.630±0.031	0.635±0.028	0.623±0.024	0.492±0.030	0.616	0.035
POSSSTOPALPHA	0.609±0.033	0.595±0.033	0.614±0.047	0.587±0.050	0.508±0.053	0.591	0.050
TOK	0.647±0.074	0.724±0.051	0.864±0.019	0.857±0.024	0.792±0.013	0.773	0.039
TOKALPHA	0.655±0.077	0.712±0.052	0.847±0.020	0.848±0.014	0.798±0.018	0.769	0.037
TOKNER	0.667±0.037	0.731±0.032	0.846±0.018	0.847±0.022	0.686±0.024	0.781	0.033
TOKNERALPHA	0.734±0.032	0.762±0.038	0.870±0.024	0.864±0.022	0.834±0.030	0.794	0.033
TOKNERR	0.729±0.037	0.756±0.040	0.838±0.028	0.844±0.016	0.793±0.022	0.775	0.034
TOKNERRALPHA	0.737±0.034	0.759±0.034	0.836±0.021	0.821±0.018	0.722±0.026	0.766	0.034
TOKNERRSTOP	0.727±0.039	0.756±0.034	0.835±0.020	0.843±0.014	0.709±0.027	0.762	0.035
TOKNERRSTOPALPHA	0.736±0.040	0.761±0.029	0.818±0.016	0.817±0.023	0.742±0.019	0.764	0.035
TOKNERSTOP	0.745±0.045	0.768±0.033	0.842±0.015	0.857±0.027	0.811±0.019	0.792	0.034
TOKNERSTOPALPHA	0.735±0.039	0.759±0.033	0.878±0.028	0.875±0.027	0.849±0.041	0.796	0.037
TOKPOS	0.730±0.042	0.763±0.036	0.846±0.025	0.847±0.022	0.773±0.031	0.788	0.025
TOKPOSALPHA	0.724±0.056	0.770±0.030	0.870±0.015	0.865±0.019	0.674±0.019	0.794	0.027
TOKPOSS	0.719±0.057	0.756±0.031	0.876±0.031	-	0.683±0.021	0.795	0.042
TOKPOSSALPHA	0.715±0.068	0.748±0.048	0.864±0.019	0.865±0.020	0.646±0.014	0.781	0.029
TOKPOSSSTOP	0.701±0.025	0.760±0.021	0.855±0.022	0.821±0.021	0.643±0.022	0.784	0.024
TOKPOSSSTOPALPHA	0.703±0.029	0.764±0.021	0.876±0.031	0.883±0.020	0.759±0.019	0.785	0.024
TOKPOSSTOP	0.715±0.030	0.763±0.025	0.839±0.014	0.857±0.022	0.615±0.014	0.780	0.033
TOKPOSSTOPALPHA	0.720±0.044	0.762±0.032	-	-	-	0.775	0.029
TOKSTOP	0.646±0.078	0.717±0.055	0.857±0.013	0.861±0.013	0.782±0.023	0.771	0.041
TOKSTOPALPHA	0.650±0.080	0.717±0.058	0.827±0.016	0.818±0.021	0.710±0.050	0.761	0.042
Avg of F1	0.673	0.707	0.809	0.806	0.688		
Avg of stderr	0.049	0.023	0.026	0.031	0.036		