

Explaining Data-Driven Personas to End Users

Soon-gyo Jung*, Joni Salminen*§, Bernard J. Jansen*

*Qatar Computing Research Institute, Doha, Qatar

§University of Turku

{sjung, jsalminen, bjansen}@hbku.edu.qa

ABSTRACT

Enabled by digital user data and algorithms, persona user interfaces (UI) are moving to digital formats. However, algorithms and user data, if left unexplained to end users, might leave data-driven personas (DDPs) difficult to understand and trust. This is because the data and the way it is processed are complex and not self-evident, requiring explanations of the DDP information and UIs. In this research, we provide a proof of concept for adding transparency to DDP using a real system UI. Furthermore, we demonstrate ways to add breakdown information that can help alleviate user stereotyping associated with the use of personas.

KEYWORDS

Personas; digital interfaces; transparency, information design.

ACM Reference format:

Soon-Gyo Jung, Joni Salminen and Bernard J. Jansen. 2020. Explaining Data-Driven Personas to End Users. In Proceedings of the IUI workshop on Explainable Smart Systems and Algorithmic Transparency in Emerging Technologies (ExSS-ATEC'20). Cagliari, Italy, 7 pages.

CSS CONCEPTS

• Human-centered computing ~ Human computer interaction (HCI)

1 Introduction

A persona represents the goals, behaviors and characteristics of a user segment [4, 29]. While personas are typically created qualitatively from user interviews [14, 17], qualitative approaches are newly complemented by data-driven personas (DDPs) that use quantitative methods, algorithms, and online user data [11, 22, 35]. This transition from traditional personas to DDPs is associated with the *digitalization of persona user interfaces (UIs)*. While personas are traditionally presented in one or two page paper profiles [6, 26], DDPs are presented in a digital UIs that the persona users can interact with (see example in Figure 1).

Data-driven persona generation is becoming increasingly popular in the industry [27, 34, 35, 43]. The challenge relating to this shift is that while research has been done on traditional paper

layouts [28], not much is known about the digital persona UIs and their user experience (UX). Apart from exploratory studies [37, 38, 41], usability problems and interaction patterns in DDP context remain uncharted. More particularly, there has been little research on how to make the digital persona UIs transparent [31]. Transparency refers to providing explanations on how opaque algorithms produce information for end users [13].

This research aims to shed some light into these unexplored areas, with a specific focus on the design goal of making DDPs understandable and trustworthy from the perspective of their users (e.g., journalists, marketers, online content creators, medical professionals, corporate decision makers, and so on).

As a contribution, we demonstrate ways for adding transparency in DDPs by two means: (1) *adding explanations of persona information and how it was produced* and (b) *adding breakdown information of the representative persona characteristics*, towards the goal of mitigating stereotypical thinking.

Therefore, our goals with this research are to demonstrate means to add transparency to DDPs to increase persona users' understanding and trust towards the personas (both being risks noted in previous research [8, 23]); and to add information breakdowns that show the persona is a composite representation of a group of users, thereby providing means to alleviate user stereotyping, a risk stressed in the persona research [15, 22, 46].

2 Related Literature

Personas were introduced as a HCI technique [29] in software development [9, 17]. There are a variety of benefits attributed to personas [1], such as focusing on user outcomes, consensus building among designers and developers, user-centricity, and more granular product targeting [33, 36]. Personas provide communication benefits within teams [7] and organizations [28]. Personas can enable designers to identify with backgrounds different from their own and realize that the user preferences may deviate from their personal preferences [16, 17, 45].

Yet, to achieve the said benefits, it is critical that personas are perceived as credible and trustworthy by their end users [32]. To achieve trust credibility, one proposed technique is explaining how the personas were created, what design choices were made and why. Such transparency has been found especially important in algorithmic systems that, due to their complexity, may appear suspicious to end users [10, 13].

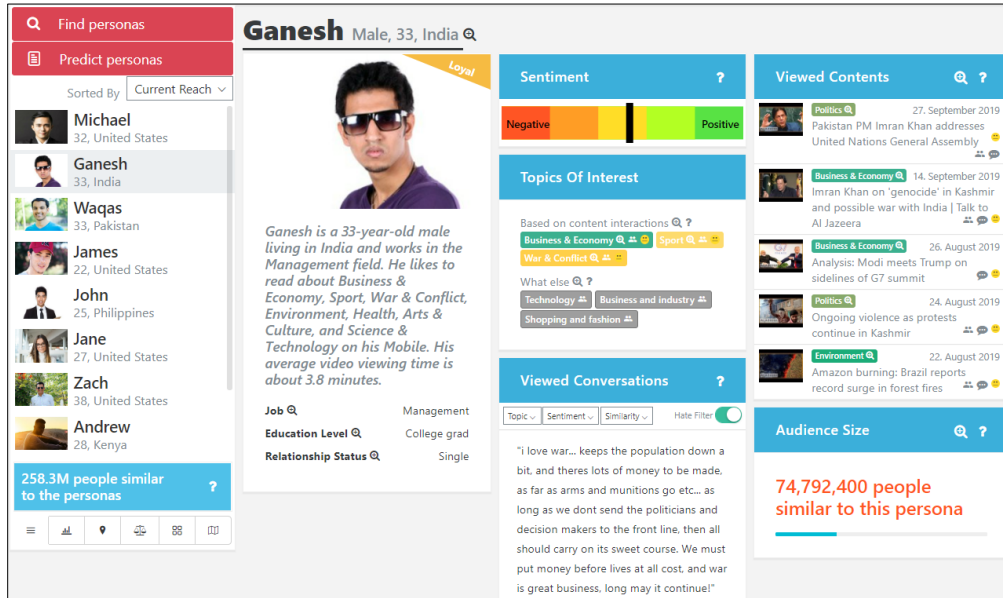


Figure 1: A DDP from a real production system¹. There are several ways for end users to interact with the system, including, e.g., selecting the persona, changing the number of personas generated, and filtering the comments of the persona.

Persona transparency is an unexplored area in the HCI literature. Among the rare studies focused on persona transparency, Salminen et al. [42] analyze the impact of explanations added in the persona UI on user perceptions. They find that higher transparency (in the form of explanations) increased the perceived completeness and clarity of the shown personas. However, there was an undesirable effect of the explanations decreasing the credibility of the persona. The researchers interpreted this as an indication of a *transparency trade-off*, according to which the technical explanations disrupt the façade of personas being perceived as real people.

It is also worth to note that Salminen et al. [42] implemented the explanations “forcefully”, meaning that they were shown as open pop-up type of boxes to the users (see Figure 2). In contrast, we implement the explanations as interactive tooltip definitions that the users can reveal by hovering over the tooltip icon.

Overall, computational techniques are becoming more common in persona development, with several researchers presenting their versions of algorithmically generated personas [2, 3, 24, 47]. The users are given access to the generated personas through system UIs where they can interact with the personas, including selecting each persona and viewing their information. The users of these DDPs may question the information in persona profiles because they are unsure of how it was produced. This is a special concern for DDPs because their creation relies on opaque algorithmic processes that are often difficult to communicate in layman terms [5]. This difficulty can be seen from the findings of user studies that report issues of confusion and information design of algorithmically generated DDPs [36–38, 41].

The advice from the previous research is that persona creators should seek to experiment with novel designs of transparency for DDPs [42]. To this end, we present some explanations and data breakdowns we have implemented in a persona system. Note that these findings represent only the added explanations and breakdowns and do not include an empirical user study on their implementation on the persona UX. Such a study is a planned next step in the research agenda.

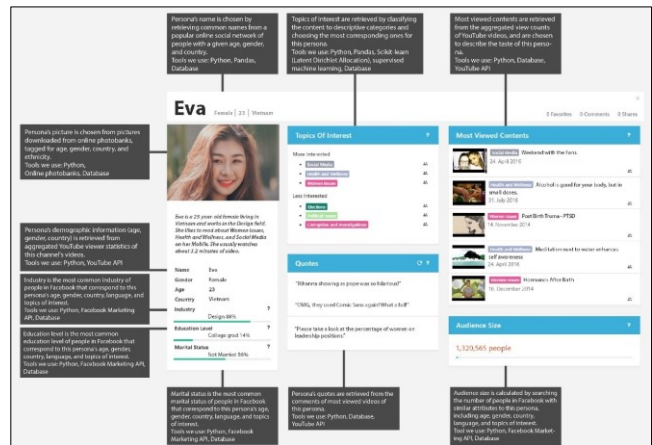


Figure 2: Explanations implemented in Salminen et al. [42]. These were shown “forcefully” without giving the users ability to enable or disable the explanations.

¹ <https://persona.qcri.org>

Table 1: Explanations implemented in the DDP system. Adapted from Salminen et al. [42].

Section	Explanation provided	Implemented (X = No, ✓ = Yes)
Name	Persona’s name is chosen by retrieving common names from a popular online social network of people with a given age, gender, and country. Tools we use: Python, Pandas, Database	X
Picture	Persona’s picture is chosen from pictures downloaded from online photobanks, tagged for age, gender, country, and ethnicity. Tools we use: Python, Online photobanks, Database	X
Demographics	Persona’s demographic information (age, gender, country) is retrieved from aggregated YouTube viewer statistics of this channel’s videos. Tools we use: Python, YouTube API	X
Job	Job is shown based on Facebook audience sizes. The system collects Facebook audience sizes based on persona’s demographic, interests, and language.	✓
Education Level	Education Level is shown based on Facebook audience sizes. The system collects Facebook audience sizes based on persona’s demographic, interests, and language.	✓
Relationship Status	Relationship Status is shown based on Facebook audience sizes. The system collects Facebook audience sizes based on persona’s demographic, interests, and language.	✓
Topics of Interest	Topics of interest are retrieved by classifying the content to descriptive categories and choosing the most corresponding ones for this persona. Tools we use: Python, Pandas, Scikit-learn (Latent Dirichlet Allocation), supervised machine learning, Database	✓
Most Viewed Contents	Most viewed contents are retrieved from the aggregated view counts of YouTube videos and are chosen to describe the taste of this persona. Tools we use: Python, Database, YouTube API	✓
Viewed conversations	Persona’s quotes are retrieved from the comments of most viewed videos of this persona. Tools we use: Python, Database, YouTube API	✓
Audience Size	Audience size is calculated by searching the number of people on Facebook with similar attributes to this persona, including age, gender, country, language, and topics of interest. Tools we use: Python, Facebook Marketing API, Database	✓

3 Implementing DDP Transparency

We adopted a simple design principle for transparency: *explain to the user what the information is and where it comes from*. The explanations were then crafted by one of the researchers for all the information elements in the persona UI, as defined in Table 1. After this, the other researchers gave feedback on the wording and content of the explanations. Finally, after being reviewed by everyone in the research team, the explanations were implemented in the persona system.

Note that the explanations are the same as the ones used in a previous user study [42]. That study, however, tested only persona mockups, not a live system. Here, we implement the explanations in a live system for real client organizations¹.

3.1 Persona System

The persona system is called Automatic Persona Generation (APG) and it has been widely reported in previous research [2, 3, 18, 19, 39]. APG is both a system and methodology for generating personas from online analytics and social media user data. The system uses application programming interfaces (APIs) to automatically collect online user data with channel owners’ permission. It then carries out algorithmic data analyses and outputs a set of DDPs that the end users can interact with using the system UI. APG uses a robust Web framework for Python (Flask) and a stable back-end database (PostgreSQL). It supports

multiple online analytics and social media platforms, including Facebook Insights, YouTube Analytics, and Google Analytics.

Thus, we implement the explanations of the previous user study [42] in APG. The following sections demonstrate the implementation through practical examples from the UI. We first demonstrate the explanations and then the data breakdowns. Note that all explanations require the user to hover either the tooltip icon (the small question mark in Figure 4) or the element itself to show. The breakdowns require the user to click on the breakdown icon (the small magnifying glass in Figure 3).

3.2 Explanations

Figure 3 demonstrates the explanation for the stability indicator. The stability function informs the user of how frequently this persona appears in different persona sets over time. If the persona appears often, he or she is labeled as a “Loyal” persona. Otherwise, the persona is labeled as a “Occasional” persona.

Figure 4 shows the sentiment explanation. Sentiment score is calculated as an aggregate score from the comments associated with the persona and describes the persona’s overall attitude.

Figure 5 shows the explanation for topics of interest. Topics are reflective of the content consumption preferences of online audience personas [39]. Similarly, most viewed contents describe the content that the group corresponding to the persona has most viewed (see Figure 6). The comments shown in the persona profile are inferred from this content (see Figure 7). Each persona has

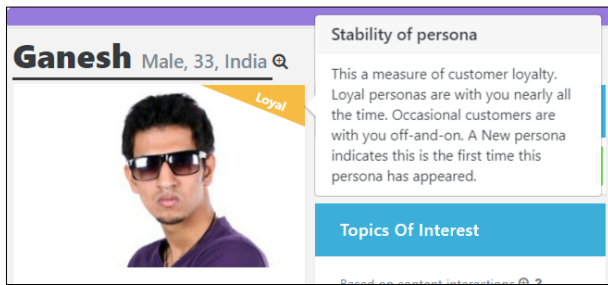


Figure 3: Explanation for the stability of the persona.

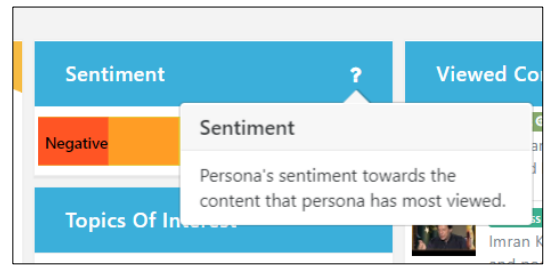


Figure 4: Explanation for the sentiment of the persona.

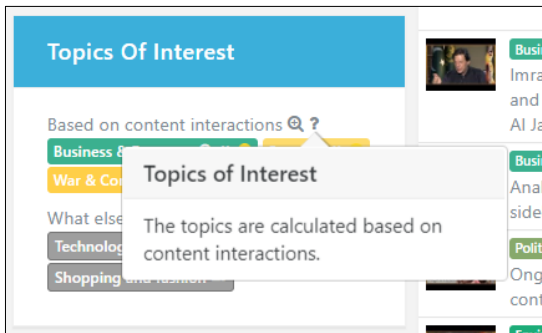


Figure 5: Explanation for topics of interest.

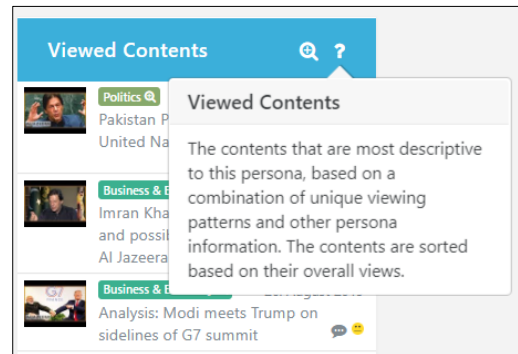


Figure 6: Explanation for the viewed contents.

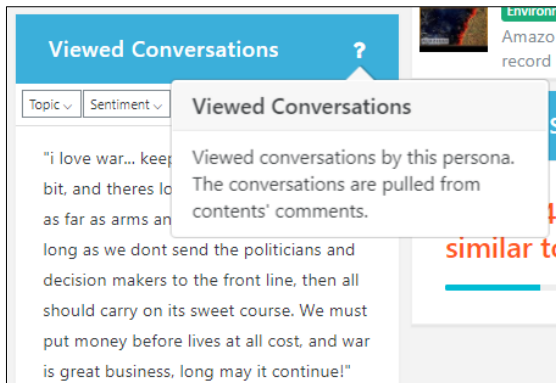


Figure 7: Explanation for the quotes.

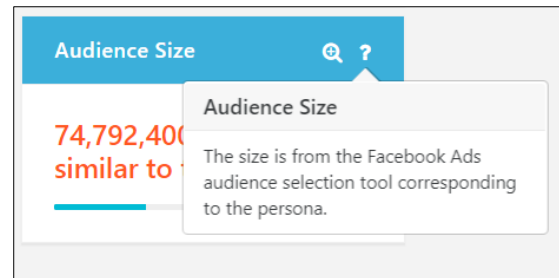


Figure 8: Explanation for the audience size.

demographic traits (age, gender, location) and topics of interest. Based on these, audience size is calculated. This corresponds to the number of people with the said characteristics (see Figure 8).

3.3 Data Breakdowns

To reduce stereotyping and to facilitate the understanding of the data, APG provides breakdowns of information. Figure 9 shows the demographic groups that have the highest quantitative association with the content engagement pattern that the persona is based on. The point is to show to the users that even though the persona has a representative demographic group (in this case, Male 25-34 India), there are also other demographic group that fit, with different degrees of association, to the behavioral pattern of

this persona. In other words, there is diversity within the persona. In a similar vein, Figure 10 illustrates the distribution of topics of interest. It shows how much, in quantitative terms, the persona prefers, or does not prefer, a given topic. Again, as these measures are calculated using machine learning models (see [3]), we can obtain and present a probabilistic score for the persona users.

3.4 Explaining Algorithmic Process of DDPs

One challenging – perhaps even the most challenging – aspect of explanation in DDPs is the functioning of the core algorithm. This has previously been done using equations [2, 3, 39, 40] and figures (see Figure 12).

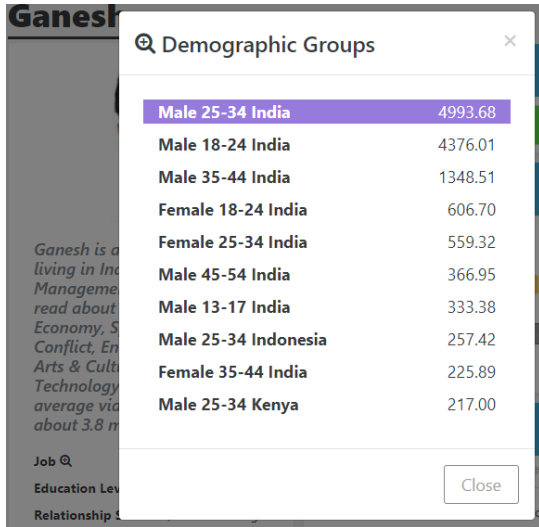


Figure 9: Breakdown of demographic groups, intended to decrease stereotyping by showing that not only one demographic group corresponds to the shown persona. For example, figure shows that although the dominant demographic group is male, also females (e.g., Female 18-24 India) correspond to the behavioral pattern of the persona.

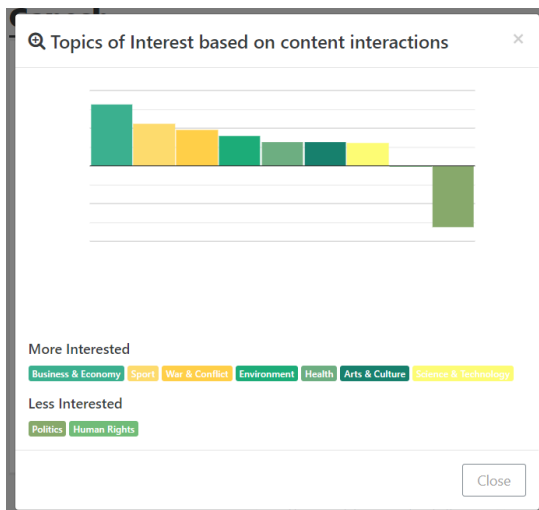


Figure 10: Distribution of the persona’s topical interests.

To generate the personas, APG uses the underlying data to obtain a grouped interaction matrix V ($V = g * c$), where the columns of the said matrix, for our task, are video content (c) and the rows represents demographic user groups (g). The element in the matrix are the view-counts of the videos for each demographic group. The system then applied non-negative matrix factorization (NMF) [20] to V to discern p latent video viewing behaviors, using the resultant weights from the NMF. These groups, p , are then enriched by adding attributes, including a name, profile picture, their topic of interest among others.

Various ways to explain this algorithmic approach have been attempted in previous literature, including a simple stepwise list

(see Figure 11) and complex mathematical denotations (see Figure 12) explanations. Essentially, communicating algorithmic processes is a hard problem to solve as the process has many steps and a high degree of technical complexity. Explaining these processes in a simple graph, text, or table seem not very user-friendly. As a future course of action, we are planning to produce an explainer video – the advantages of a video are many: we can use different screens, views, and animations to simplify the algorithm; we can break down the process into a logical narrative; we can give examples that make the storyline more concrete; and we can support the conveying of the message with visual, textual and auditory information (i.e., voiceover). This facilitates learning and understanding by different user types.

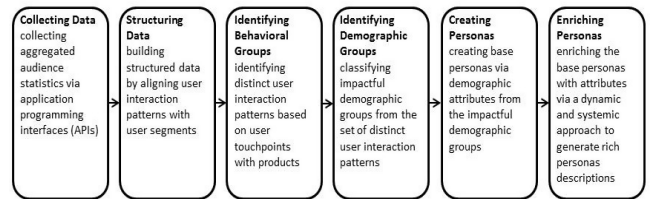


Figure 11: Stepwise explanation of the APG algorithm [3].

$$\begin{matrix}
 & & p * c & & \\
 & & \boxed{H} & & \\
 \boxed{V} & = & \boxed{W} & + & \boxed{\epsilon} \\
 g * c & & g * p & & g * c
 \end{matrix}$$

Figure 12: Symbolic explanation of the APG algorithm [2].

4 Discussion

4.1 Contribution

Personas are said to be cognitively compelling [4] and empathetic [21, 25], as they put a human face on otherwise obscure user data. Pruitt and Grudin [30] outline that psychological theory explains why personas should be engaging, pointing out that personas provide a conduit for conveying a broad range of user attributes.

Yet, personas have been repeatedly challenged in the literature for their “imaginary” nature [8], abstraction and lack of credibility [23, 32]. DDPs provide features and functionalities that can provide partial or complete solutions to long-standing persona weaknesses, such as being slow to create and rapidly expiring [2] and being subjective instead of fact-based [3, 8]. In addition, personas have been criticized for lack a real value to enhance user insights, especially in the modern environment with many other analytics tools are available for probing into online audiences [1]. Using digital persona UIs could potentially provide ailments to enhance the value decision makers get from personas.

Nonetheless, due to prevalence of *paper* as the default choice of UI for personas, there is currently a lack of empirical studies focused on investigating the UX of digital persona UIs, as most persona interfaces have not been available in Web systems. According to previous literature [37, 38], the concerns relate to navigation, understanding, and credibility. Users also have questions about the algorithm behind the personas.

To this end, this research provides design suggestions and ideas for information breakdowns that aim to explain the information content in the DDPs and challenge the assumption that the persona is just one person, instead of being representative of a whole group.

4.2 Future Work

First, empirical user studies to test the design ideas outlined here are highly called for. The real impact of explanations on UX needs to be corroborated. Particularly, it is essential to address two core design questions:

- (a) *do the explanations really increase users' understanding about the persona information?*
- (b) *Do breakdowns really reduce stereotypical thinking about the persona?*

Second, user-specific differences towards explanations can affect their implementation [12]. One aspect that makes adding explanations challenging is the technical savviness among users. For some users, more technical information can be irrelevant and even alienate them for the “easily approachable” personas, while others crave for such information. Thus, a design challenge is to provide technical explanations for those who need them without interfering with the self-explanatory nature of the persona UI.

Third, experimenting with new explanation types (e.g., innovative use of video, graphics, product walkthroughs...) is needed. This research focused on a very specific implementation of tooltip explanations, whereas software systems enable other complementary approaches that should be tested.

Fourth, the described explanation approaches were generic across all personas. They are tied to shared components such as sections, datasets, and algorithms, but not specific to the current persona being shown. For example, users may wonder why the current persona is of specific age and has specific interests. The generic explanations are indirect and may require users to figure out the exact answers independently. For this reason, *persona-specific* explanations may be needed.

Overall, even though APG contains tooltip definitions of each information section, its algorithmic transparency [44] may not be adequate but additional explanations may be needed.

4.3 Practical Implications

Finally, the frequency of understanding issues reported in related research [36–38] implies there is a need for system-specific training. For optimal usability, self-explanatory features would be the ideal design goal. However, interactive persona UIs and DDPs can become complex, prompting the use of various educational means, such as explainer videos, video tutorials, and collaborative

workshops. For persona adoption in the target organization, explanations can be useful but not necessarily enough.

REFERENCES

- [1] Alhadreti, O. and Mayhew, P. 2017. To Intervene or Not to Intervene: An Investigation of Three Think-aloud Protocols in Usability Testing. *Journal of Usability Studies*, 12, 3 (2017), 111–132.
- [2] An, J. et al. 2018. Customer segmentation using online platforms: isolating behavioral and demographic segments for persona creation via aggregated user data. *Social Network Analysis and Mining*, 8, 1 (2018). DOI:https://doi.org/10.1007/s13278-018-0531-0.
- [3] An, J. et al. 2018. Imaginary People Representing Real Numbers: Generating Personas from Online Social Media Data. *ACM Transactions on the Web (TWEB)*, 12, 4 (2018), Article No. 27. DOI:https://doi.org/10.1145/3265986.
- [4] Bødker, S. et al. 2012. Personas, people and participation: challenges from the trenches of local government. *Proceedings of the 12th Participatory Design Conference: Research Papers - Volume 1* (Roskilde, Denmark, 2012), 91–100.
- [5] Brickey, J. et al. 2012. Comparing Semi-Automated Clustering Methods for Persona Development. *IEEE Transactions on Software Engineering*, 38, 3 (May 2012), 537–546. DOI:https://doi.org/10.1109/TSE.2011.60.
- [6] Chang, Y. et al. 2008. Personas: From Theory to Practices. *Proceedings of the 5th Nordic Conference on Human-computer Interaction: Building Bridges* (New York, NY, USA, 2008), 439–442.
- [7] Chapman, C.N. et al. 2008. Quantitative Evaluation of Personas as Information. *Proceedings of the Human Factors and Ergonomics Society Annual Meeting* (Sep. 2008), 1107–1111.
- [8] Chapman, C.N. and Milham, R.P. 2006. The Personas' New Clothes: Methodological and Practical Arguments against a Popular Method. *Proceedings of the Human Factors and Ergonomics Society Annual Meeting* (Oct. 2006), 634–636.
- [9] Cooper, A. 2004. *The Inmates Are Running the Asylum: Why High Tech Products Drive Us Crazy and How to Restore the Sanity (2nd Edition)*. Pearson Higher Education.
- [10] Diakopoulos, N. and Koliska, M. 2017. Algorithmic transparency in the news media. *Digital Journalism*, 5, 7 (2017), 809–828.
- [11] Drego, V.L. et al. 2010. *The ROI Of Personas*. Forrester Research.
- [12] Eslami, M. et al. 2018. Communicating Algorithmic Process in Online Behavioral Advertising. *Proceedings of the 2018 CHI Conference on Human Factors in Computing Systems* (Montréal, Canada, 2018), 432.
- [13] Garfinkel, S. et al. 2017. Toward Algorithmic Transparency and Accountability. *Commun. ACM*, 60, 9 (Aug. 2017), 5–5. DOI:https://doi.org/10.1145/3125780.
- [14] Goodman, J. et al. 2007. Formats for User Data in Inclusive Design. *Universal Access in Human Computer Interaction. Coping with Diversity* (Jul. 2007), 117–126.
- [15] Hill, C.G. et al. 2017. Gender-Inclusiveness Personas vs. Stereotyping: Can We Have it Both Ways? *Proceedings of the 2017 CHI Conference* (Denver, Colorado, USA, 2017), 6658–6671.
- [16] Hilton, K. and Henderson, K. 2008. Developing criminal personas for designers. *Papers from the British Criminology Conference*, 8, (2008), 175–186.
- [17] Judge, T. et al. 2012. Comparing Collaboration and Individual Personas for the Design and Evaluation of Collaboration Software. *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems* (New York, NY, USA, 2012), 1997–2000.
- [18] Jung, S. et al. 2018. Automatically Conceptualizing Social Media Analytics Data via Personas. (San Francisco, California, USA, Jun. 2018).
- [19] Jung, S. et al. 2017. Persona Generation from Aggregated Social Media Data. *Proceedings of the 2017 CHI Conference Extended Abstracts on Human Factors in Computing Systems* (Denver, Colorado, USA, 2017), 1748–1755.
- [20] Lee, D.D. and Seung, S.H. 1999. Learning the Parts of Objects by Non-negative Matrix Factorization. *Nature*, 401, 6755 (1999), 788–791.
- [21] Long, F. 2009. Real or imaginary: The effectiveness of using personas in product design. *Proceedings of the Irish Ergonomics Society Annual Conference* (2009).
- [22] Marsden, N. and Haag, M. 2016. Stereotypes and Politics: Reflections on Personas. *Proceedings of the 2016 CHI Conference on Human Factors in Computing Systems* (San Jose, USA, 2016), 4017–4031.
- [23] Matthews, T. et al. 2012. How Do Designers and User Experience Professionals Actually Perceive and Use Personas? *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems* (Austin, Texas, USA, 2012), 1219–1228.
- [24] McGinn, J.J. and Kotamraju, N. 2008. Data-driven persona development. *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems* (Florence, Italy, 2008), 1521–1524.

- [25] Miaskiewicz, T. et al. 2009. A Preliminary Examination of Using Personas to Enhance User-Centered Design. *AMCIS 2009 Proceedings* (2009), Article 697 <http://aisel.aisnet.org/amcis2009/697>.
- [26] Miaskiewicz, T. and Kozar, K.A. 2011. Personas and user-centered design: How can personas benefit product design processes? *Design Studies*. 32, 5 (2011), 417–430.
- [27] Mijač, T. et al. 2018. The potential and issues in data-driven development of web personas. *2018 41st International Convention on Information and Communication Technology, Electronics and Microelectronics (MIPRO)* (May 2018), 1237–1242.
- [28] Nielsen, L. et al. 2015. A Template for Design Personas: Analysis of 47 Persona Descriptions from Danish Industries and Organizations. *Int. J. Sociotechnology Knowl. Dev.* 7, 1 (2015), 45–61.
- [29] Nielsen, L. 2019. *Personas - User Focused Design*. Springer.
- [30] Pruitt, J. and Grudin, J. 2003. Personas: Practice and Theory. *Proceedings of the 2003 Conference on Designing for User Experiences* (San Francisco, California, USA, 2003), 1–15.
- [31] Rönkkö, K. 2005. An Empirical Study Demonstrating How Different Design Constraints, Project Organization and Contexts Limited the Utility of Personas. *Proceedings of the Proceedings of the 38th Annual Hawaii International Conference on System Sciences - Volume 08* (Washington, DC, USA, 2005).
- [32] Rönkkö, K. et al. 2004. Personas is Not Applicable: Local Remedies Interpreted in a Wider Context. *Proceedings of the Eighth Conference on Participatory Design: Artful Integration: Interweaving Media, Materials and Practices - Volume 1* (Toronto, Ontario, Canada, 2004), 112–120.
- [33] Russo, J.E. et al. 1989. The validity of verbal protocols. *Memory & Cognition*. 17, 6 (1989), 759–769.
- [34] Salminen, J. et al. 2020. A Template for Data-Driven Personas: Analyzing 31 Quantitatively Oriented Persona Profiles. *In the Proceedings of the 22nd International Conference on Human-Computer Interaction (HCI'20)* (Copenhagen, Denmark, Jul. 2020).
- [35] Salminen, J. et al. 2018. Are personas done? Evaluating their usefulness in the age of digital analytics. *Persona Studies*. 4, 2 (Nov. 2018), 47–65. DOI:<https://doi.org/10.21153/psj2018vol4no2art737>.
- [36] Salminen, J. et al. 2019. Confusion and information triggered by photos in persona profiles. *International Journal of Human-Computer Studies*. 129, (Sep. 2019), 1–14. DOI:<https://doi.org/10.1016/j.ijhcs.2019.03.005>.
- [37] Salminen, J. et al. 2019. Design Issues in Automatically Generated Persona Profiles: A Qualitative Analysis from 38 Think-Aloud Transcripts. *Proceedings of the ACM SIGIR Conference on Human Information Interaction and Retrieval (CHIIR)* (Glasgow, UK, Mar. 2019), 225–229.
- [38] Salminen, J. et al. 2018. Findings of a User Study of Automatically Generated Personas. *Extended Abstracts of the 2018 CHI Conference on Human Factors in Computing Systems* (Montréal, Canada, 2018), LBW097:1–LBW097:6.
- [39] Salminen, J. et al. 2018. From 2,772 segments to five personas: Summarizing a diverse online audience by generating culturally adapted personas. *First Monday*. 23, 6 (Jun. 2018). DOI:<https://doi.org/10.5210/fm.v23i6.8415>.
- [40] Salminen, J. et al. 2017. Generating Cultural Personas from Social Data: A Perspective of Middle Eastern Users. *Proceedings of The Fourth International Symposium on Social Networks Analysis, Management and Security (SNAMS-2017)* (Prague, Czech Republic, 2017).
- [41] Salminen, J. et al. 2018. “Is More Better?”: Impact of Multiple Photos on Perception of Persona Profiles. *Proceedings of ACM CHI Conference on Human Factors in Computing Systems (CHI2018)* (Montréal, Canada, Apr. 2018).
- [42] Salminen, J. et al. 2019. Persona Transparency: Analyzing the Impact of Explanations on Perceptions of Data-Driven Personas. *International Journal of Human-Computer Interaction*. 0, 0 (Nov. 2019), 1–13. DOI:<https://doi.org/10.1080/10447318.2019.1688946>.
- [43] Salminen, J. et al. 2019. The future of data-driven personas: A marriage of online analytics numbers and human attributes. *ICEIS 2019 - Proceedings of the 21st International Conference on Enterprise Information Systems* (Heraklion, Greece, Jan. 2019), 596–603.
- [44] Springer, A. and Whittaker, S. 2019. Progressive disclosure: empirically motivated approaches to designing effective transparency. *Proceedings of the 24th International Conference on Intelligent User Interfaces* (Marina del Ray, California, 2019), 107–120.
- [45] Sproull, L. et al. 1996. When the Interface Is a Face. *Human-Computer Interaction*. 11, 2 (Jun. 1996), 97–124. DOI:https://doi.org/10.1207/s15327051hci1102_1.
- [46] Turner, P. and Turner, S. 2011. Is stereotyping inevitable when designing with personas? *Design studies*. 32, 1 (2011), 30–44.
- [47] Zhang, X. et al. 2016. Data-driven Personas: Constructing Archetypal Users with Clickstreams and User Telemetry. *Proceedings of the 2016 CHI Conference on Human Factors in Computing Systems* (San Jose, California, USA, 2016), 5350–5359.