


Viewtron IP-F6

360 Security Camera, 6MP Fisheye IP Camera

Indoor / Outdoor




- 1:1 (2160×2160) @ 30fps
- H.265+, H.265, H.264+, H.264, MJPEG Video Encoding
- IR Night Vision, Low Light, Zero Light
- 10-20m Effective Infrared Distance
- Built-in Microphone for Audio Surveillance
- Built-in micro-SD card slot, supports up to 256GB cards
- IP67 Rated for Indoor and Outdoor Surveillance Applications
- Built-in AI Software supports Human Detection and Vehicle Detection
- Line Crossing, Intrusion Zones, Crowd Density Events Supported
- Supports Viewtron VMS software for Mac and Windows
- Support mobile surveillance by smart phones with iOS and Android OS Apps

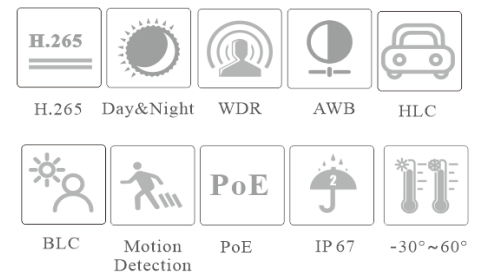

Specifications

Model	IP-F6
Camera	
Image Sensor	1/2.5" Progressive Scan CMOS
Max. Resolution	2160×2160
Electronic Shutter	1/3s ~ 1/100000s
Min. Illumination	0.01 lux@F2.0, AGC ON; 0 lux with IR
IRIS	Fixed IRIS
Lens	1.65mm @F2.0, horizontal field of view : 180° (wall mount), 360°(ceiling mount), 360°(desktop)
WDR	120dB
S/N Ratio	≥ 50dB
BLC	Yes
HLC	Yes
Digital NR	3D NR
Image	
Video Compression	Main stream: H.265+ / H.265/ H.264+ / H.264 Sub stream: H.265+ / H.265/ H.264+ / H.264 MJPEG
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile
Main Stream	<p>Model1: Fisheye Fisheye view (main stream): 2160×2160/1440×1440/1080×1080 (50Hz: 1~25fps; 60Hz: 1~30fps) Fisheye view (sub stream): 960×960/720×720/480×480 (50Hz: 1~25fps; 60Hz: 1~30fps) Fisheye view (third stream): 640×640/360×360(50Hz: 1~25fps; 60Hz: 1~30fps)</p> <p>Mode2: Panoramic Panoramic view (main stream): 3200×1800/2560×1440/1920×1080 (50Hz:1~25fps; 60Hz:1~30fps) Panoramic view (sub stream): 1280×720/640×360 (50Hz:1~25fps; 60Hz:1~30fps) Panoramic view (third stream): 1280×720/640×360 (50Hz:1~25fps; 60Hz:1~30fps)</p> <p>Mode 3: Fisheye+Panoramic+3 PTZ Fisheye view (main stream): 2160×2160/1440×1440/1080×1080 (50Hz: 1~20fps; 60Hz: 1~20fps) Fisheye view (sub stream): 960×960/720×720/480×480 (50Hz: 1~20fps; 60Hz: 1~20fps) Fisheye view (third stream): 640×640/360×360(50Hz: 1~20fps; 60Hz: 1~20fps) Panoramic view (main stream): 3200×1800/2560×1440/1920×1080 (50Hz:1~20fps; 60Hz:1~20fps) Panoramic view (sub stream): 1280×720/640×360 (50Hz:1~20fps; 60Hz:1~20fps) Panoramic view (third stream): 1280×720/640×360 (50Hz:1~20fps; 60Hz:1~20fps) 3PTZ view: (1280×720) * 3 (50Hz:1~20fps; 60Hz: 1~20fps)</p> <p>Mode 4 : Fisheye+ 4 PTZ Fisheye view (main stream): 2160×2160/1440×1440/1080×1080 (50Hz: 1~25fps; 60Hz: 1~30fps) Fisheye view (sub stream): 960×960/720×720/480×480 (50Hz: 1~25fps; 60Hz: 1~30fps) Fisheye view (third stream): 640×640/360×360(50Hz: 1~25fps; 60Hz: 1~30fps) 4PTZ view : (1280×720) * 4 (50Hz:1~15fps; 60Hz: 1~15fps)</p> <p>Mode5 : Fisheye+ 4 PTZ Fusion Fisheye view (main stream): 2160×2160/1440×1440/1080×1080 (50Hz: 1~25fps; 60Hz: 1~30fps) Fisheye view (sub stream): 960×960/720×720/480×480 (50Hz: 1~25fps; 60Hz: 1~30fps) Fisheye view (third stream): 640×640/360×360(50Hz: 1~25fps; 60Hz: 1~30fps) 4PTZ fusion view (main stream): 2560×1440 (50Hz:1~20fps; 60Hz: 1~20fps) 4PTZ fusion view (sub stream): 640×360 (50Hz:1~20fps; 60Hz: 1~20fps) 4PTZ fusion view (third stream): 640×360 (50Hz:1~20fps; 60Hz: 1~20fps)</p>

Bit Rate	64Kbps ~ 10Mbps
Bit Rate Type	VBR/CBR
Audio Compression	G711A / U
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Flip, Image Mirror, NR, etc. adjustable through client software or web browser
ROI	8 ROI, each ROI to be configured separately
Interfaces	
Network	1 CH RJ45 10 M/100 M self-adaptive Ethernet port
Video Output	CVBS (BNC × 1)
Audio	2CH Built-in MIC, 1 CH audio input, 1CH audio output
RS-485	Yes, half-duplex
Storage	Built-in micro SD card slot, supports up to 256GB micro-SD cards
Reset	Yes
Alarm	1CH alarm input, 1CH alarm output
Functions	
Remote Monitoring	Web Browser, Viewtron VMS, NVR, Native Mobile App for iPhone and Android
Web Browser	IE11(plug-in required)/Chrome 89.0+/Edge 89.0+/Firefox 87.0+/Safari 14.0+
Online Connection	Support simultaneous remote monitoring for up to 6 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, RTMP, SNMP, PPPoE, DDNS, 802.1x, SMTP, FTP, UPnP, HTTPS, HTTP, QoS, P2P, HTTP POST
Interface Protocol	ONVIF
AI Software	Mode 1/3/4/5 (ceiling mounting): (Human) region intrusion/region entrance/region exiting/line crossing/target counting by line, crowd density detection, heat map Mode 2/3 (Wall mounting or desktop): Region intrusion/region entrance/region exiting/line crossing/target counting by line (human/motor vehicle/non-motor vehicle classification), crowd density detection
Smart Alarm	Motion detection, sensor alarm, SD card error, SD card full, IP address conflict, cable disconnection
General function	Watermark, video mask, heartbeat, corridor pattern, fisheye de-warping, system backup
PoE	Yes. IEEE802.3af
IR Night Vision Distance	10-20m
Ingress Protection	IP67 Weatherproof Rated. Safe for indoor and outdoor installation.
General	
Power Supply	DC12V/PoE
Power Consumption	<10W
Working Environment	-30C° to 60 C° (-22°F to 140 °F). Humidity 95% or less (non-condensing)
Dimensions(mm)	φ130.6×46.3
Weight (net)	Approx. 516.2g
Installation	Wall mounting, ceiling mounting, desktop
Certificate	CE, FCC, UKCA
Environment Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU) , directive 94/62/EC and REACH(EC1907/2006)

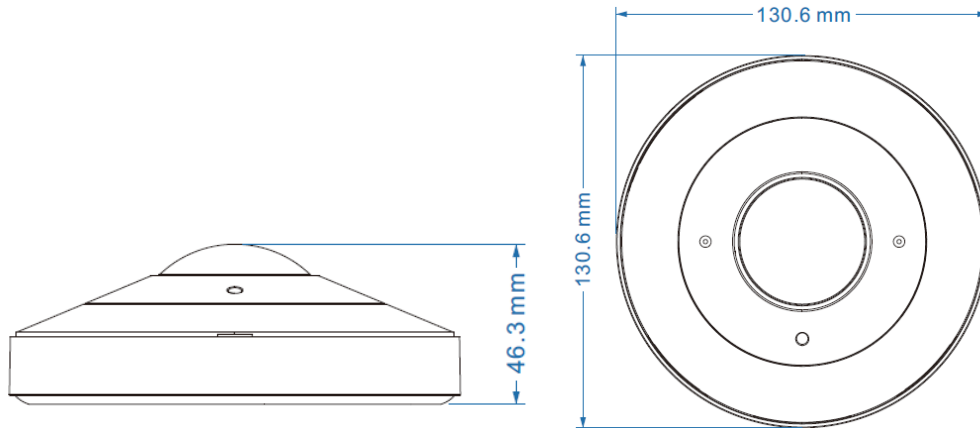Dimensions**Available Installation Mounts**