



R-SEAL 3000W

Tape for Insulation Joints


ACCESSORIES
TAPE
FLASHING
LIQUID TAPE

PRODUCT DESCRIPTION

R-SEAL 3000W is a nominal 2mil high strength dead soft white aluminum foil coated with cold weather acrylic pressure sensitive adhesive.

The malleable foil conforms to irregular surfaces and applies easily to both fibrous and sheet metal ducts. R-SEAL 3000W excels in demanding temperature and humidity applications and provides superior performance and durability over a wide range of environmental conditions.

PRODUCT CONSTRUCTION

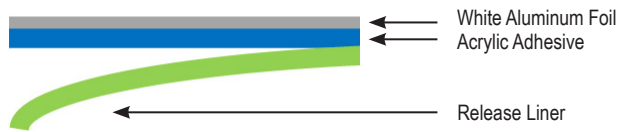

COMPLIANCES

- UL723 (0/0 Flame Spread/Smoke Rating)
- Specifically designed for cold weather conditions

PRODUCT DATA

Item	Roll Width	Roll Length	Rolls/Case
R-SEAL 3000W	3 inches	150 feet	16

TYPICAL PHYSICAL PROPERTIES

Typical values shown in the chart below are not intended to be used for specification development. Technical data is believed to be true and accurate. Rmax recommends that the purchaser test for fitness of use in all applications.

Test	Typical Value	Typical Value (metric)	Test Method
Product Thickness Ω	3.8 mils	0.08 mm	PSTC-133
Backing Thickness (mils)	1.75 mils	0.04 mm	PSTC-133
Peel Adhesion Δ	45 oz/in	12.5 N/25 mm	PSTC-101
Shear Adhesion	>24 hrs @ 2.2 psi	>24 hrs @15.2 kPa	PSTC-107
Tensile Strength	21 lb/in	94.9 N/25 mm	PSTC-131
Elongation	4%	4%	PSTC-131
Water Vapor Transmission	0.00 perm	0.0 ng/(Pa.s.m ²)	ASTM D3833
Installation Temperature	0°F (min)	-17°C (min)	
Operating Temperature	-40 to 250°F	-40 to 121°C	

Ω - excluding liner Δ - 20 minute dwell



APPLICATION/INSTALLATION

- All surfaces to which the tape is to be applied should be free of moisture, oils, dust, dirt and other debris that could inhibit adhesion. Clean surfaces with a dry cloth as necessary.
 - Center tape over surface to be sealed, e.g., board joint, fastener plate, etc.
 - Do not allow the tape to form voids or buckle as it is applied.
 - Wipe tape firmly from center out with feathering tool or hand roller to smooth out wrinkles. Applying more pressure yields more surface contact, and therefore, creates a greater bond.
 - Do not tear tape, cut with scissors or knife.
 - NOTE: For optimal performance, maintain a minimum of 3/4" coverage beyond the area to be sealed.
-

Rmax Sales Offices and Plant Locations

Central:

13524 Welch Road
Dallas, Texas 75244

Phone: 972-387-4500
Fax: 972-387-4673
Toll Free: 1-800-527-0890

E-mail us at rmax@rmax.com or visit our website www.rmax.com

East:

1649 South Batesville Road
Greer, South Carolina 29650

Phone: 864-297-1382
Fax: 864-234-7548
Toll Free: 1-800-845-4455

West:

210 Lyon Drive
Fernley, Nevada 89408

Phone: 775-575-4849
Fax: 775-575-5035
Toll Free: 1-800-762-9462

2018-02



Proudly Made and
Engineered in the U.S.A.



Improving Your Design.

www.rmax.com | (800) 527-0890